


NOTE : STANDARD FASTENER TORQUE AS PER STD-DES-01-00 FR-DES-006-00


HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00		CENTER OF SHAFT
B.1	-25.98	15.00	M10 THRU'	
B.2	0.00	30.00	M10 THRU'	
B.3	25.98	15.00	M10 THRU'	
B.4	25.98	-15.00	M10 THRU'	
B.5	0.00	-30.00	M10 THRU'	
B.6	-25.98	-15.00	M10 THRU'	
C.1	-6.00	0.00	M5 x 10.00 mm DEEP	
C.2	6.00	0.00	M5 x 10.00 mm DEEP	


TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

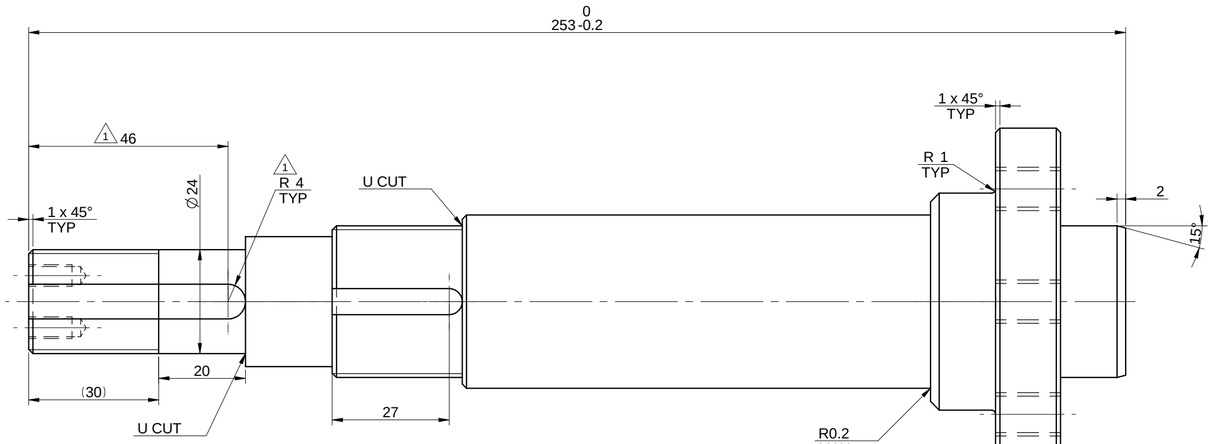

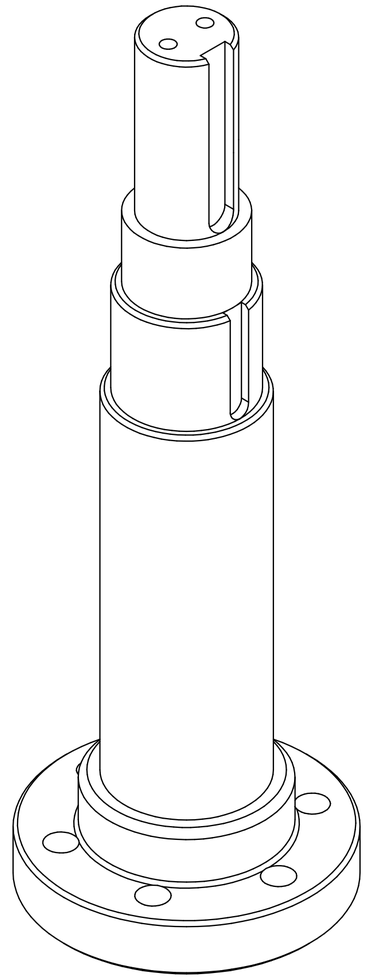


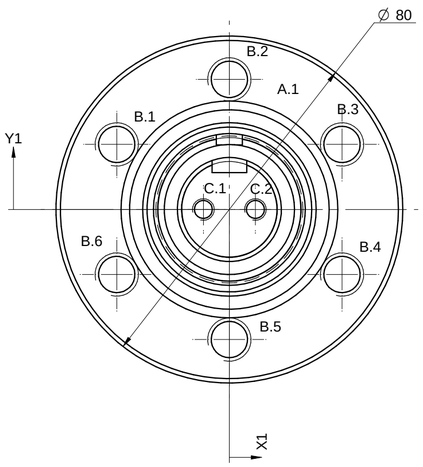

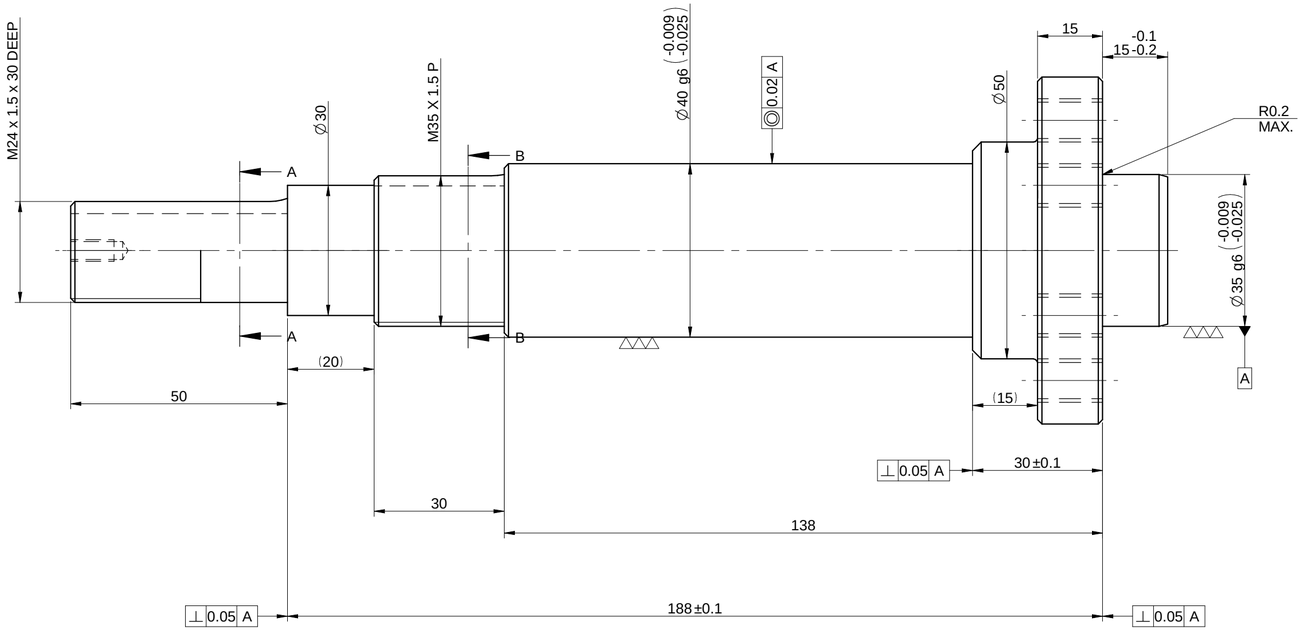



SECTION A-A
SCALE 1:1



SECTION B-B
SCALE 1:1

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 24-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)
3) ORIENTAION OF KEYWAY TO BE MAINTAIN w.r.t. TO CLAMPING HOLES.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
1	KEYWAY SLOT INCREASED	09/11/2024	03007260

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : M.W

RESERVED SPACE FOR CONTRO...
CONTROLLED COPY

www.wipropari.com
1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE
© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI GROUP

DESCRIPTION	DRAWING TYPE
SHAFT	MACHINING

SURFACE AREA	SURFACE TREATMENT	MACHINING	DESIGN UNIT	DESIGN UNIT CD.	TEAM NO.	SHEET SIZE
65.08 in^2	I.Z.B.P. (TRIVALENT)	▽▽(▽▽▽)	WPES	0300	PL-02	A2

REFERENCE DWG.	PART CLASS.	HEAT TREATMENT
PRJ87A406043	B	---

DRN.BY	CHKD.BY	APPD.BY	MATERIAL	DRG./PART CODE	REV.	SCALE
03007273	03004785	03002882	EN24	P24W2A124011	01	1 : 1
09/11/2024	09/11/2024	09/11/2024	NET WEIGHT-Kg 2.45 kg			SHEET 1 OF 1

\\Pariengnewvb\b10engg\24-25\P24W2-Perkins Engine assembly line modification\ExDM Uploading\P24W2A124011.dft