


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A

PFR/DES/07/REV-01

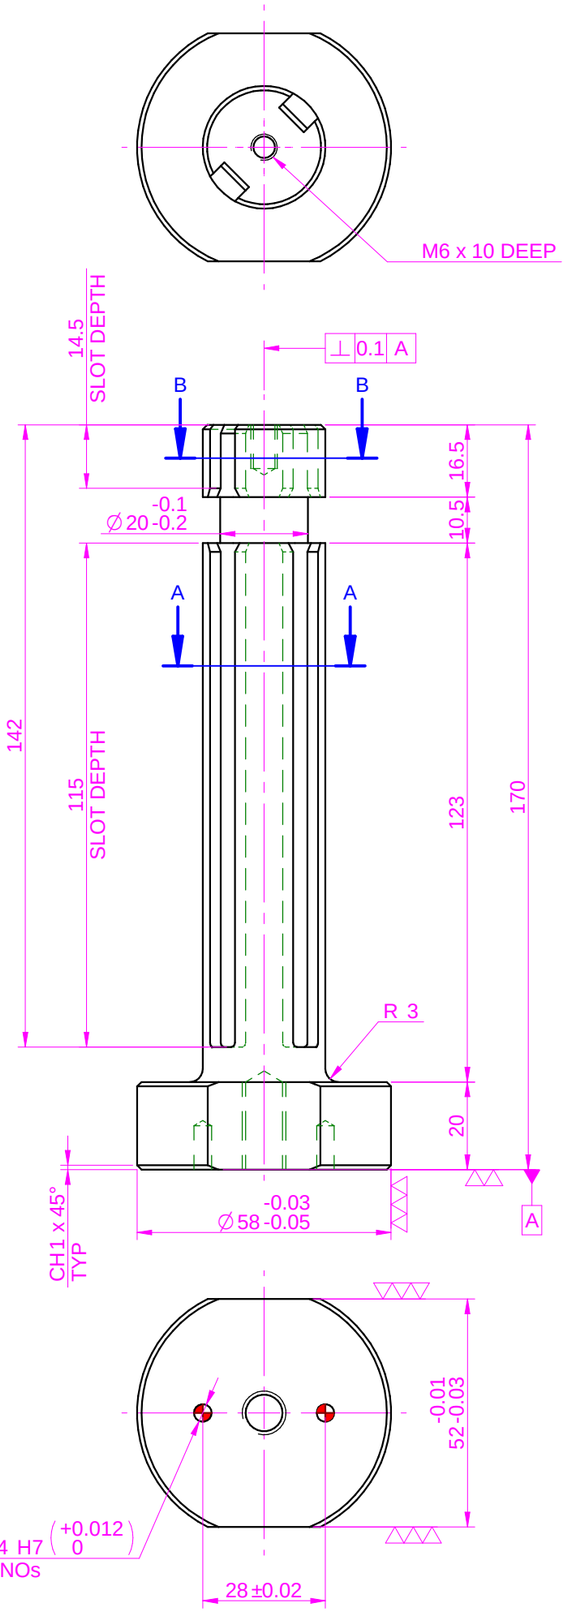

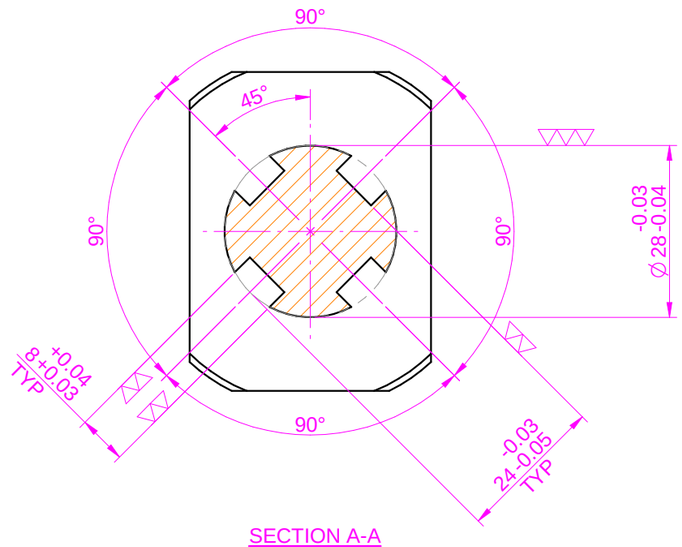



SECTION A-A

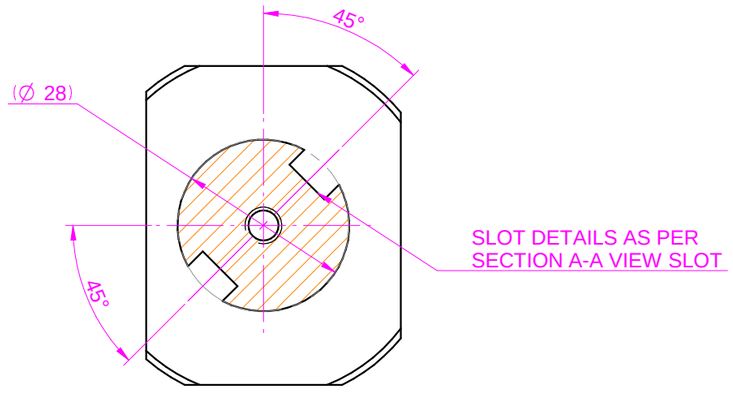


SECTION B-B

SLOT DETAILS AS PER
SECTION A-A VIEW SLOT

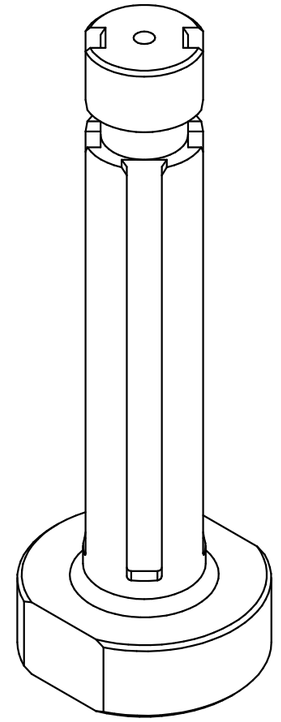

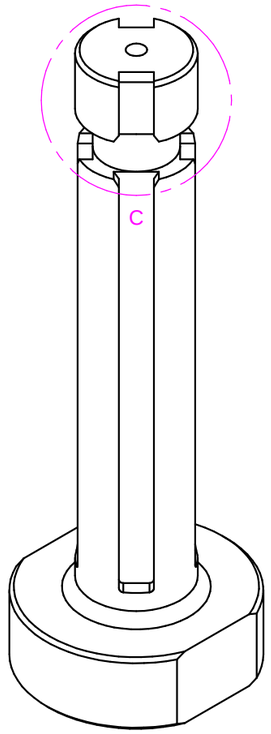

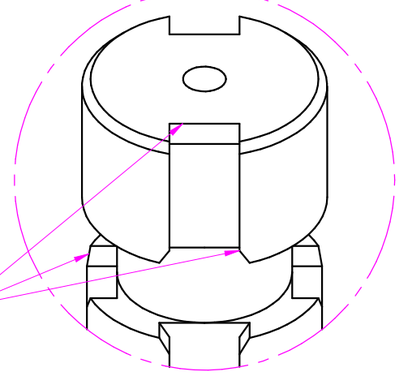

DETAIL C

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **SLOTTED SHAFT**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
40.28 in^2	NO FINISH	▽(▽▽ ▽▽▽)	M.S.	0.97 kg	SBP-01	A3

	DRN.BY	CHKD.BY	APPD.BY
	BDJ	SVK	SVK
DATE	15/10/2017	15/10/2017	15/10/2017

REFERENCE DWG. ---

PART CLASS. ---

DRG./PART CODE: **PAB87S010051**

REV. **00**

SCALE 1 :

SHEET 1 OF 1

\\parienggnew\BUSINESS PRODUCTS 1\Product Development\2017-18\Rotor Assembly\1-Mechanical Design\5-Part Assembly Drawings\New Concept\PAB87S010051.00.dft