


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07

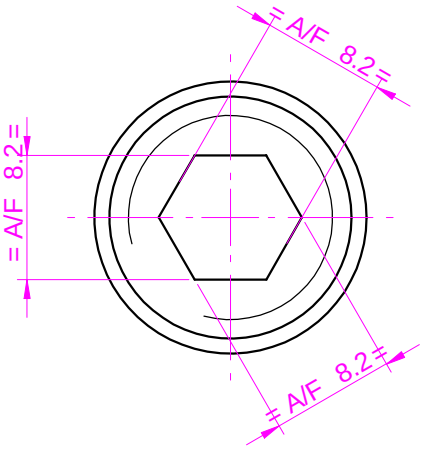

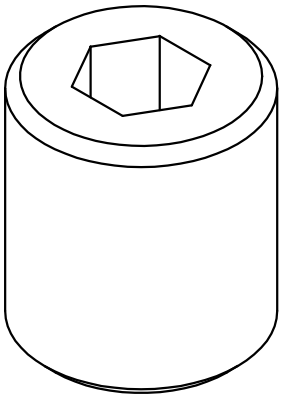

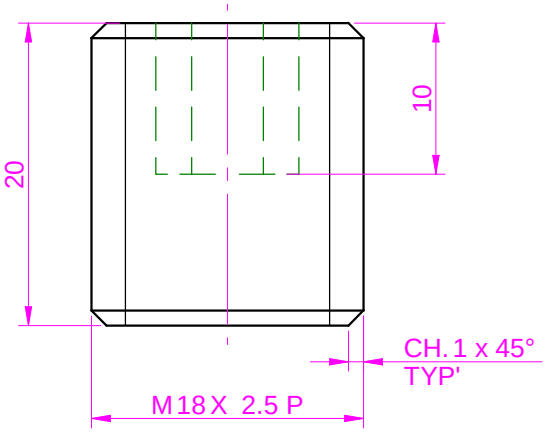

UNSP.RADII	0.5 R
UNSP.CHF.	0.5 X 45°

UNSPECIFIED TOL.(M) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	CAR. NO.	DATE	CHKD.

PRECISION AUTOMATION & ROBOTICS INDIA LTD,Pune 41

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PARENT DESCRIPTION : INTAKE PRESSING SLIDE

PARENT CODE : PRV14B04U160

DESCRIPTION: **GUIDING PIN**

DRAWING TYPE: MACHINING

FINISH MTL.SIZE	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
AS PER DRG	BLACK OXIDE	~	M.S.	0.03 kg	PL-02	A4

DRN.BY	CHKD.BY	APPD.BY	REPLACES DWG.	DRG./PART CODE	REV.	SCALE
Sushant			---	PAV14B041608	00	2 : 1
08/07/2014			PART CLASS. B			SHEET 1 OF 1
DATE						

\\parienggnew\BT10ENGG\13-14\PRV140000000-MM-EngineLine\PRV14B000000-Cyl head\Subsystems and Units\PRV14B040000\PRV14B04U100\PRV14B04U160\PAV14B041608.00.dft