
NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A

PFR/DES/07

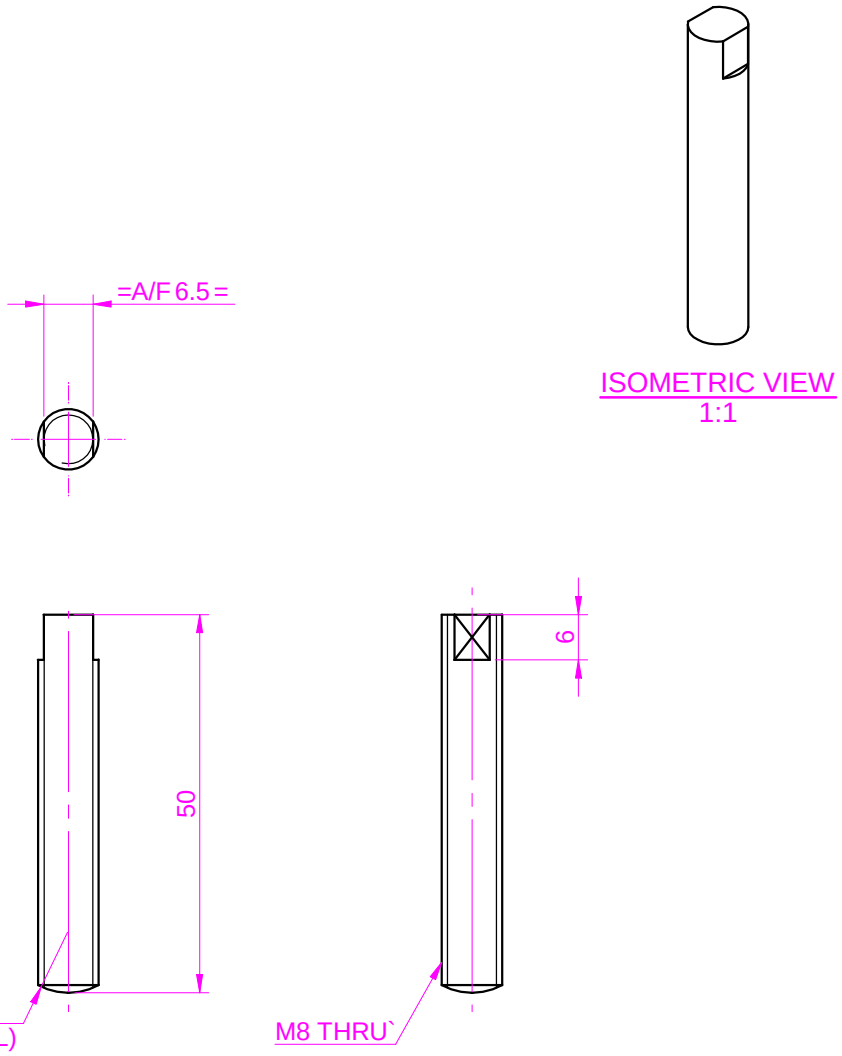

SURFACE AREA : 2.06 in^2

UNSP.RADII	0.5 R
UNSP.CHF.	0.5 X 45°

UNSPECIFIED TOL.(M) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

NOTE :-
TO BE TOUGHENED UPTO 28-32 HRC.

REVISION	DESCRIPTION	CAR. NO.	DATE	CHKD.

PRECISION AUTOMATION & ROBOTICS INDIA LTD

PARI
www.parirobotics.com

PARENT DESCRIPTION : LH CYLINDER ASSEMBLY

PARENT CODE : PRZ15A01U230

DESCRIPTION: **STOPPER STUD**

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

FINISH MTL.SIZE	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
AS PER DWG.	ZINC BLACK PASSIVATION TRIVALENT	▽▽	EN-9	0.02 kg	PL-02	A4

DRN.BY	CHKD.BY	APPD.BY	REPLACES DWG.	DRG./PART CODE	REV.	SCALE
TTD	PRASAD	RUPESH	---	PAZ15A012302	00	1 : 1
20/12/2015			PART CLASS. C			SHEET 1 OF 1
DATE						

\\pariengg\NEWBT030 ENGG\Design 15-16\PRZ15000000-Fiat FAMB Assly Line\PRZ15A000000-Half Lock\Subsystems and Units\PRZ15A010000\PRZ15A01U200\PRZ15A01U230.00\PAZ15A012302.00.dft