


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A

PFR/DES/07/REV-01

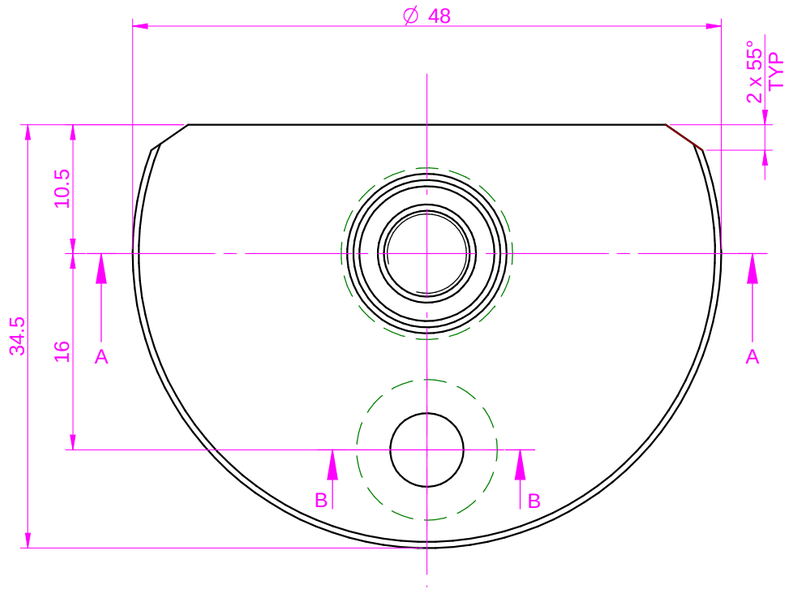


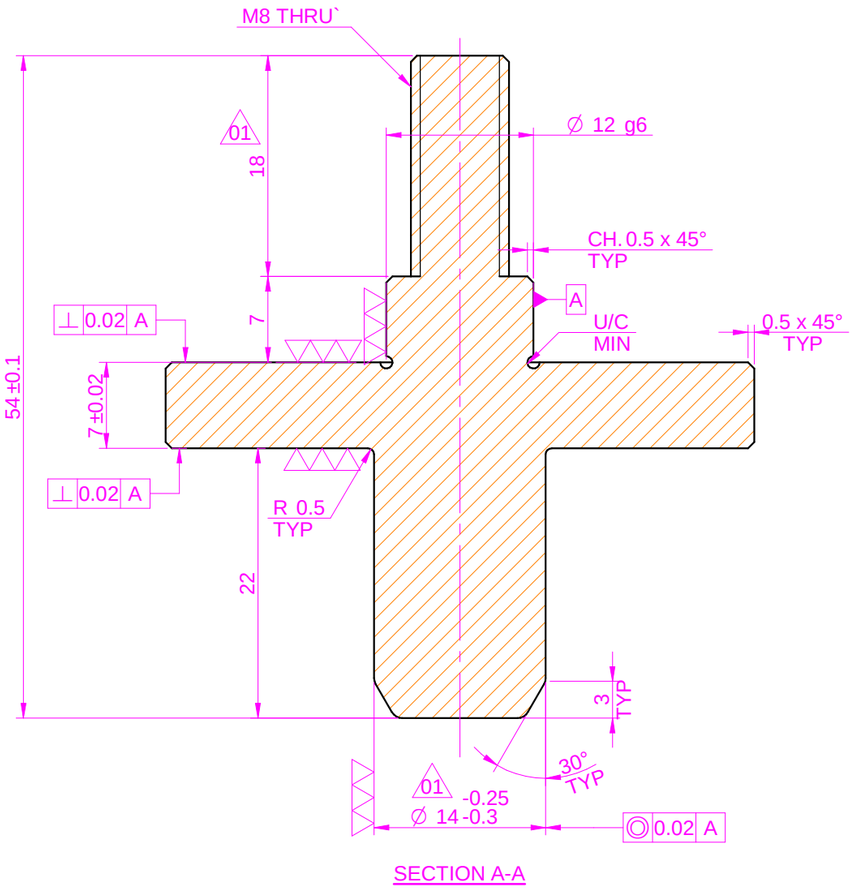

SECTION A-A



SECTION B-B

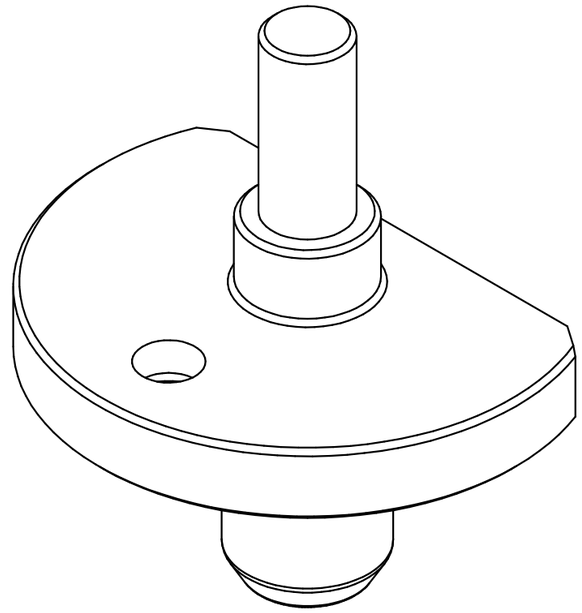

NOTE:-
1)TO BE CASE HARDENED TO 58±2 HRc.
CASE DEPTH 0.8 TO 1.2mm
2)KEEP THREAD SOFT

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY
01	TOLERANCE MODIFY, DIM 18 WAS 15.	P1_Det/ 3096/17	19/09/2017	JEEVAN

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **LOCATION PIN G**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
8.37 in^2	IZBP	▽▽ (▽▽▽)	20MnCr5	0.11 kg	PL-01	A3

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
ANJUM	SRK		PRA98C170030	**PRA98C170700**	**1**	2:1
19/09/2017			ART CLASS. B			SHEET 1 OF 1
DATE	19/09/2017	19/09/2017				

\\Parieng\bt070engg\2016-2017\SO_PRA98_BATTERY ASSLY LINE\ExDM Uploading\C174-LOCATION PIN-G.dft