NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A

PFR/DES/07/REV-01

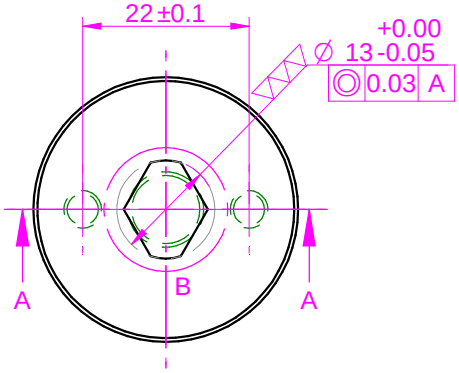

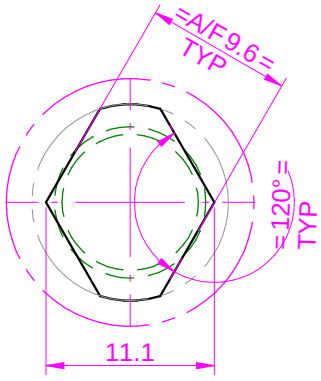

DETAIL B
2:1

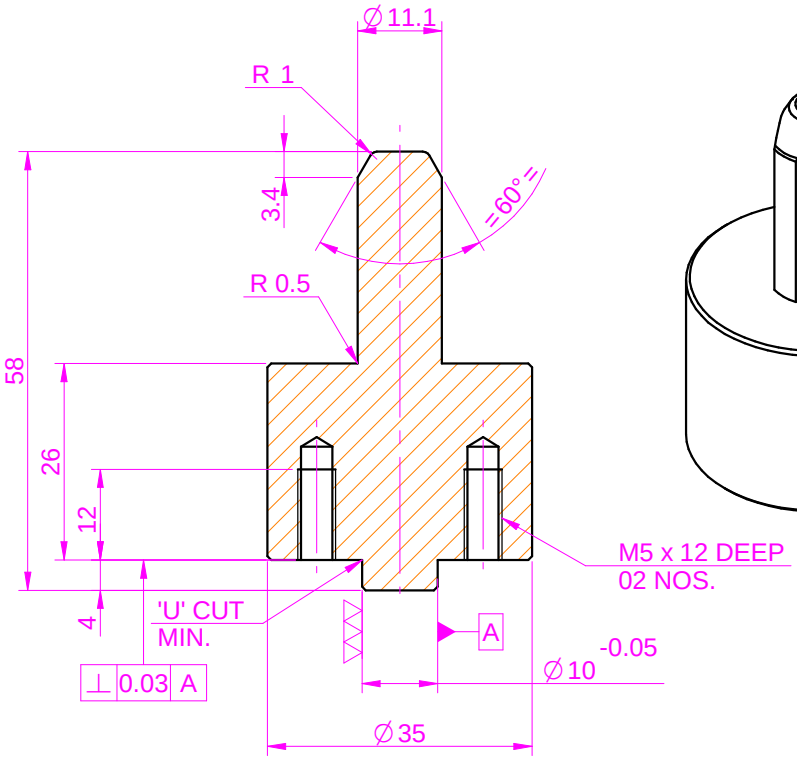

SECTION A-A

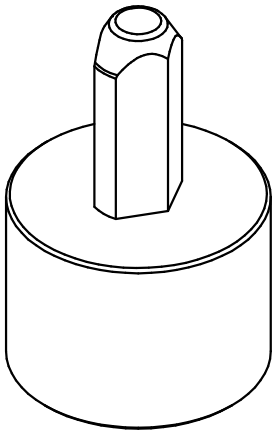

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI

www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm

2.DO NOT SCALE DRAWING.

3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **LOCATION PIN**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
9.59 in^2	IZBP	▽▽(▽▽▽)	M.S.	0.21 kg	PL-01	A4

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
AKSHAY	SRK		PRA98C170038	**PRA98C170722**	**0**	1:1
13/02/2018			ART CLASS.			SHEET
DATE	13/02/2018	13/02/2018	B			1 OF 1

\\parieng\BT070ENGG\2016-2017\SO_PRA98_BATTERY ASSLY LINE\ExDM Uploading\20180209_C174-LOCATION PIN-F.dft