


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A

PFR/DES/07/REV-01

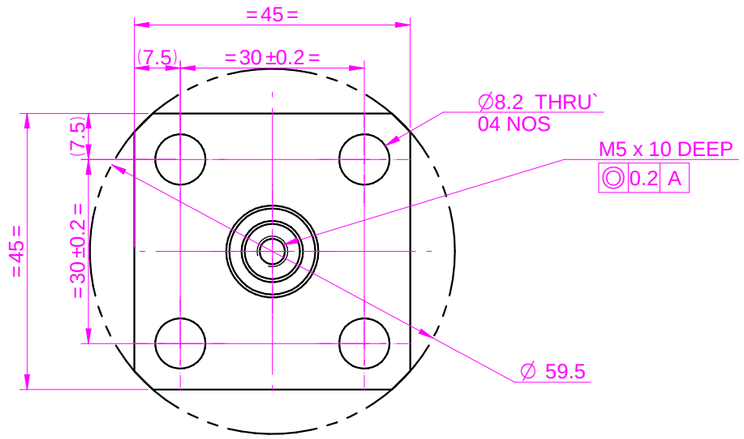

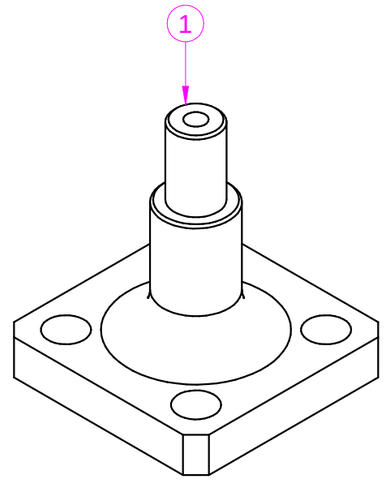

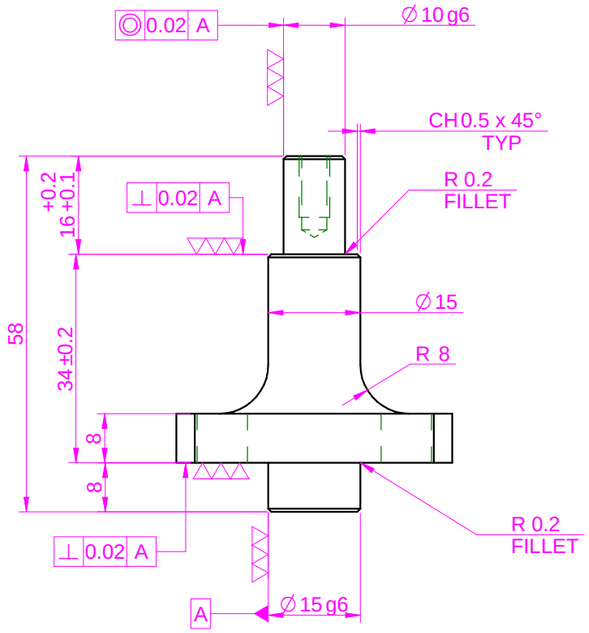

NOTE :
MATERIAL : EN24
FINISH : IZBP
MACHINING : ▽▽(▽▽▽)

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 25-28 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **PIN**

DRAWING TYPE: PART

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
12.23 in^2	#	▽▽(▽▽▽)	#	0.17 kg	CE-01	A3

	DRN.BY	CHKD.BY	APPD.BY
	RAM D	PRASAD	PIYUPESH
DATE	14/05/2021	14/05/2021	14/05/2021

REFERENCE DWG.: PRB83B601027

PART CLASS.: B

DRG./PART CODE: **PRB83B601772**

REV.: **0**

SCALE: 1 : 1

SHEET: 1 OF 1

\\pariengg\NEW\BT030 ENGG\Design 17-18\PRB83000000-Godzilla Crank\ExDM_Uploading\PRB83B601772.dft