

NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A

PFR/DES/07/REV-01

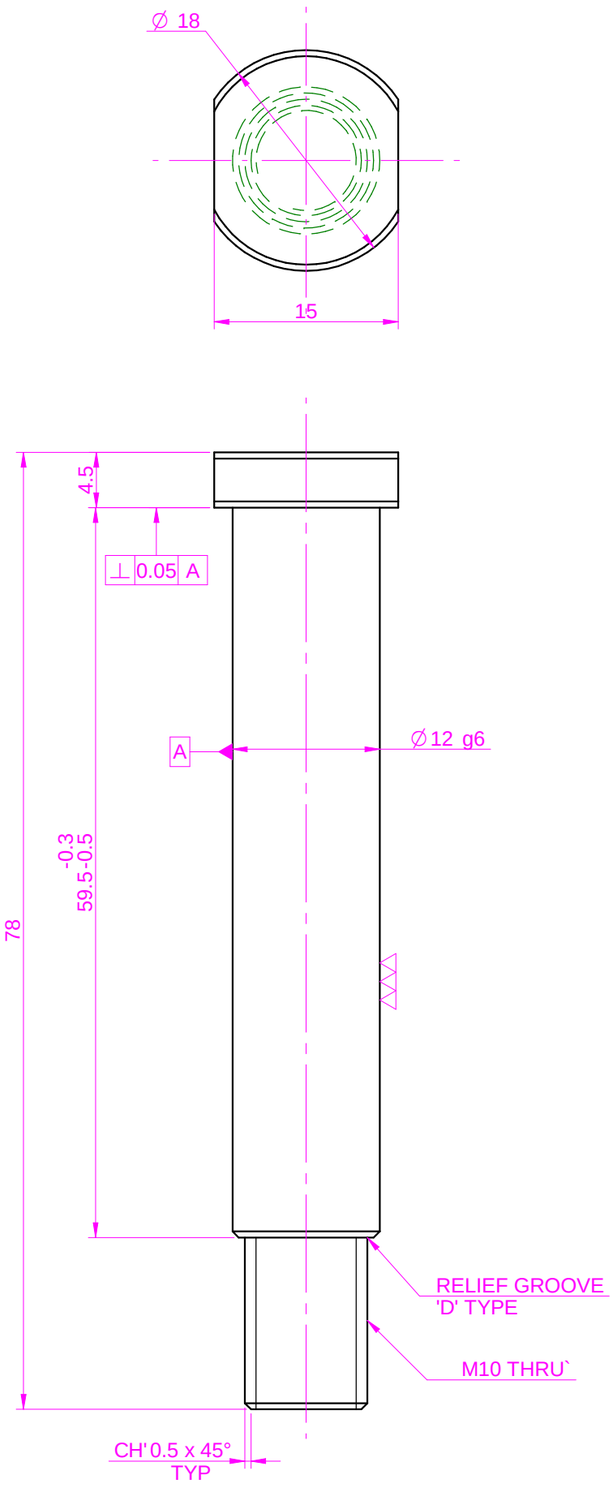

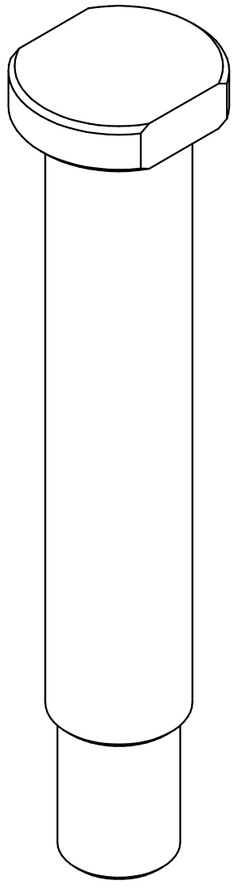

HEAT TREATMENT:-
TO BE TOUGHENED UPTO 28-32 HRC.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: PIN

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
5.20 in^2	IZBP	▽▽	EN-8 / C45	0.07 kg	PL-02	A3

	DRN.BY	CHKD.BY	APPD.BY
	S VAIBHAV	UTKARSH PRAVESH	
DATE	05/10/2017	05/10/2017	05/10/2017

REFERENCE DWG.: PAT49A022369

PART CLASS.: B

DRG./PART CODE: PRB95C107047

REV.: 00

SCALE: 2 : 1

SHEET: 1 OF 1

\\parienggnew\BT030 ENGG\Design 17-18\PRB95000000-TML IPV\ExDM Uploading\PAB95C107047.dft