


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00





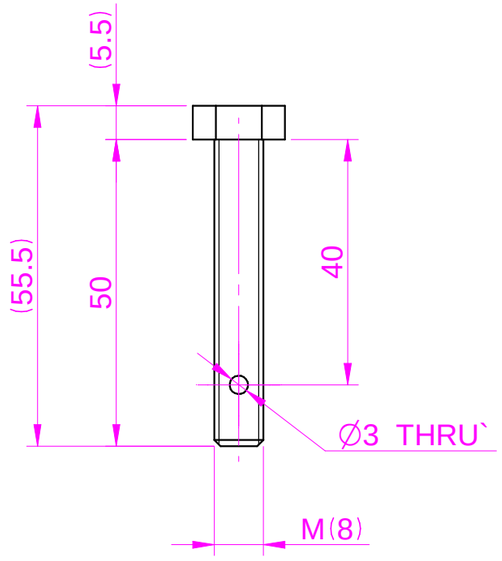

TO BE REWORK FROM - 4A0120101094 BOLT HEX HEAD_M8X50 10.9_PARISTD (FULL THREADED)

PSA REF. CODE_12772512557

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: REWORK EX. HEAD CAP SCREW M8x50

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
2.85 in^2	#	50	#	0.00 kg	PL - 02	A3

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
SVS	PRASAD	PRASAD	----	PRE93B305057	0	1 : 1
11/06/2018			PART CLASS. C			SHEET 1 OF 1
DATE	11/06/2018	11/06/2018				

\\parienggnew\BT10ENGG\17-18\PRE930000000-PSAExDM_Uploading\PRE93B305057.dft