


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00

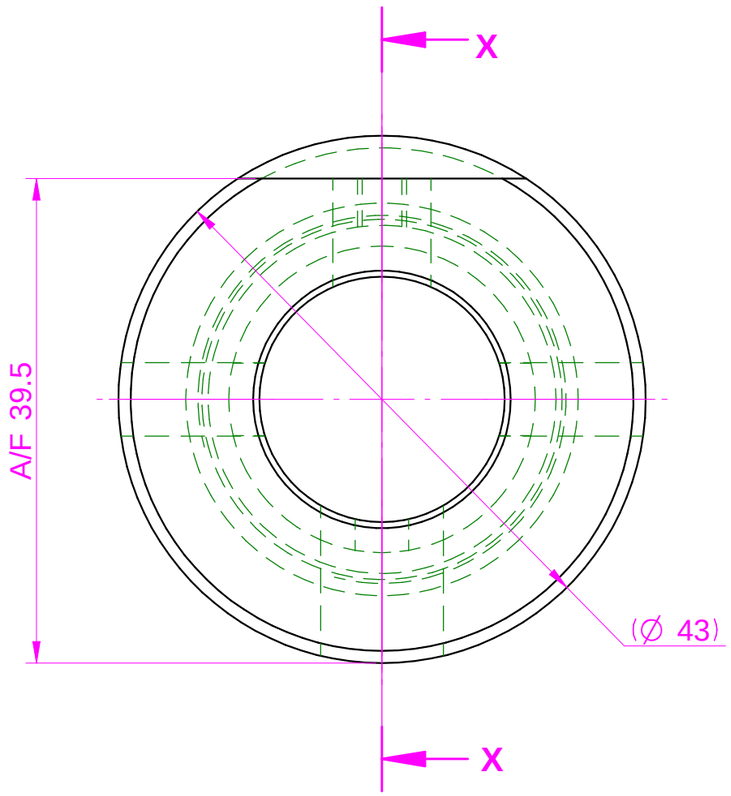

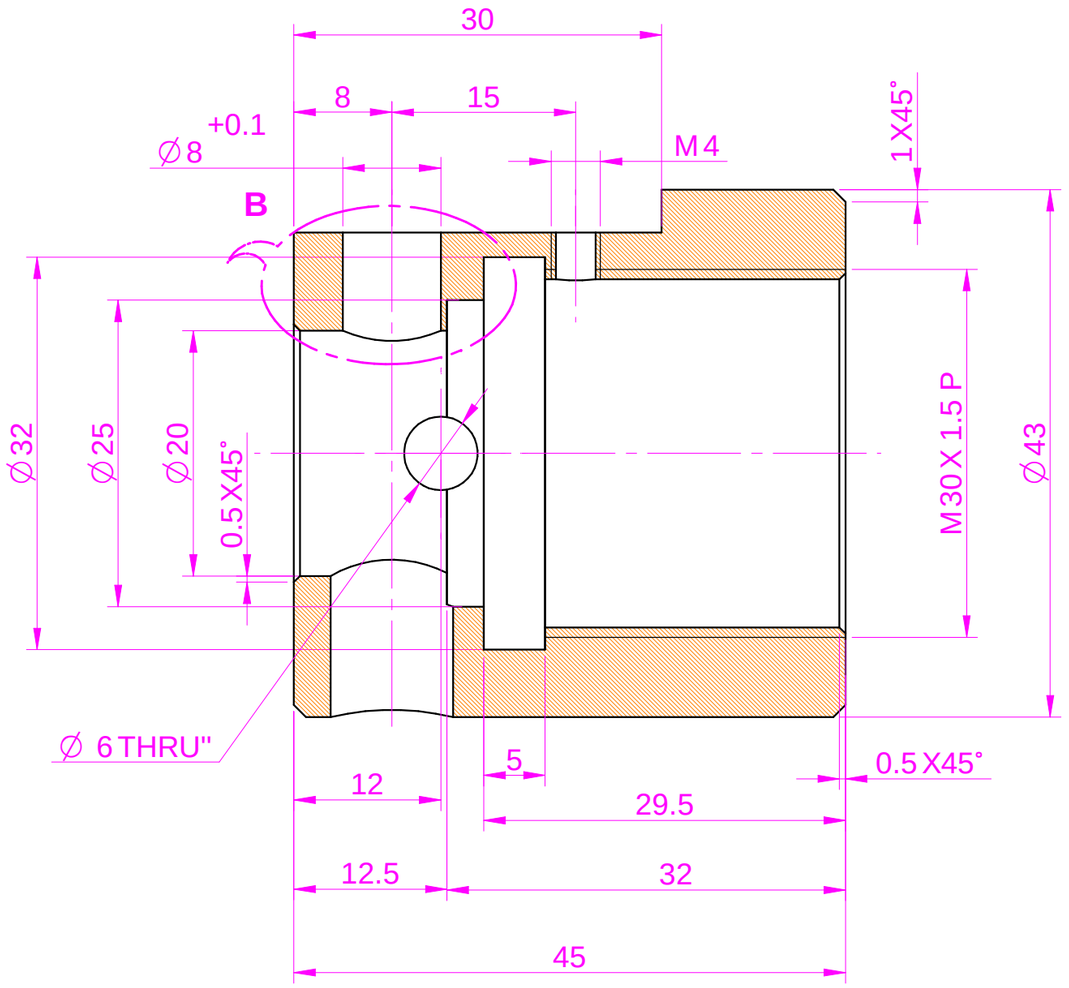


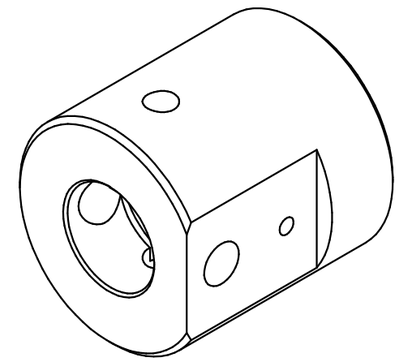

SECTION X-X
2:1

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 28-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

TRAITEMENT DE CHALEUR :-
1) À RENFORCER JUSQU'À 28-32 HRC.
2) RE-TARAUDAGE À FAIRE APRÈS TRAITEMENT DE SURFACE CHEZ LE FOURNISSEUR (S'IL Y A LIEU)



DETAIL B
2:1

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: SHOCK ABS SLEEVE M30X1.5P L=45

DRAWING TYPE: MACHAINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
19.76 in^2	IZBP	3.2	EN8	0.29 kg	PL - 02	A3

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
SVS	PRASAD	APPD	PRF73A100536	PRE93B305070	00	2 : 1
30/10/2018			PART CLASS. B			SHEET 1 OF 1
DATE	30/10/2018	30/10/2018				

\\pariengg\new\BT10ENGG\17-18\PRE93000000-PSA\ExDM_Uploading\PRE93B305070.dft