
NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00

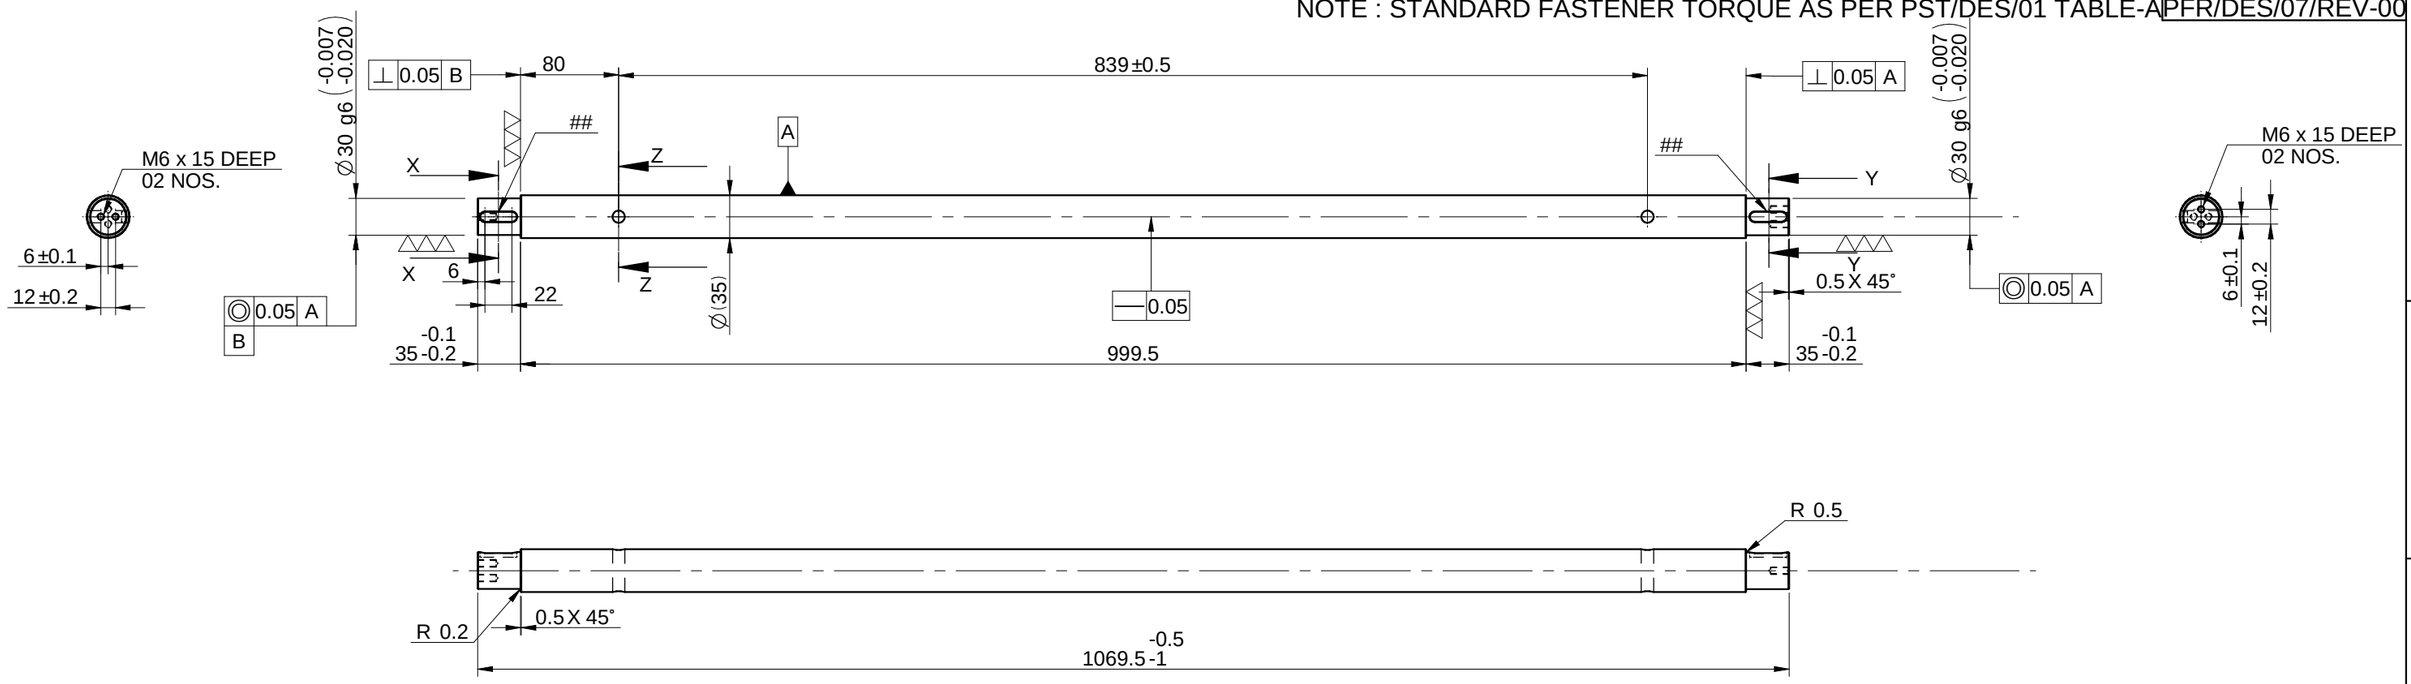

MARKED KEY WAYS SHOULD BE INLINE WITHIN 0.05MM

NOTE:
1)#USE STD. DIA.35g6 En-8(D) BRIGHT BAR.
2) STRAIGHTNESS:-0.2mm/1000mm MAX.
3) RUNOUT:-0.1mm/1000mm.
4) $FLASH HARD CHROME PLATING 15 TO 20 MICRONS,HARDNESS 850.
5) SURFACE FINISH:-Ra 0.2 TO 0.3 MICRONS.
6) ALL KEYWAY SHOULD BE INLINE WITHIN 0.05

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY
1	MATERIAL CHANGED	P2_det/9485/19	26/08/19	VIVEK

PARI
www.parirobotics.com

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **SHAFT**

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
188.30 in^2	$	▽▽(▽▽▽)	#	7.85 kg	PL-02	A3

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
ASHOK	PRASAD	PRASAD	PRE85A103026	**PRF83A106004**	**01**	1 : 5
26/08/2019			PART CLASS. B			SHEET 1 OF 1
DATE	26/08/2019	26/08/2019				

\\parienggnew\BT030 ENGG\Design 18-19\PRF83-Dynomerk - Test Bed Y-Conveyor\ExDM_Uploading\PRF83A106004.dft