


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A

PFR/DES/07/REV-00



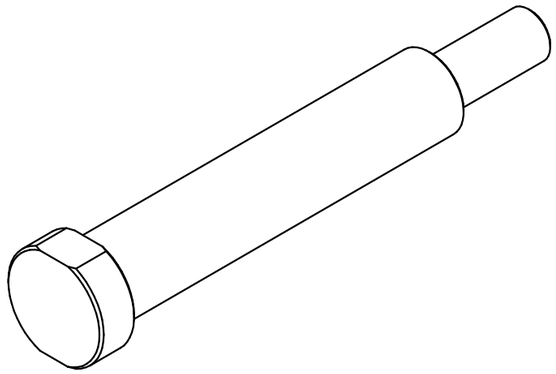

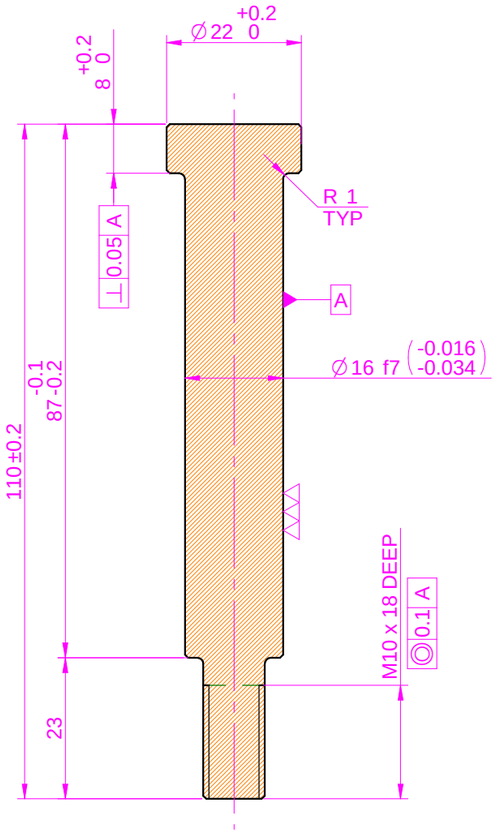

SECTION X-X

INSPECTION &TEST REQUIREMENT NOTE:-
FINISH JOB ULTRASONIC TEST REPORT REQUIRED

NOTE :
MATERIAL : EN9/C45
FINISH : IZBP
MACHINING : ▽▽(▽▽▽)

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 28-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.

UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **PIN**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
9.13 in^2	#	#	#	0.16 kg	PL-02	A3

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
PRAVIN	RUPESH	RUPESH	----	PRG86B103021	00	1 : 1
DATE	22/10/2018	22/10/2018	PART CLASS. B			SHEET 1 OF 1

\parienggVBT080ENGG\2018-19\SO_PRG86_HD Transmission Assby Ford-Otosan\Exdm Uploading\PAG86B103021.dft