


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00

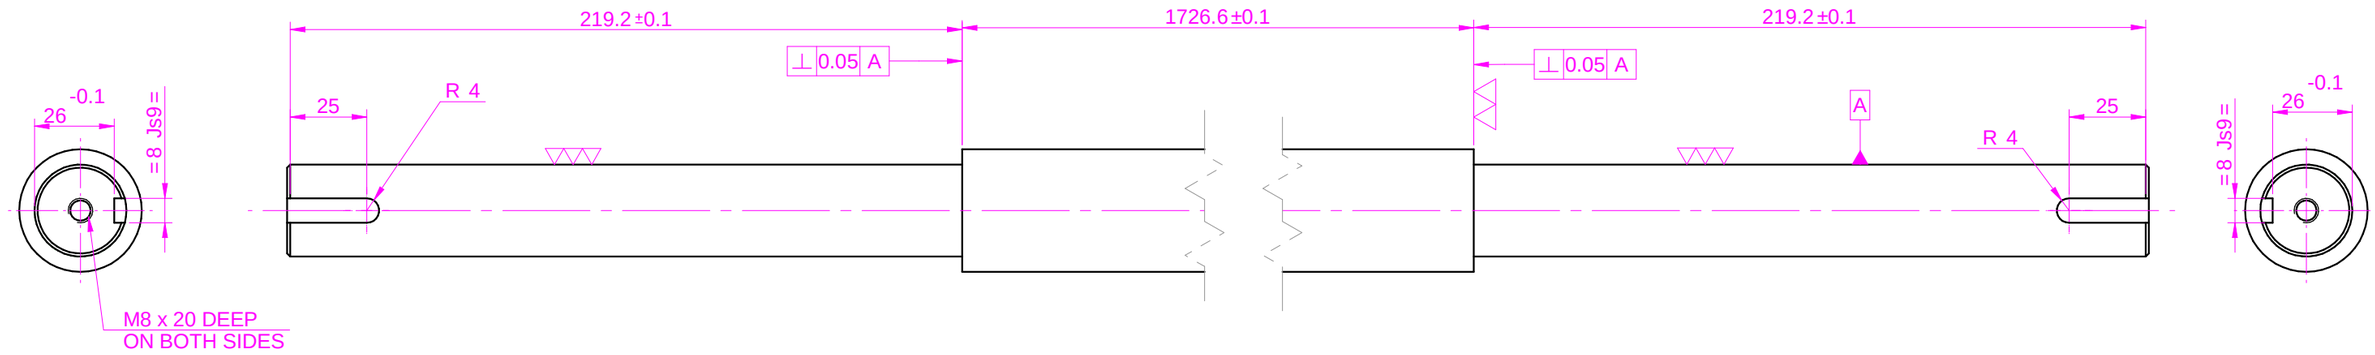

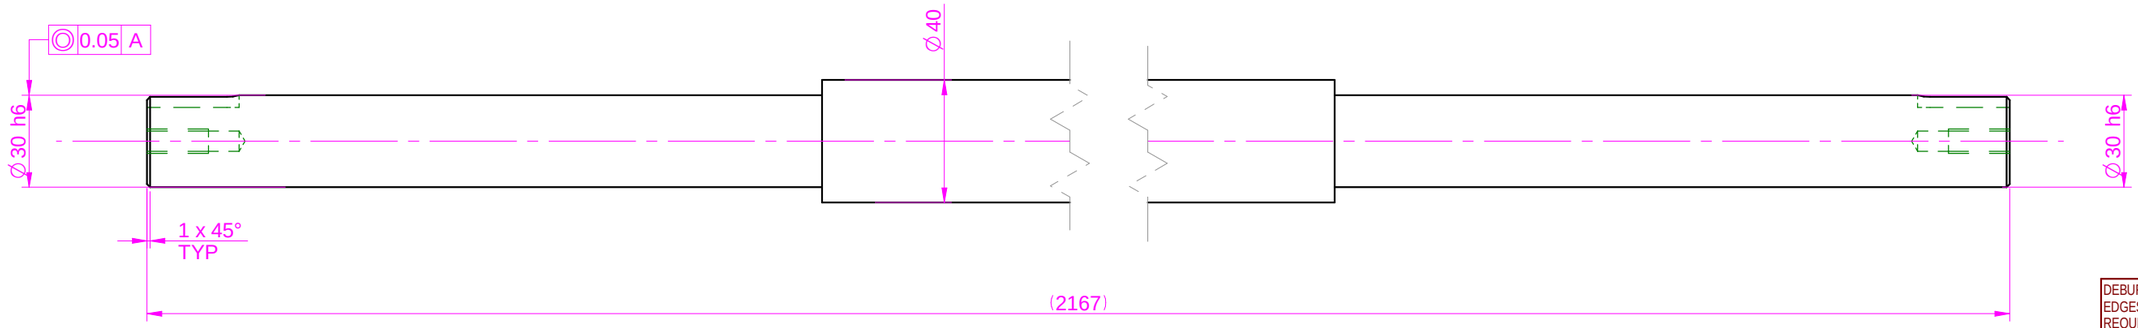

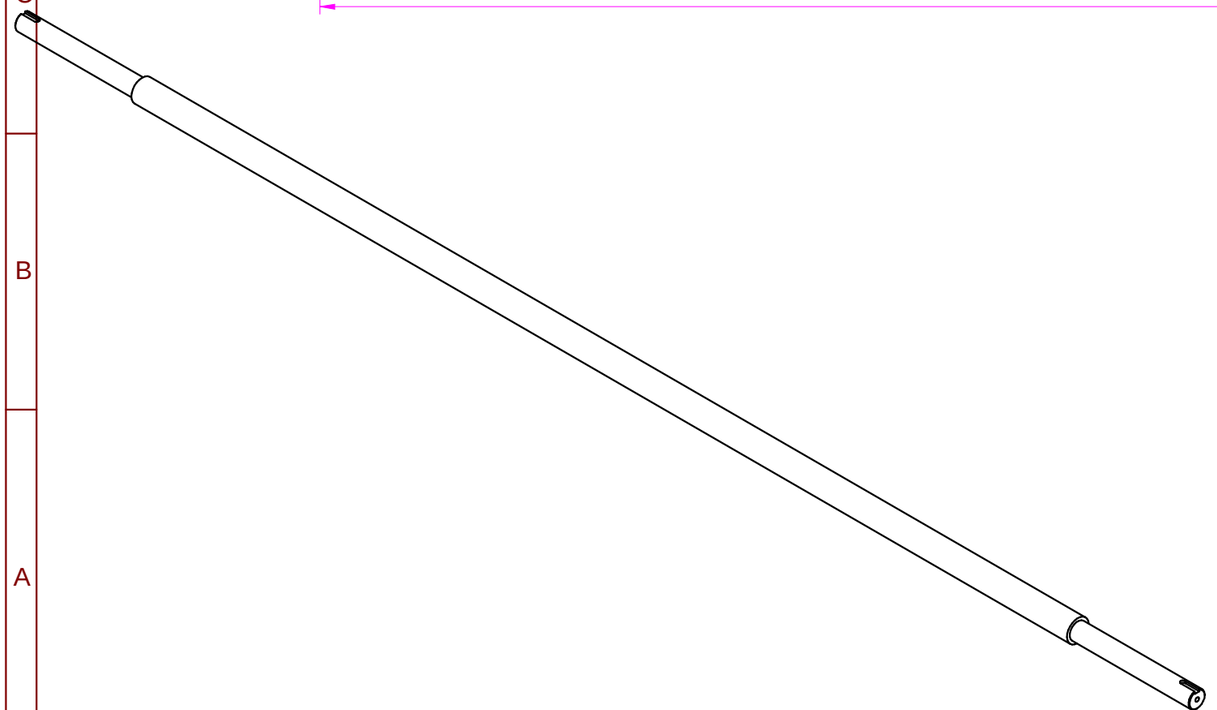

NOTE :-
1.TO BE TOUGHENED UPTO 24~32HRC
2. BOTH KEYWAYS SHOULD BE INLINE.

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY
02				
01				

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: SHAFT

DRAWING TYPE: M/C

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
406.93 in^2	IZBP	▽ (▽▽, ▽▽▽)	En-9	19.44 kg	PL-01	A3

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
SANI	ASK	[illegible]	PRH90A030096	PRH90B302031	00	1:2
DATE 19/03/2019	19/03/2019	19/03/2019	PART CLASS. B			SHEET 1 OF 1

\\parienggnew\BT050ENGG\18-19\PRH90-BFL-FAB & Crankshaft handling line\ExDM_Uploading\PRH90B302031.dft