


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00

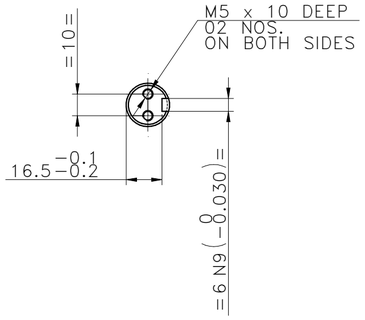

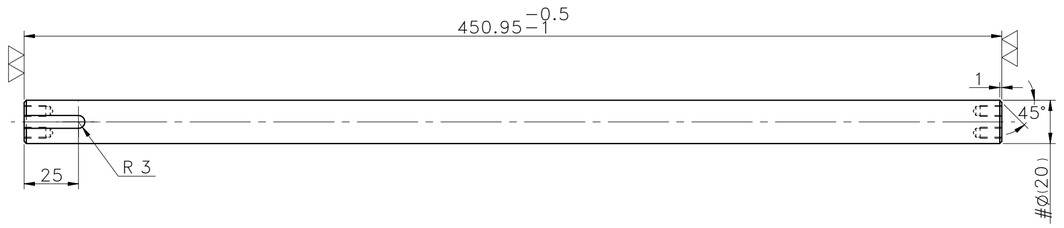

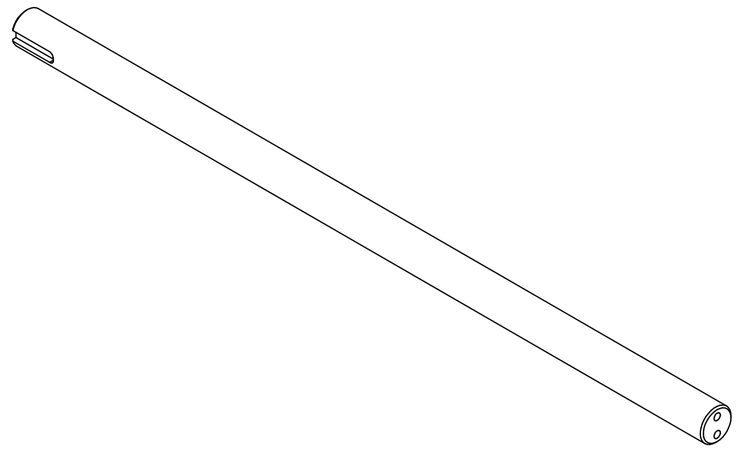

NOTE:-
1) # USE STD. φ20g6 En-8(D) BRIGHT BAR.
2) STRAIGHTNESS:- 0.1mm/1000mm MAX.
3) RUNOUT:- 0.05mm/1000mm.
4) $ FLASH HARD CHROME PLATING 15 TO 20 MICRONS, HARDNESS 850 TO 1000 HV.
5) SURFACE FINISH:- Ra 0.2 TO 0.3 MICRONS.

NOTE :
MATERIAL: REF. NOTE
FINISH: $
MACHINING: ▽▽

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.

UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI

PRECISION AUTOMATION & ROBOTICS INDIA LTD

www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: **SHAFT**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
46.01 in^2	#	#	#	1.10 kg	PL-01	A2

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
ROHIT M	SHIVA G	SHIVA G	PAY74B202113	**PRJ93A170008**	**00**	1 : 5
14/02/2019			PART CLASS.			SHEET
DATE	14/02/2019	14/02/2019	B			1 OF 1

\\pari\engg\BT010ENGG\18-19 Projects\SO_PRJ93_Ring Gear Pack In Pack Out\EXDM Uploading\PRJ93-CONVEYOR W3 A1 P4.dft