NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00

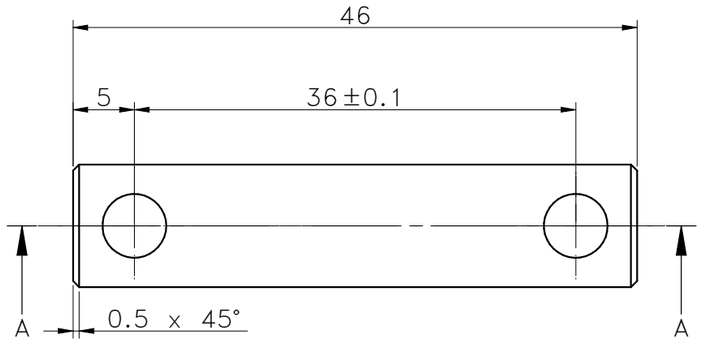



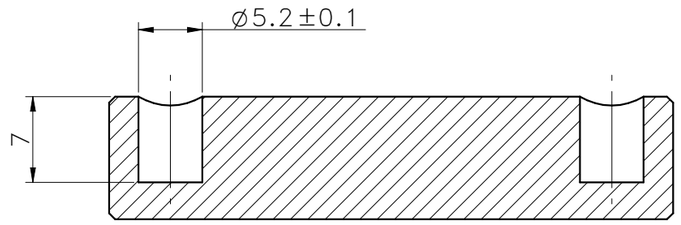

SECTION A–A
SCALE 2:1

NOTES :
1) REMOVE ALL SHARP EDGES & CORNERS
2) TO BE TOUGHENED TO 28–32 HRC
3) BOTH O 5.2 HOLES SHOULD BE IN ONE PLANE

NOTE :
MATERIAL: EN9/C45
FINISH: IZBP
MACHINING: ▽▽

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY

PARI
www.parirobotics.com

PRECISION AUTOMATION & ROBOTICS INDIA LTD

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: **PIN**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
2.79 in^2	#	#	#	0.03 kg	PL-01	A3

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
ROHIT M	JEEVAN	SRK	PRG87A100002	**PRK76A010058**	**0**	2 : 1
23/07/2019			PART CLASS. B			SHEET 1 OF 1
DATE	23/07/2019	23/07/2019				

\\parienggt\BT010ENGG\18-19 Projects\SO_PRK76_Stator Assly\ExDM Uploading\PRK76-PIN.dft