NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-01

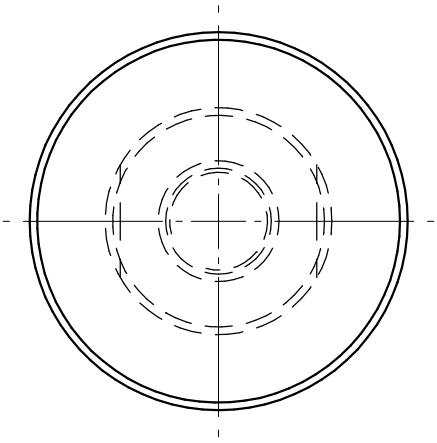

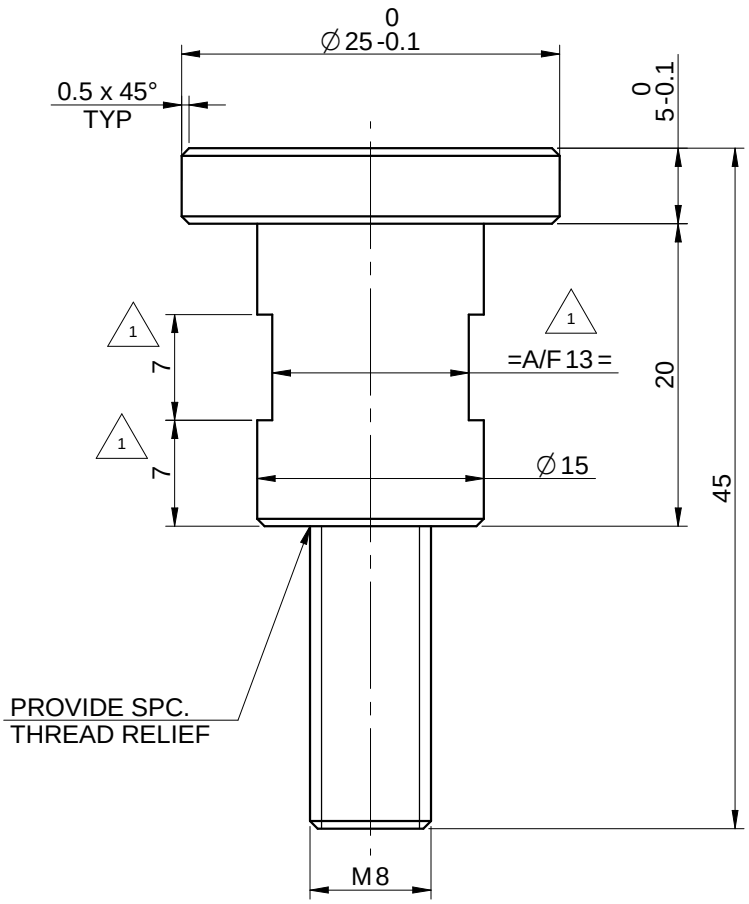

1	ACROSS FLAT ADDED.	12/01/2021	TUSHAR C
REVISION	DESCRIPTION	DATE	DRN.BY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.

UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS

Gen Tol.: IS 2102

PARI

www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm

2.DO NOT SCALE DRAWING.

3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **PIN**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
4.29 in^2	IZBP	▽▽	M.S.	0.05 kg	PL-01	A4

	DRN.BY	CHKD.BY	APPD.BY
	ANJUM		
	12/01/2021		
DATE	12/01/2021	12/01/2021	

REFERENCE DWG.: ---

PART CLASS.: B

DRG./PART CODE: **PRM89N023049**

REV.: **01**

SCALE: 2 : 1

SHEET: 1 OF 1

\\parienggt\BT010ENGG\19-20 Projects\SO_PRM89- Vinfast\EXDM Uploading\PART-1.dft