NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-01

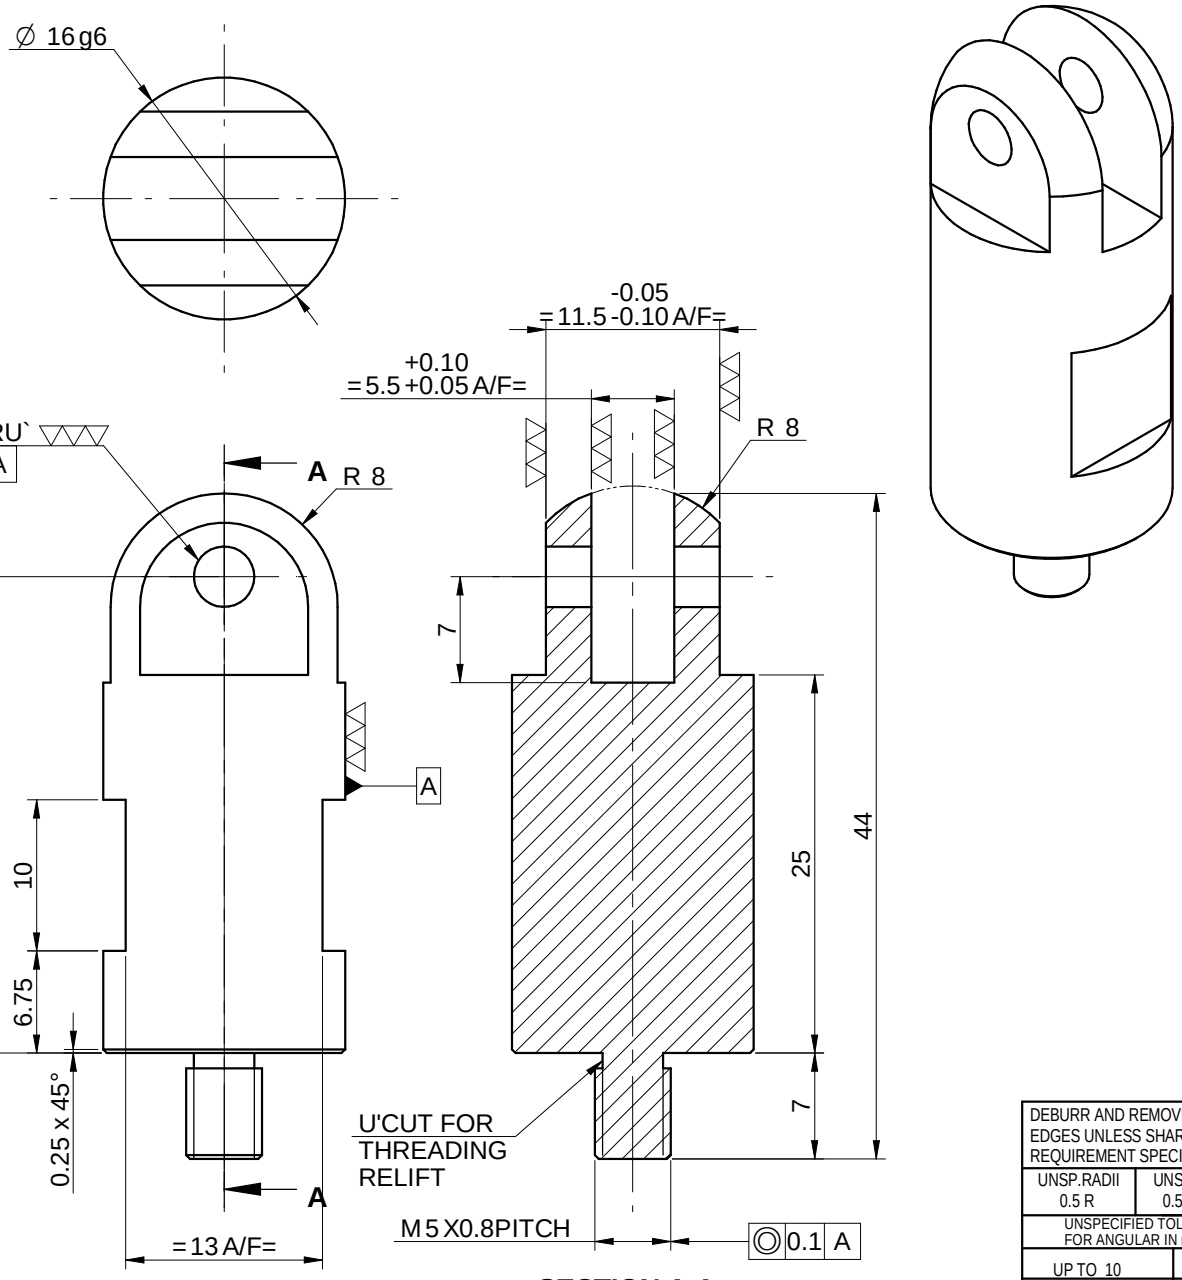

SECTION A-A

NOTE - TO BE CASE HARDENED TO 50-55 HRC
CASE DEPTH 0.8 TO 1.2 mm
KEEP THREADS SOFT

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

PARI

www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **PIN**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
3.84 in^2	IZBP	▽▽(▽▽▽)	20MnCr5	0.04 kg	PL-01	A4

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
SHAMLA J	JEEVAN D		PAZ15E037048	**PRP55A130043**	**00**	2:1
12/08/2020			PART CLASS.			SHEET
DATE	12/08/2020	12/08/2020	B			1 OF 1

\\Parienggl\bt010engg\20-21 Projects\SO_PRP55_PSA-Avtec EB2 Engine line\EXDM Uploading\PAZ15E037048.dft