


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-01

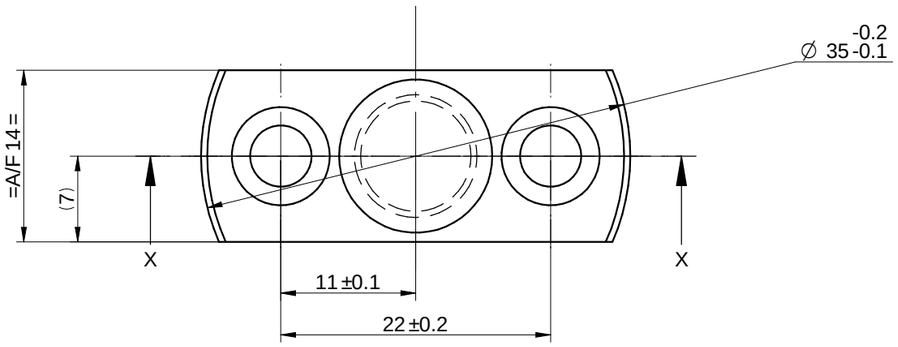

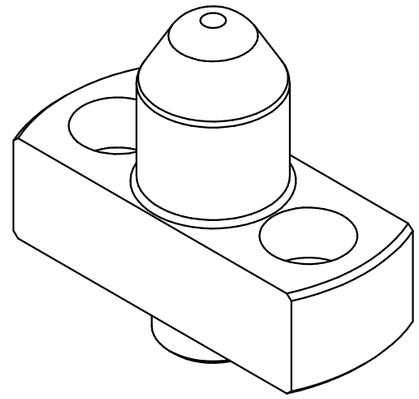

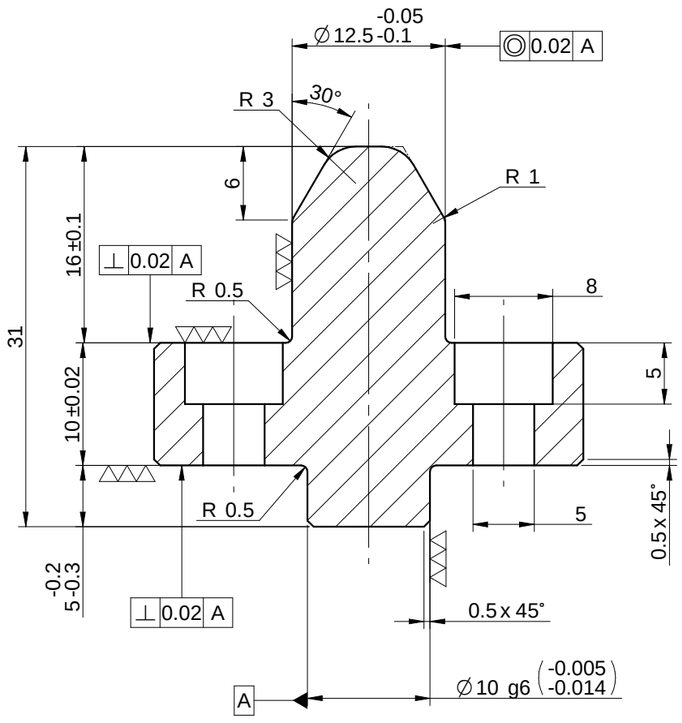

SECTION X-X
SCALE 2:1

HEAT TREATMENT NOTE :-
1) TO BE CASE HARDENED UPTO 56~60 HRC.
2) CASE DEPTH 0.8~1.2mm.
3) THREADS TO BE KEEP SOFT.
4) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.(IF APPLICABLE)

FINISH:- HARD CHROME PLATING DEPTH 0.025 mm WITH BUFFING

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **PIN**

DRAWING TYPE: MACHINING

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
4.36 in^2	#	▽▽(▽▽▽)	20MnCr5	0.05 kg	PL-02	A3

DRN.BY	CHKD.BY	APPD.BY
ROHIT Z	PHARANDE SHIVA G	
03/03/2021		
DATE	03/03/2021	03/03/2021

REFERENCE DWG.: PRE93B205008, PRK65A502004
PART CLASS.: B

DRG./PART CODE: **PRP94B102016**

REV.: **0**

SCALE: 2 : 1

SHEET: 1 OF 1

\\parienggnewBT050ENGG\20-21\PRP94000000-MSIL Automatic Handling - for K12N Cylinder Head\ExDM_Uploading\PRP94B102016.dft