


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-01



TOP VIEW
SCALE 2:1

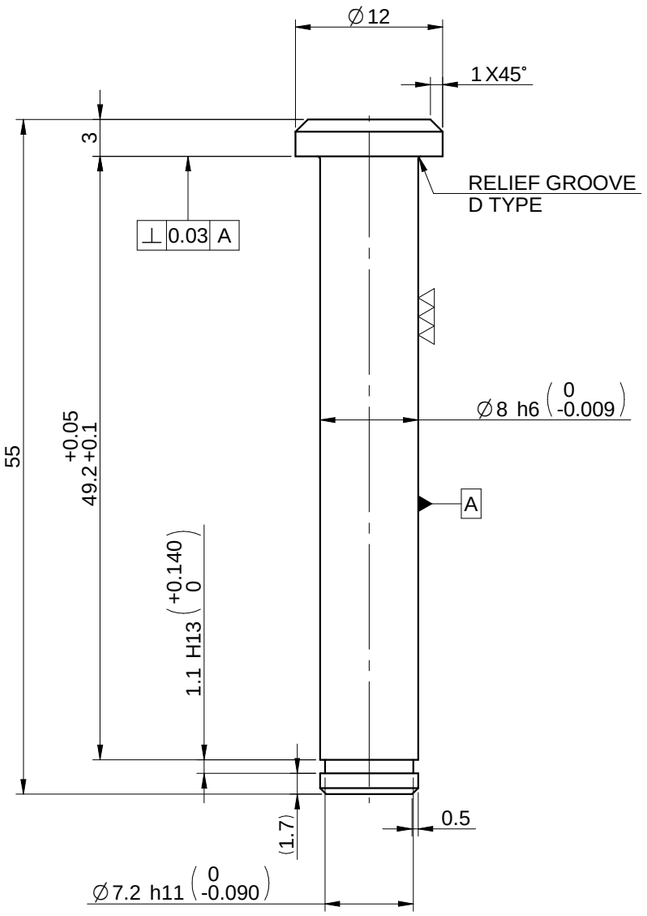


FRONT VIEW
SCALE 2:1

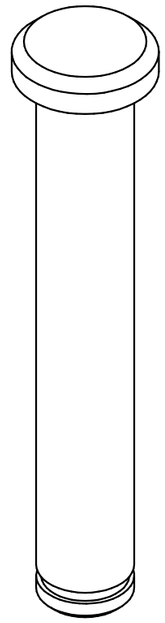

ISOMETRIC VIEW
SCALE 2:1

| DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED | |
|---|---|
| UNSP.RADII 0.5 R | UNSP.CHF. 0.5 X 45° |

| UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1.5° |
| 10 UP TO 50 | ±0°50' |
| 50 UP TO 120 | ±0°25' |
| 120 UP TO 400 | ±0°15' |

| UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.2 |
| 6 UP TO 30 | ±0.5 |
| 30 UP TO 120 | ±0.8 |
| 120 UP TO 315 | ±1.2 |
| 315 UP TO 1000 | ±2 |
| 1000 UP TO 2000 | ±3 |

| UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm. | |
|---|---|
| UP TO 10 | ±1 ° |
| 10 UP TO 50 | ±0 °30' |
| 50 UP TO 120 | ±0 °20' |
| 120 UP TO 400 | ±0 °10' |

| UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm. | |
|---|---|
| 0.5 UP TO 3 | ±0.1 |
| 3 UP TO 6 | ±0.1 |
| 6 UP TO 30 | ±0.2 |
| 30 UP TO 120 | ±0.3 |
| 120 UP TO 315 | ±0.5 |
| 315 UP TO 1000 | ±0.8 |
| 1000 UP TO 2000 | ±1.2 |

LIMITS
Gen Tol.: IS 2102

| REVISION | DESCRIPTION | DATE | DRN.BY |
|---|---|---|---|
| | | | |
| | | | |

NOTE :
# MATERIAL : C-45
# FINISH : IZBP
# MACHINING : ▽▽(▽▽▽)

HEAT TREATMENT :-
1) TO BE TOUGHENED UPTO 24-32 HRC.
2) RETAPPING TO BE DONE AFTER SURFACE TREATMENT AT SUPPLIER END.( IF APPLICABLE )

PARI

PRECISION AUTOMATION & ROBOTICS INDIA LTD

www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

DESCRIPTION: **PIN**

DRAWING TYPE: MACHINING

| SURFACE AREA | FINISH | MACHINING | MATERIAL : | NET WEIGHT-Kg: | TEAM NO. | SHEET SIZE |
|---|---|---|---|---|---|---|
| 2.53 in^2 | # | # | # | 0.02 kg | PL-02 | A3 |

| DRN.BY | CHKD.BY | APPD.BY | REFERENCE DWG. | DRG./PART CODE | REV. | SCALE |
|---|---|---|---|---|---|---|
| SVD | AAJ | AAJ | PRK79D305009 | **PRQ64C401050** | **0** | 2 : 1 |
| 27/01/2021 | 27/01/2021 | 27/01/2021 | PART CLASS. B | | | SHEET 1 OF 1 |

\parienggnew\BT030 ENGG\Design 20-21\PRQ64000000-Diff Case Assembly\Exdm uploading\PRQ64C401050.dft