

NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-01

SR.NO	DESCRIPTION	LENGTH	WIDTH	THICKNESS	MATERIAL	QUANTITY	REMARKS	SURFACE AREA/QUANTITY
2	DISC			25.00 mm	En-9	1	---	39.60 in^2
1	ROD	266.00 mm			En-9	1	---	126.55 in^2



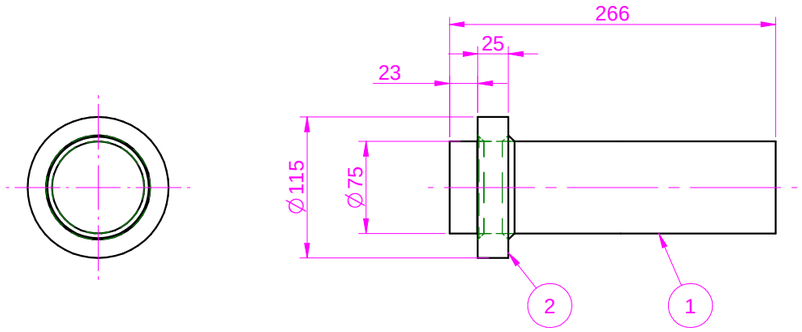

WELDING NOTES -
1) ALL JOINTS SHOULD BE AS PER TABLES "GENERAL WELDING DETAILS"
2) ALL CHILD PARTS TO BE STRAIGHTENED BEFORE WELDING
3) SUITABLE EDGE PREPARATION TO BE DONE BEFORE WELDING
4) FABRICATED STRUCTURE TOLERANCES SHOULD BE AS PER IS 2102 COARSE GRADE UNLESS SPECIFIED.
5) WELDING SHOULD BE NEAT & CLEAN
6) ALL WELDING JOINTS SHALL BE DRESSED PROPERLY
7) MASK MACHINED FACES (IF ANY) DURING PAINTING
8) WELD CLASS - "B"
9) STRESS RELIEVING - APPLICABLE
10) SHOT BLASTING - NOT APPLICABLE

INSPECTION NOTES -
1) DYE PENETRATION TEST FOR WELDING - APPLICABLE
2) ULRASONIC TESTING FOR FINISH JOB - NOT APPLICABLE
3) LEAK PROOF WELD JOINT - NOT REQUIRED

GENERAL WELDING DETAILS FOR UNSPECIFIED WELD JOINTS


1) REFER TABLE FOR UNSPECIFIED BEAD SIZE.

UNSPECIFIED WELD BEAD SIZES IN mm		
MIN. PLATE / SECTION THICKNESS	BEAD SIZE FOR WELD CLASS C & D	BEAD SIZE FOR WELD CLASS B
UPTO 4	2	2
4 UPTO 8	3	4
8 UPTO 12	5	6
ABOVE 12	5	8

2) REFER TABLE BELOW FOR UNSPECIFIED WELD DETAILS.


WELD LENGTH (MM)	WELD CLASS C & D (WELD-PITCH)	WELD CLASS B (WELD-PITCH)
UPTO 250	FULL LENGTH WELD	FULL LENGTH WELD
250 TO 500	50-100	50-100
500 TO 1000	50-150	50-150
ABOVE 1000	100-200	100-200

3) FOR STITCH WELDING, APPLY 25 MM WELD ON END OF WELD SEAM UNLESS SPECIFIED.

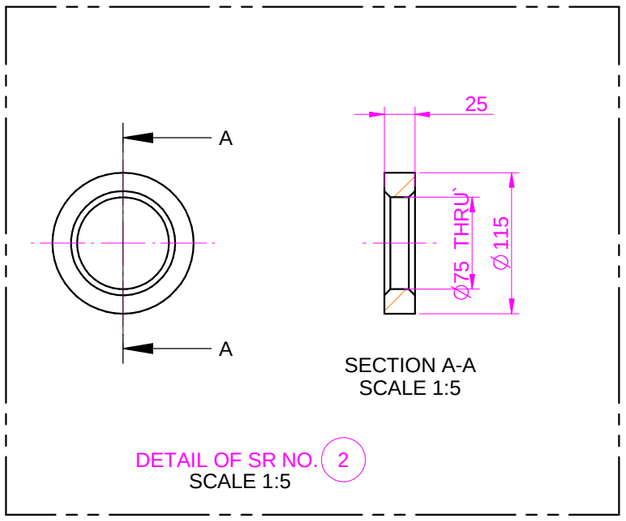

SECTION A-A
SCALE 1:5

DETAIL OF SR NO. 2
SCALE 1:5

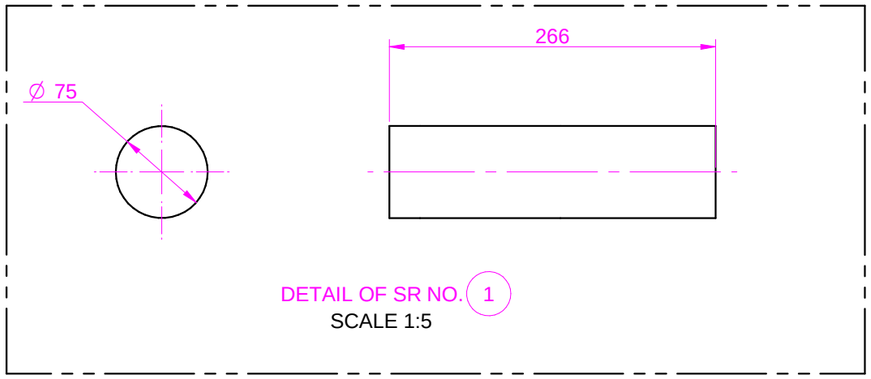

DETAIL OF SR NO. 1
SCALE 1:5

'B' CLASS WELD

H.T.PROCESS	: TOUGHENED
HARDNESS & DEPTH	: 24 - 32 HRC.
FINISH & DEPTH	: ZINK BLACK PASSIVATION TRIVALENT
TEST COUPON SIZE	:(Ø25 x 50mm LENGTH - 02NOS)
WELD CLASS	: B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI

$THREAD M65X2P FOR DEPTH 17MM
MAKE SUIT TO 4R0250112001_LOCK NUT LOCKING WASHER TYPE_KM13_SKF
FABRICATION NOTES :-
1) ALL JOINTS TO BE CO2 MIG, FULL WELDED.FILLET SIZE 10 mm.
2) WELDING SHOULD BE NEAT AND CLEAN.
3) SUITABLE EDGE PREPARATION TO BE DONE.
4) REMOVE ALL SHARP EDGES & CORNERS.
5) STRESS RELIEVING TO BE DONE
6) CRACK DETECTION TEST TO BE DONE
7) INSPECTION REPORT &* WELDING REPORT TO BE SUBMITTED TO DESIGN BEFORE ASSLY .
8) ALL H7 HOLES TO BE CONTROLED u0.02
9) ALL TAP HOLES TO BE CONTROLED u0.2
10) TO BE TOUGHENED UPTO 28 ~32HRC

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0 °50'
50 UP TO 120	±0 °25'
120 UP TO 400	±0 °15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
2	FINISH CHANGED. IZBP WAS ENP.	08/12/2021	NAMDEO
1	SHAFT DIAMETER & KEYWAY DIMENSION UPDATED REFER SHEET 2 OF 2	26/07/2021	PRADEEP

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: SHAFT

DRAWING TYPE: FAB - M/C


SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
134.65 in^2	IZBP 2	~(▽▽ ▽▽▽)	REFER BOM	5.44 kg	PL-01	A3


DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
MIRA	JEEVAN	SRK	PAT49A011033	PRR74A055037	2	1 :
08/12/2021						SHEET 1 OF 2
DATE	08/12/2021	08/12/2021	PART CLASS. T+S			


\\parienggnew\BT060ENGG\20-21\PRR74_Kohler-Engine Assembly Line\ExDM Uploading\PRR74A055037.dft

NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A


PFR/DES/07/REV-01

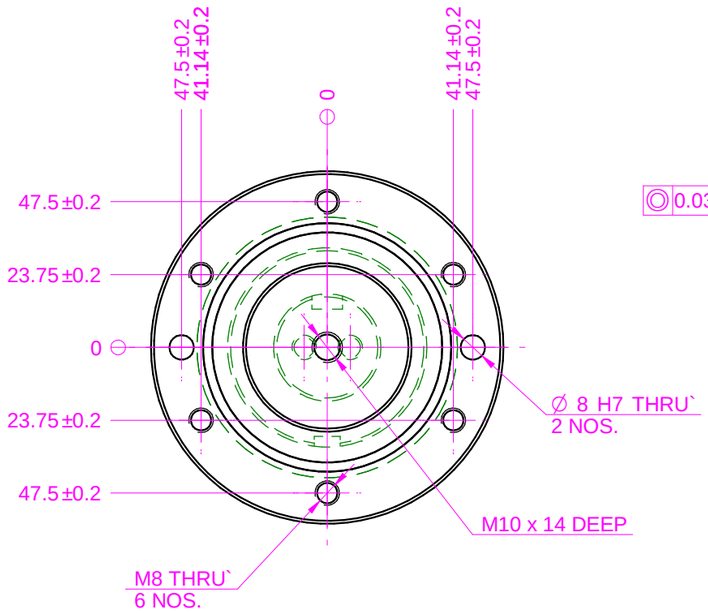

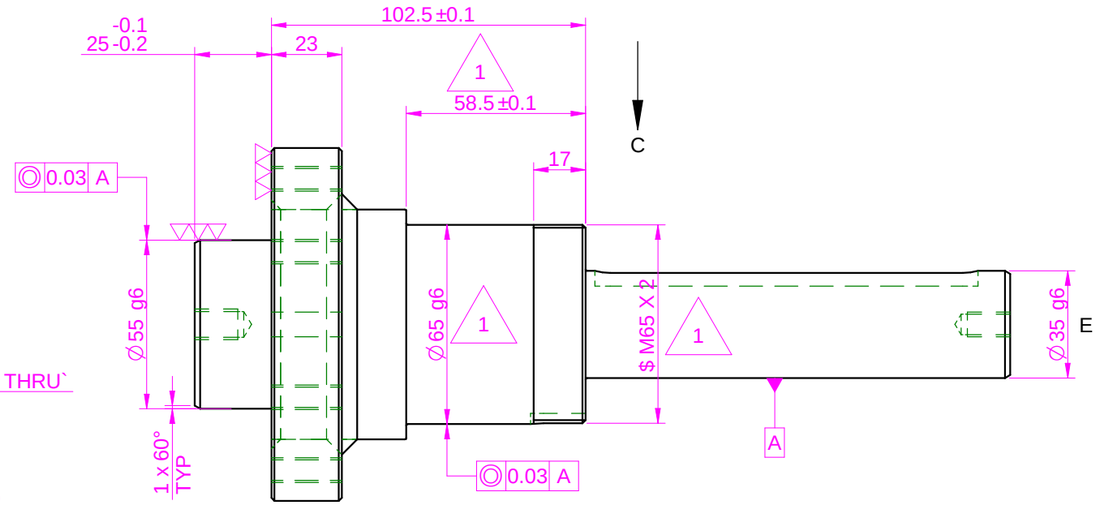


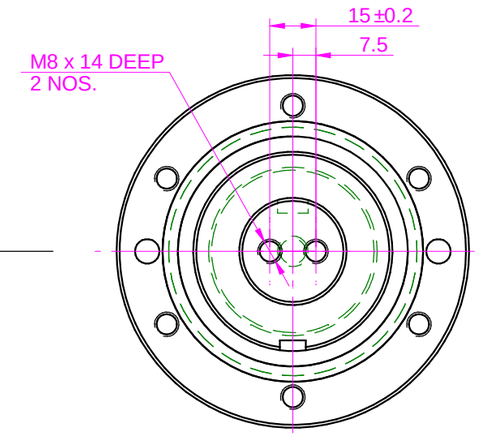


VIEW E
SCALE 1:2

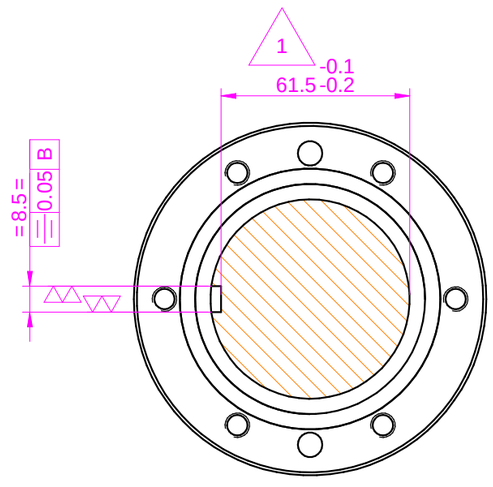


SECTION B-B
SCALE 1:2

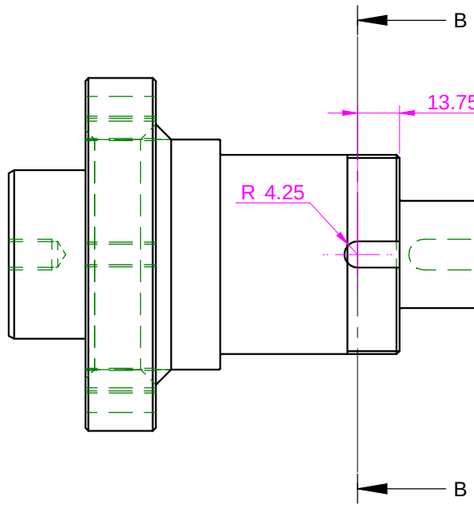



SECTION D-D
SCALE 1:2

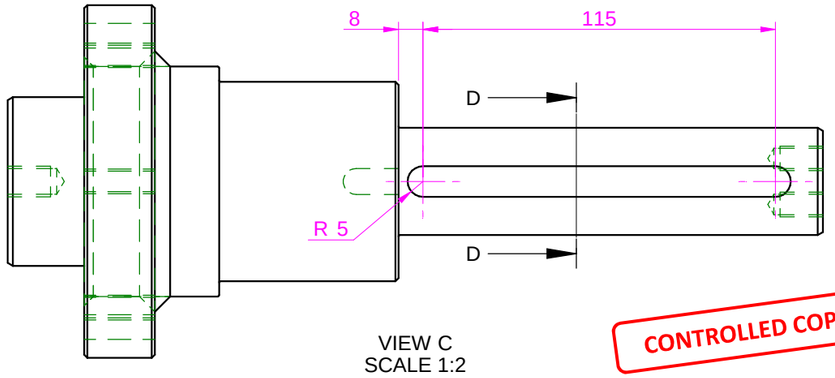

VIEW C
SCALE 1:2

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.

UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.

UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.

0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
2	FINISH CHANGED. IZBP WAS ENP.	08/12/2021	NAMDEO
1	SHAFT DIAMETER & KEYWAY DIMENSION UPDATED REFER SHEET 2 OF 2	26/07/2021	PRADEEP

PARI
www.parirobotics.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

PRECISION AUTOMATION & ROBOTICS INDIA LTD

DESCRIPTION: **SHAFT**

DRAWING TYPE: FAB - M/C

SURFACE AREA	FINISH	MACHINING	MATERIAL :	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
134.65 in^2	IZBP 2	~(▽▽ ▽▽▽)	REFER BOM	5.44 kg	PL-01	A3

DRN.BY	CHKD.BY	APPD.BY
MIRA	JEEVAN	SRK
08/12/2021	08/12/2021	08/12/2021
DATE		

REFERENCE DWG. PAT49A011033

PART CLASS. T+S

DRG./PART CODE: **PRR74A055037**

REV. **2**

SCALE 1 :

SHEET 2 OF 2

\\parienggnew\BT060ENGG\20-21\PRR74_Kohler-Engine Assembly Line\ExDM Uploading\PRR74A055037.dft