


NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-04



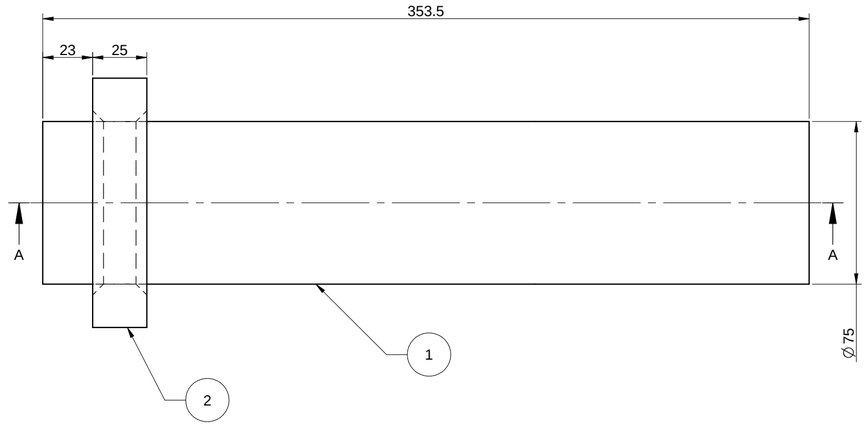

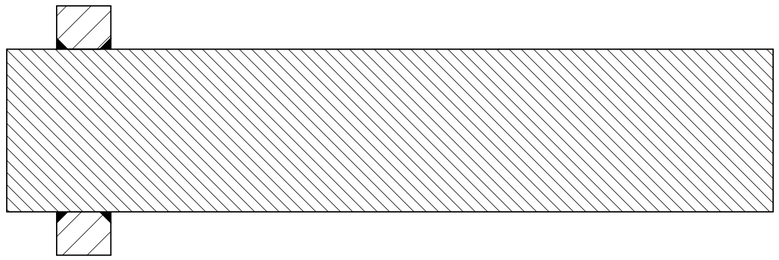

SECTION A-A
SCALE 1:2

GENERAL WELDING DETAILS FOR UNSPECIFIED WELD JOINTS

1) REFER TABLE FOR UNSPECIFIED BEAD SIZE.

UNSPECIFIED WELD BEAD SIZES IN mm		
MIN. PLATE / SECTION THICKNESS	BEAD SIZE FOR WELD CLASS C & D	BEAD SIZE FOR WELD CLASS B
UPTO 4	2	2
4 UPTO 8	3	4
8 UPTO 12	5	6
ABOVE 12	5	8

2) REFER TABLE BELOW FOR UNSPECIFIED WELD DETAILS.


WELD LENGTH (MM)	WELD CLASS C & D (WELD-PITCH)	WELD CLASS B (WELD-PITCH)
UPTO 250	FULL LENGTH WELD	FULL LENGTH WELD
250 TO 500	50-100	50-100
500 TO 1000	50-150	50-150
ABOVE 1000	100-200	100-200

3) FOR STITCH WELDING, APPLY 25 MM WELD ON END OF WELD SEAM UNLESS SPECIFIED.

WELDING NOTES -
1) ALL JOINTS SHOULD BE AS PER TABLES “GENERAL WELDING DETAILS”
2) ALL CHILD PARTS TO BE STRAIGHTENED BEFORE WELDING
3) SUITABLE EDGE PREPARATION TO BE DONE BEFORE WELDING
4) FABRICATED STRUCTURE TOLERANCES SHOULD BE AS PER IS 2102 COARSE GRADE UNLESS SPECIFIED.
5) WELDING SHOULD BE NEAT & CLEAN
6) ALL WELDING JOINTS SHALL BE DRESSED PROPERLY
7) MASK MACHINED FACES (IF ANY) DURING PAINTING
8) WELD CLASS - "B"
9) STRESS RELIEVING - APPLICABLE
10) SHOT BLASTING - APPLICABLE

INSPECTION NOTES -
1) DYE PENETRATION TEST FOR WELDING - APPLICABLE
2) ULRASONIC TESTING FOR FINISH JOB - APPLICABLE
3) LEAK PROOF WELD JOINT - NOT REQUIRED

WELD CLASS - "B"



T + S NOTE :

H.T.PROCESS	: TOUGHENED
HARDNESS & DEPTH	: 28-32 HRC
FINISH & DEPTH	: IZBP
TEST COUPON SIZE	:∅30 mm (20mmLENGTH - 01NOS)
WELD CLASS	: B

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING

RAW MATERIAL	HEAT TREATMENT	FINISH COMPOMENT
UT	DP+UT	MPI

SR.NO	DESCRIPTION	LENGTH	WIDTH	THICKNESS	MATERIAL	QUANTITY	SURFACE AREA/QUANTITY
2	DISC		DIA. 115.00 mm	25.00 mm	En-9	1	39.60 in^2
1	ROD	353.50 mm	DIA. 75.00 mm		En-9	1	126.55 in^2

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : M.W

RESERVED SPACE FOR CONT...
CONTROLLED COPY

REVISION	DESCRIPTION	DATE	DRN.BY
1	THREAD NOTE ADDED AND DWG UPDATED	22/12/2022	SUPRIYA K

www.wipropari.com

WIPRO PARI PRIVATE LIMITED
[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION: **SHAFT**
DRAWING TYPE: FAB - M/C

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED


SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
160.65 in^2	IZBP	▽▽(▽▽▽)	REFER BOM	7.77 kg	PL-02	A2

SURFACE FINISH ▽▽▽▽ ▽▽▽ ▽▽ ▽ HEAT TREATMENT --

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
SUPRIYA K	ABHAY P	SHIVA G	PAT49A011033	PRT84S103156	01	1 : 2
22/12/2022	22/12/2022	22/12/2022	PART CLASS. T+S			SHEET 1 OF 3


\\pune\engnew\BT030 ENGG\Design 21-22\PRT84_Stellantis GB ass'ly limet\Exdrn uploading\PRT84S103156.dft

NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-04

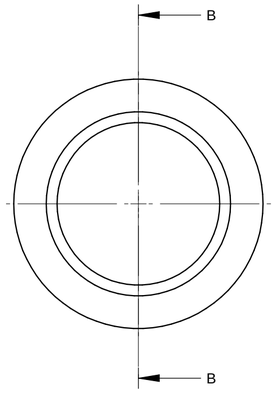


DETAIL VIEW
SCALE 1:2

2

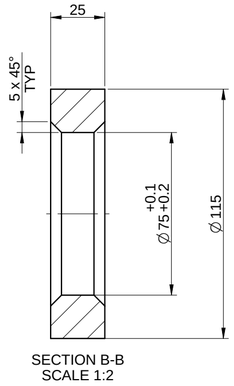

SECTION B-B
SCALE 1:2

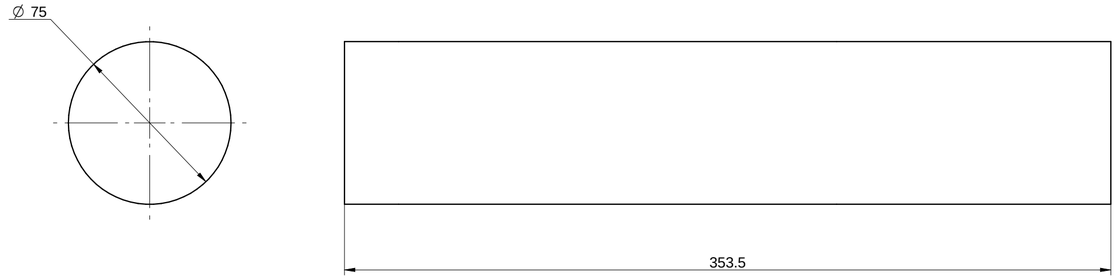

DETAIL VIEW
SCALE 1:2

1

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

REVISION	DESCRIPTION	DATE	DRN.BY
1	THREAD NOTE ADDED AND DWG UPDATED	22/12/2022	SUPRIYA K

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : M.W

RESERVED SPACE FOR ... AMP

CONTROLLED COPY

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI PRIVATE LIMITED

[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION	DRAWING TYPE
SHAFT	FAB - M/C


SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
160.65 in^2	IZBP	▽▽(▽▽▽)	REFER BOM	7.77 kg	PL-02	A2


SURFACE FINISH ▽▽▽▽ ▽▽▽ ▽▽ ▽ HEAT TREATMENT --

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
SUPRIYA K	ABHAY P	SHIVA G	PAT49A011033	PRT84S103156	01	1 : 2
22/12/2022	22/12/2022	22/12/2022	PART CLASS. T+S			SHEET 2 OF 3


\\parlengg\new\BT030 ENGG\Design 21-22\PRT84_Stellantis GB assly limit\Exdm upload\rg\PRT84S103156.dft


NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-04

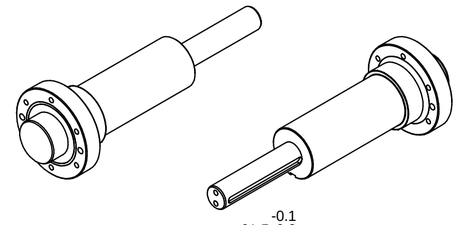





SECTION E-E
SCALE 1:2

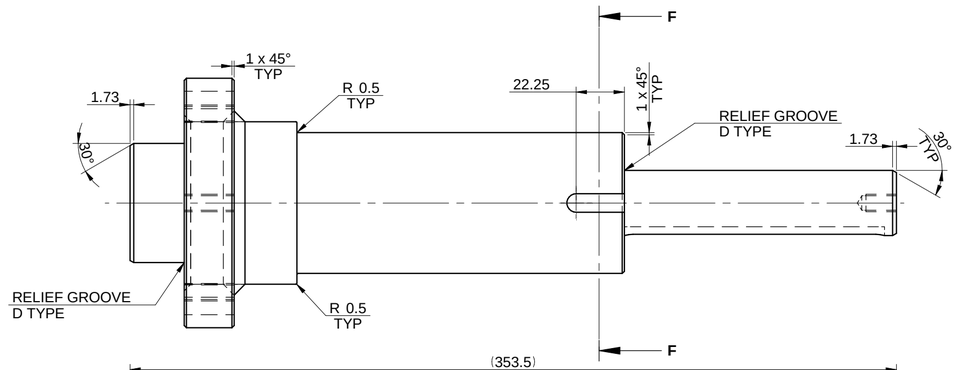




SECTION F-F
SCALE 1:2



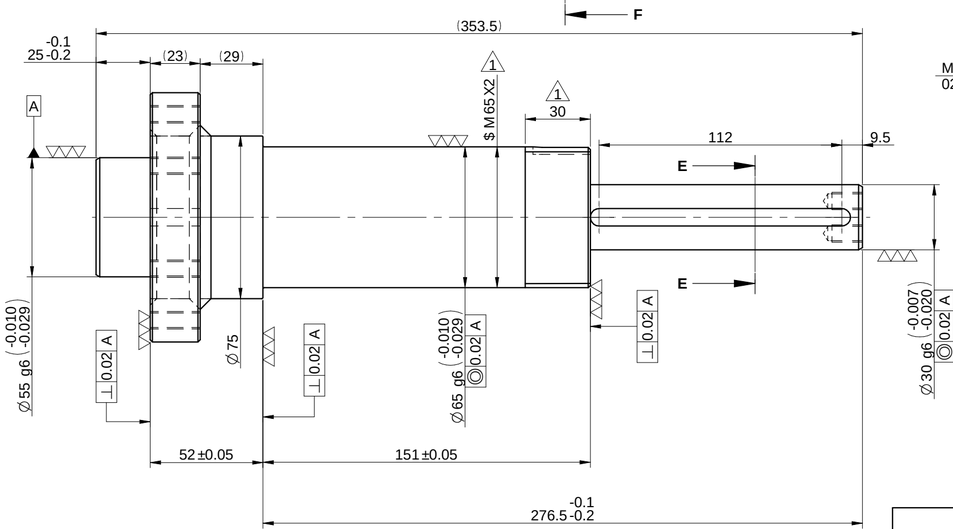

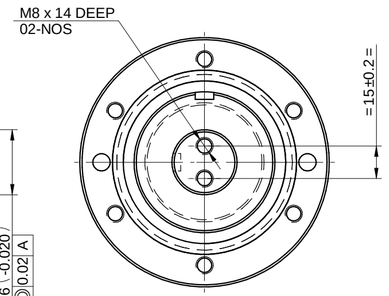

HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	-47.50	0.00	Ø 8.00 mm THRU'	H7
A.2	47.50	0.00	Ø 8.00 mm THRU'	H7
B.1	-41.14	23.75	M8 THRU'	
B.2	0.00	47.50	M8 THRU'	
B.3	41.14	23.75	M8 THRU'	
B.4	41.14	-23.75	M8 THRU'	
B.5	0.00	-47.50	M8 THRU'	
B.6	-41.14	-23.75	M8 THRU'	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

1 $THREAD M65X2P FOR DEPTH 30MM
MAKE SUIT TO 4R0250112001_LOCK NUT LOCKING WASHER TYPE_KM13_SKF
FABRICATION NOTES :-
1) ALL JOINTS TO BE CO2 MIG, FULL WELDED.FILLET SIZE 10 mm.
2) WELDING SHOULD BE NEAT AND CLEAN.
3) SUITABLE EDGE PREPARATION TO BE DONE.
4) REMOVE ALL SHARP EDGES & CORNERS.
5) STRESS RELIEVING TO BE DONE
6) CRACK DETECTION TEST TO BE DONE
7) INSPECTION REPORT &* WELDING REPORT TO BE SUBMITTED
TO DESIGN BEFORE ASSLY .
8) ALL H7 HOLES TO BE CONTROLED u0.02
9) ALL TAP HOLES TO BE CONTROLED u0.2
10) TO BE TOUGHENED UPTO 28 ~32HRC

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : M.W

RESERVED SPACE FOR CONTROLLED COPY

CONTROLLED COPY

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
1	THREAD NOTE ADDED AND DWG UPDATED	22/12/2022	SUPRIYA K

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI PRIVATE LIMITED
[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION: **SHAFT**

DRAWING TYPE: FAB - M/C

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
160.65 in^2	IZBP	▽▽(▽▽▽)	REFER BOM	7.77 kg	PL-02	A2

SURFACE FINISH ▽▽▽▽ ▽▽▽ ▽▽ ▽ HEAT TREATMENT --

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
SUPRIYA K	ABHAY P	SHIVA G	PAT49A011033	PRT84S103156	01	1 : 2
22/12/2022	22/12/2022	22/12/2022	PART CLASS. T+S			SHEET 3 OF 3

\\pune\engnew\BT030 ENGG\Design 21-22\PRT84_Stellantis GB assly limetExdrn uploading\PRT84S103156.dft