


NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-05

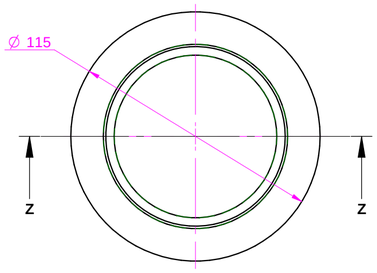

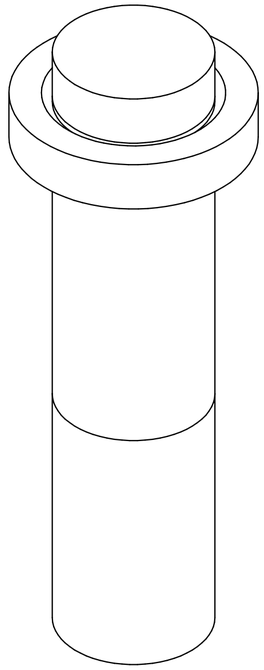

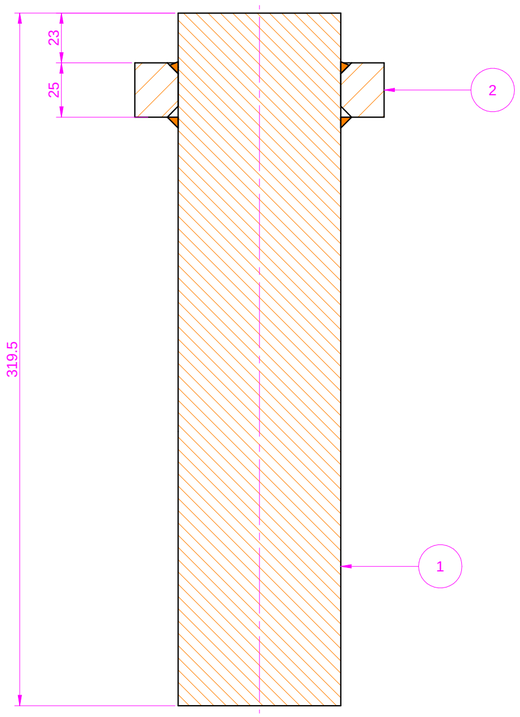

SECTION Z-Z
SCALE 1:2

GENERAL WELDING DETAILS FOR UNSPECIFIED WELD JOINTS

1) REFER TABLE FOR UNSPECIFIED BEAD SIZE.

UNSPECIFIED WELD BEAD SIZES IN mm		
MIN. PLATE / SECTION THICKNESS	BEAD SIZE FOR WELD CLASS C & D	BEAD SIZE FOR WELD CLASS B
UPTO 4	2	2
4 UPTO 8	3	4
8 UPTO 12	5	6
ABOVE 12	5	8

2) REFER TABLE BELOW FOR UNSPECIFIED WELD DETAILS.

WELD LENGTH (MM)	WELD CLASS C & D (WELD-PITCH)	WELD CLASS B (WELD-PITCH)
UPTO 250	FULL LENGTH WELD	FULL LENGTH WELD
250 TO 500	50-100	50-100
500 TO 1000	50-150	50-150
ABOVE 1000	100-200	100-200

3) FOR STITCH WELDING, APPLY 25 MM WELD ON END OF WELD SEAM UNLESS SPECIFIED.

WELDING NOTES -
1) ALL JOINTS SHOULD BE AS PER TABLES “GENERAL WELDING DETAILS”
2) ALL CHILD PARTS TO BE STRAIGHTENED BEFORE WELDING
3) SUITABLE EDGE PREPARATION TO BE DONE BEFORE WELDING
4) FABRICATED STRUCTURE TOLERANCES SHOULD BE AS PER IS 2102 COARSE GRADE UNLESS SPECIFIED.
5) WELDING SHOULD BE NEAT & CLEAN
6) ALL WELDING JOINTS SHALL BE DRESSED PROPERLY
7) MASK MACHINED FACES (IF ANY) DURING PAINTING
8) WELD CLASS - "B"
9) STRESS RELIEVING - APPLICABLE
10) SHOT BLASTING - APPLICABLE

INSPECTION NOTES -
1) DYE PENETRATION TEST FOR WELDING - APPLICABLE
2) ULRASONIC TESTING FOR FINISH JOB - NOT APPLICABLE
3) LEAK PROOF WELD JOINT - NOT REQUIRED

H.T.PROCESS : TOUGHENED
HARDNESS & DEPTH : 24 - 32 HRC.
FINISH & DEPTH : IZBP
TEST COUPON SIZE :(∅25 x 50mm LENGTH - 02NOS)
WELD CLASS : B IF APPLICABLE

MTC REPORT REQURIED
NON DESTRUCTIVE TESTING

RAW MATERIAL UT	HEAT TREATMENT DP+UT	FINISH COMPOMENT MPI

SR.NO	DESCRIPTION	LENGTH	WIDTH	THICKNESS	MATERIAL	QUANTITY	REMARKS	SURFACE AREA/QUANTITY
2	DISC			25.00 mm	En-9	1	---	39.60 in^2
1	ROD	319.50 mm			En-9	1	---	126.55 in^2

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED

UNSP.RADII	UNSP.CHF.
0.5 R	0.5 X 45°

UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'

UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4

UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'

UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2

LIMITS
Gen Tol.: IS 2102

REVISION	DESCRIPTION	DATE	DRN.BY
2	TOLERANCE ADDED	08/09/2023	9265
1	TOLERANCE UDAPTED	06/04/2023	NILESH W

www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

WIPRO PARI PRIVATE LIMITED
[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION: SHAFT
DRAWING TYPE: FAB - M/C

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
145.86 in^2	IZBP	∼(▽)	M.S.	6.35 kg	PL-02	A2


SURFACE FINISH ▽▽▽ ▽▽▽ ▽▽ ▽ ∼ HEAT TREATMENT Error: No reference


DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
AVINASH	AMAN	AMAN	PAT49A011033	PRV73B015065	02	1 : 2
11/09/2023	11/09/2023	11/09/2023	PART CLASS. T+S			SHEET 1 OF 3


NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

\\srv010436\EXM Uploading\2022-23\PRV73\PRV73B015065.dft


NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-05

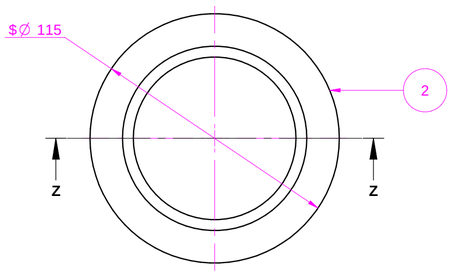





SECTION Z-Z
SCALE 1:2

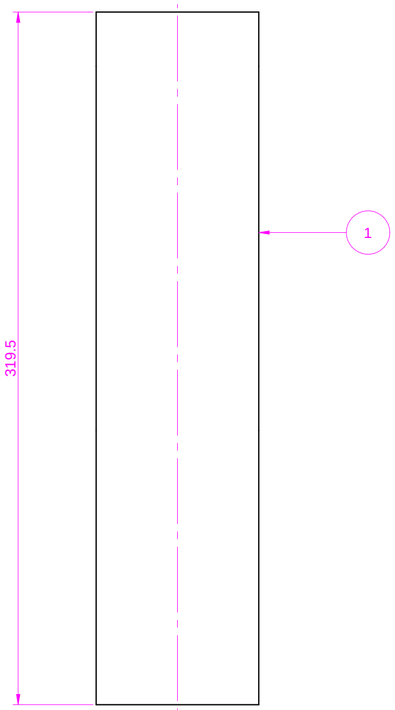

$ MARKED DIMENSION TO BE SUIT WITH EACH OTHER

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
2	TOLERANCE ADDED	08/09/2023	9265
1	TOLERANCE UDAPTED	06/04/2023	NILESH W

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER
LOCATION : PUNE

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

WIPRO PARI PRIVATE LIMITED

[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION	DRAWING TYPE
SHAFT	FAB - M/C

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
145.86 in^2	IZBP	~(▽)	M.S.	6.35 kg	PL-02	A2


SURFACE FINISH ▽▽▽ ▽▽▽ ▽▽ ▽ HEAT TREATMENT Error: No reference


DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
AVINASH	AMAN	AMAN	PAT49A011033	PRV73B015065	02	1 : 2
11/09/2023	11/09/2023	11/09/2023	PART CLASS. T+S			SHEET 2 OF 3


NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.


\\srv010435\EXDM Uploading\2022-23\PRV73\PRV73B015065.dft


NOTE : STANDARD FASTENER TORQUE AS PER PST-DES-01 PFR-DES-07-REV-05

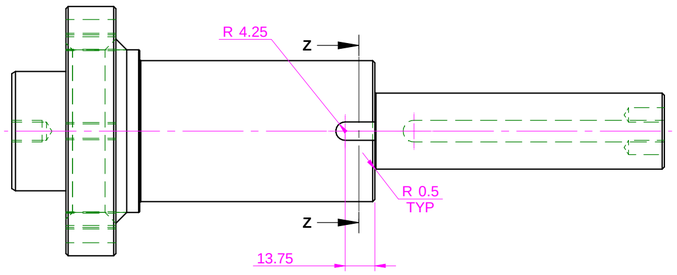







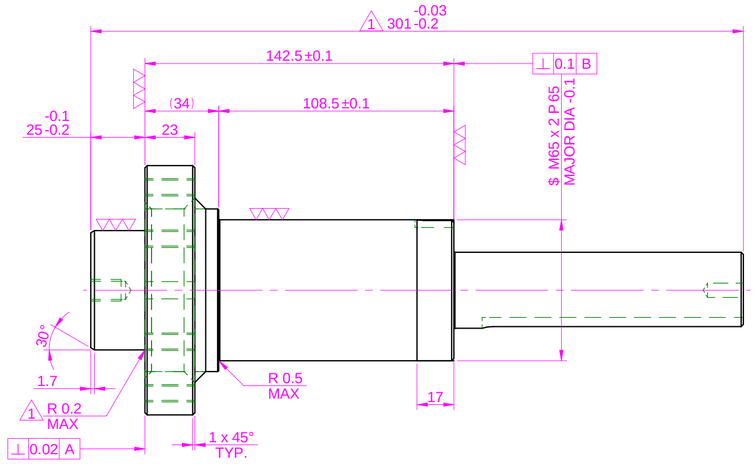

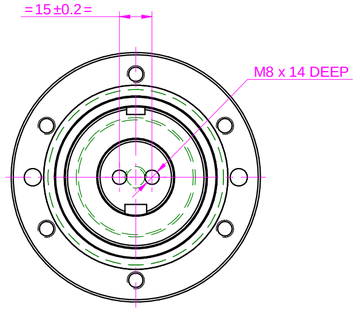

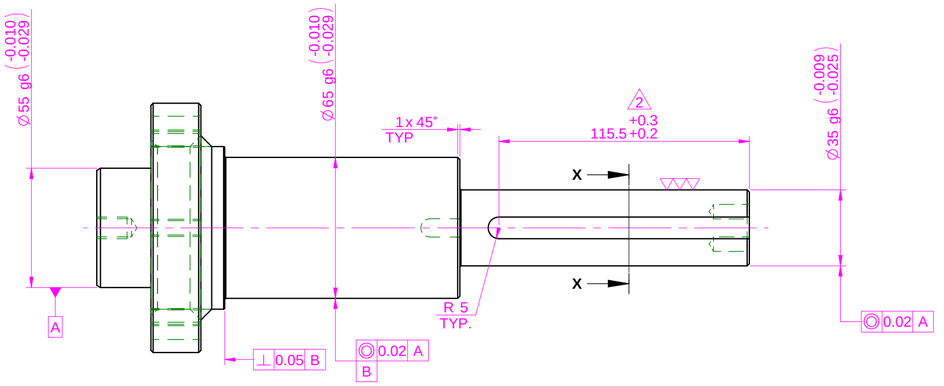



HOLE TABLE				
Hole	X	Y	Size	REMARK
A.1	0.00	0.00	M10 x 14.00 mm DEEP	
B.1	-47.50	0.00	Ø 8.00 mm THRU'	H7
B.2	47.50	0.00	Ø 8.00 mm THRU'	H7
C.1	-41.14	23.75	M8 THRU'	
C.2	0.00	47.50	M8 THRU'	
C.3	41.14	-23.75	M8 THRU'	
C.4	41.14	23.75	M8 THRU'	
C.5	0.00	-47.50	M8 THRU'	
C.6	-41.14	-23.75	M8 THRU'	

TOLERANCE NOTE :-
1) ALL H7 HOLES C.D SHOULD BE CONTROLLED WITHIN±0.02. / IT7
2) ALL HOLES,TAP & COUNTER BORE C.D,
SHOULD BE CONTROLLED WITHIN ±0.2.

$THREAD M65X2P FOR DEPTH 17MM
MAKE SUIT TO 4R0250112001_LOCK NUT LOCKING WASHER TYPE_KM13_SKF

NOTE FOR WIPRO PARI DESIGN -REF. ONLY
WEAR DETAILS : N.A.

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(FAB) FOR ANGULAR IN mm.	
UP TO 10	±1.5°
10 UP TO 50	±0°50'
50 UP TO 120	±0°25'
120 UP TO 400	±0°15'
UNSPECIFIED TOL.(FAB) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.2
6 UP TO 30	±0.5
30 UP TO 120	±0.8
120 UP TO 315	±1.2
315 UP TO 1000	±2
1000 UP TO 2000	±3
OVER 2000	±4
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1°
10 UP TO 50	±0°30'
50 UP TO 120	±0°20'
120 UP TO 400	±0°10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
OVER 2000	±2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DATE	DRN.BY
2	TOLERANCE ADDED	08/09/2023	9265
1	TOLERANCE UDAPTED	06/04/2023	NILESH W

wipro PARI
www.wipropari.com

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

LOCATION : PUNE

ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

RESERVED SPACE FOR CONTROLLED COPY STAMP

CONTROLLED COPY

WIPRO PARI PRIVATE LIMITED

[Formerly Known as Precision Automation and Robotics India Limited]

DESCRIPTION: **SHAFT**

DRAWING TYPE: FAB - M/C

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg	TEAM NO.	SHEET SIZE
145.86 in^2	IZBP	▽▽(▽▽▽)	M.S.	6.35 kg	PL-02	A2

SURFACE FINISH ▽▽▽▽ ▽▽▽ ▽▽ ▽ | HEAT TREATMENT: Error: No reference

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
AVINASH	AMAN	AMAN	PAT49A011033	PRV73B015065	02	1 : 2
11/09/2023	11/09/2023	11/09/2023	PART CLASS. T+S			SHEET 3 OF 3

\\srv010436\EXDM Uploading\2022-23\PRV73\PRV73B015065.dlt