


NOTE : STANDARD FASTENER TORQUE AS PER PST/DES/01 TABLE-A PFR/DES/07/REV-00

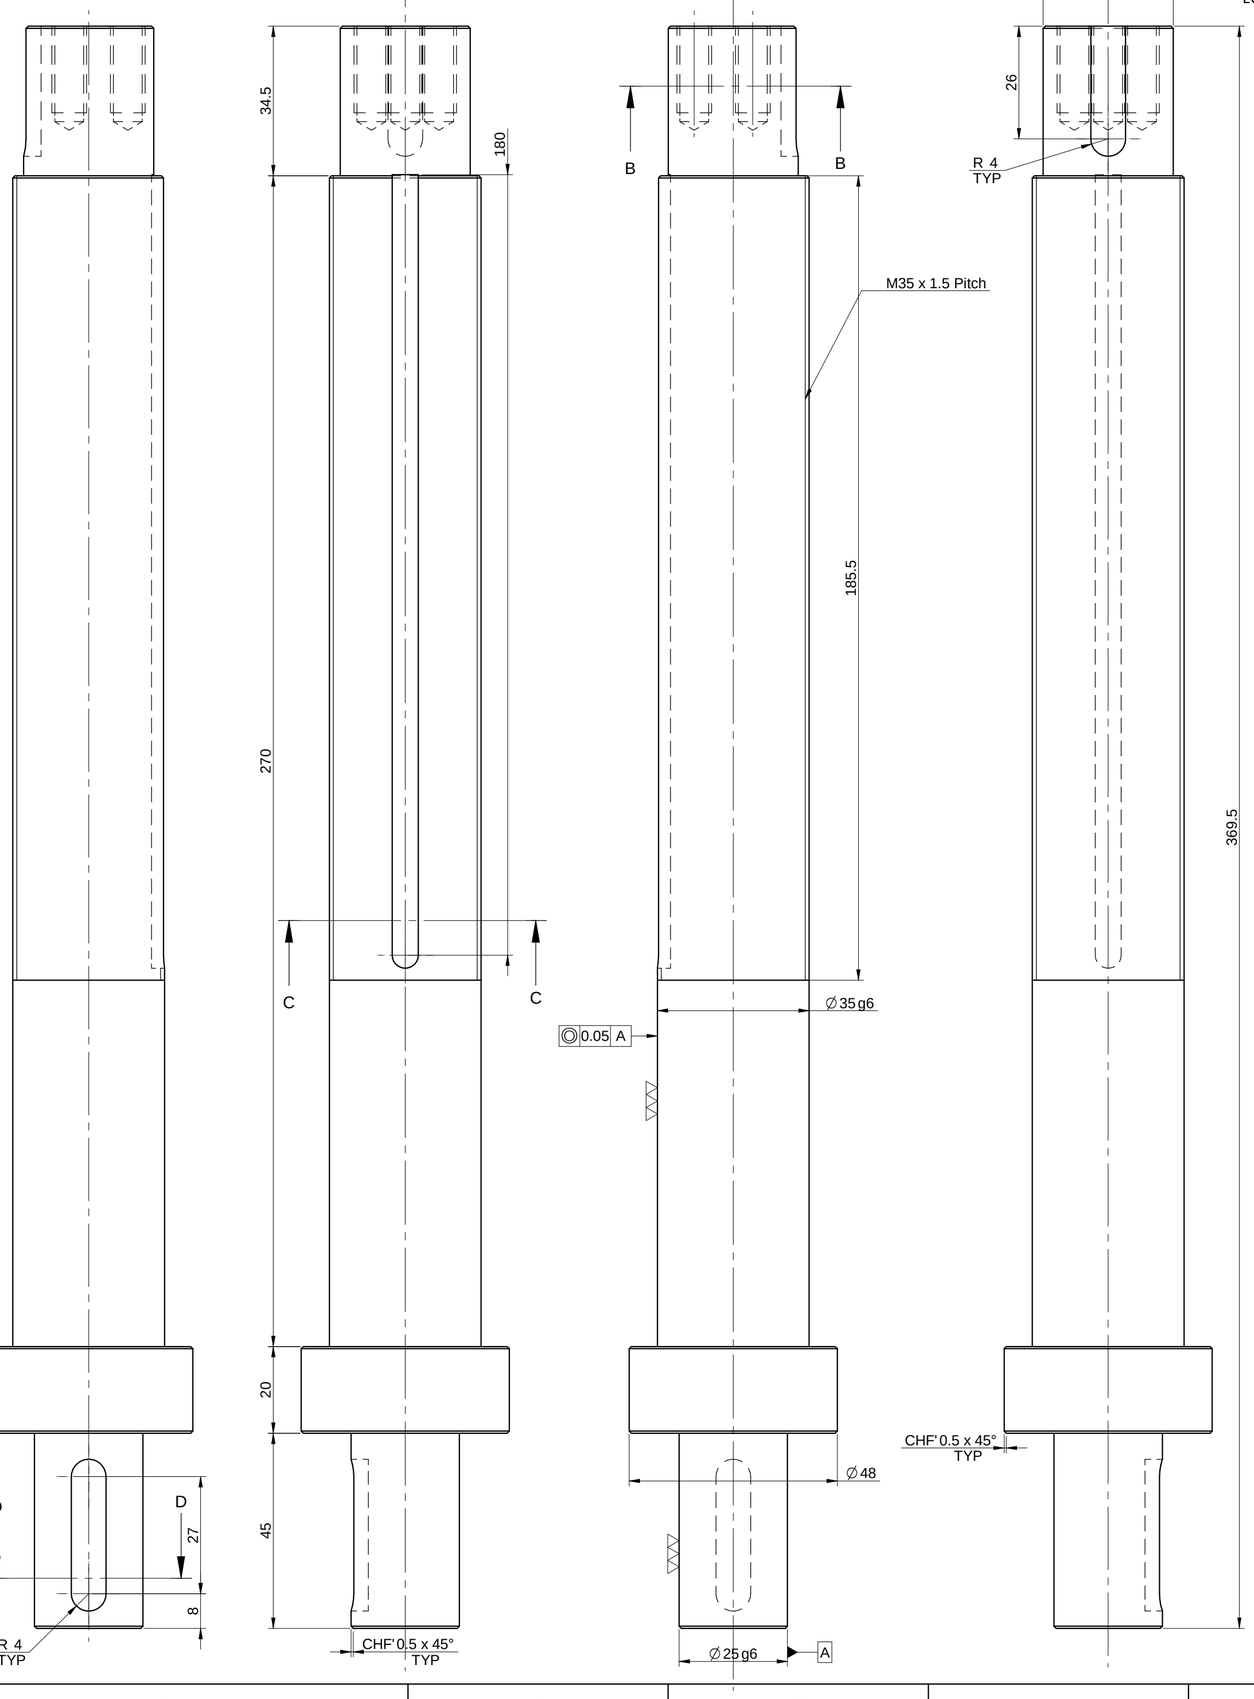


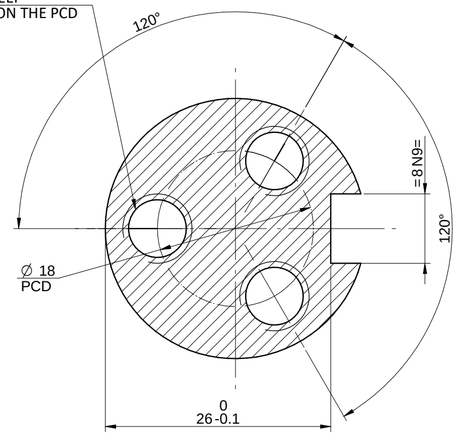


SECTION B-B



SECTION D-D

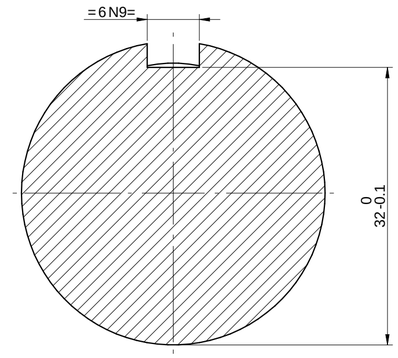

SECTION C-C

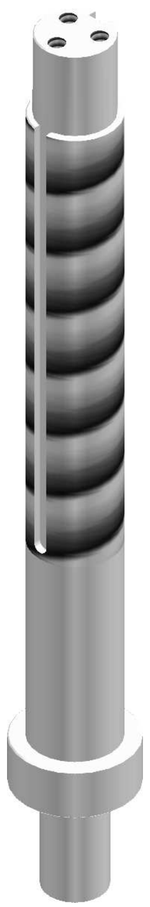

NOTE :-TOUGHENED TO 28 - 32 HRc.
KEEP THREAD SOFT

DEBURR AND REMOVE SHARP EDGES UNLESS SHARP EDGE REQUIREMENT SPECIFIED.	
UNSP.RADII 0.5 R	UNSP.CHF. 0.5 X 45°
UNSPECIFIED TOL.(M/C) FOR ANGULAR IN mm.	
UP TO 10	±1 °
10 UP TO 50	±0 °30'
50 UP TO 120	±0 °20'
120 UP TO 400	±0 °10'
UNSPECIFIED TOL.(M/C) FOR LINEAR IN mm.	
0.5 UP TO 3	±0.1
3 UP TO 6	±0.1
6 UP TO 30	±0.2
30 UP TO 120	±0.3
120 UP TO 315	±0.5
315 UP TO 1000	±0.8
1000 UP TO 2000	±1.2
LIMITS	
Gen Tol.: IS 2102	

REVISION	DESCRIPTION	DCR. NO.	DATE	DRN.BY
1	CHANGE IN MATERIAL AND CHANGE IN THREADING & GROVE LENGTH	465/18	5/10/18	TCL

PARI — PRECISION AUTOMATION & ROBOTICS INDIA LTD

www.parirobotics.com

DESCRIPTION: **SHAFT**

DRAWING TYPE: MACHINING

1.ALL DIMENSIONS ARE IN mm
2.DO NOT SCALE DRAWING.
3.IF IN DOUBT , ASK TEAM MEMBER

© ALL RIGHTS OF REPRODUCTION & DISTRIBUTION ARE RESERVED

SURFACE AREA	FINISH	MACHINING	MATERIAL	NET WEIGHT-Kg:	TEAM NO.	SHEET SIZE
70.98 in^2	IZBP	▽▽(▽▽▽)	EN9 1	2.62 kg	SBP-02	A2

DRN.BY	CHKD.BY	APPD.BY	REFERENCE DWG.	DRG./PART CODE	REV.	SCALE
TCL	MUC	TCL	--	PRZ77F040003	01	1 : 1
05/10/2018			PART CLASS.			SHEET
DATE	05/10/2018	05/10/2018	B			1 OF 1

\\parieng\DLF CAR PARKING\CAR PARKING DESIGN DATA\2017-2018\MODIFICATION PRZ77\CO1\Subsystems and Units\SS11\ExDM Uploading\PRZ77F040003.dft