

IRB 7600 Industrial Robot

Main Applications

Machine tending
Material handling
Press tending
Spot welding



Introducing the Power Robot

A new world of possibilities opens up with ABB's new power robot family. It comes in five versions, 500 kg, 400 kg, 340 kg and 150 kg handling capacities. The IRB 7600 is ideal for weighty applications, regardless of industry. Typical areas can be handling of heavy fixtures, turning car bodies, lifting engines, handling heavy parts in foundries or forges, loading and unloading of machine cells, alternatively handling large and heavy pallet layers.

A safe investment

A major concern with robots handling payloads of up to 500 kg will be to safeguard your personnel in the unlikely event of an accident, as well as to protect the robot itself and your investment.

We have therefore added a range of software products all falling under the umbrella designator of Active Safety.

Service information

A built-in Service Information System monitors the motion and load of the machine and optimizes service requirements by itself.

Active safety features

Collision detection reduces the collision force substantially. An **Electronically Stabilized Path** will ensure that the robot will maintain its planned path to its best capability considering acceleration, drag, gravity and inertia. This feature is secured through our TrueMove.

Active Brake System controls the braking while ensuring the robot maintains its path.

To achieve optimized performance, the robot adapts to true payloads through its **Self-tuning Performance**. This feature is based on QuickMove.

Passive safety features

These features include options like load identification, moveable mechanical stops and double-safe position switches.

IRB 7600

Specification

Robot versions	Reach	Handling capacity	Center of gravity	Max. wrist torque
IRB				
IRB 7600-500	2.55 m	500 kg	360 mm	3010 Nm
IRB 7600-400	2.55 m	400 kg	512 mm	3010 Nm
IRB 7600-340	2.8 m	340 kg	360 mm	2750 Nm
IRB 7600-325	3.1 m	325 kg	360 mm	2680 Nm
IRB 7600-150	3.5 m	150 kg	360 mm	1880 Nm
(IRB 7600-150 loaded with 100 kg)			1660 mm)	

Extra loads can be mounted on all variants

50 kg on upper arm and 550 kg on frame of axis 1.

Number of axes: 6

IRC5 controller variants: Single cabinet, Dual cabinet

Performance

Axis working range

Axis 1 Rotation	+180°	to	-180°
Axis 2 Arm	+85°	to	-60°
Axis 3 Arm	+60°	to	-180°
Axis 4 Wrist	+300°	to	-300°
Axis 5 Bend	+100°	to	-100°
Axis 6 Turn	+300°	to	-300°


Axis max speed

	325/500kg	400 kg	340 kg	150 kg
Axis 1	75°/s	75°/s	75°/s	100°/s
Axis 2	50°/s	60°/s	60°/s	60°/s
Axis 3	55°/s	60°/s	60°/s	60°/s
Axis 4	100°/s	100°/s	100°/s	100°/s
Axis 5	100°/s	100°/s	100°/s	100°/s
Axis 6	160°/s	160°/s	160°/s	190°/s


A supervision function prevents overheating in applications with intense and frequent movements.

Working range


IRB 7600-325/3.1

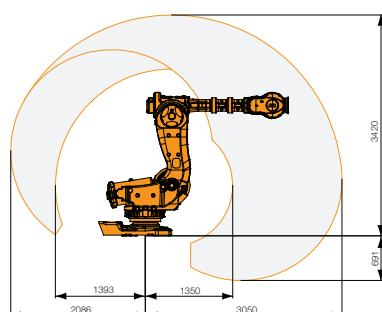


IRB 7600-400/2.55 / IRB 7600-500/2.55



IRB 7600-340/2.8

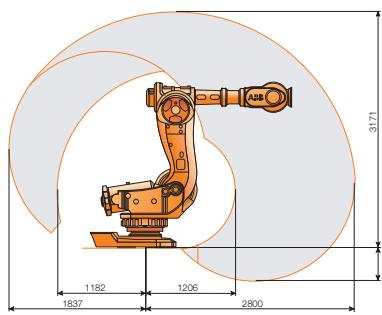

IRB 7600-150/3.5

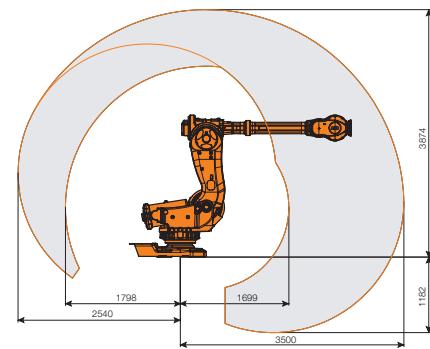

Electrical connections

Supply voltage 200-600 V, 50/60 Hz

Physical

Dimensions robot base 1206.5 x 791 mm

Weight 2,400-2,450 kg

Environment

Ambient temperature for mechanical unit

During operation +5 °C (41 °F) up to +50 °C (122 °F)

During transportation & storage -25 °C (13 °F) up to +55 °C (131 °F)

for short periods (max 24 h) up to +70 °C (158 °F)

Relative humidity Max 95%

Degree of protection IP67

Manipulator Protection Foundry Plus 2

Controller Air cooled


Computer system Totally enclosed

Noise level Max 73 dB (A)

Safety Double circuits with supervision, emergency stops and safety functions, 3-positions enable device.


Emission EMC/EMI-shielded

Data and dimensions may be changed without notice

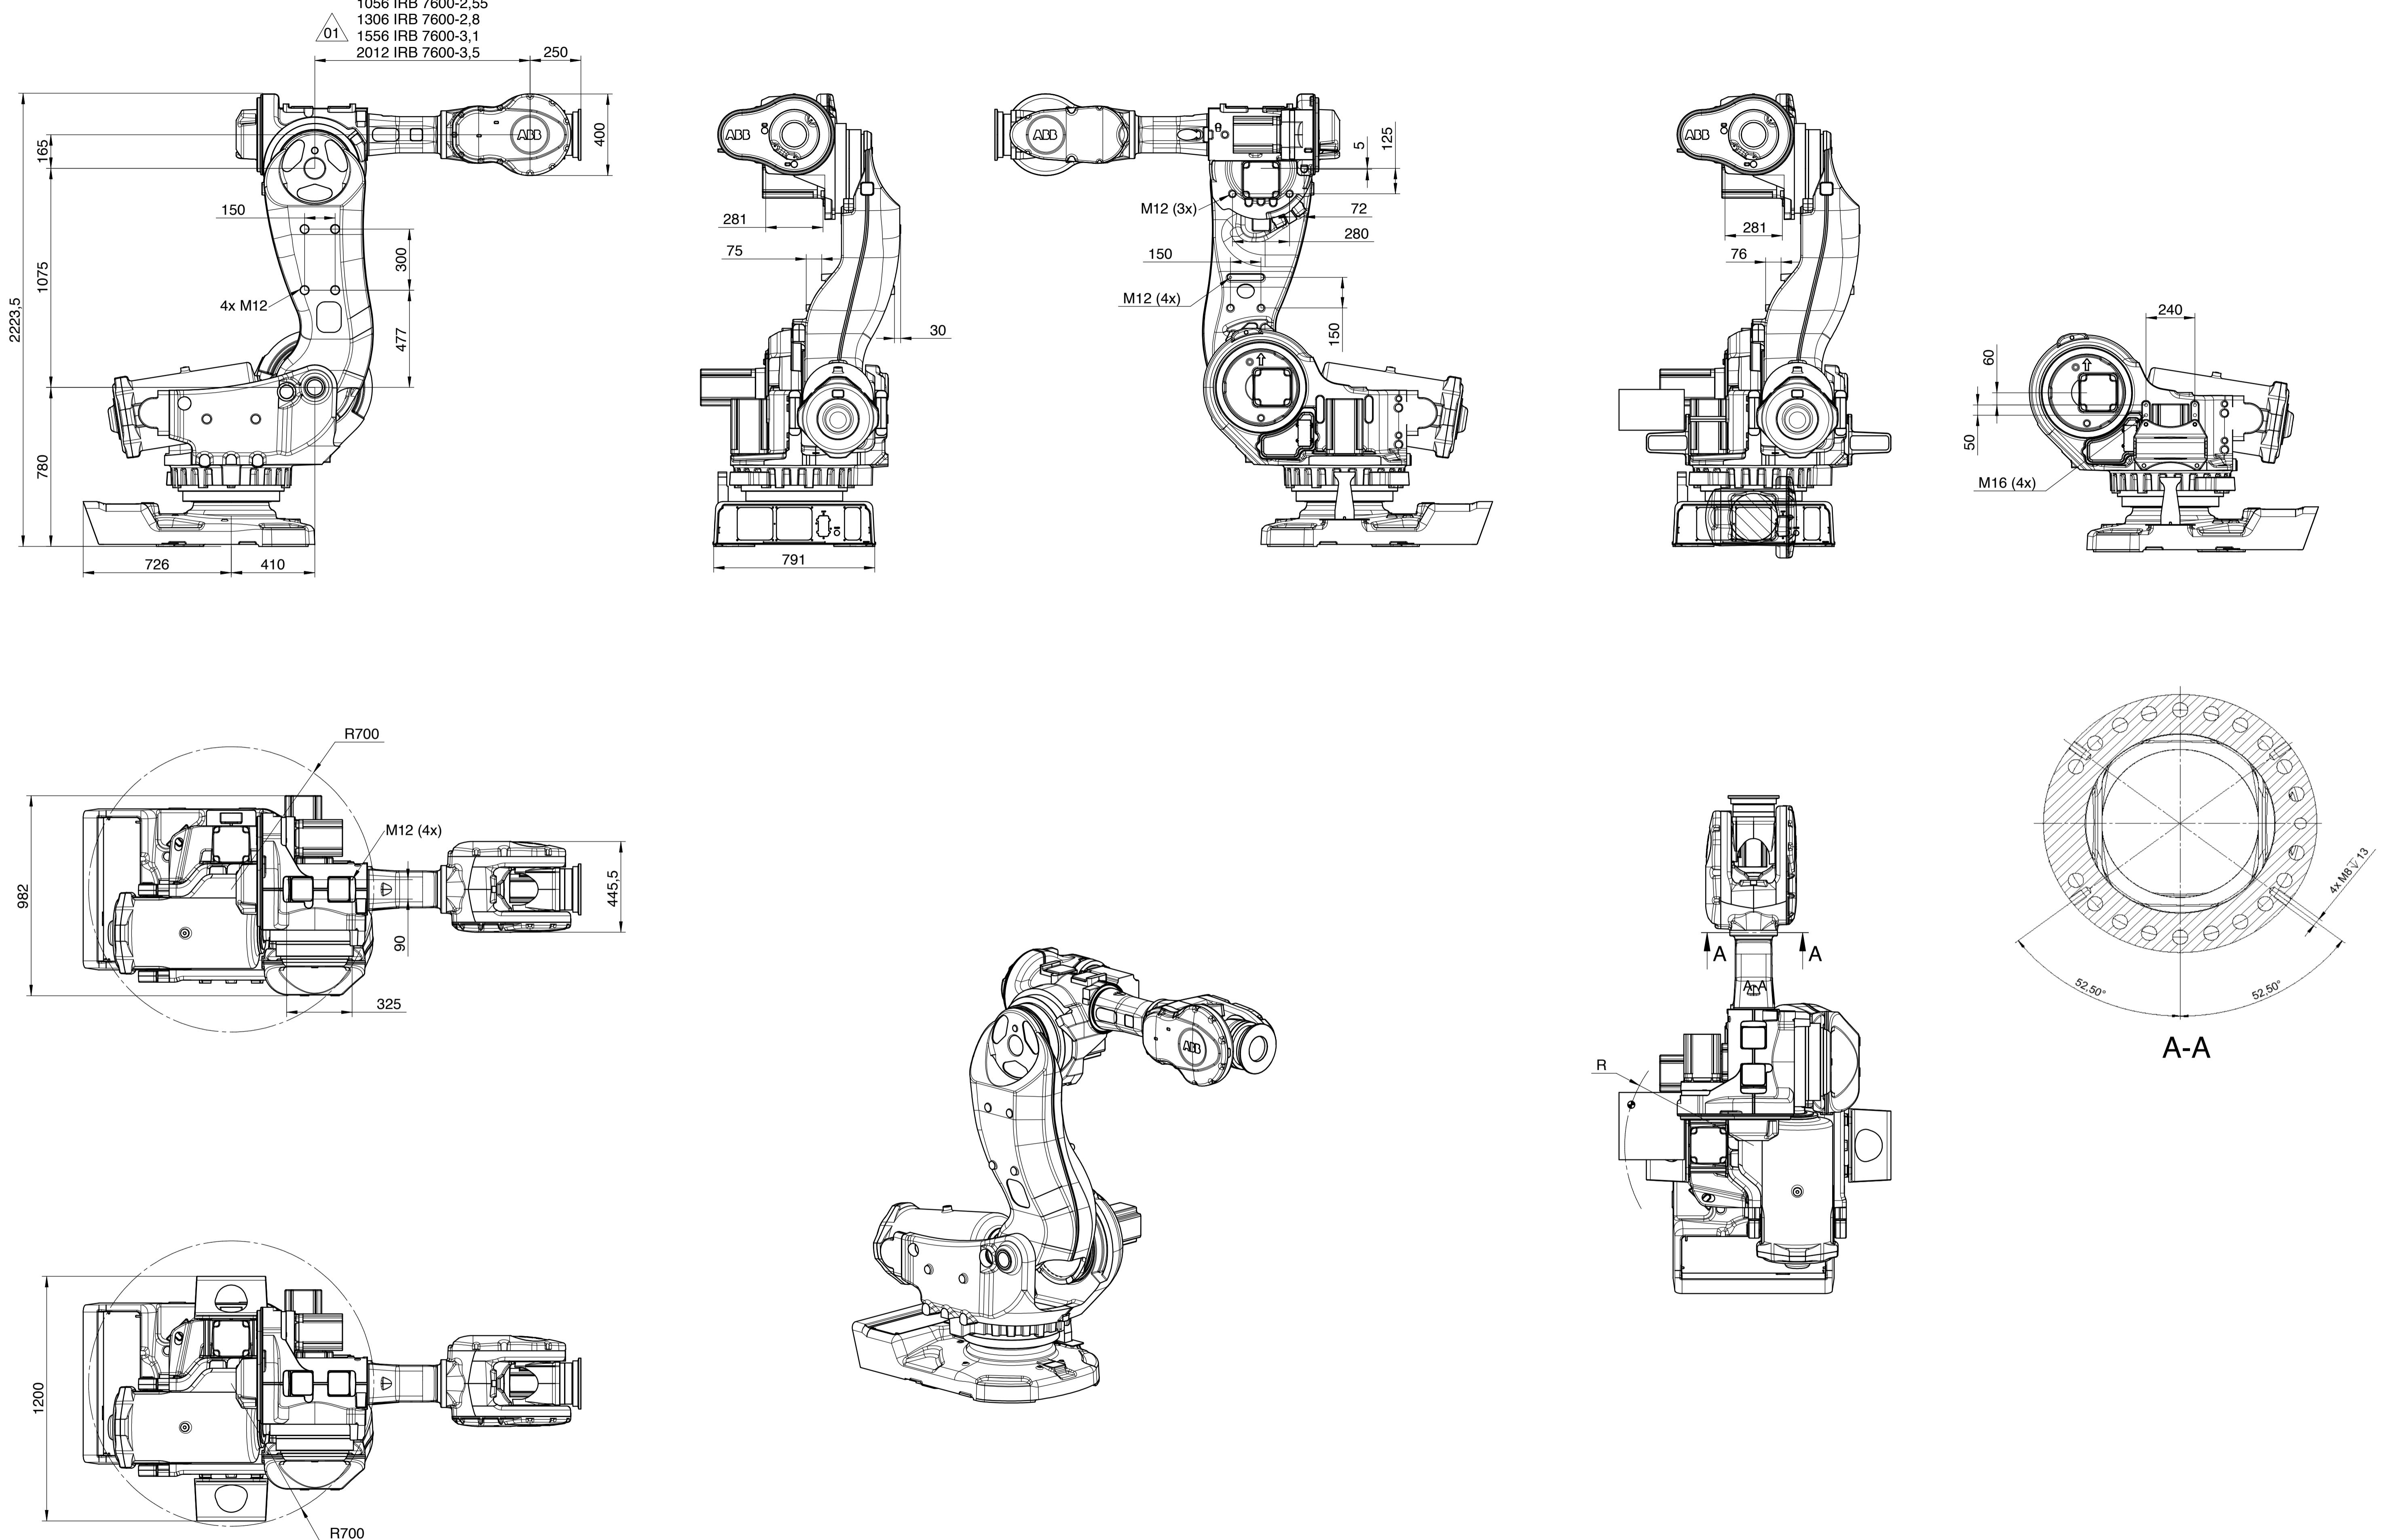


Prepared M Krispinsson, 080522	Responsible Department RO/PRMD	Description Main dimes. IRB 7600	SWD	Drawing		
Approved S Ellqvist, 080522	Take over department				Sheet 1	
Status Approved		Huvudmått IRB 7600			No.of sh. 4	
ABB		Document no.	Rev.ind.		01	
ABB AB		3HAC12683-1				



IRB 7600-2,3

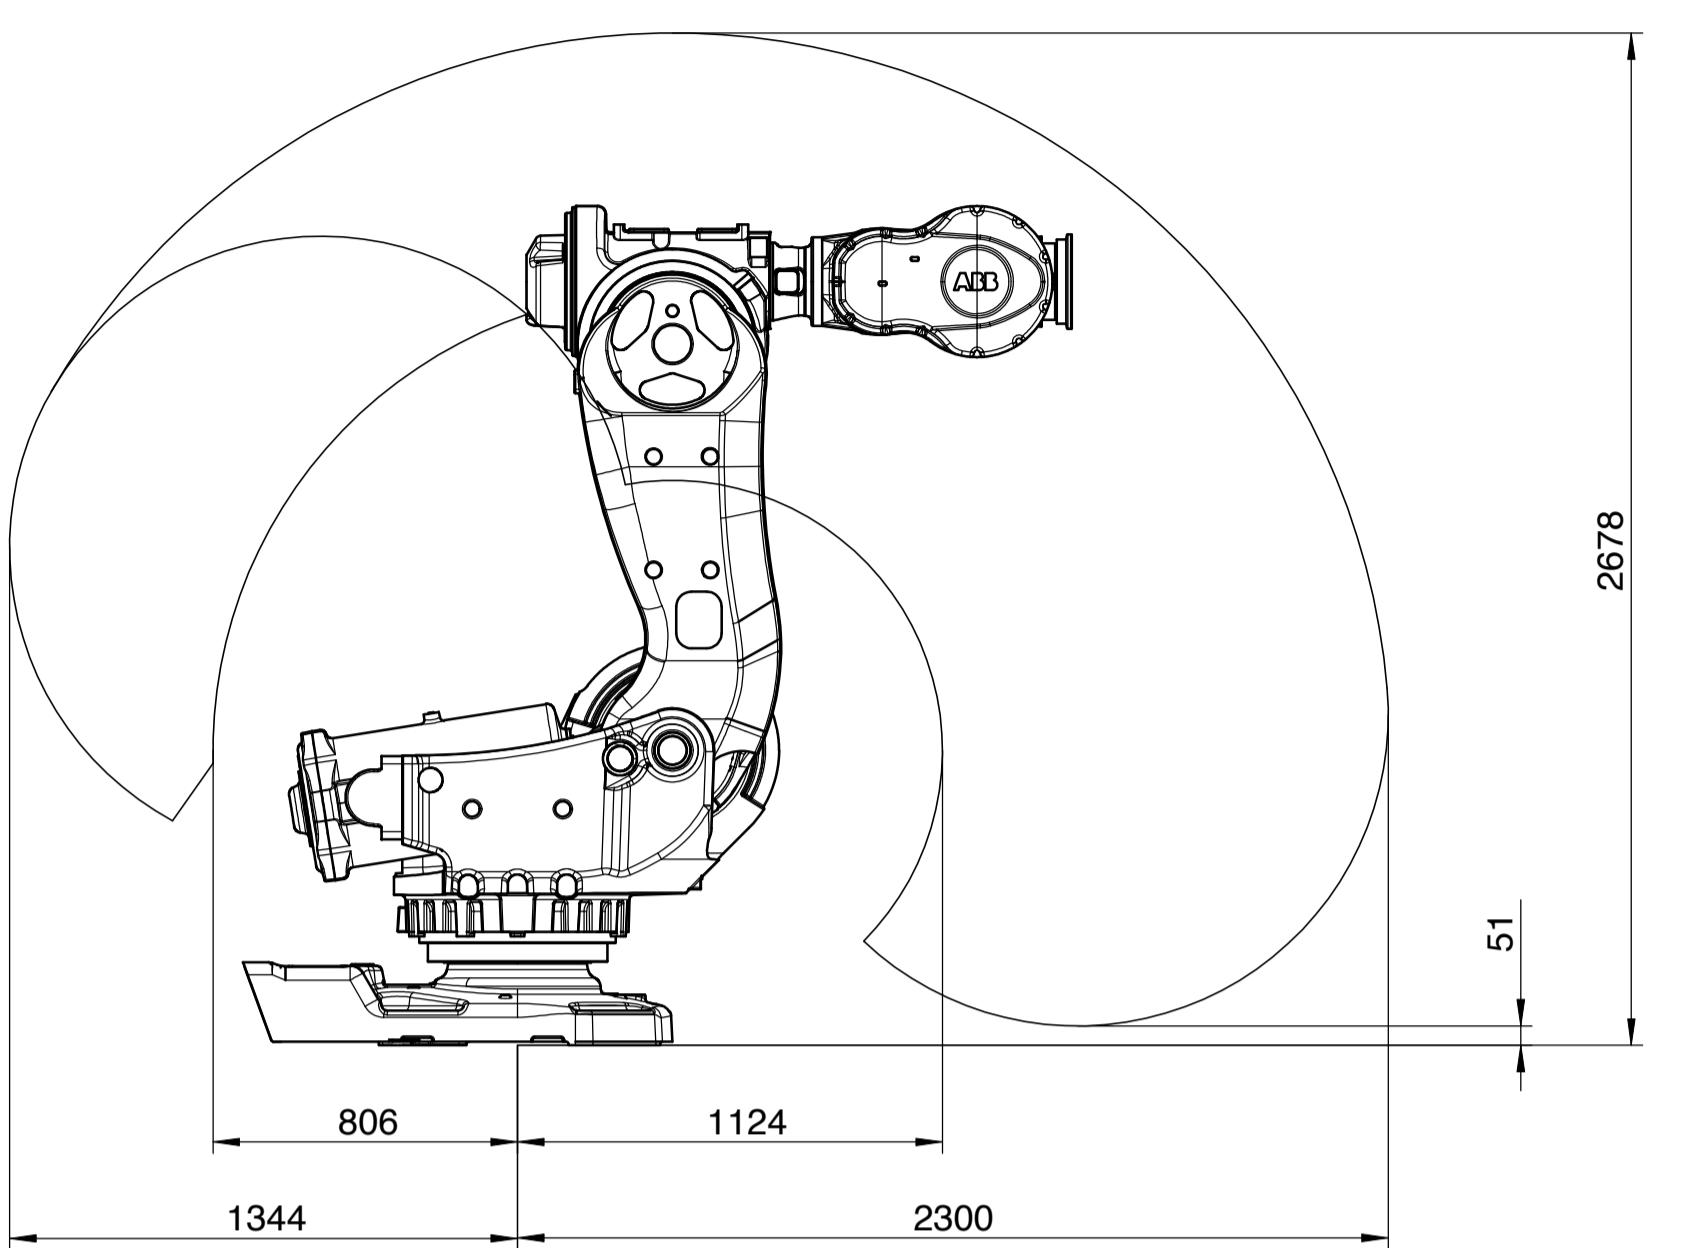

IRB 7600-2,55

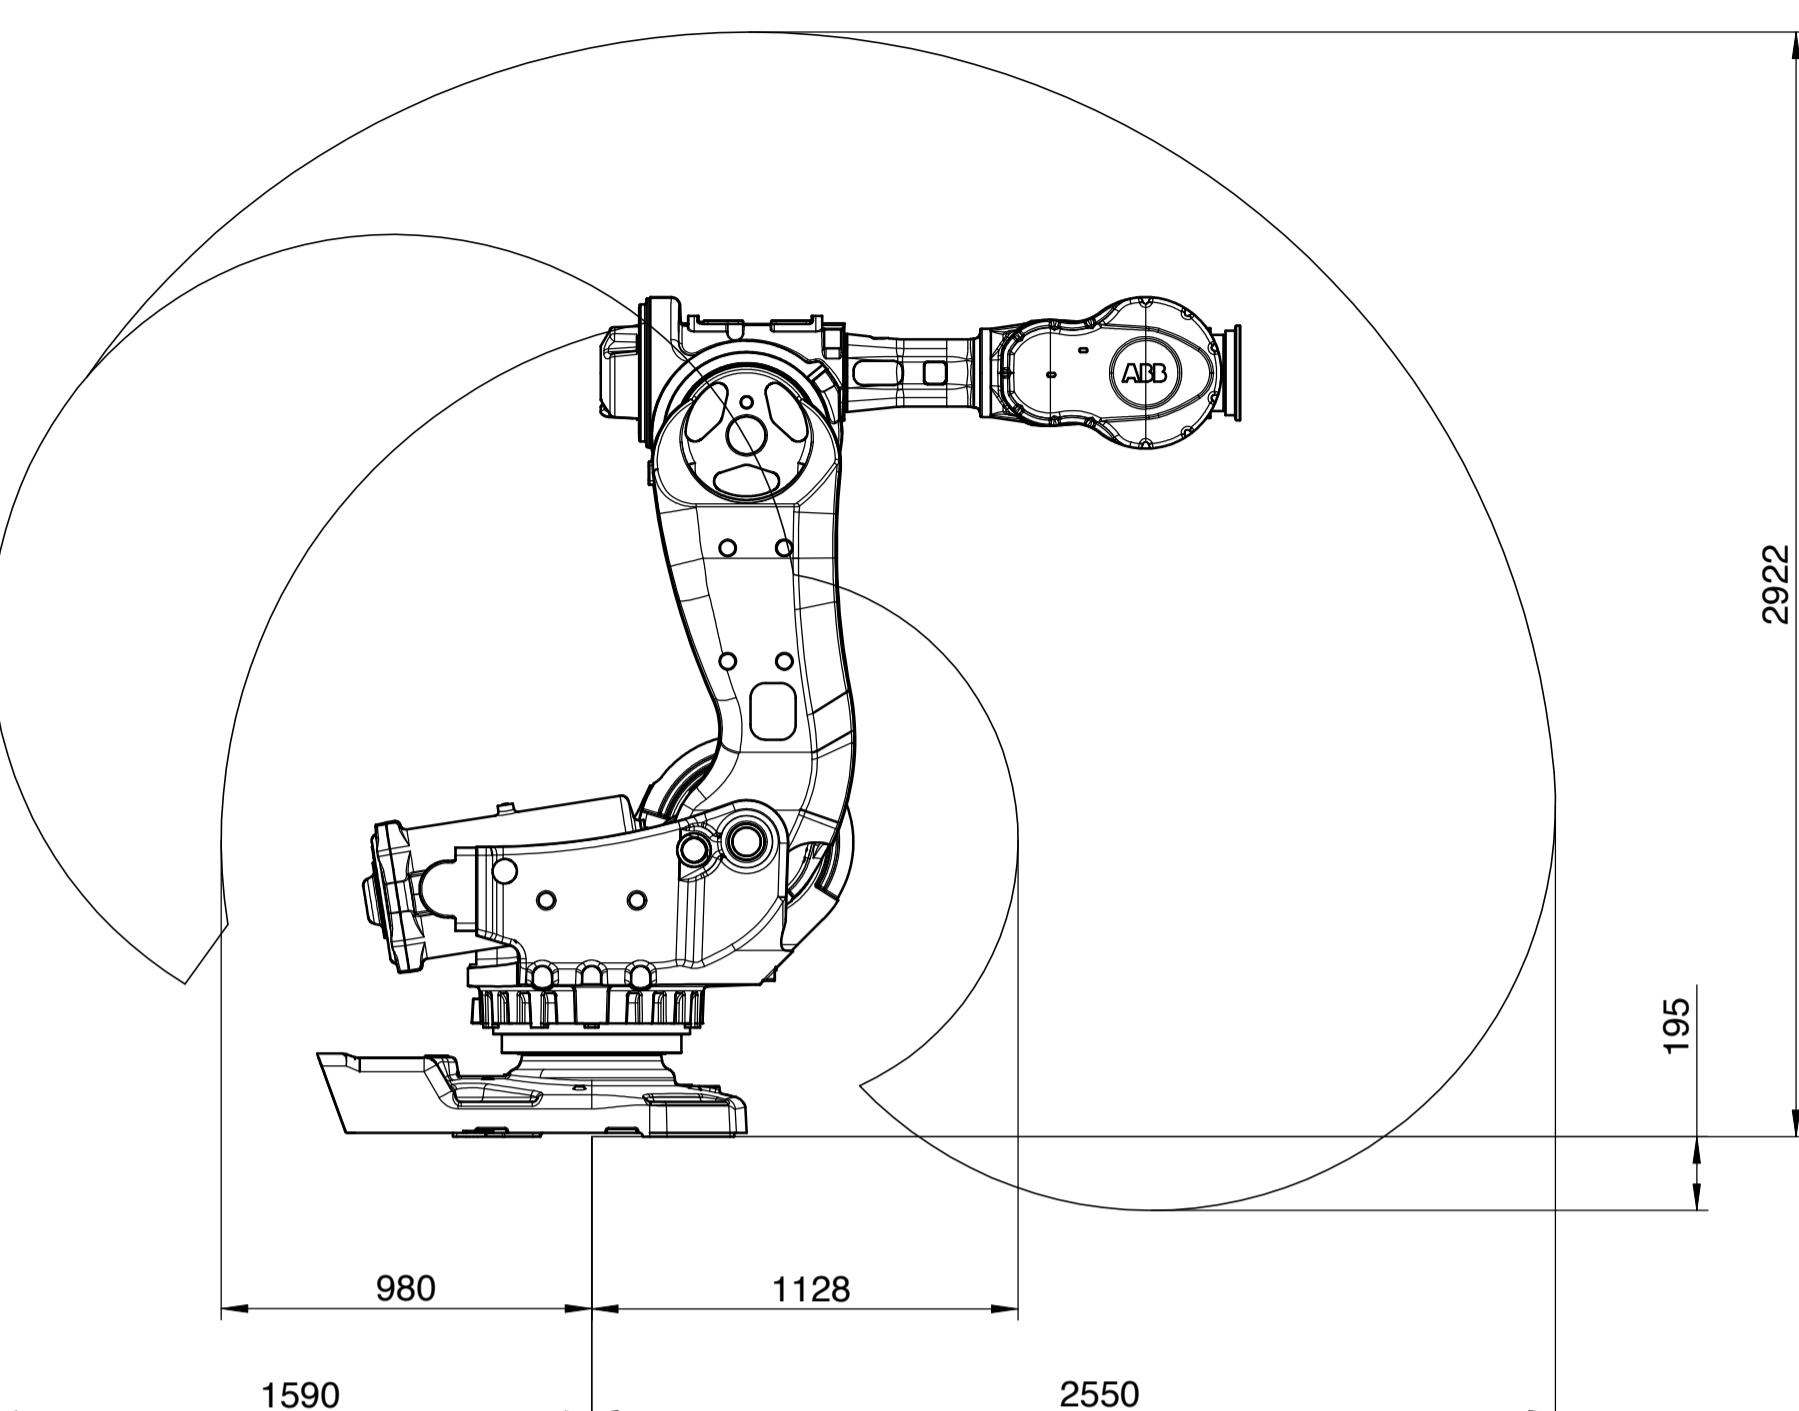


IRB 7600-2,8

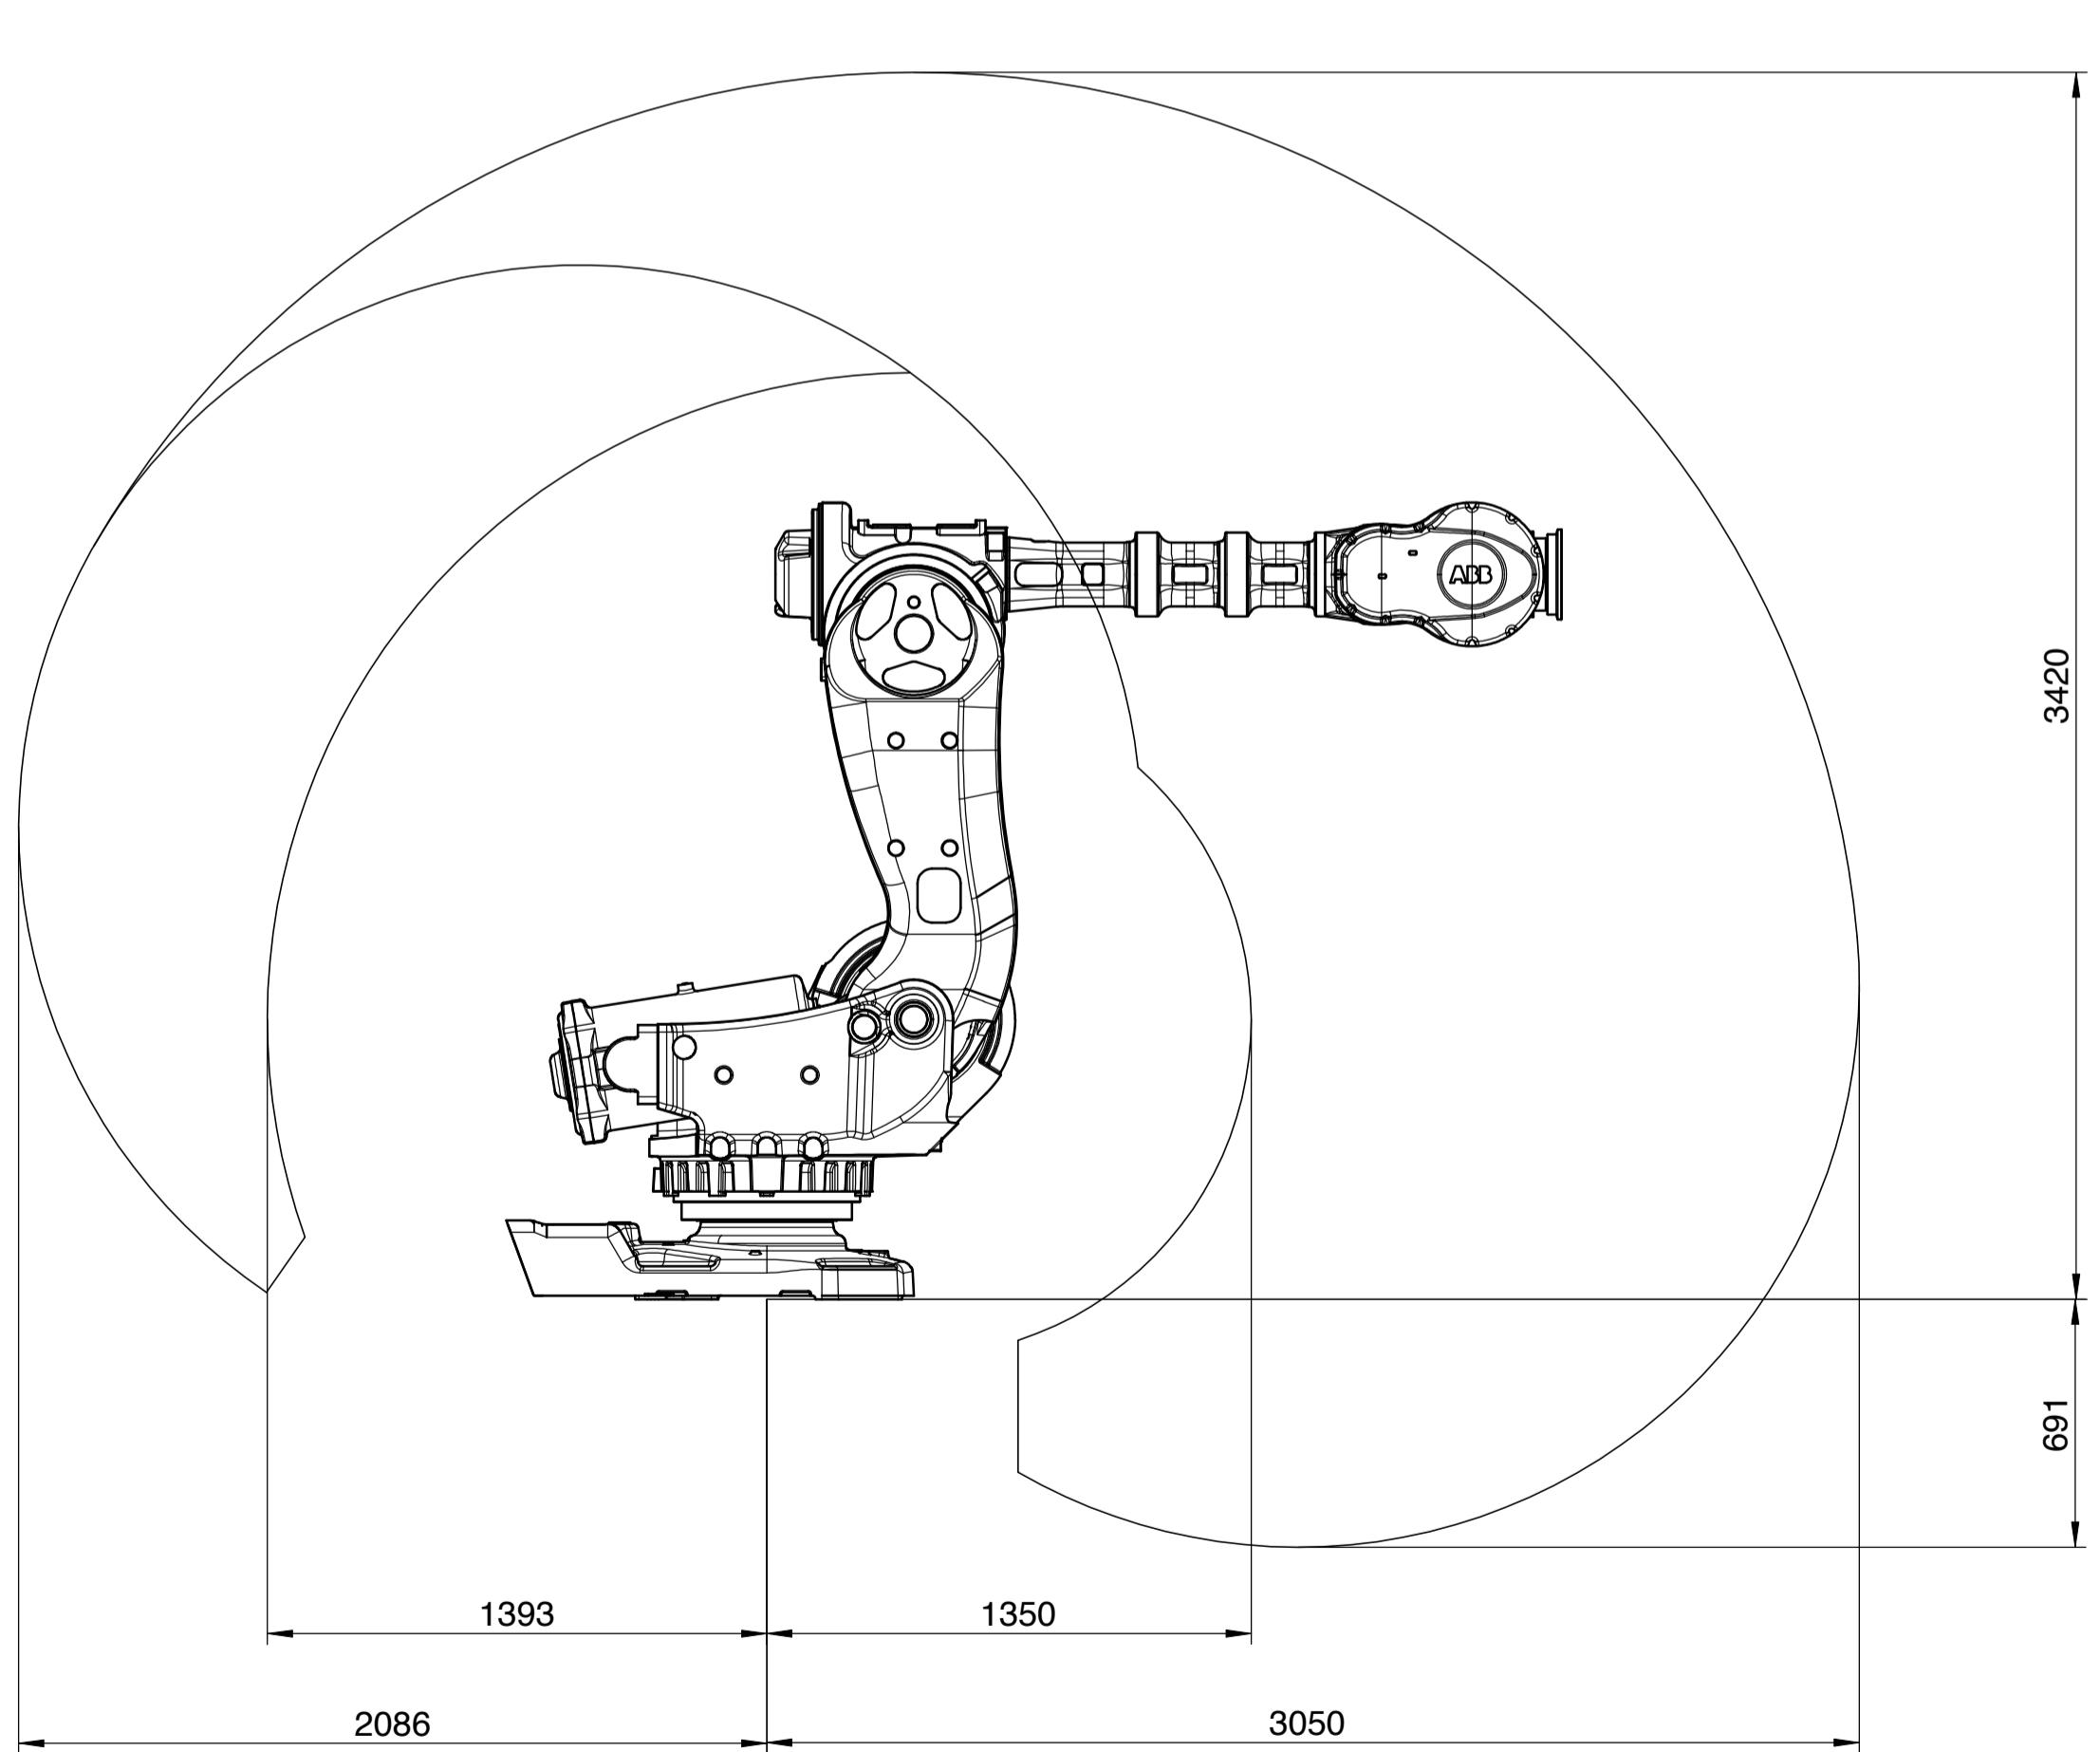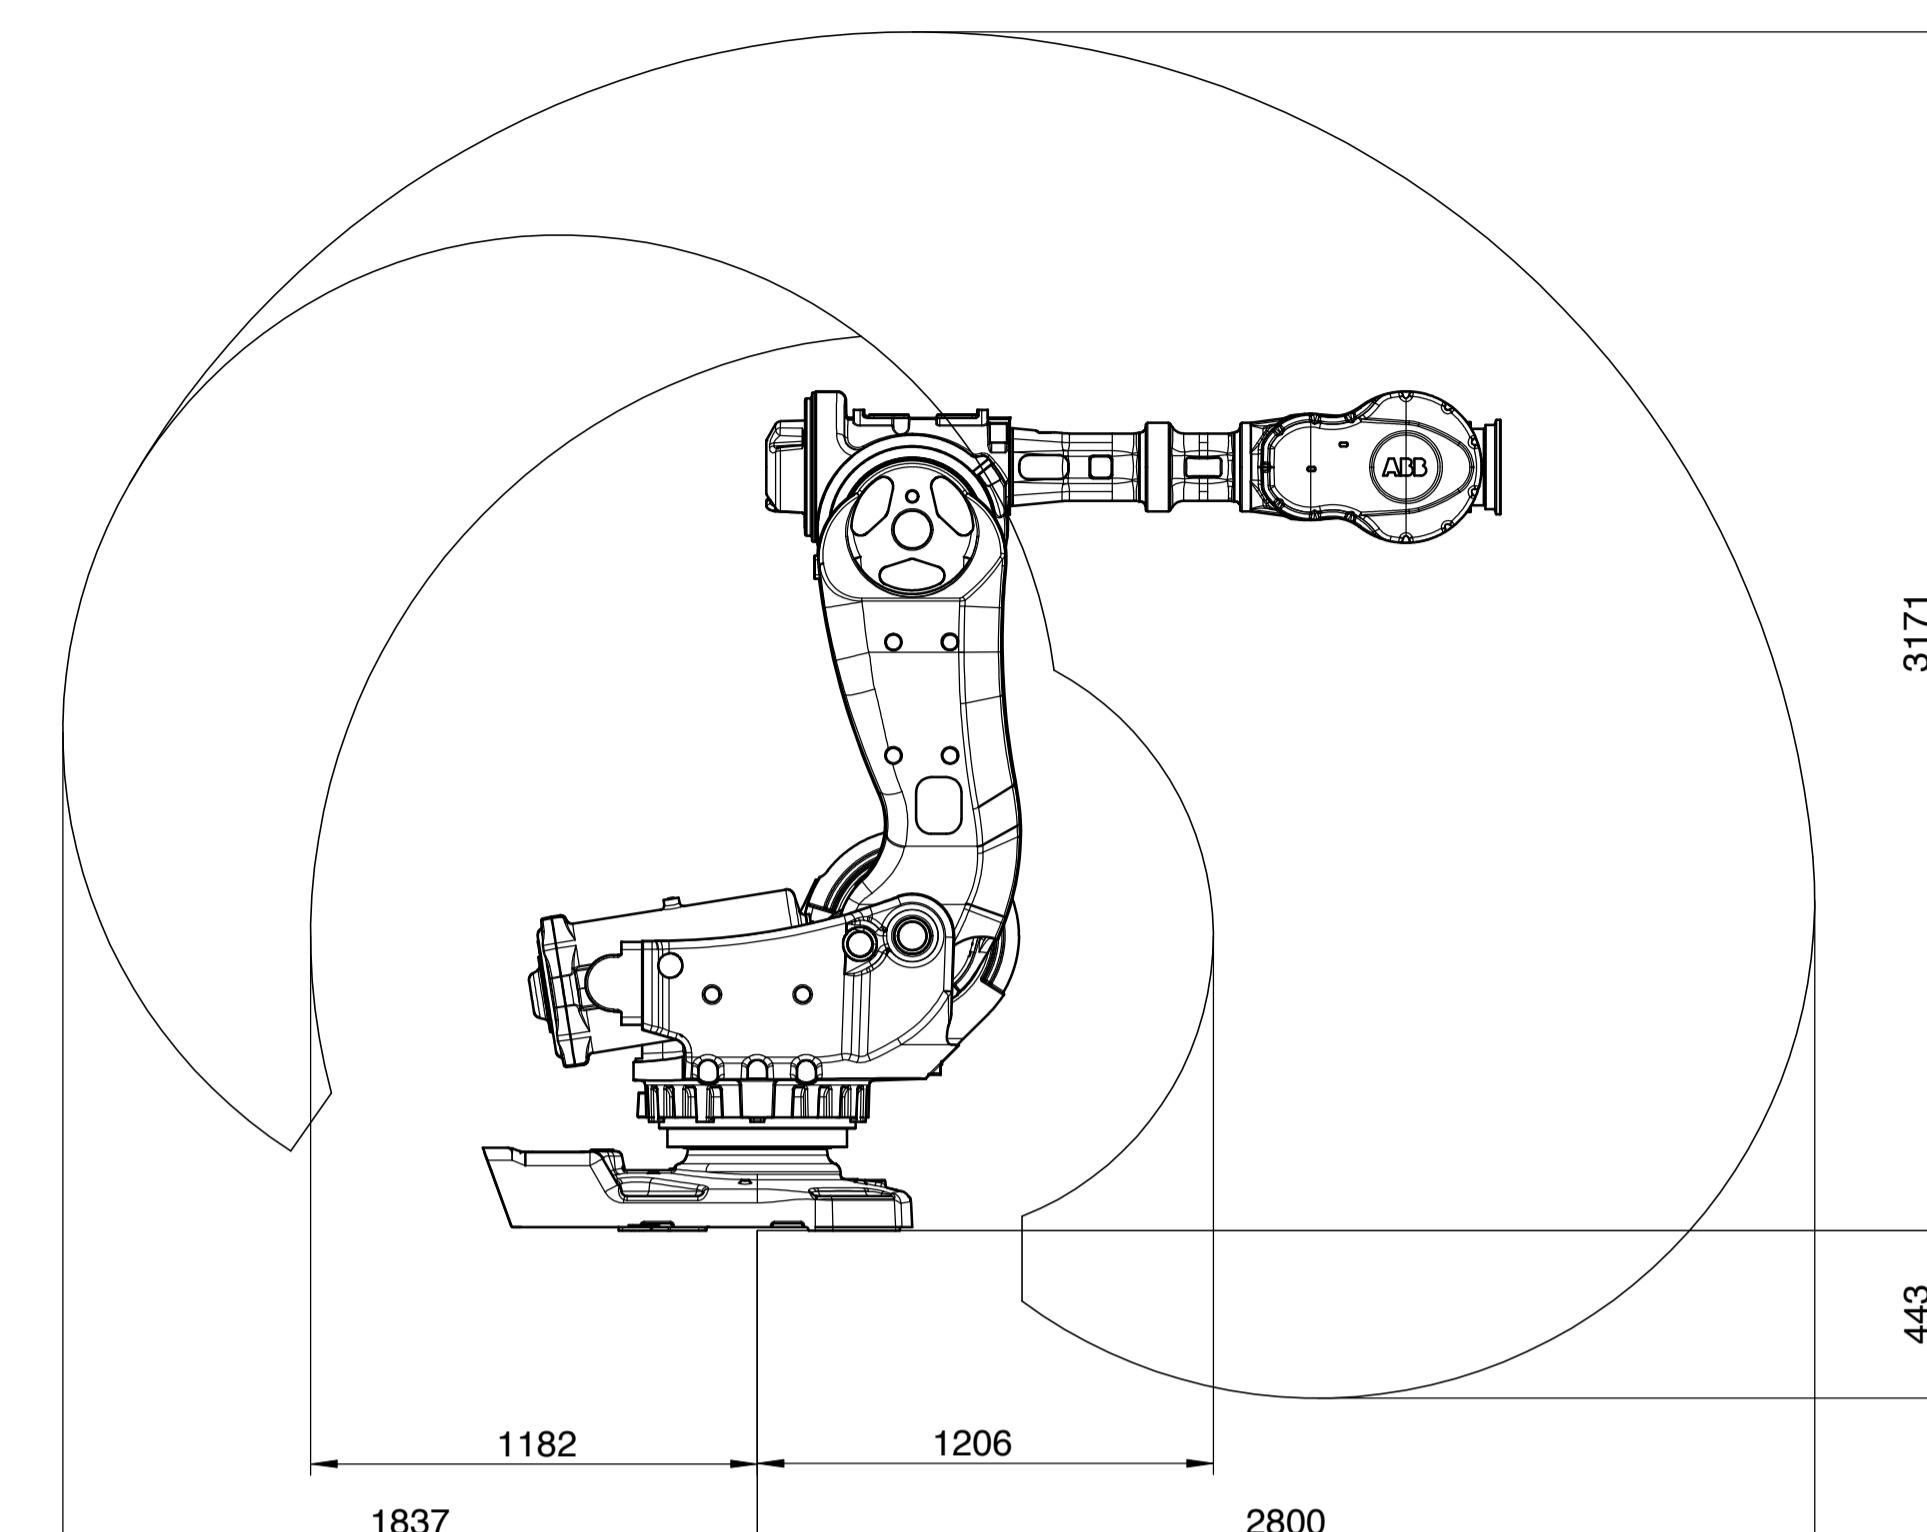

01

IRB 7600-3,1

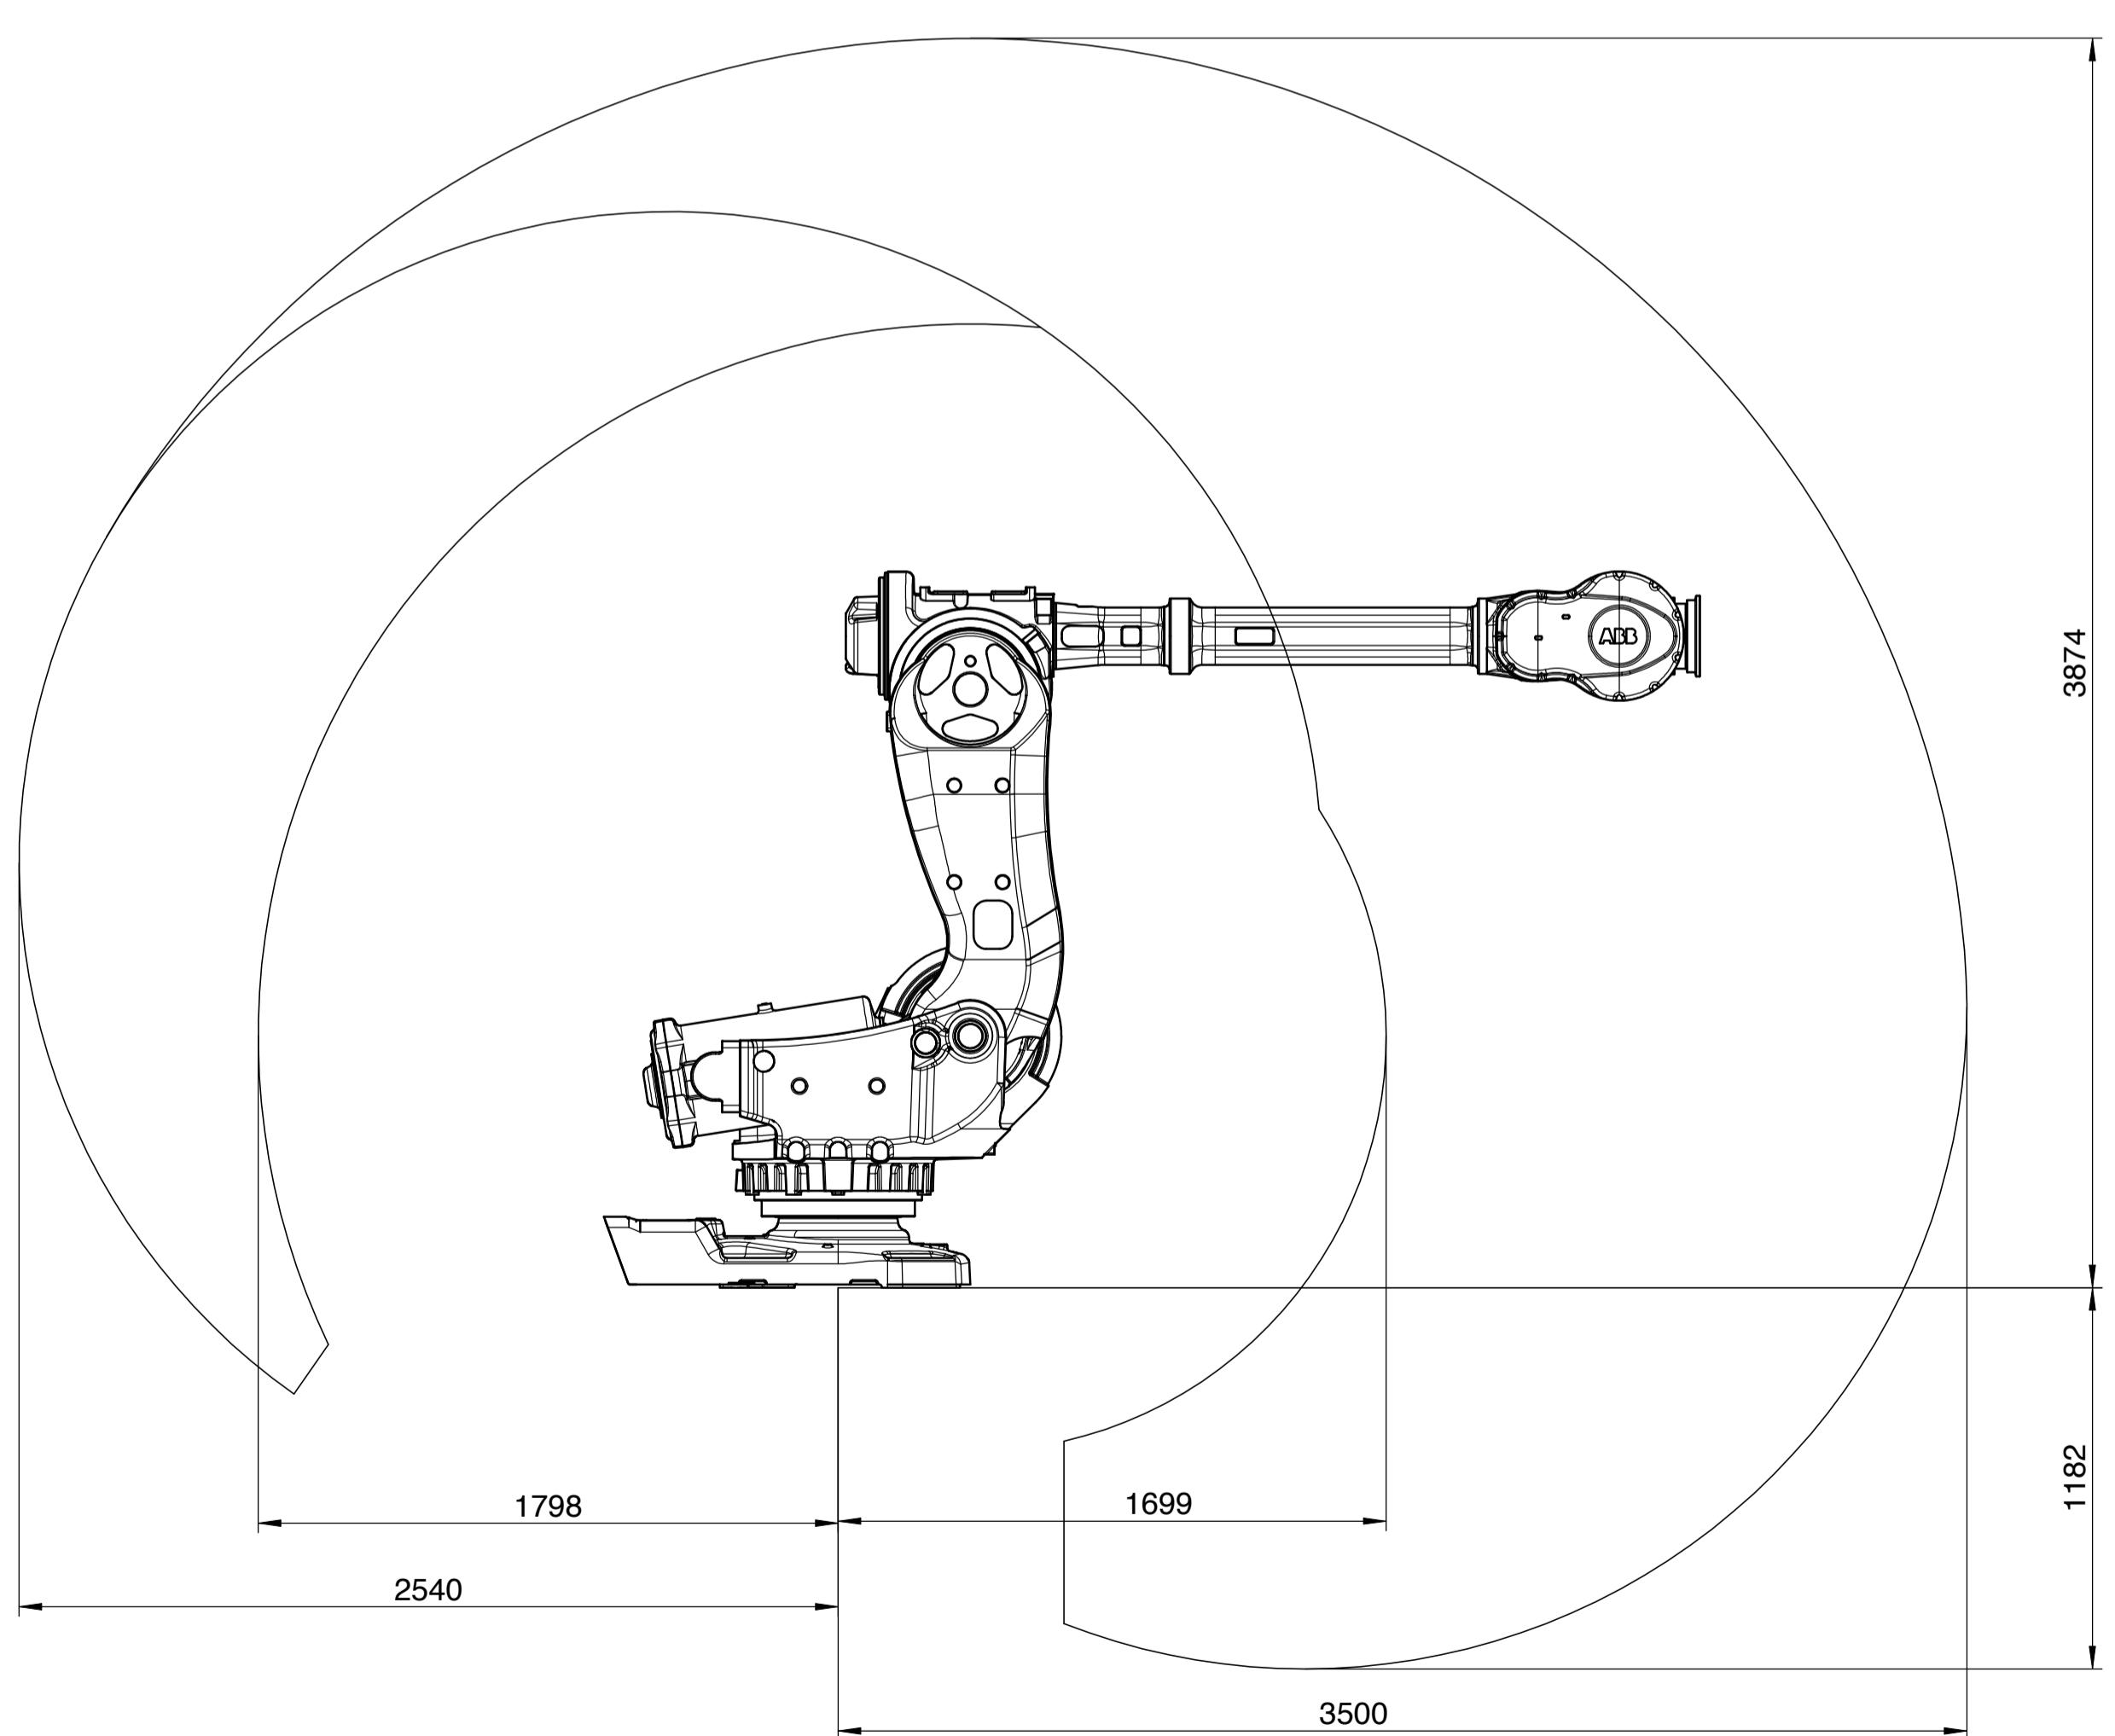

IRB 7600-3,5

ECO 500000030264
IRB 7600-3,1 was IRB7600-3.05.

Latest Revision

Prepared M Krispinsson, 080522	Responsible Department RO/PRMD	Description	SWD	Drawing
Approved S Ellqvist, 080522	Take over department	Main dimes. IRB 7600		
Status Approved		Huvudmått IRB 7600		
		Document no.		


ABB

ABB AB


3HAC12683-1

Sheet 2
No. of sh. 4
Rev. ind. 01


IRB 7600-2,3

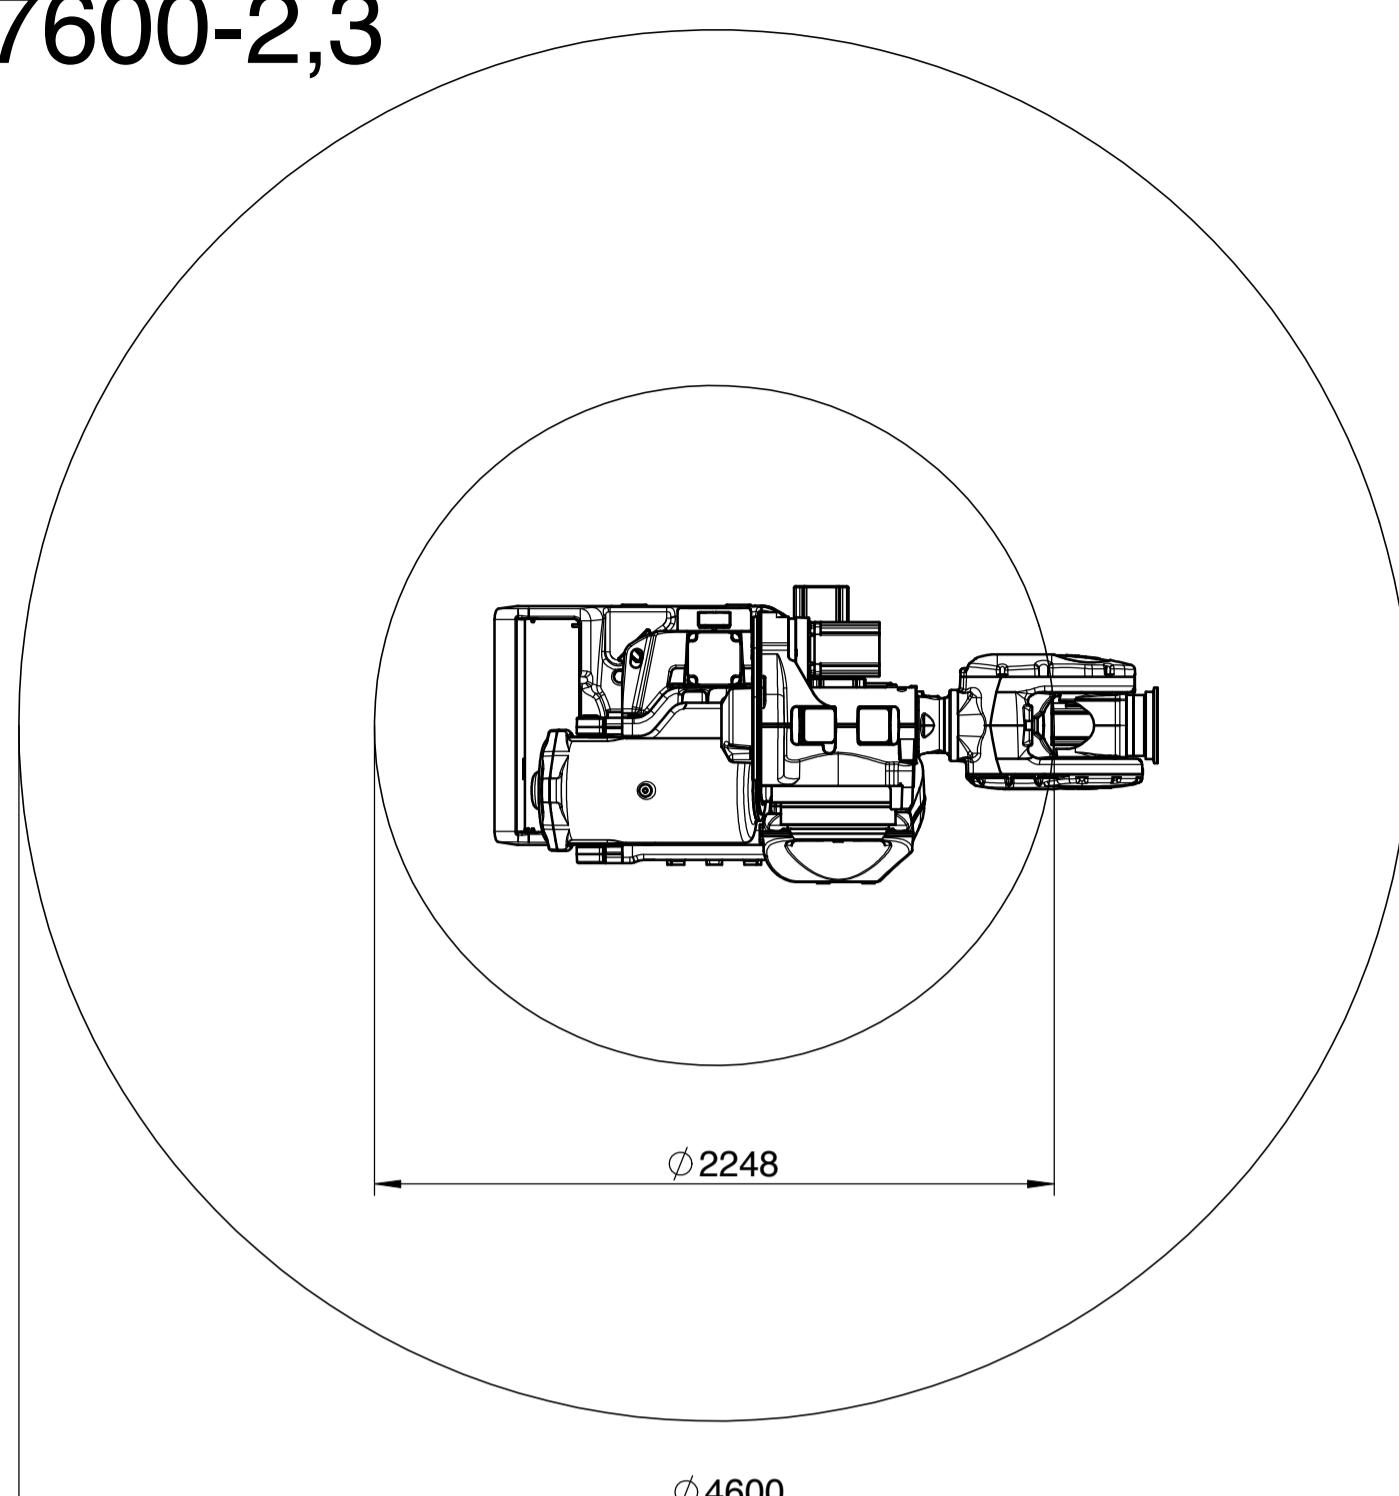


IRB 7600-2,55

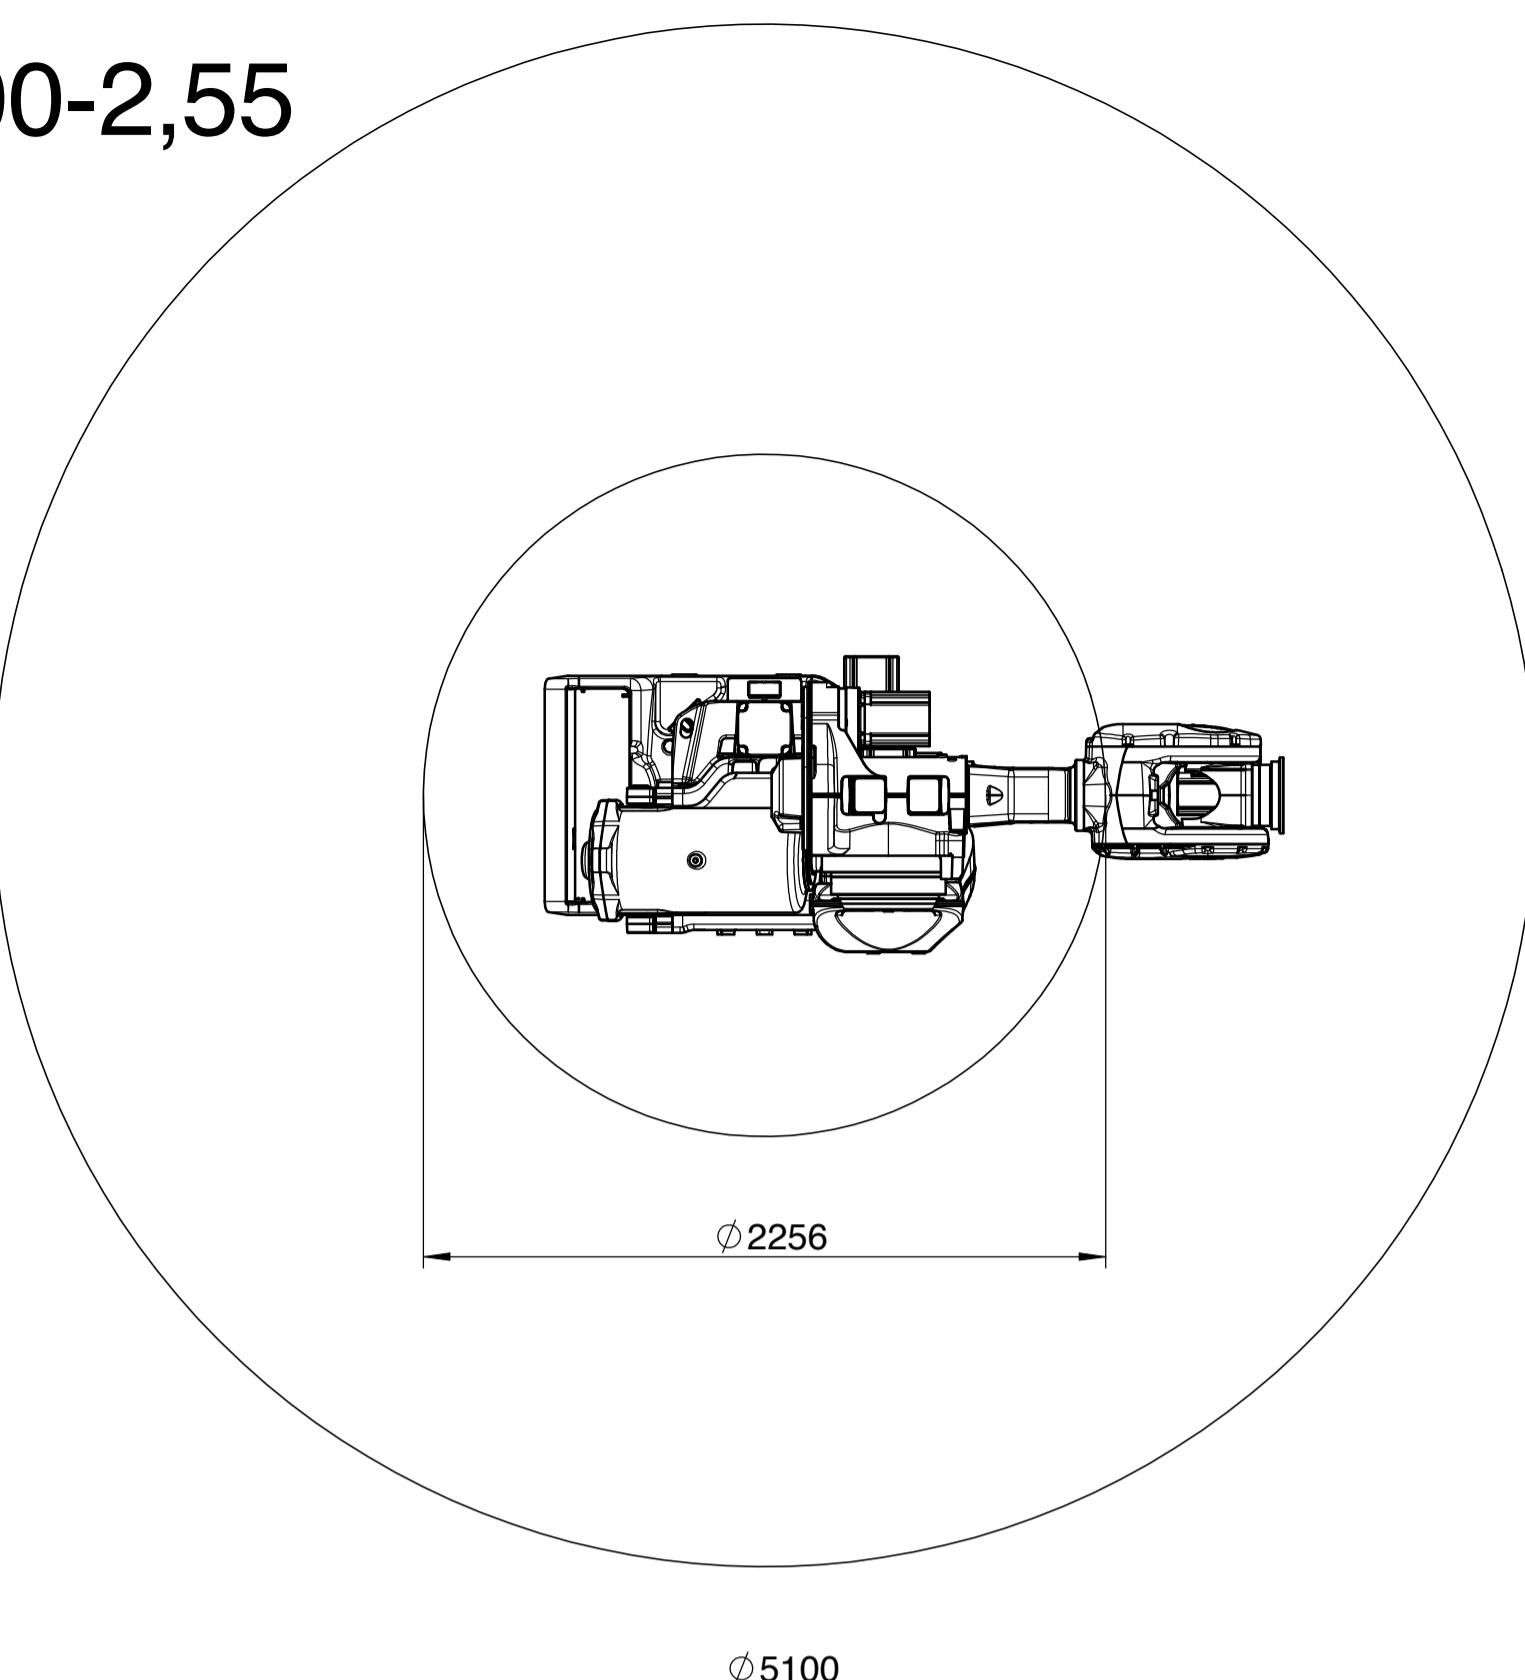


IRB 7600-2,8

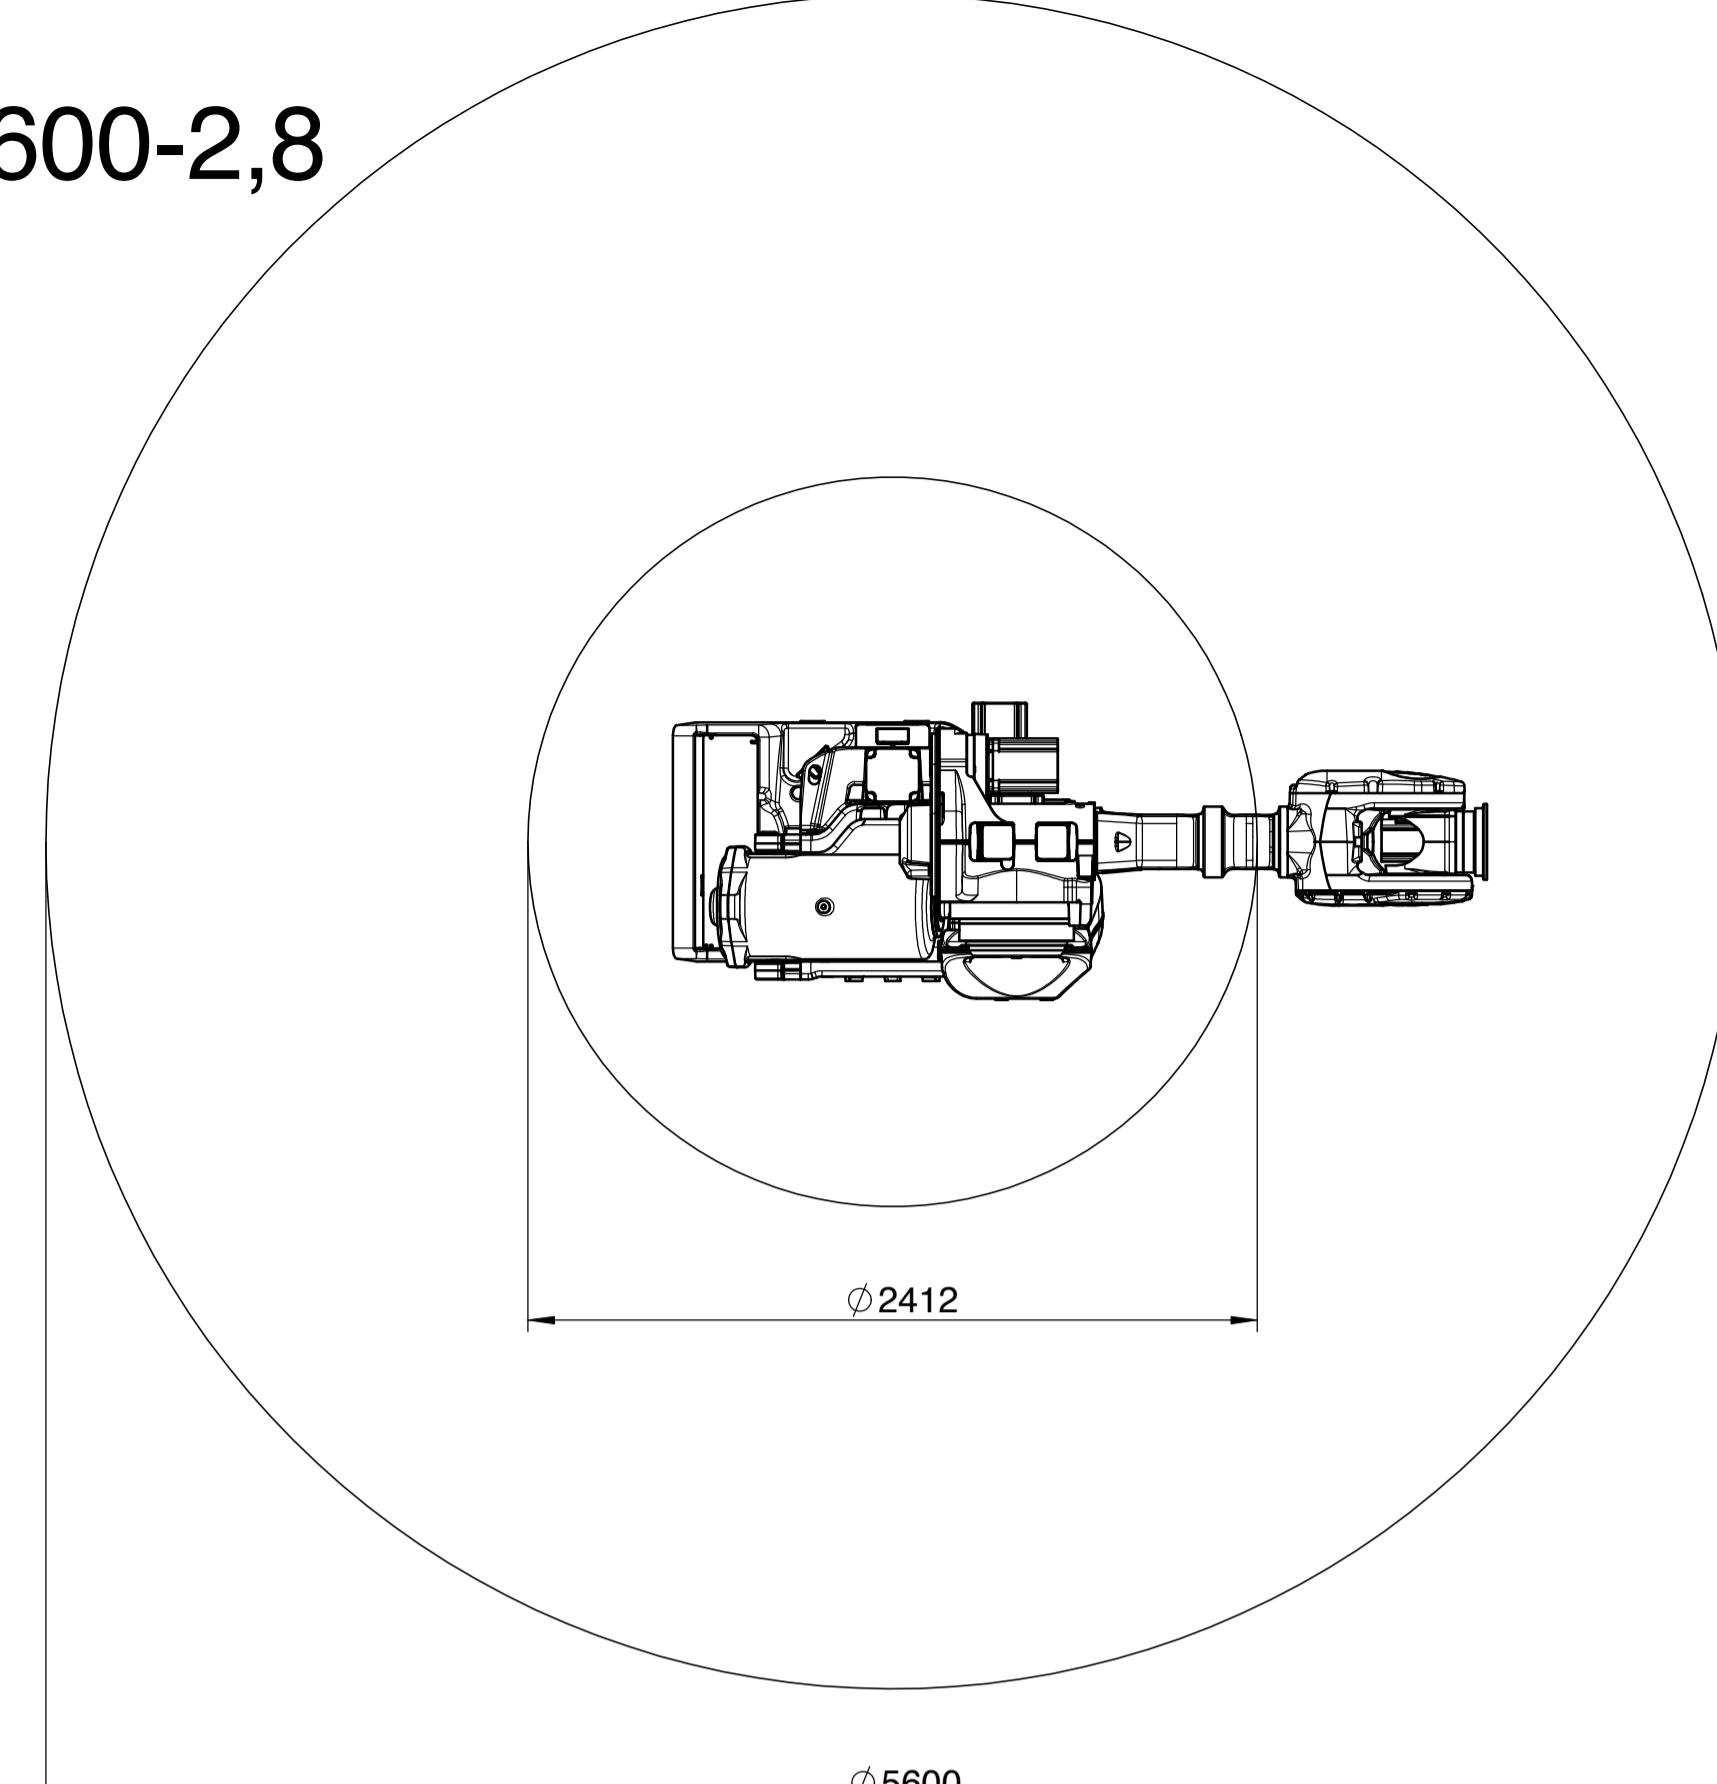

IRB 7600-3,1

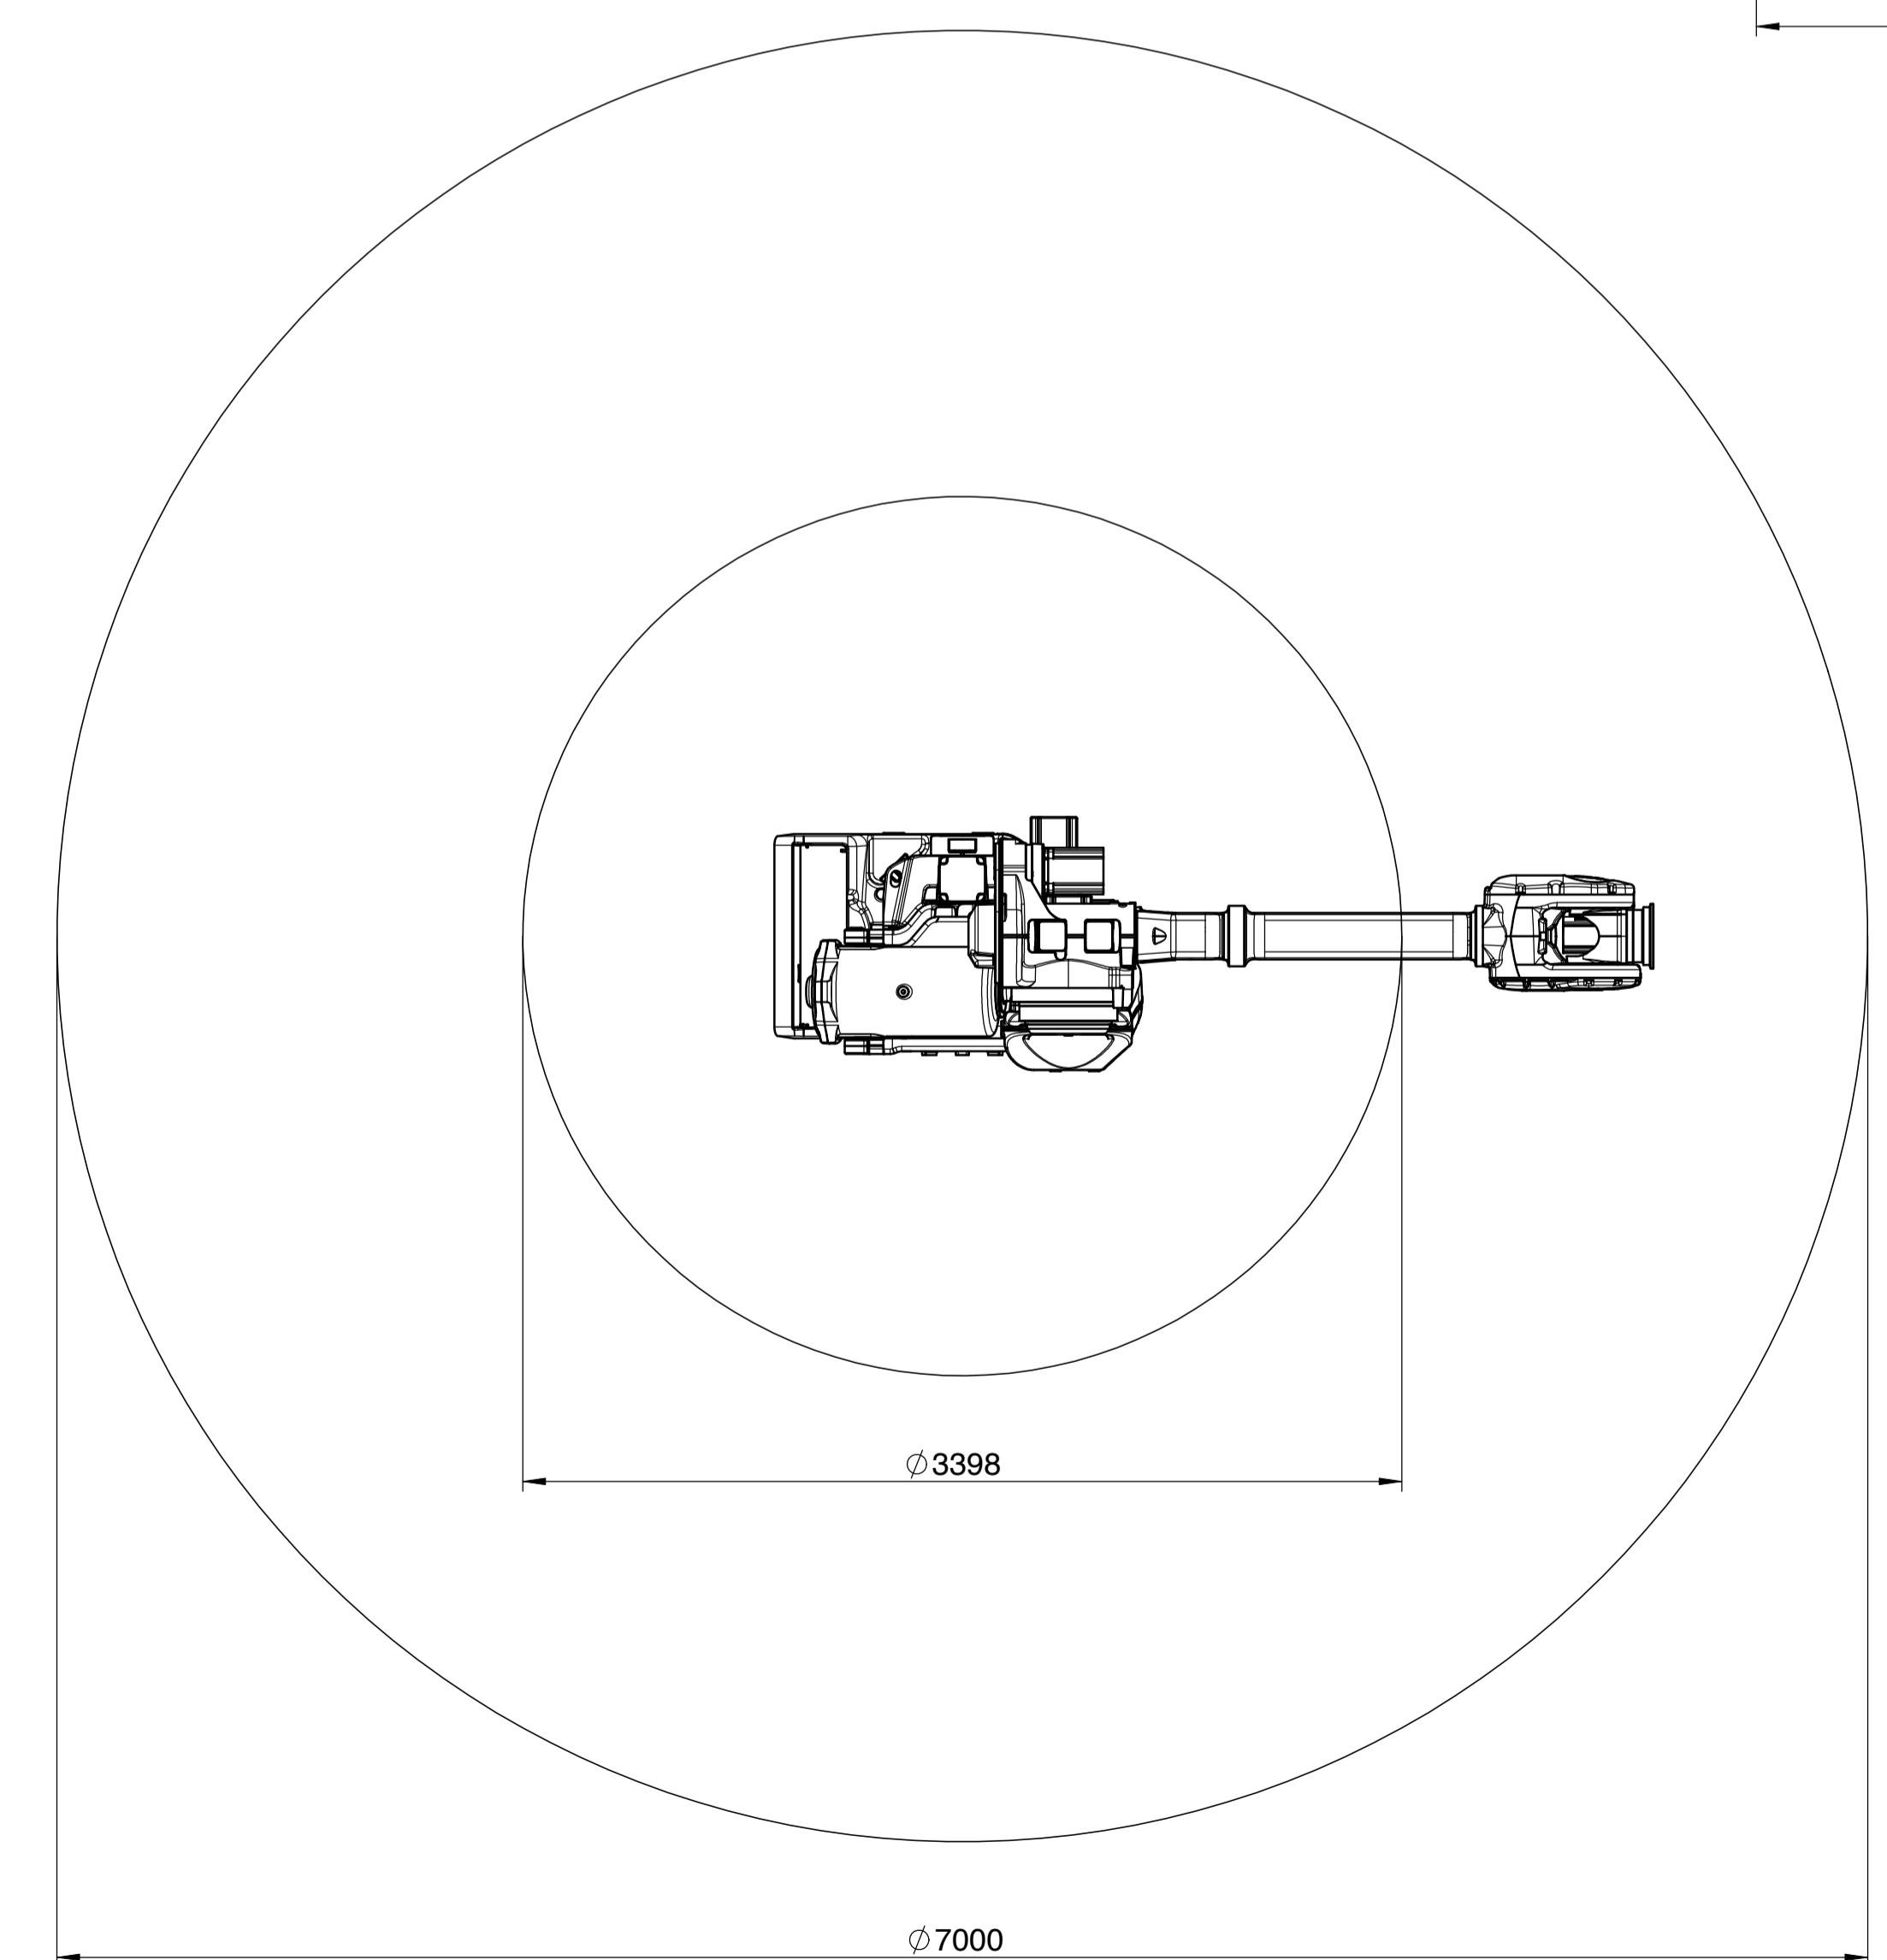

IRB 7600-3,5

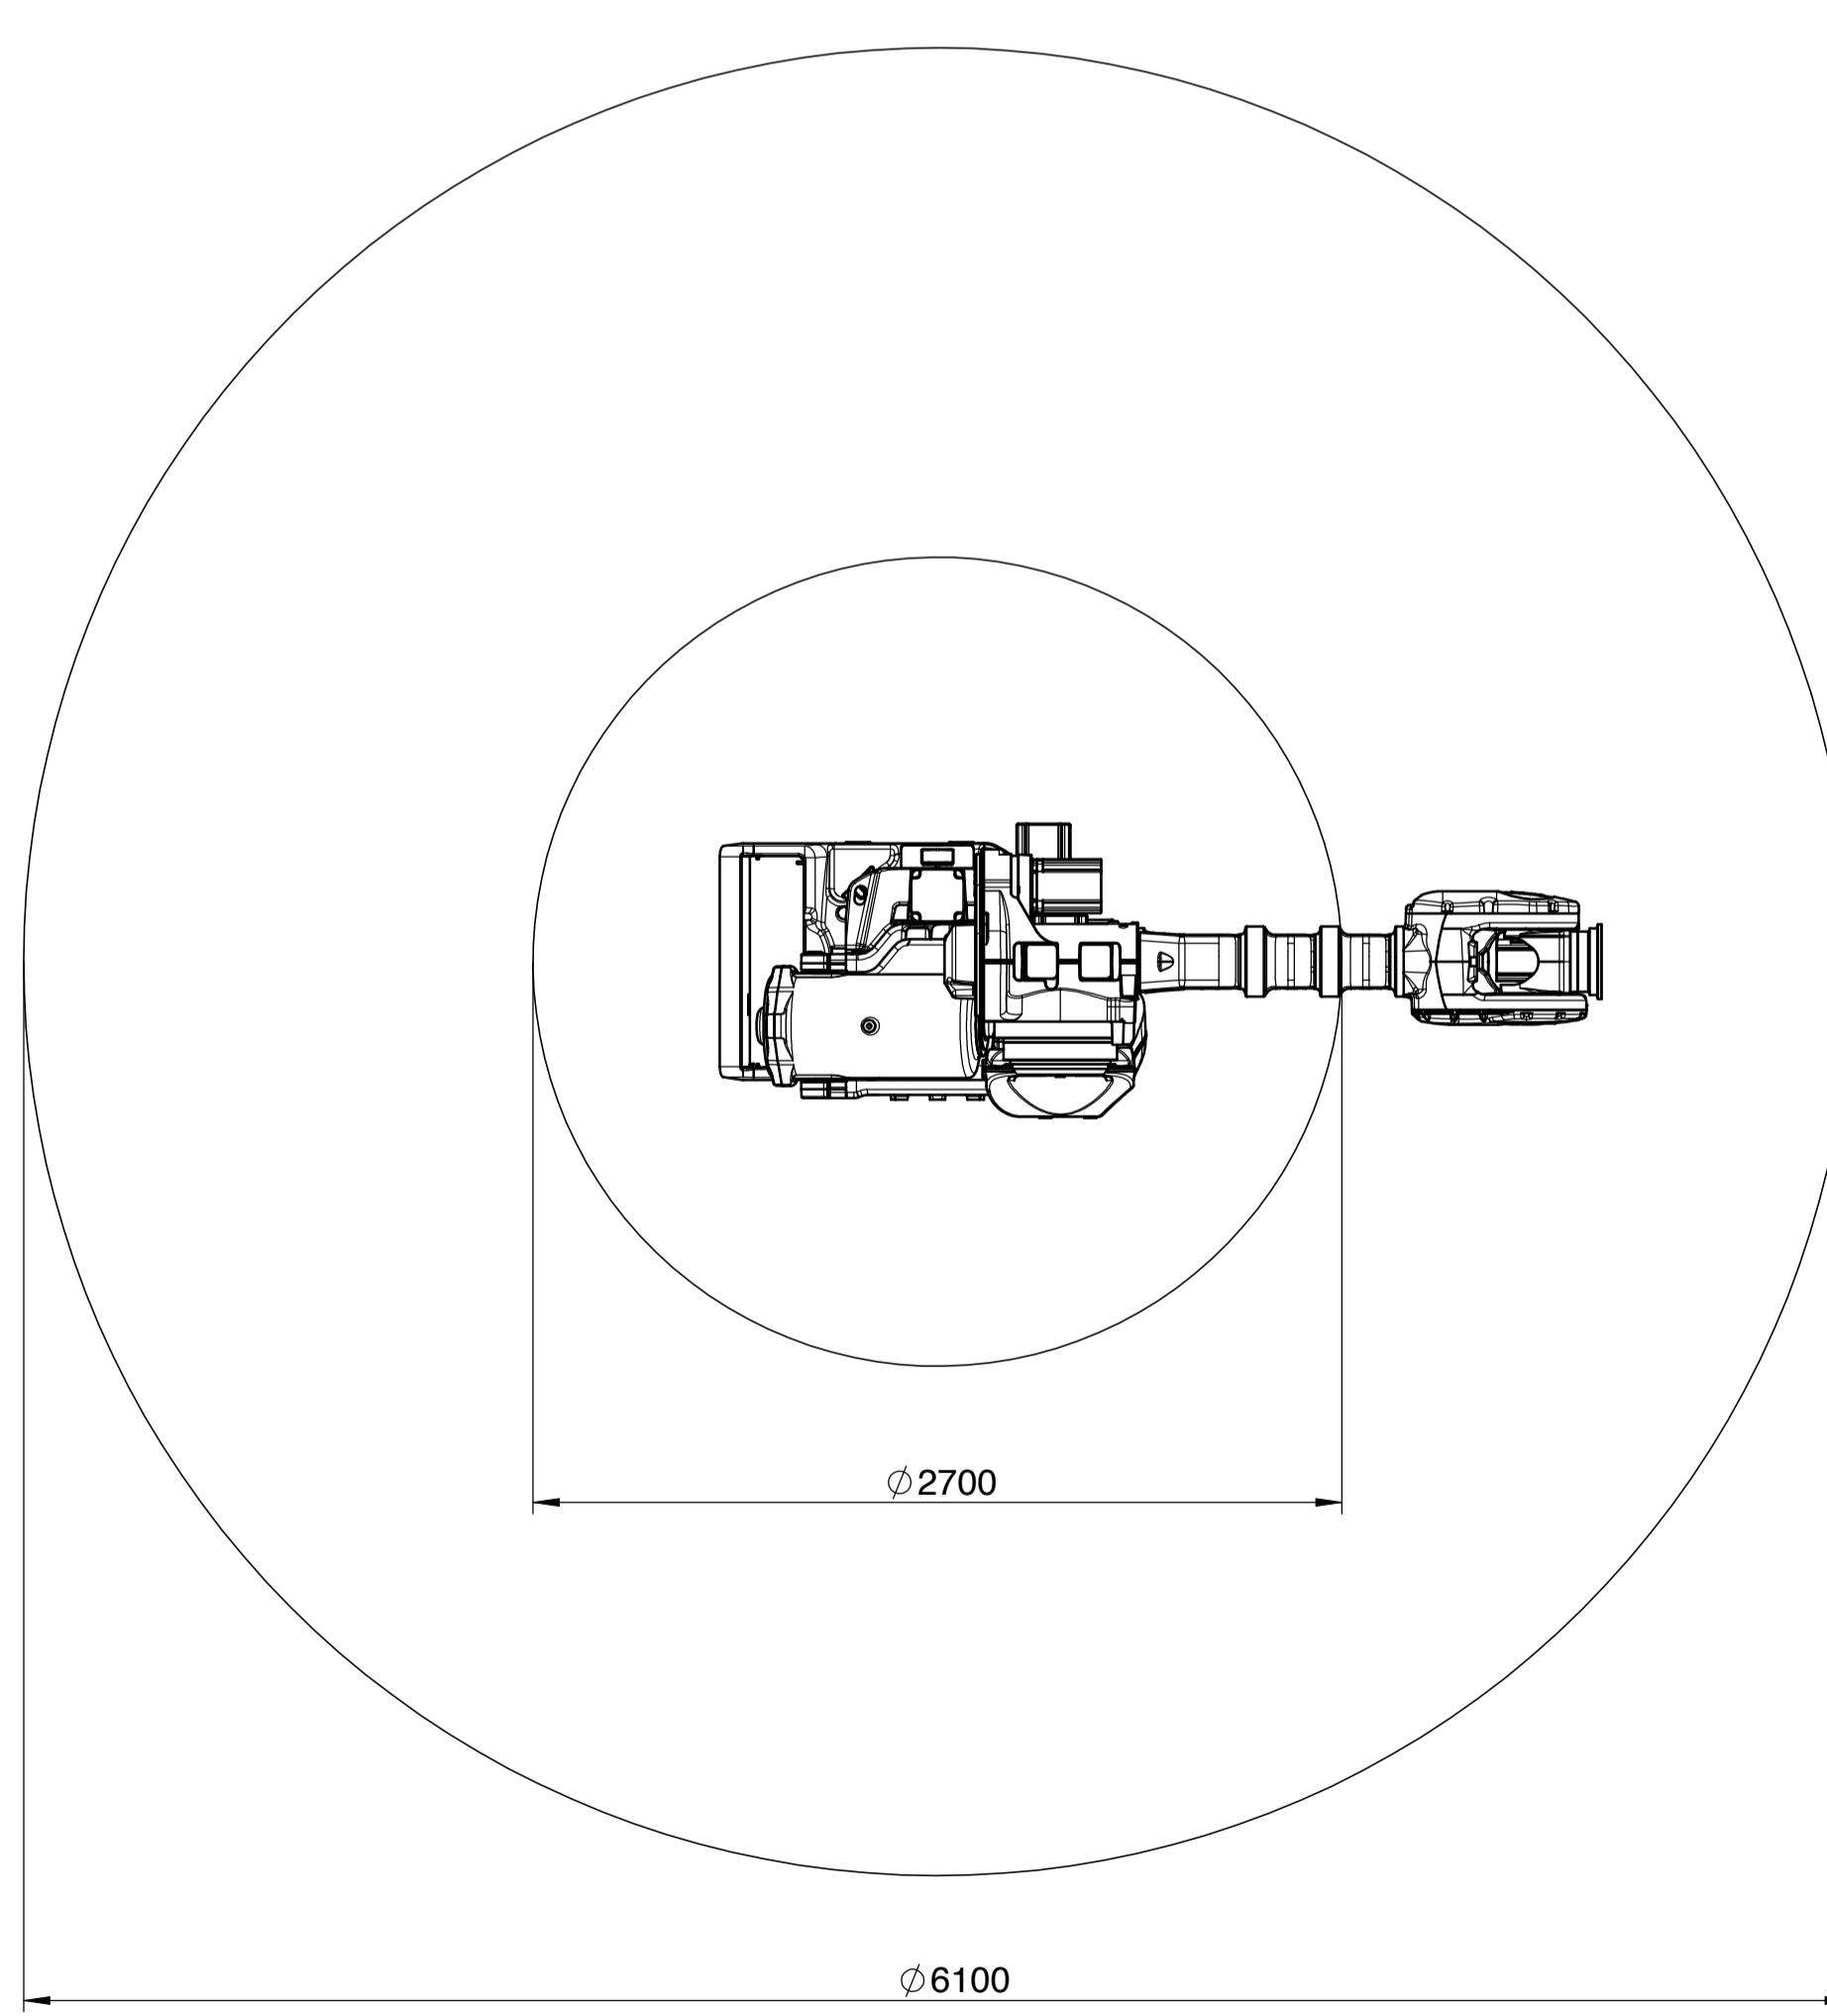

IRB 7600-3,1


ECO 500000030264
IRB 7600-3,1 was IRB7600-3,05.

Latest Revision

Prepared M Krispinsson, 080522	Responsible Department RO/PRMD	Description
Approved S Ellqvist, 080522	Take over department	SWD
Status Approved		Drawing
		Sheet
		3
	No. of sh.	4
	Rev.Ind.	H
		01
		Main dimes. IRB 7600
		Huvudmått IRB 7600
		Document no.
		3HAC12683-1


ABB**ABB AB****3HAC12683-1**

A

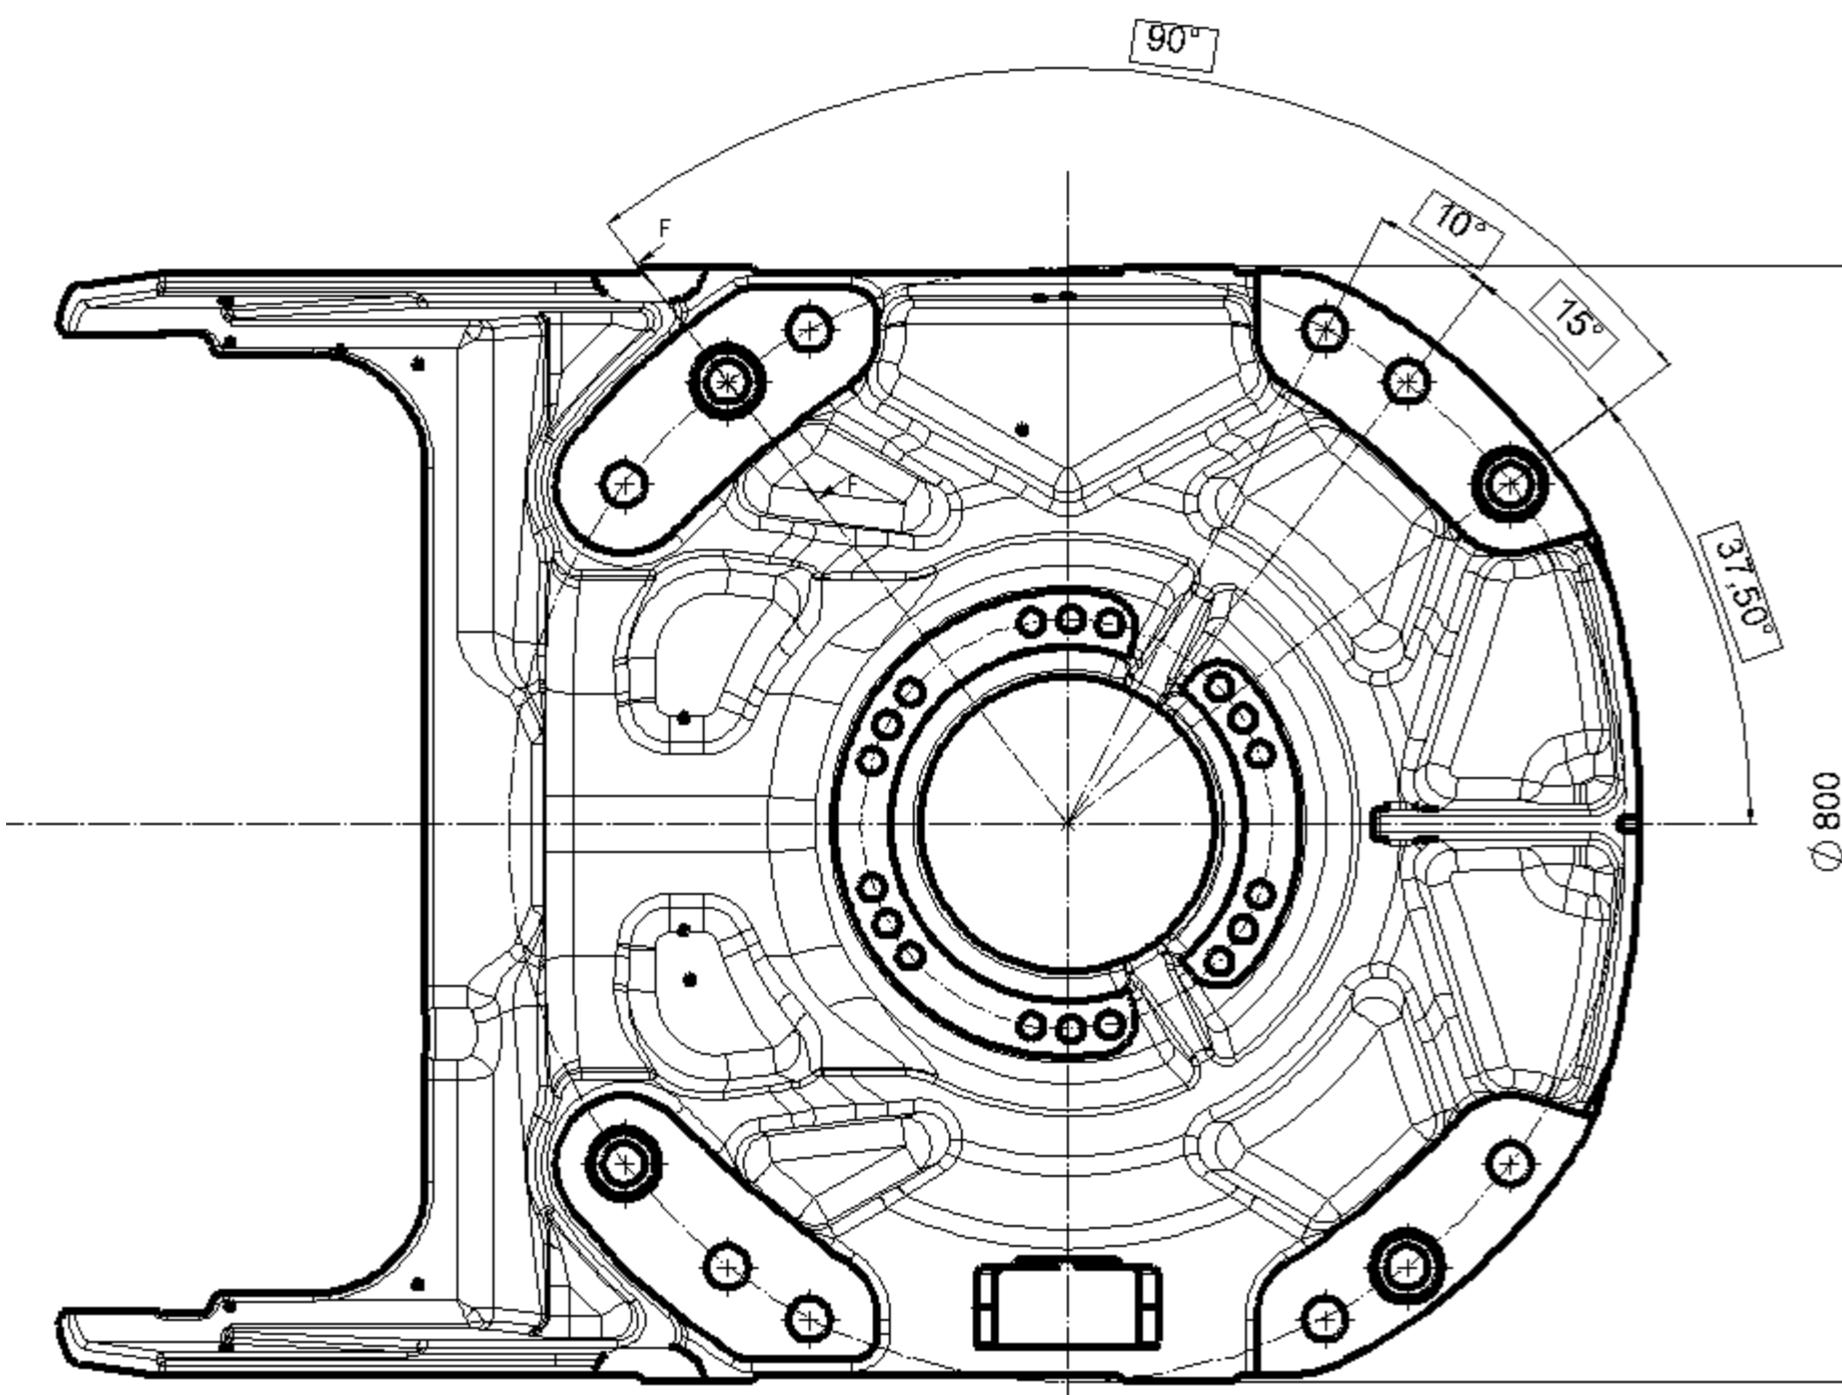


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. © Copyright 2003 ABB

D

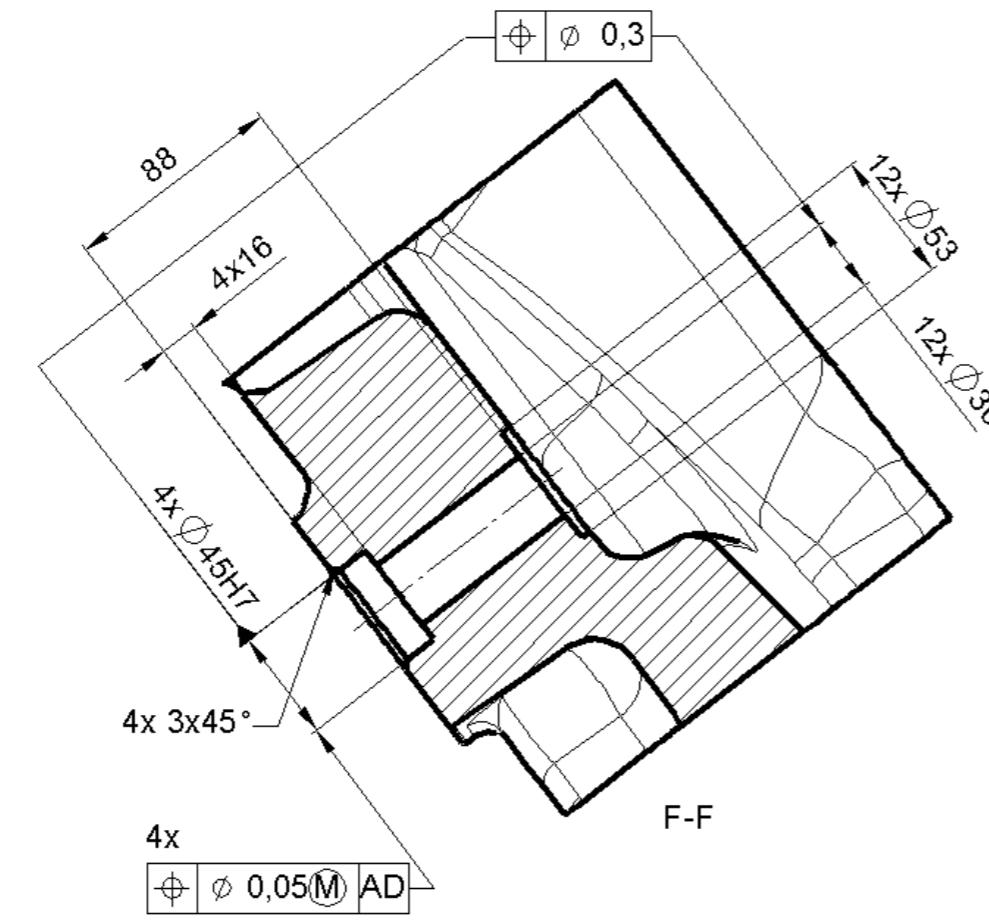

E

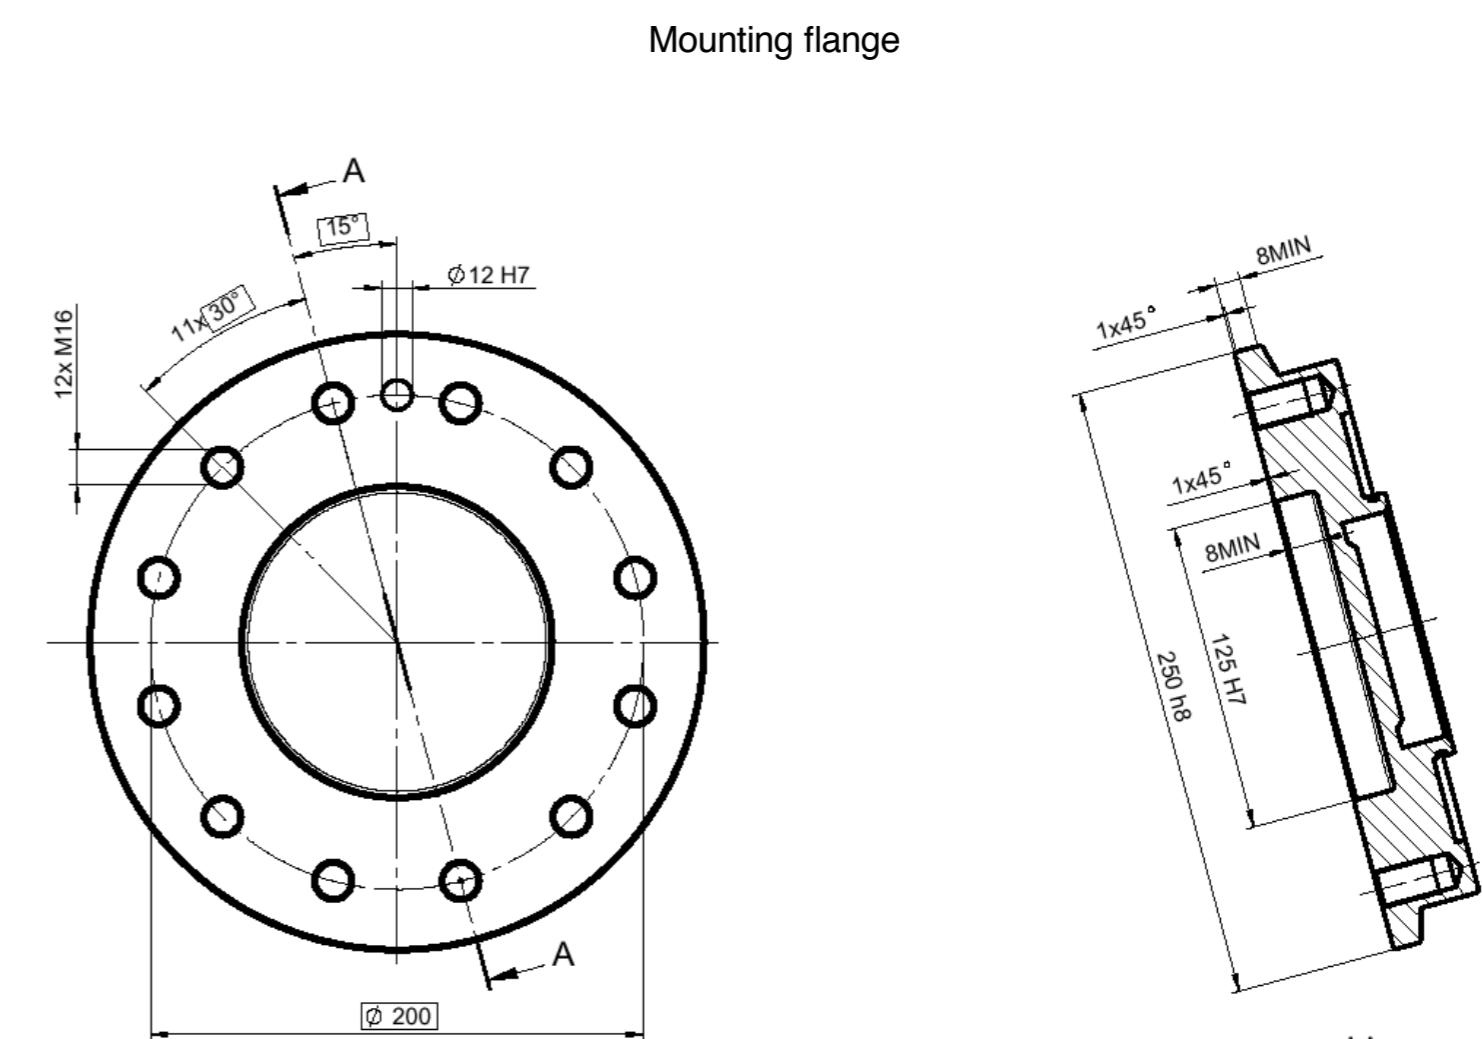

F

ECO 500000030264
IRB 7600-3,1 was IRB7600-3,05.

Latest Revision

Prepared M Krispinsson, 080522	Responsible Department RO/PRMD	Description	SWD	Drawing
Approved S Ellqvist, 080522	Take over department	Main dimes. IRB 7600		
Status Approved		Huvudmått IRB 7600		
		Document no.	Rev. ind.	01

ABB

ABB AB

3HAC12683-1