


CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE


PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

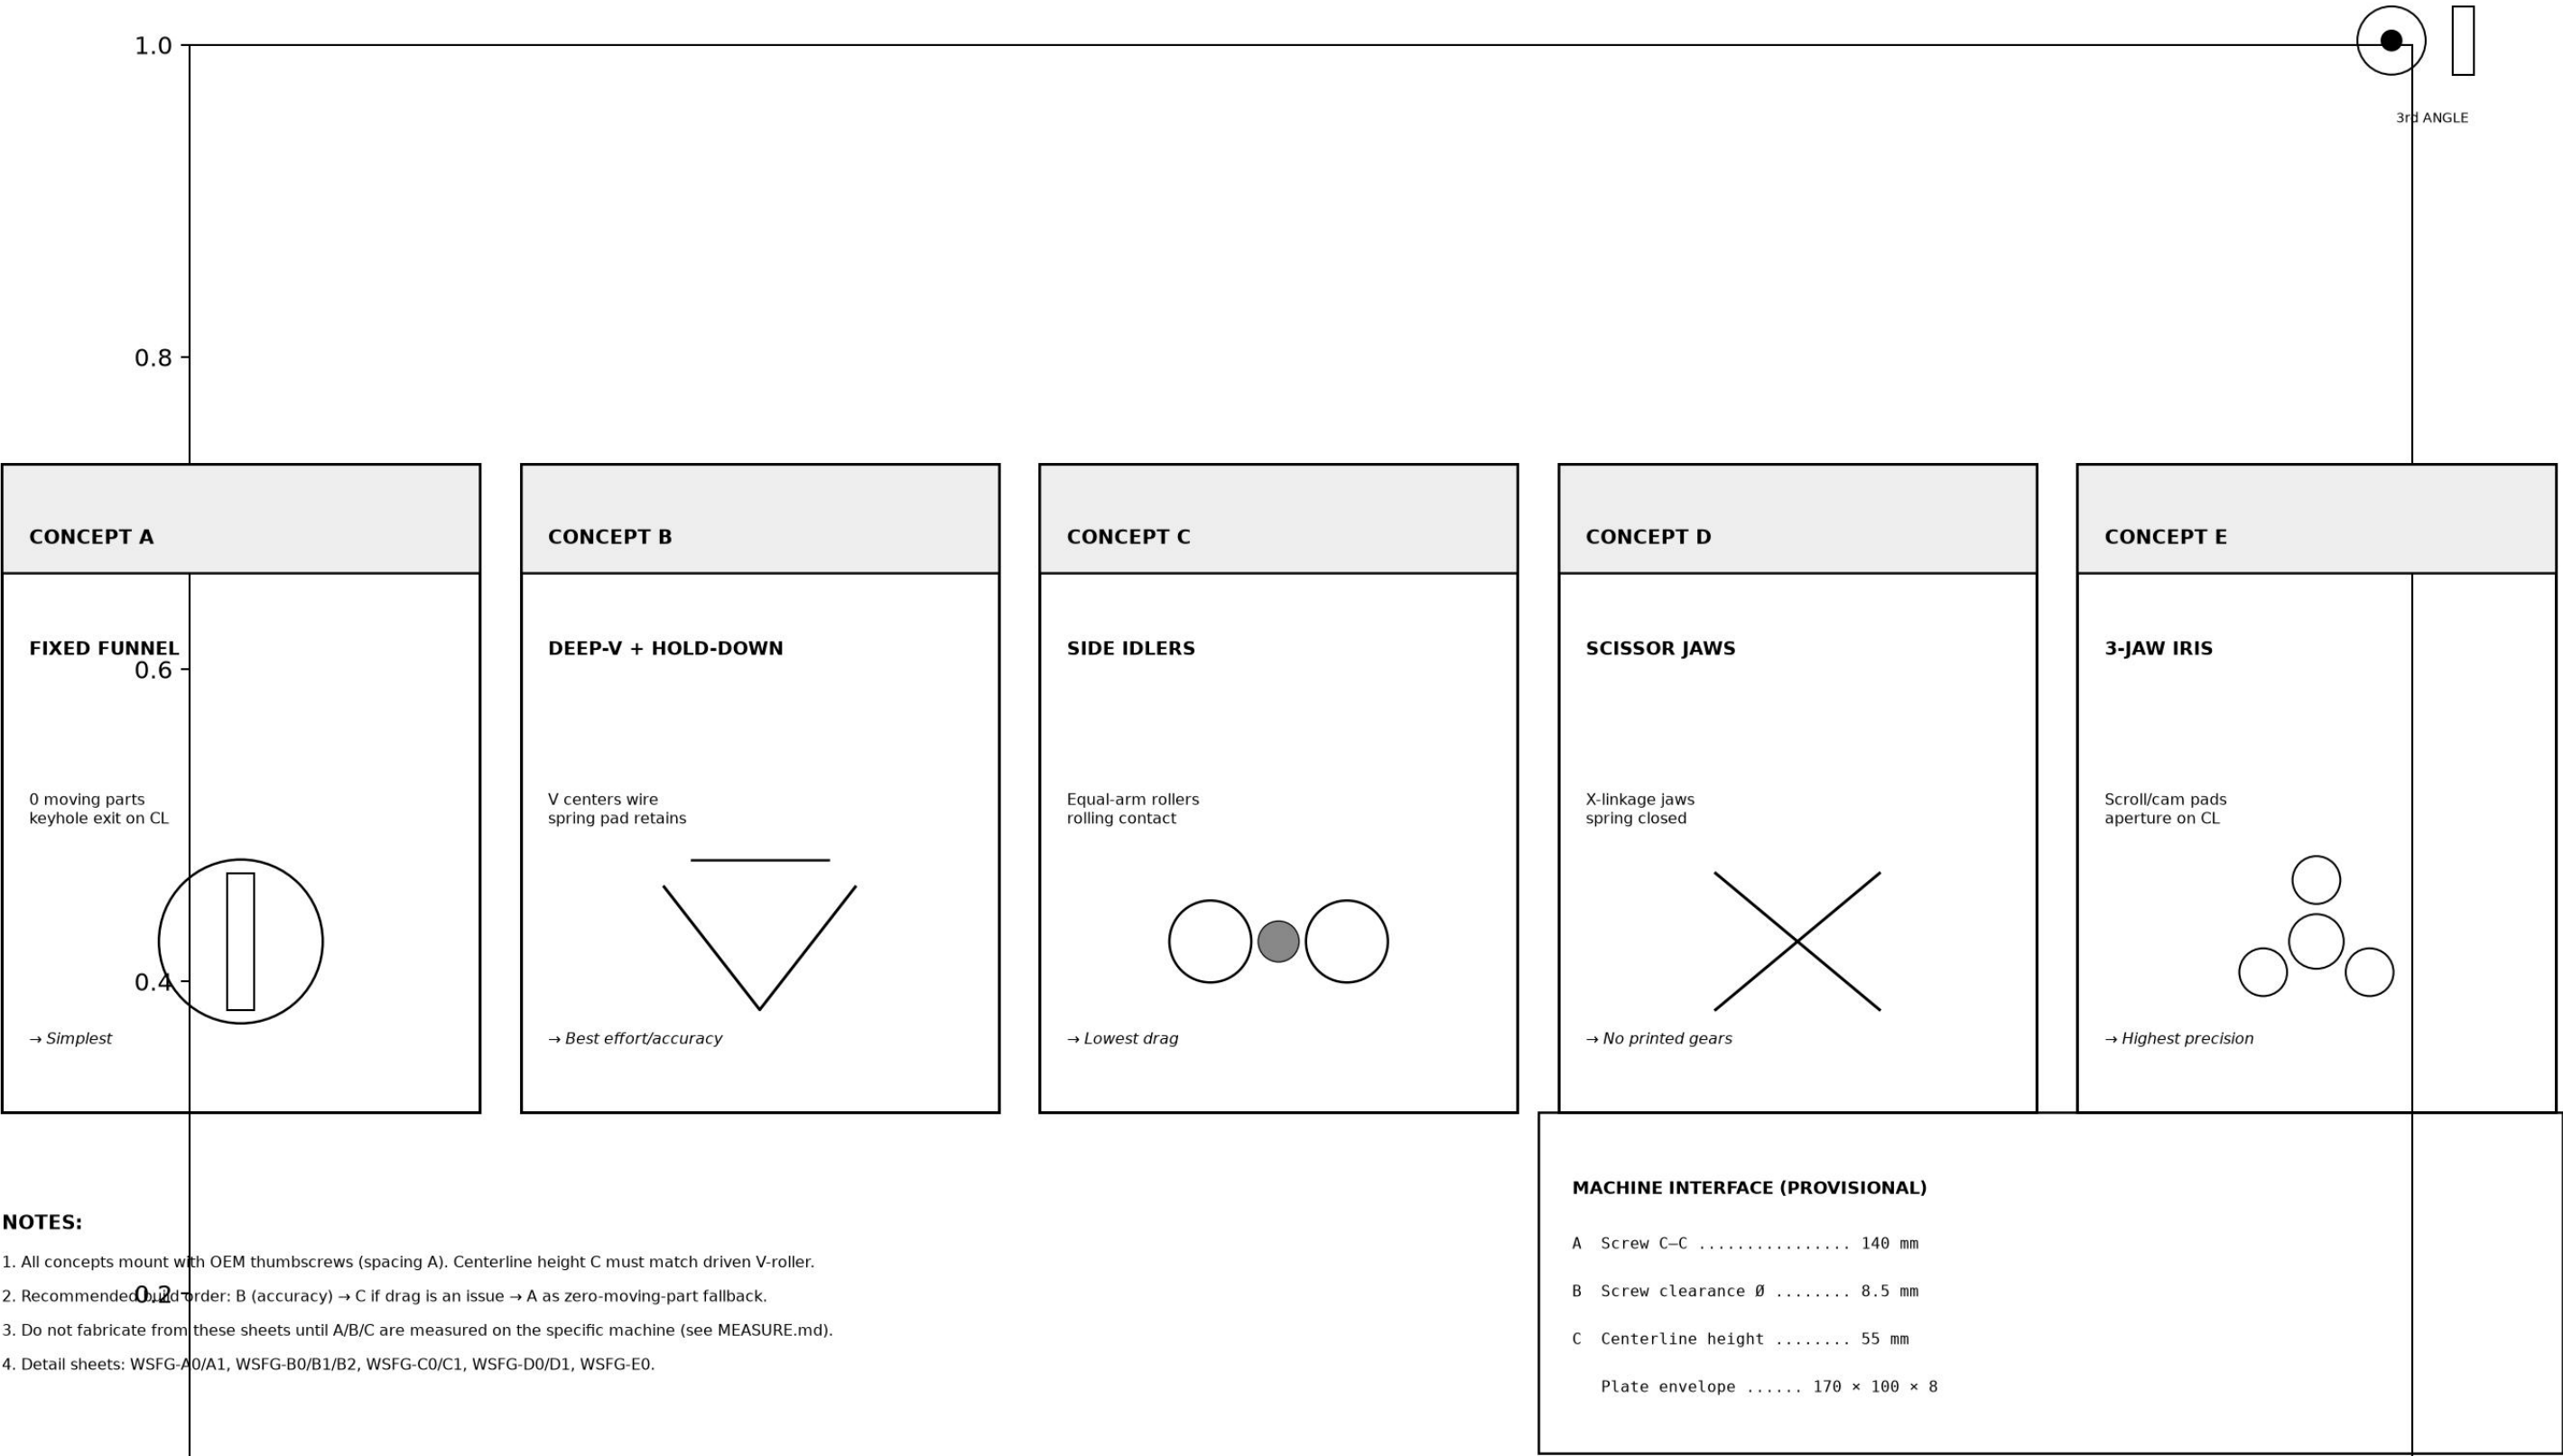

REV	DESCRIPTION
A	MULTI-CONCEPT
—	DATE: 2026-08-05

CONCEPT COMPARISON — SELF-CENTERING FEED GUIDE		
DWG NO: WSFG-00	SCALE: NTS	SHEET 1 OF 1
MATERIAL: —	UNITS: mm	TOL: ±0.5 UNLESS NOTED

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB


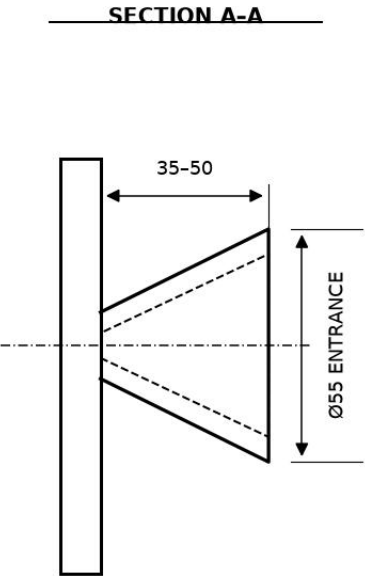


3rd ANGLE

CONCEPT A — FIXED FUNNEL ASSEMBLY			
DWG NO: WSFG-001	SCALE: 1:2	SHEET 1 OF 1	
MATERIAL: PETG / HDPE / AL 6061	UNITS: mm	TOL: ±0.5 UNLESS NOTED	

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

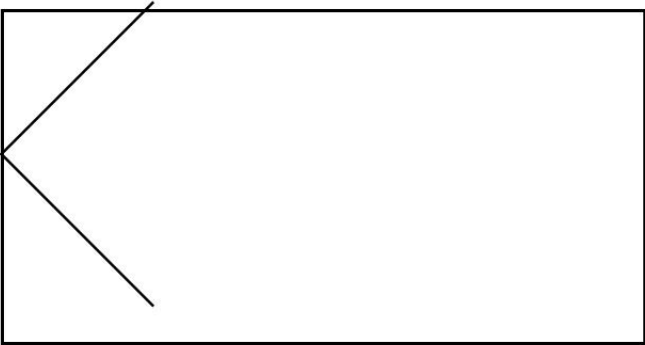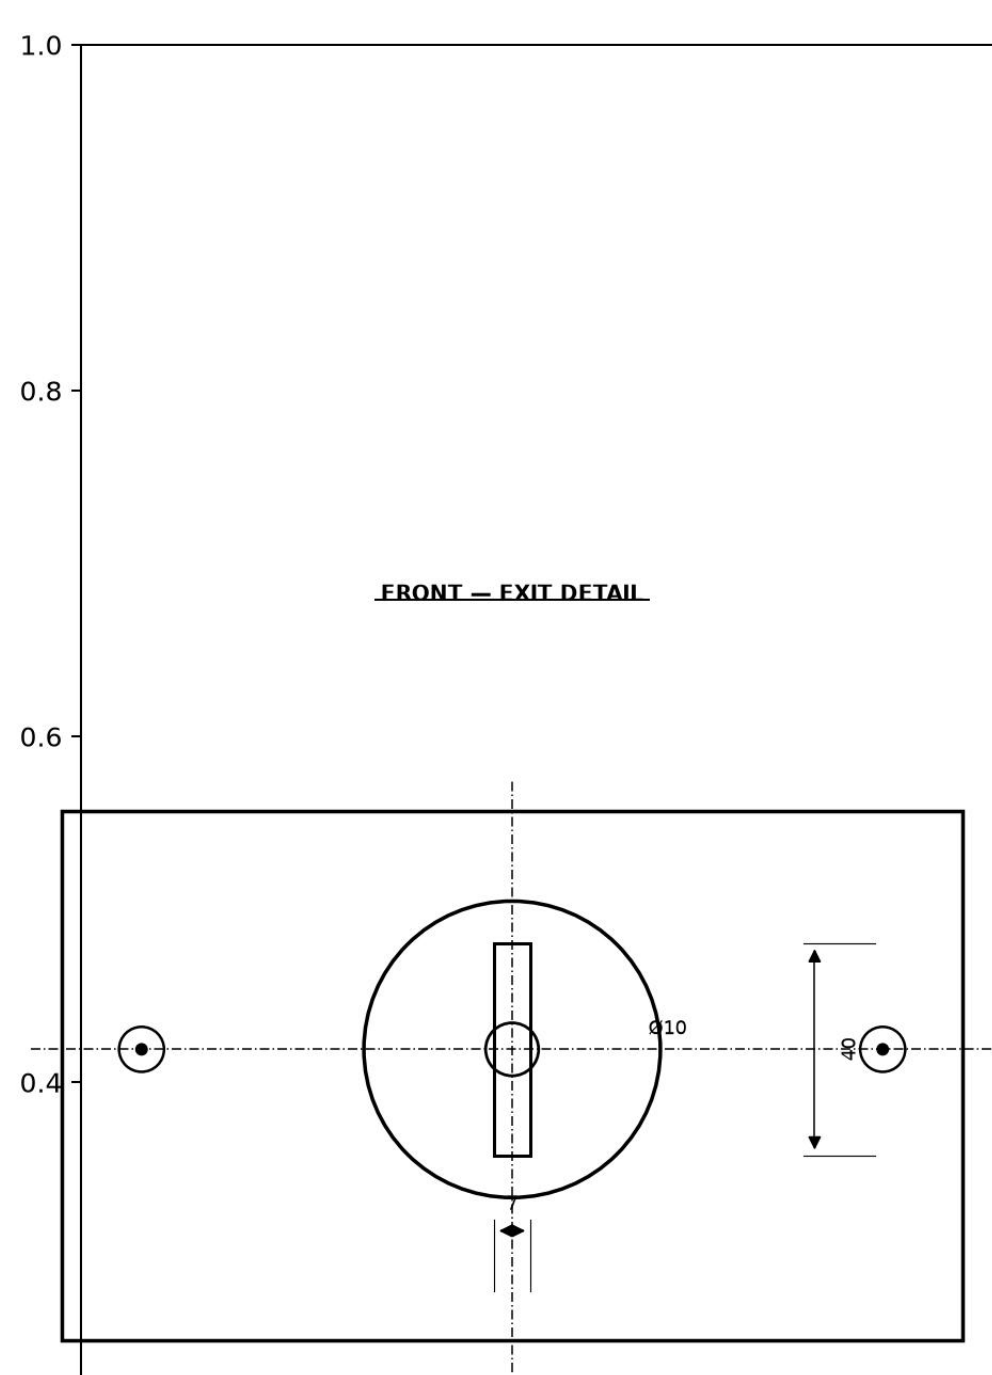

3rd ANGLE

TOP VIEW (SCHEME)



- NOTES:
- 1. Thumbscrew holes: Ø8.5 thru, C-C 140.0 (match machine).
 - 2. Keyhole must be symmetric about vertical CL within 0.5 mm.
 - 3. If printing: 4 walls, 40% infill, outer walls on XY for smooth tunnel.

REV	DESCRIPTION
A	MULTI-CONCEPT 0.9
—	DATE: 2026-08-05

CONCEPT A — FUNNEL BODY DETAIL		
DWG NO: WSFG-A1	SCALE: 1:1	SHEET 1 OF 1
MATERIAL: HDPE OR PETG PRINT	UNITS: mm	TOL: ±0.5 UNLESS NOTED

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

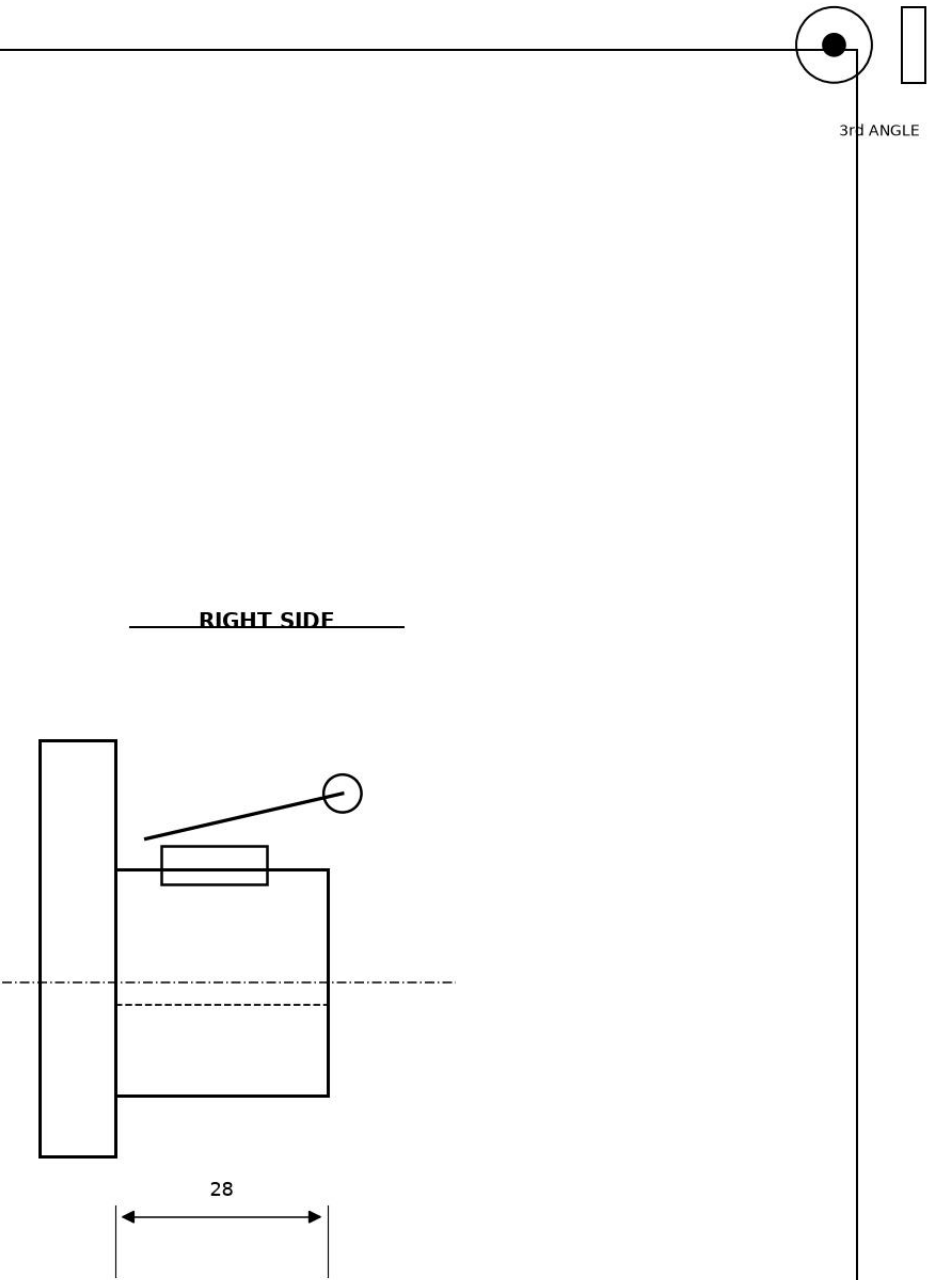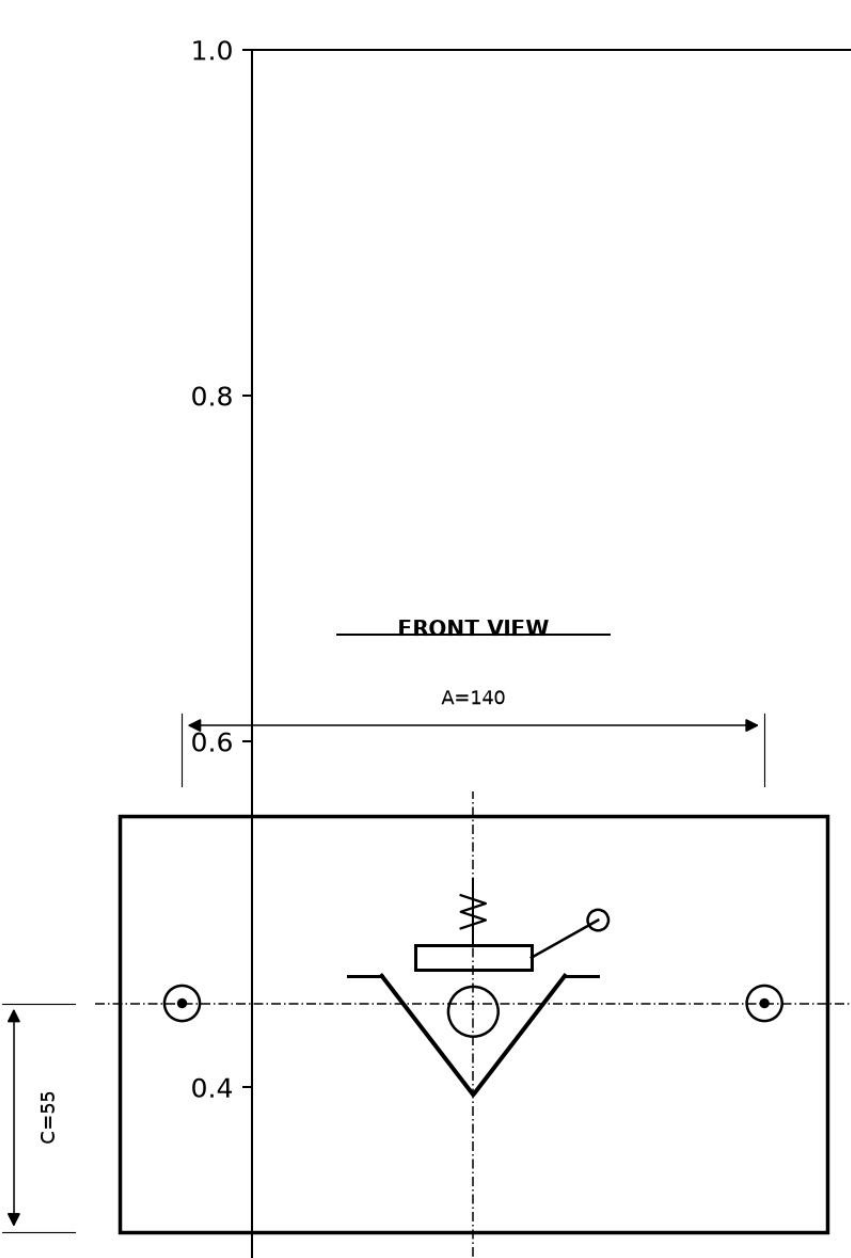



- NOTES:**
- 90° V apex ON centerline C. Apex radius ≤ 0.5 mm (or leave sharp for small wire).
 - Hold-down force 0.2 N — wire must still be pulled by driven roller without stalling.
 - V faces: UHMW tape or print in PETG; replace when grooved.
 - Bill: plate+V (B1), hold-down arm (B2), M5 pivot, torsion or extension spring.

REV	DESCRIPTION
A	MULTI-CONCEPT 0.0
—	DATE: 2026-08-05

CONCEPT B — DEEP-V + HOLD-DOWN ASSEMBLY		
DWG NO: WSFG-B0	SCALE: 1:2	SHEET 1 OF 1
MATERIAL: SEE PART SHEETS	UNITS: mm	TOL: ± 0.5 UNLESS NOTED

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

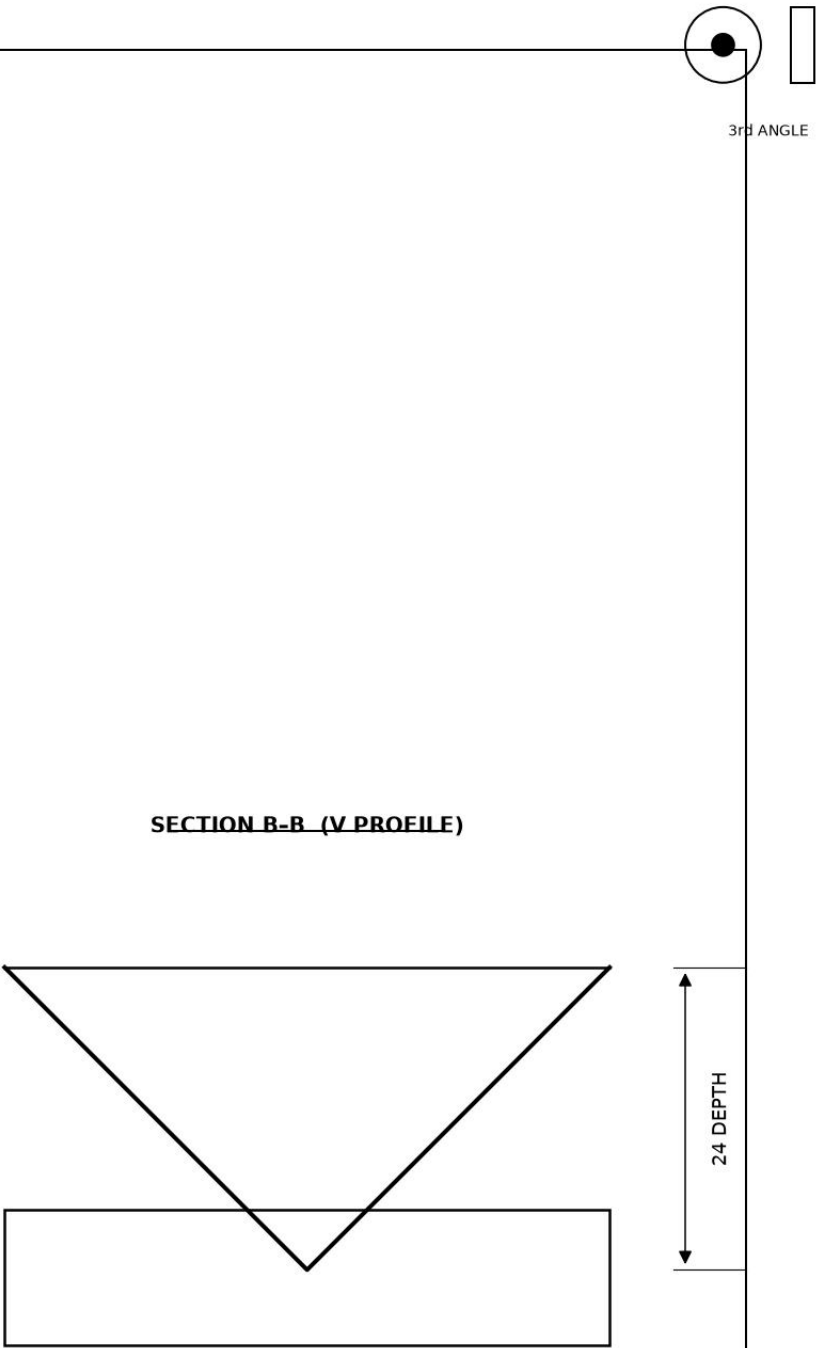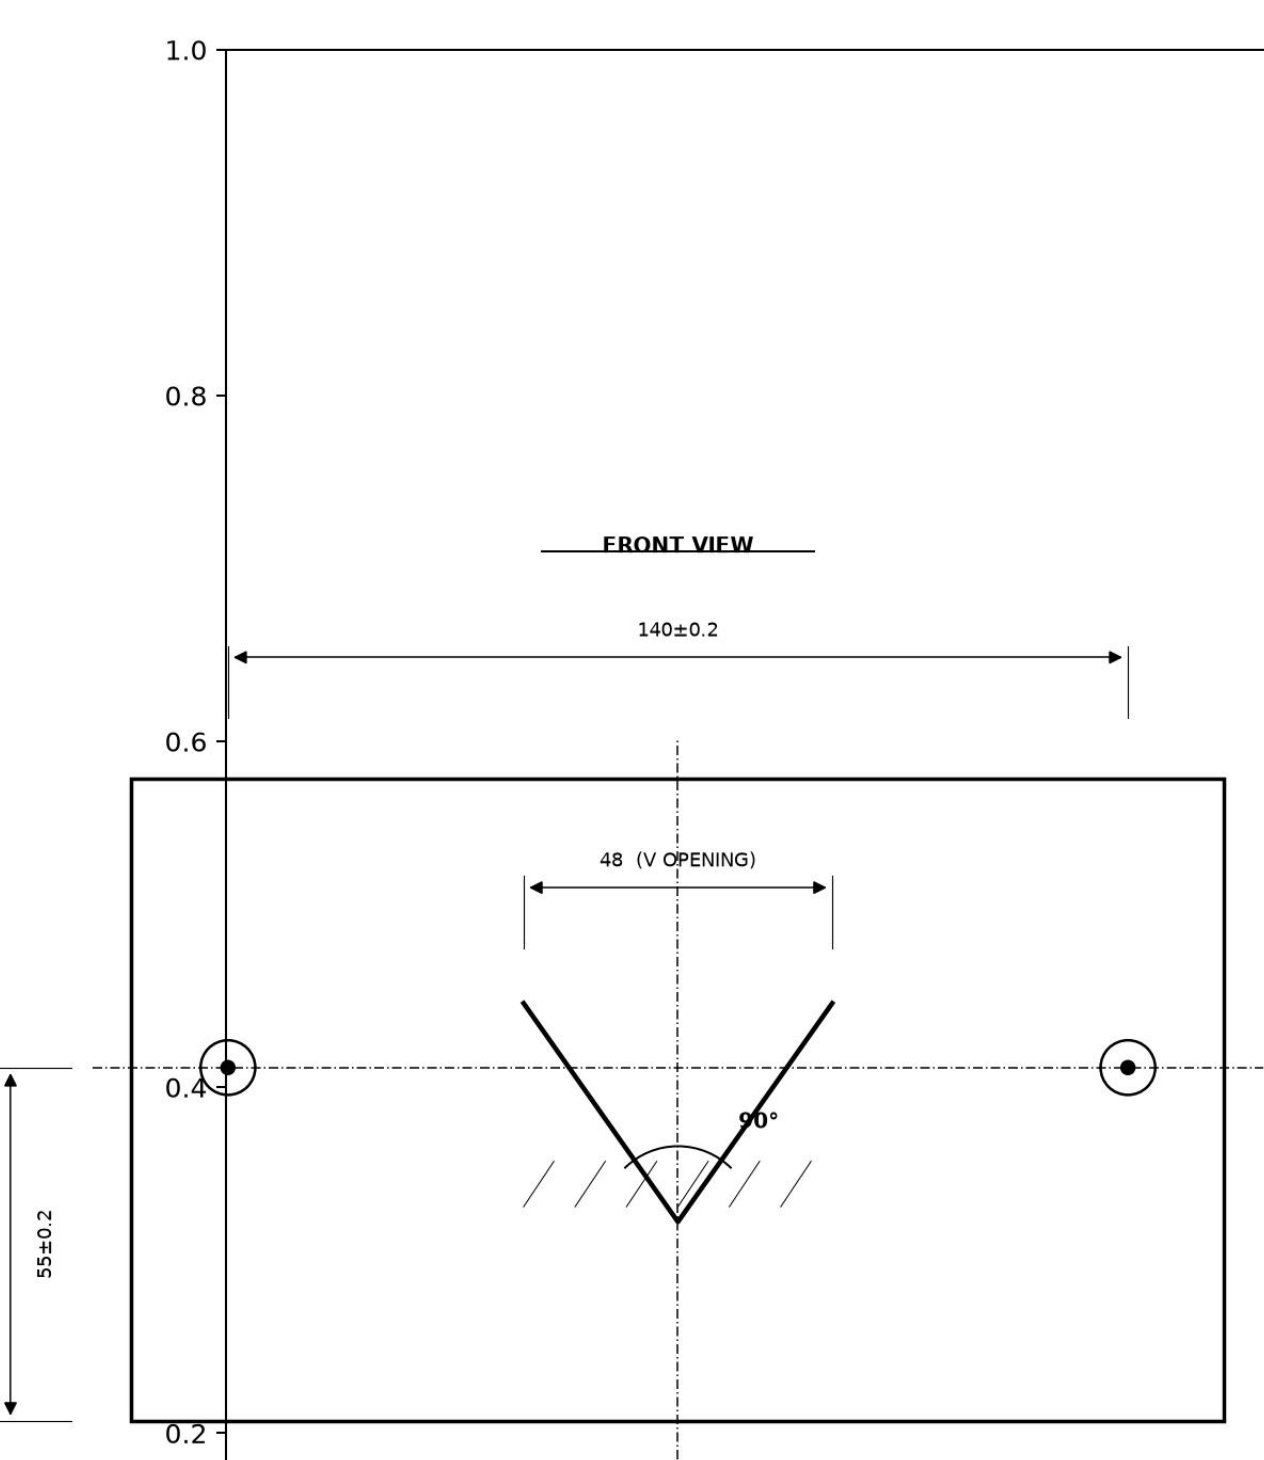


- NOTES:
- 1. Apex of V must lie on vertical & horizontal centerlines within 0.3 mm.
 - 2. Mount holes Ø8.5 thru. Spotface optional under thumbscrew heads.
 - 3. If aluminum: break V edges 0.2; If PETG: Iron V faces or sand smooth.

REV	DESCRIPTION
A	MULTI-CONCEPT 0.9
—	DATE: 2026-08-05

CONCEPT B — V-BLOCK / MOUNT PLATE		
DWG NO: WSFG-B1	SCALE: 1:1	SHEET 1 OF 1
MATERIAL: PETG OR AL 6061-T6	UNITS: mm	TOL: ±0.5 UNLESS NOTED

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

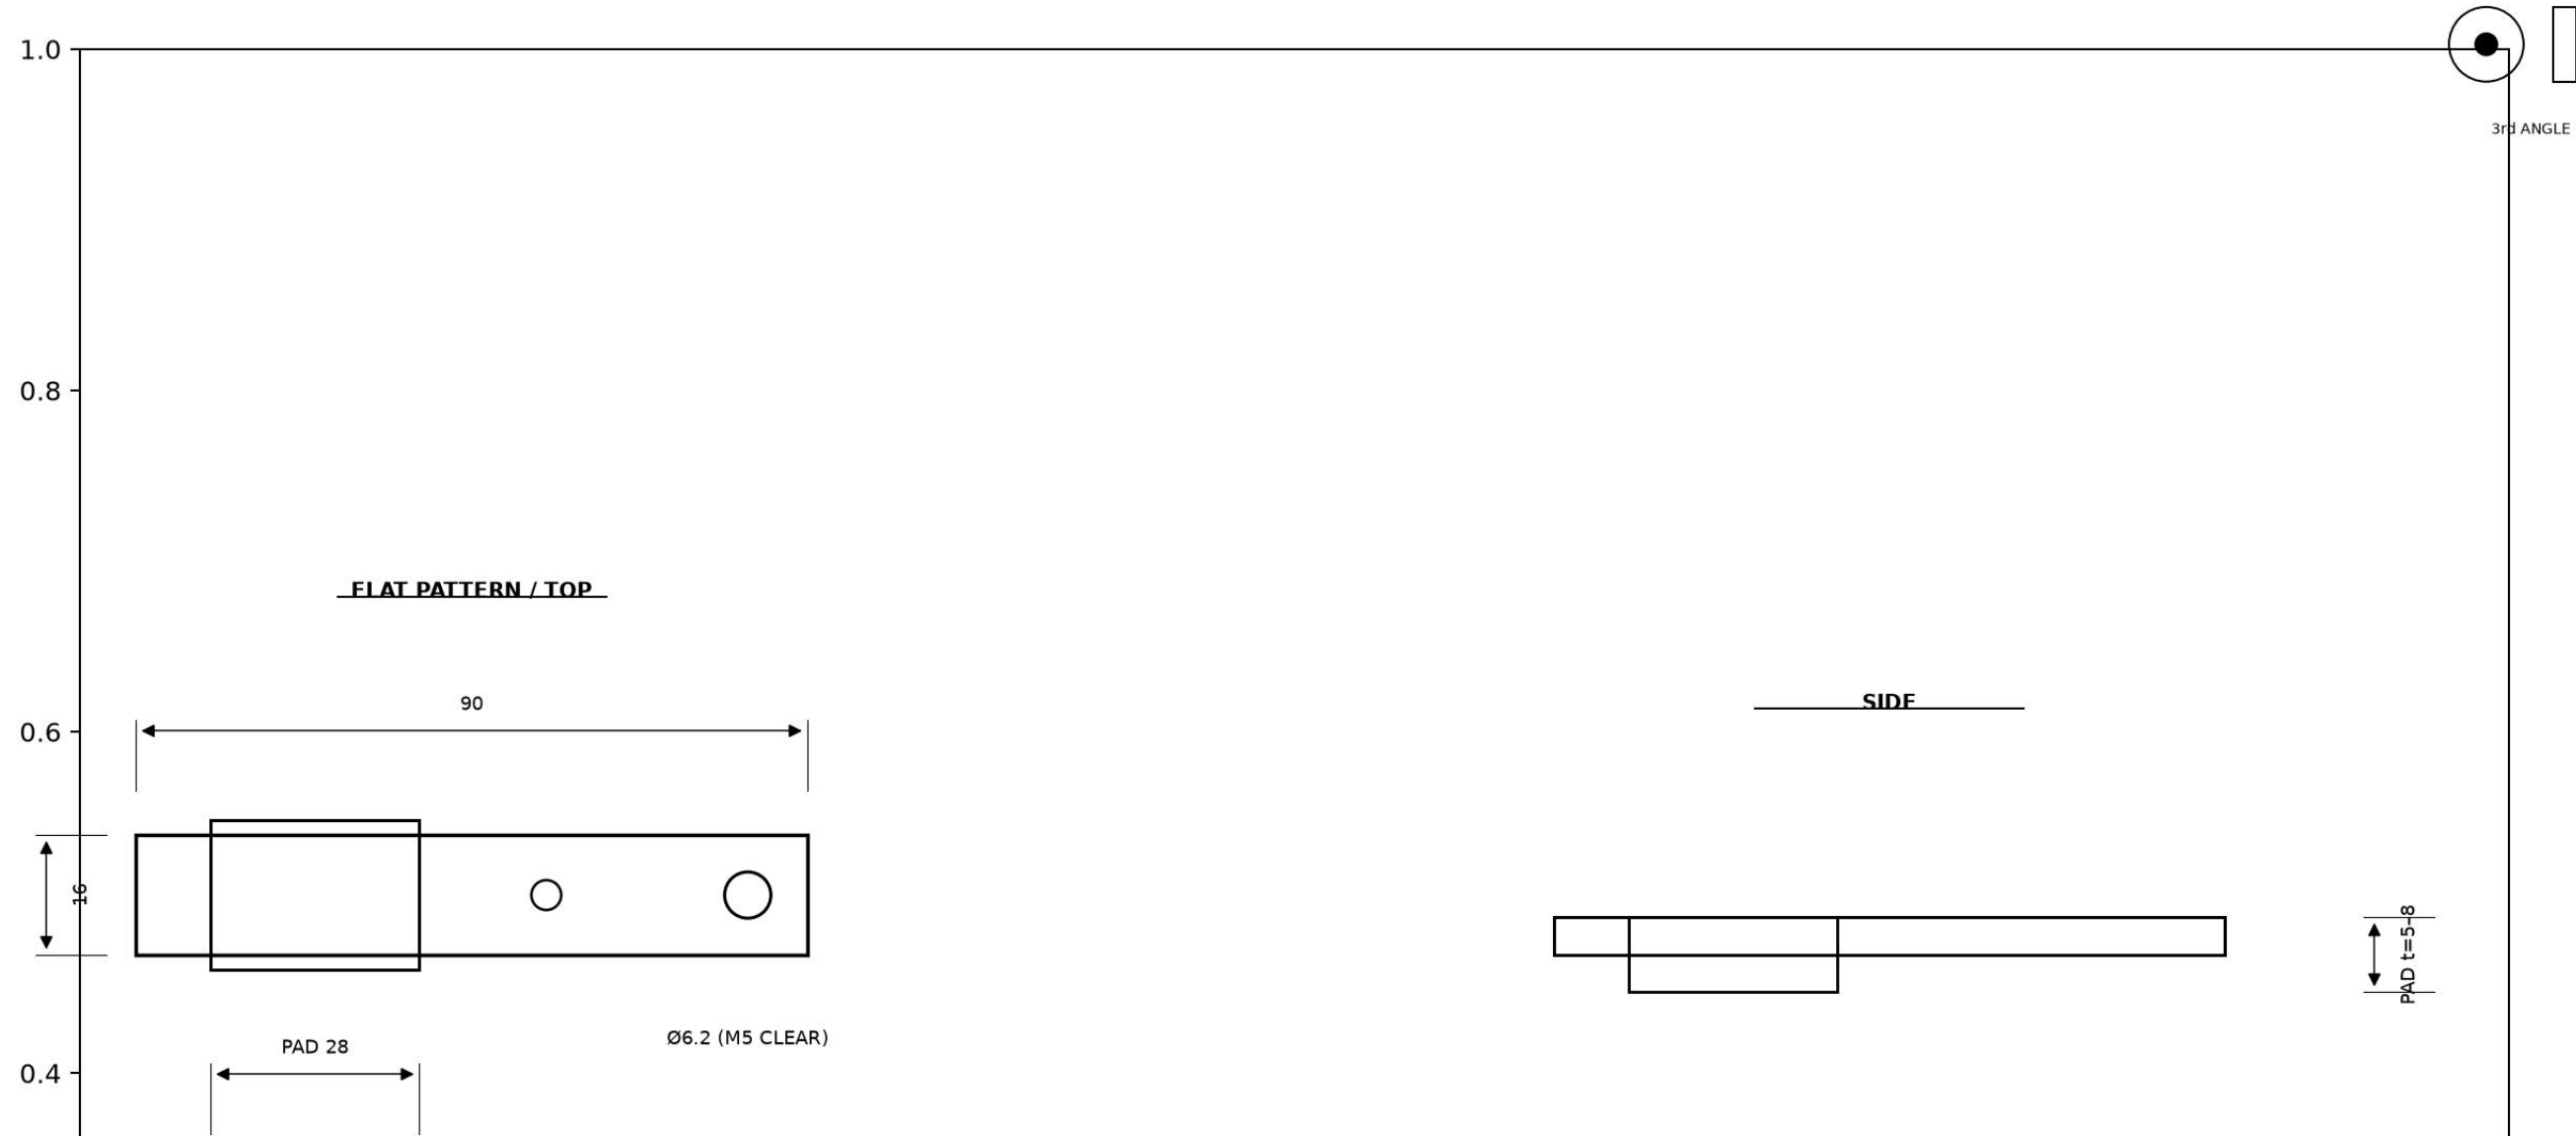

NOTES:


- 1. Pad face may be faced with leather/UHMW for grip without tearing jacket.
- 2. Spring: light torsion at pivot OR extension to plate — open by hand to Ø38.
- 3. Pivot shared with plate boss (see B0 side view).

REV	DESCRIPTION
A	MULTI-CONCEPT 0.9
—	DATE: 2026-08-05

CONCEPT B — HOLD-DOWN ARM		
DWG NO: WSFG-B2	SCALE: 1:1	SHEET 1 OF 1
MATERIAL: PETG / STEEL STRAP	UNITS: mm	TOL: ±0.5 UNLESS NOTED


CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

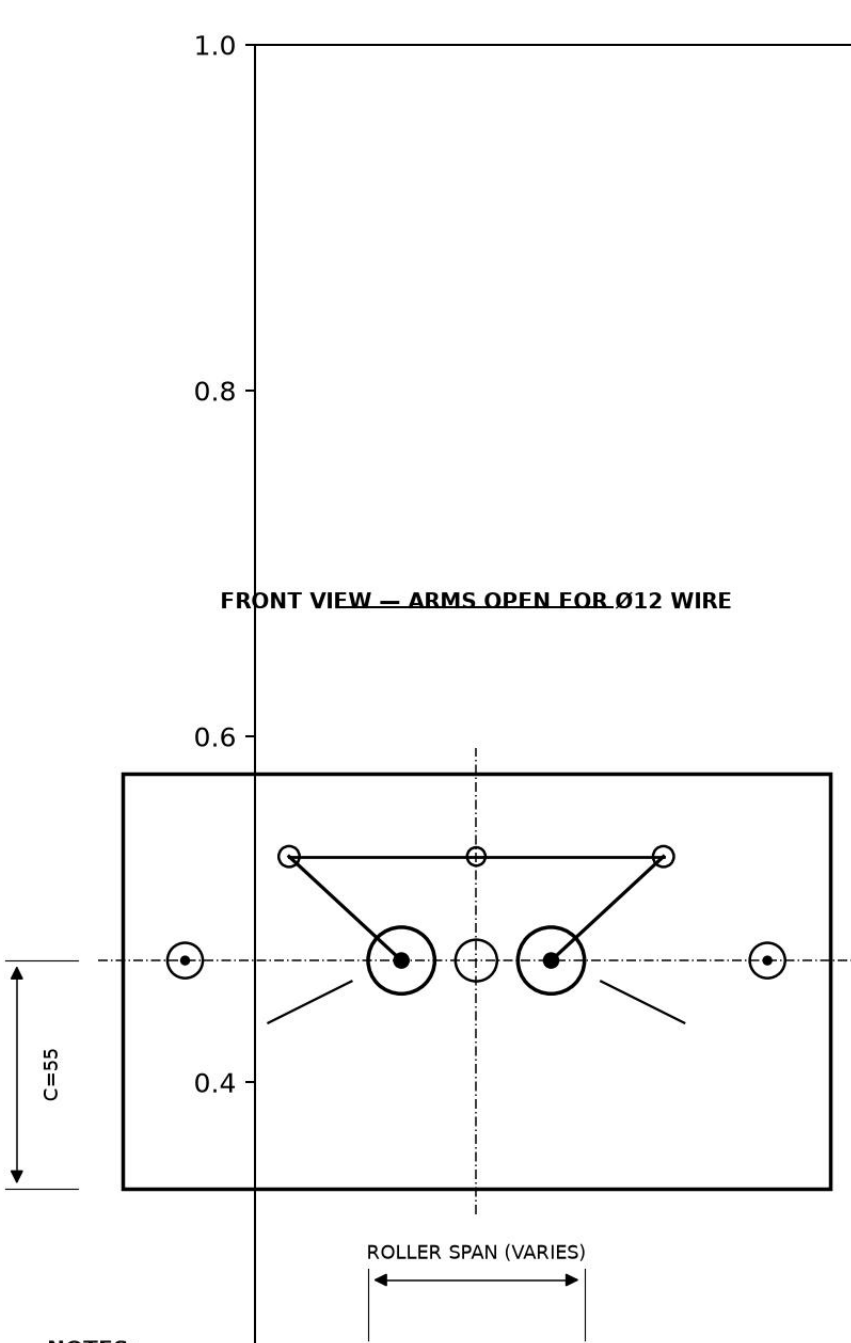

- NOTES:
- Rollers: Ø16–20 PU or POM, 608ZZ bearings (or printed axles for light duty).
 - Equalizer: solid Ø2 or slotted pivots, OR meshing gear sectors at arm pivots.
 - Spring bias closed; stop screws set minimum gap ≈ 1 mm for tiny wire.
 - Lowest drag option — preferred when thin wire slips on the driven roller.


REV	DESCRIPTION
A	MULTI-CONCEPT 0.0
—	DATE: 2026-08-05

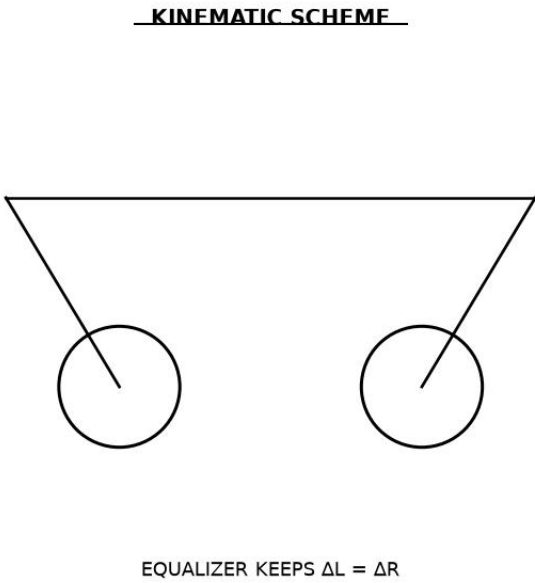

CONCEPT C — OPPOSED IDLE SIDE ROLLERS		
DWG NO: WSFG-C-0.6	SCALE: 1:2 0.8	SHEET 1 OF 1 1.0
MATERIAL: SEE NOTES	UNITS: mm	TOL: ± 0.5 UNLESS NOTED

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

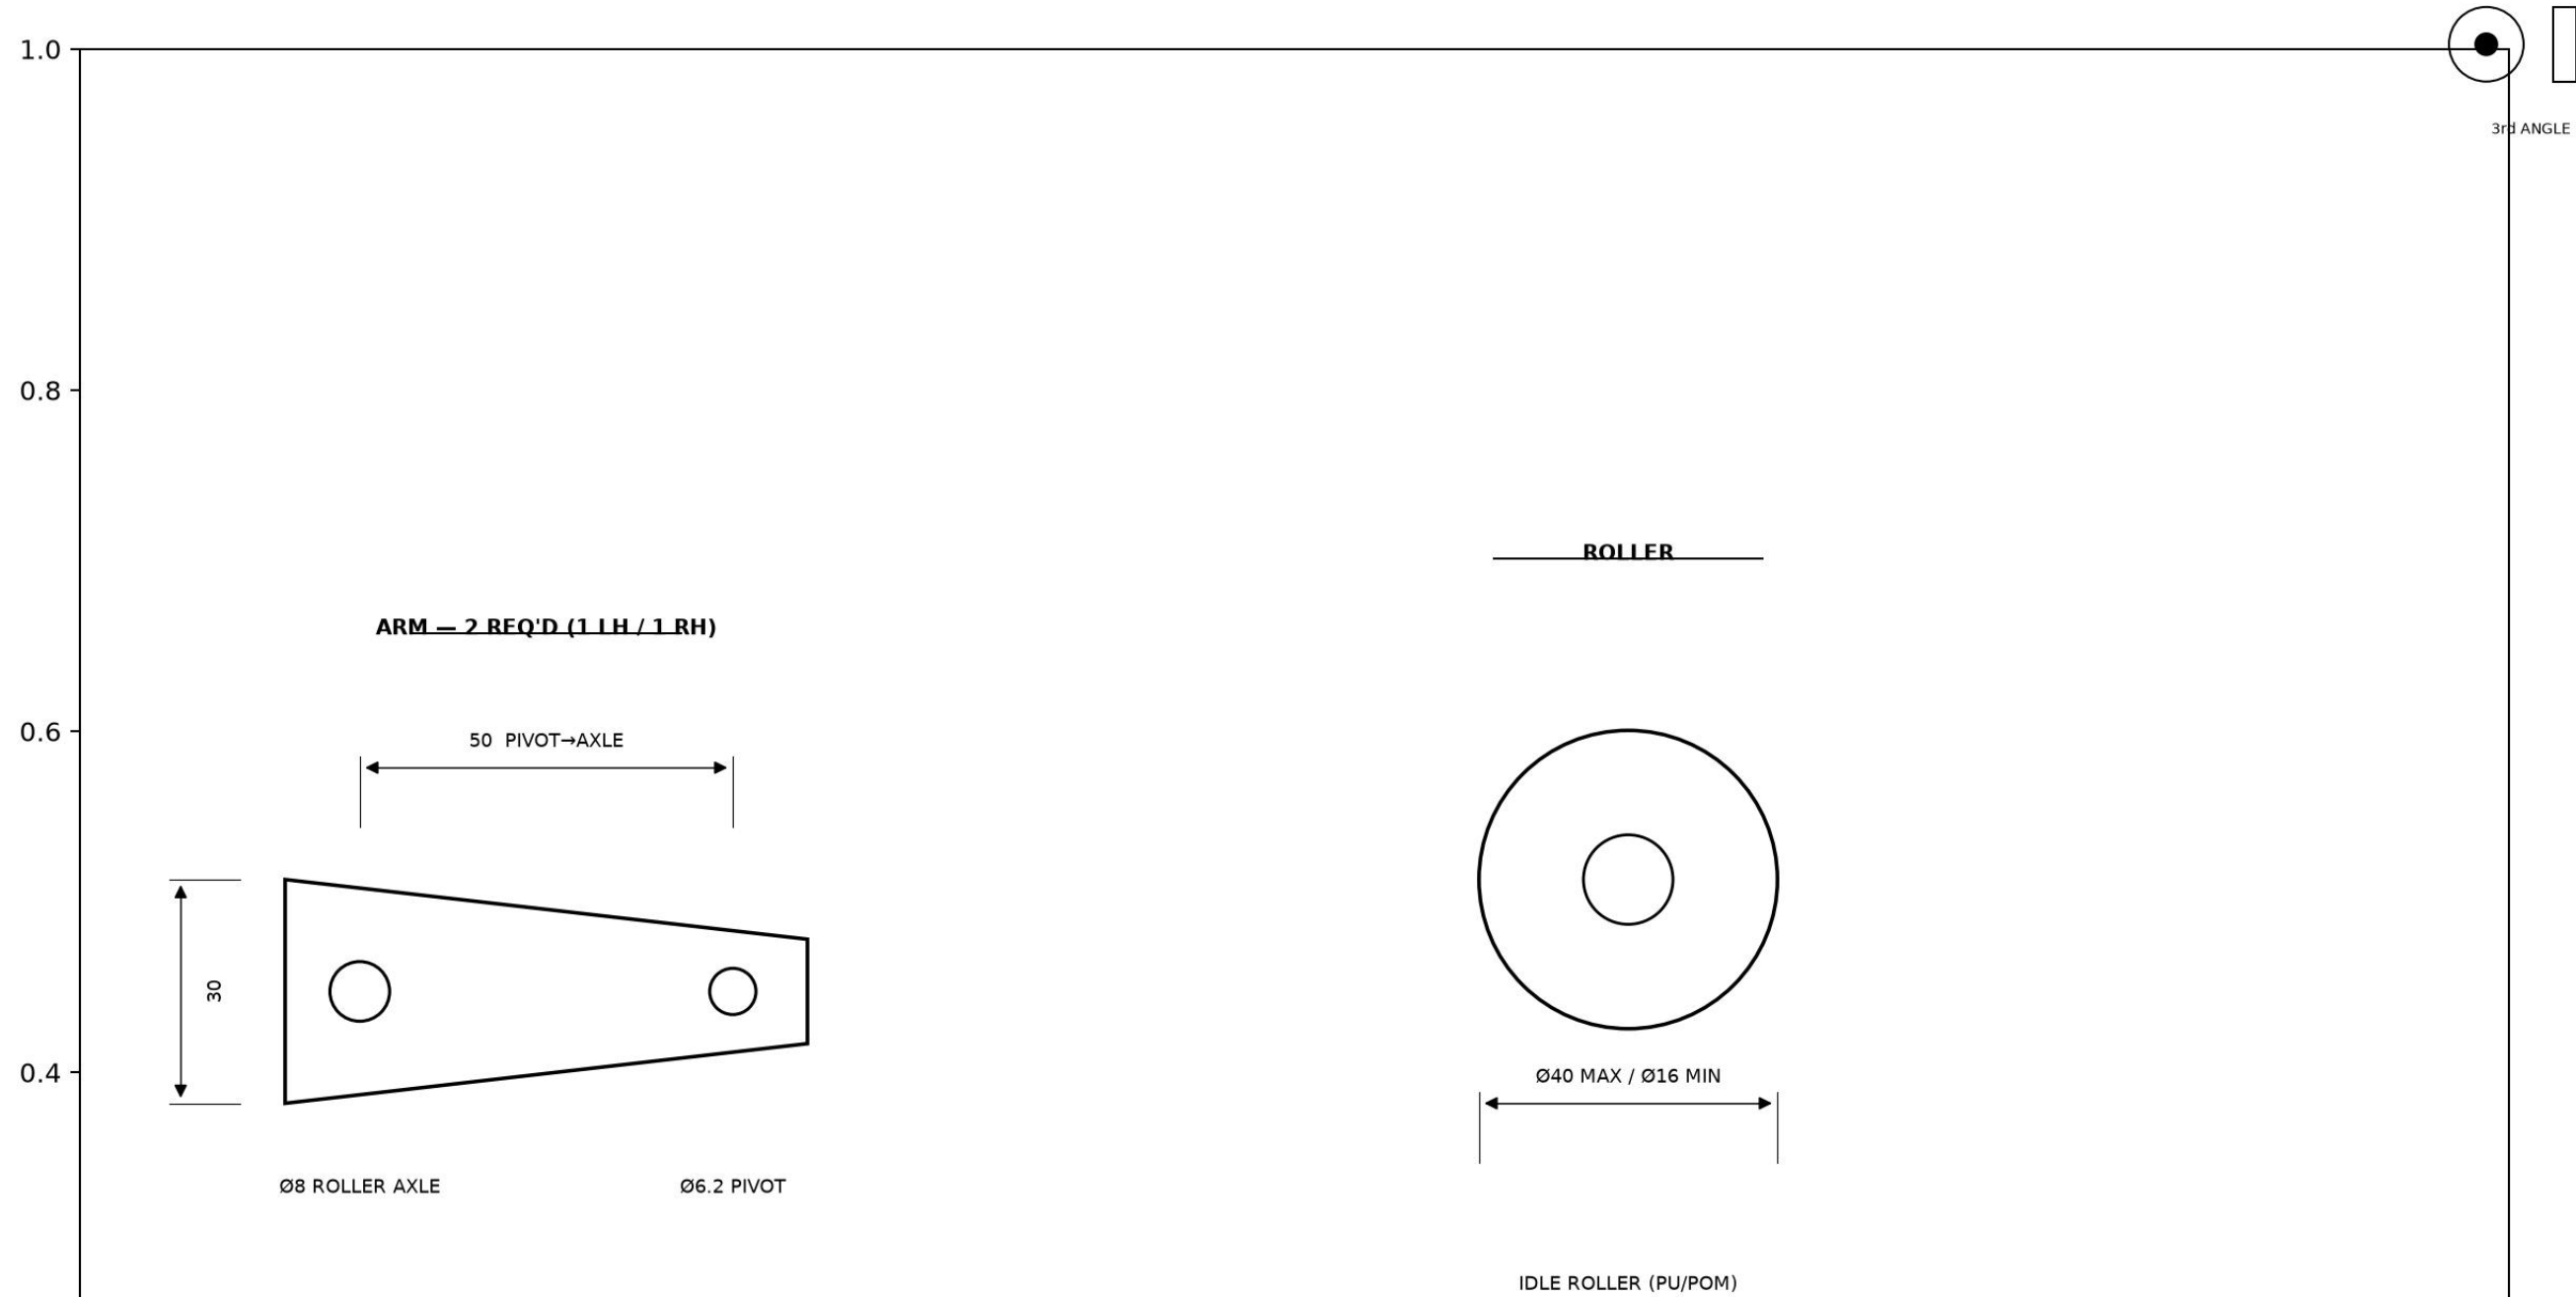


- NOTES:**
- 1. Make LH/RH arms mirrored. Keep axle parallel to blade axis within 1°.
 - 2. Equalizer holes: slotted ±3 mm for sync fine-tune after install.

REV	DESCRIPTION
A	MULTI-CONCEPT 0.9
—	DATE: 2026-08-05

CONCEPT C — SWING ARM DETAIL		
DWG NO: WSFG-C1	SCALE: 1:1	SHEET 1 OF 1
MATERIAL: AL 6061 / PETG	UNITS: mm	TOL: ±0.5 UNLESS NOTED

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

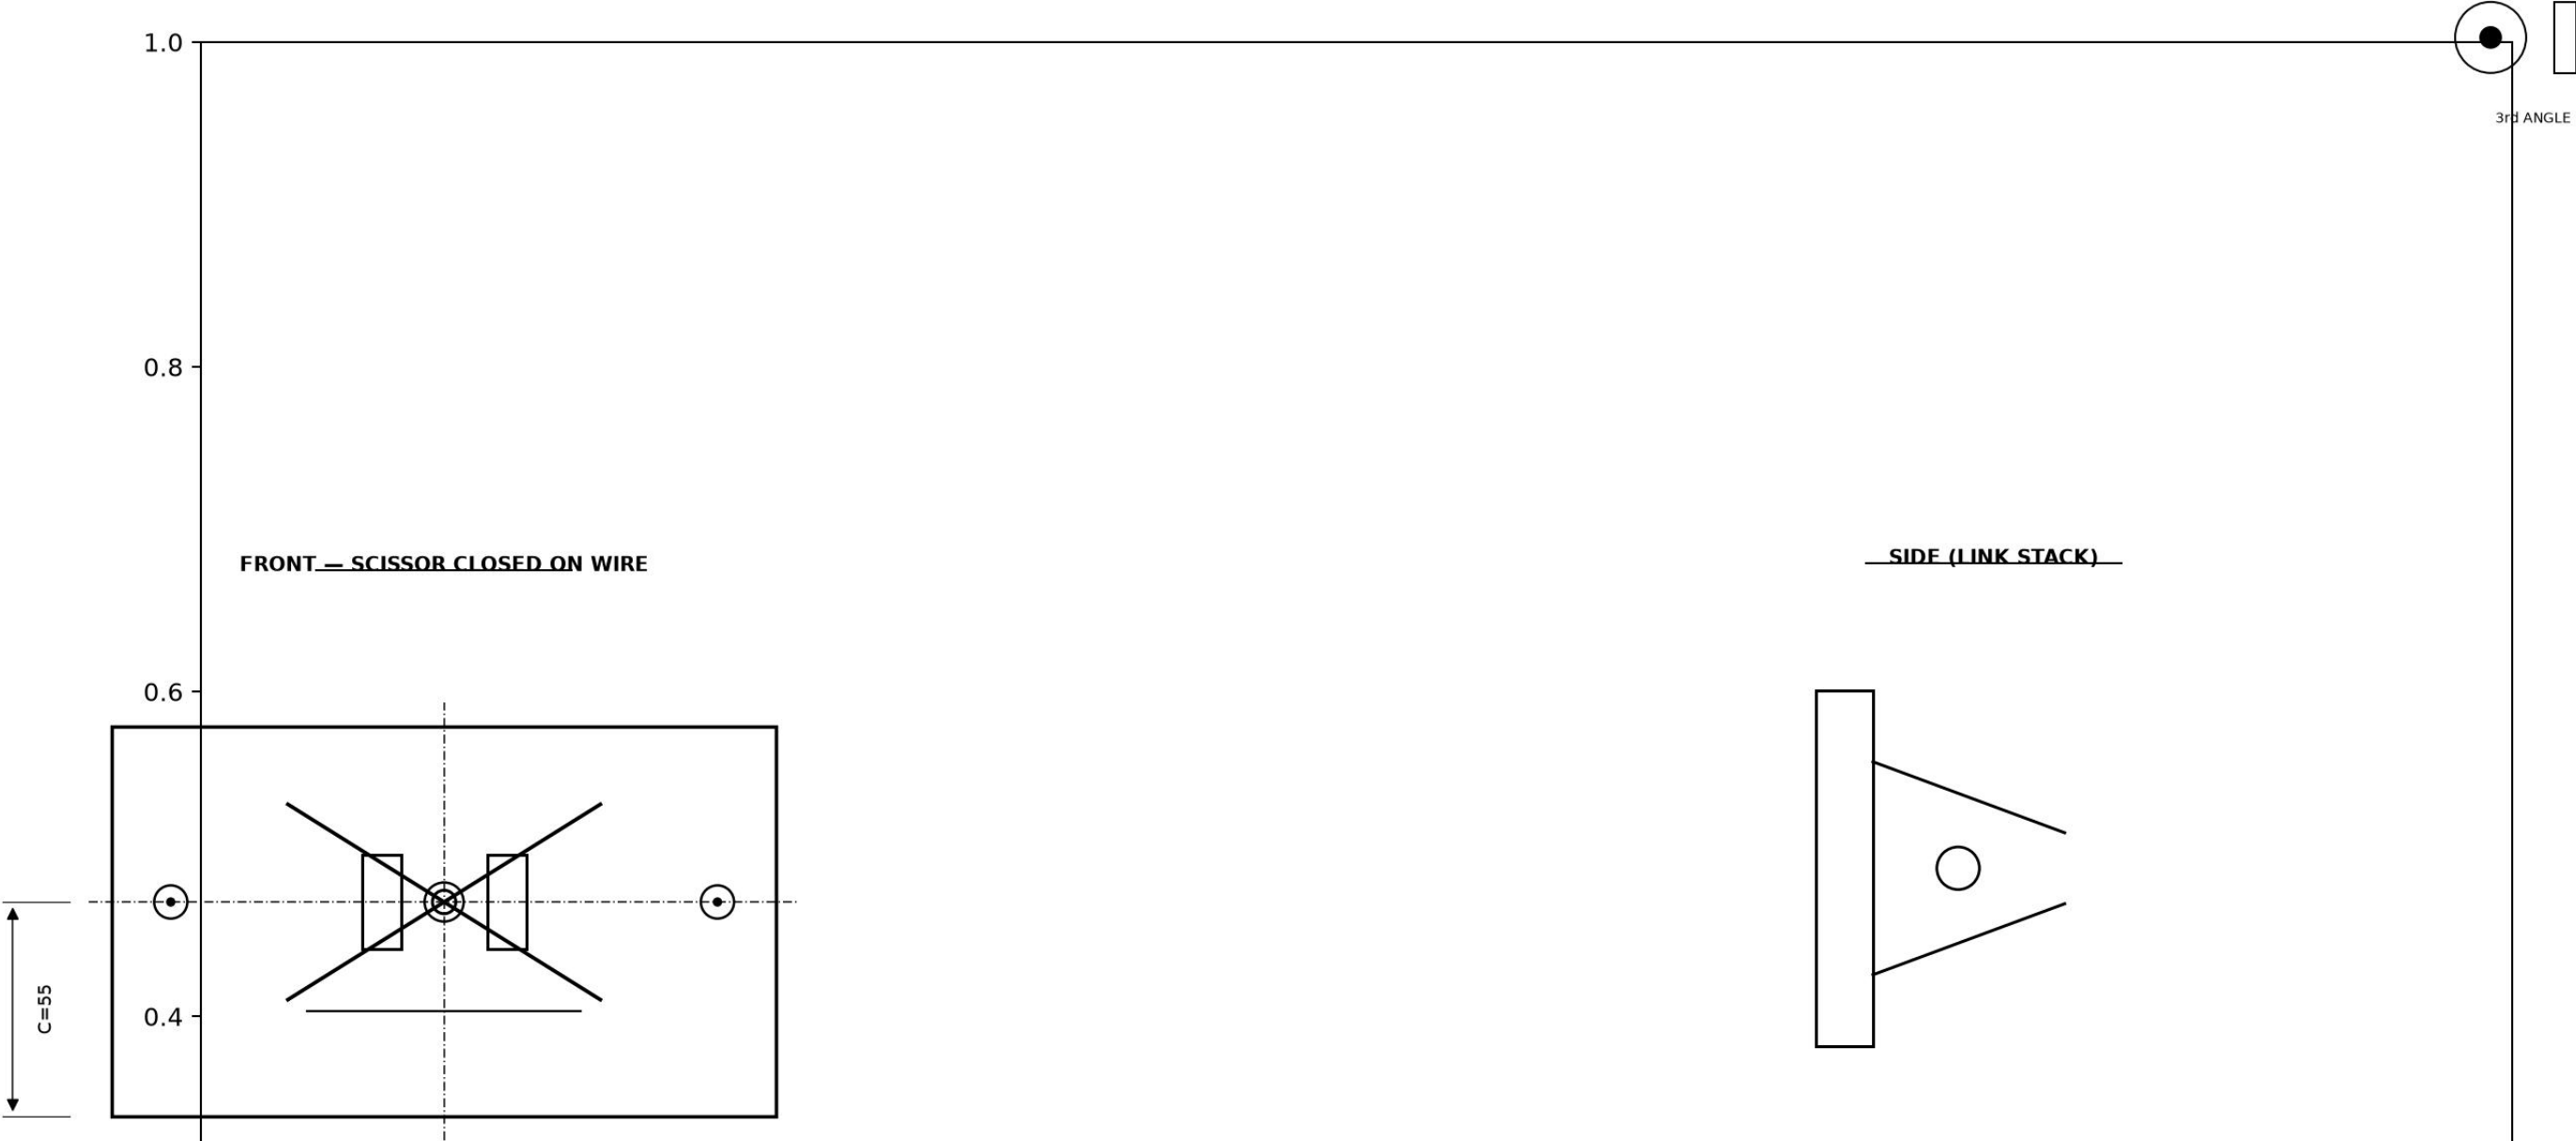


- NOTES:**
- Center pivot MUST lie on machine centerline C — this is the self-centering datum.
 - Jaw pads: V-face 0.2 flat with soft pad; bolt to link ends with shoulder screws.
 - No rack/pinion — sync is pure linkage geometry.
 - Add nylon washers between links to reduce play.

REV	DESCRIPTION
A	MULTI-CONCEPT 0.0
—	DATE: 2026-08-05

CONCEPT D — SCISSOR (X-LINK) JAWS		
DWG NO: WSFG-00	SCALE: 1:2	SHEET 1 OF 1
MATERIAL: PETG / STEEL PIVOTS	UNITS: mm	TOL: ±0.5 UNLESS NOTED

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

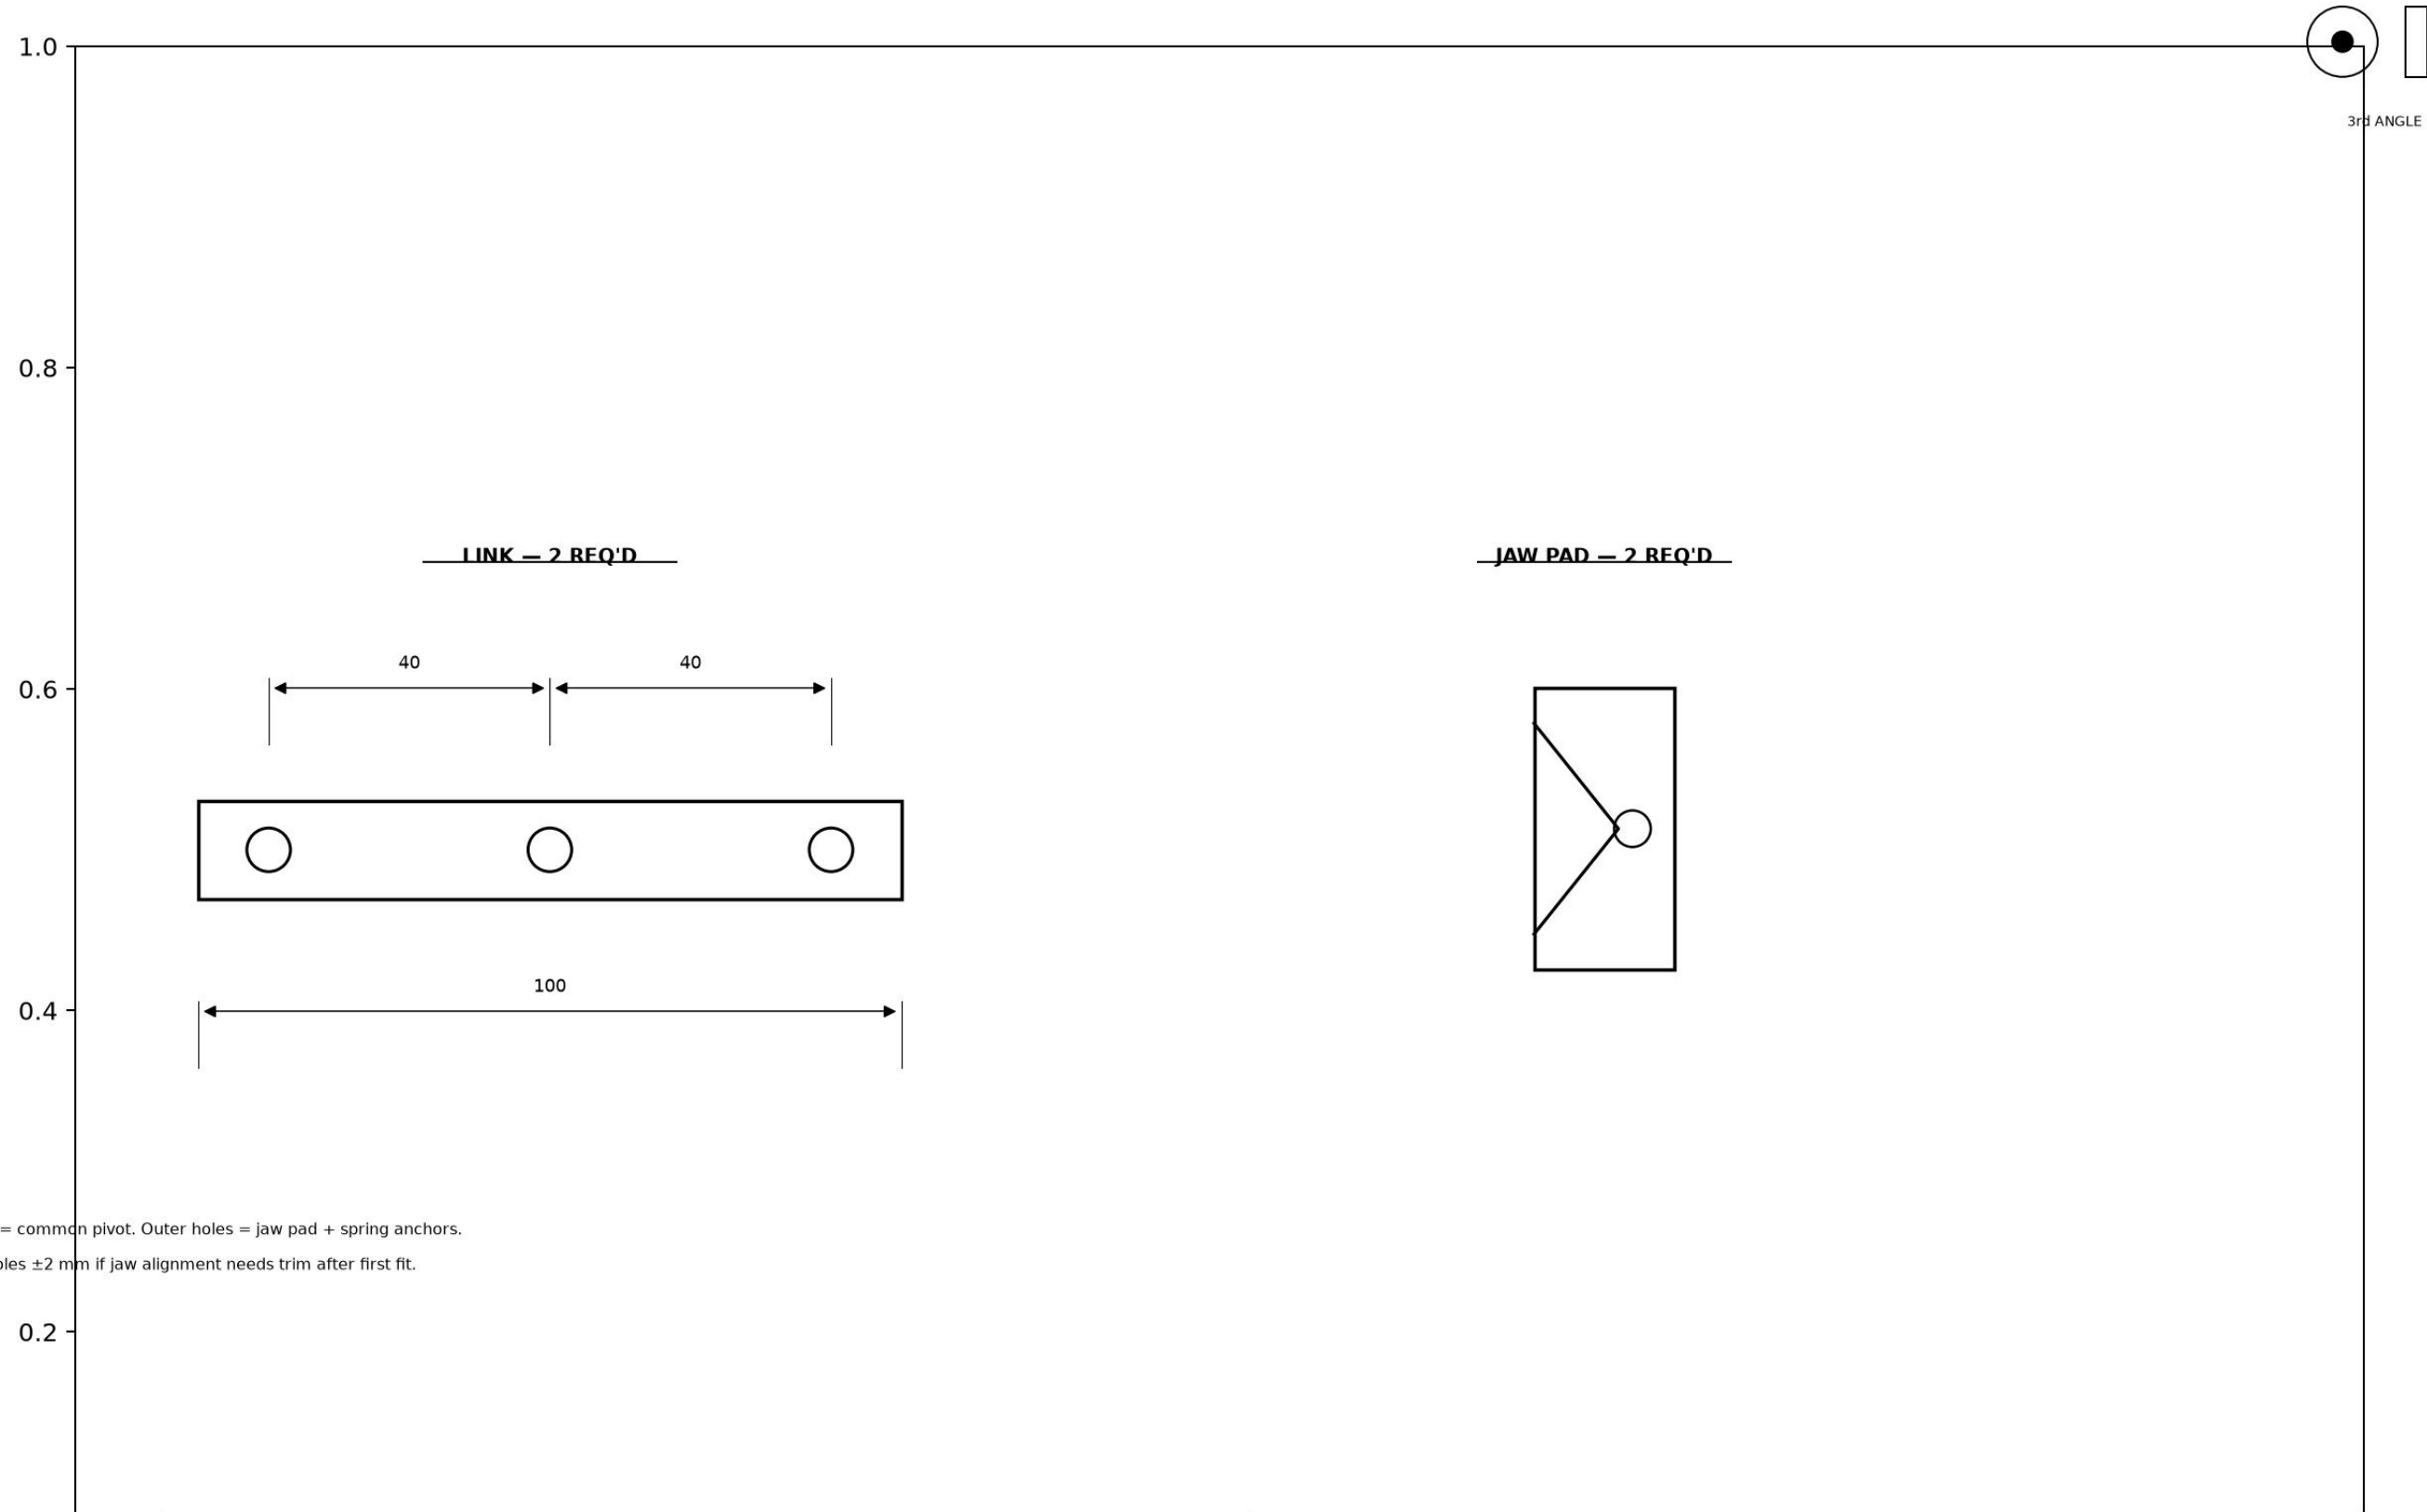


- NOTES:
- 1. Center hole = common pivot. Outer holes = jaw pad + spring anchors.
 - 2. Slot outer holes ± 2 mm if jaw alignment needs trim after first fit.

REV	DESCRIPTION
A	MULTI-CONCEPT D1
—	DATE: 2026-08-05

CONCEPT D — LINK + JAW PAD		
DWG NO: WSFG-D1	SCALE: 1:1	SHEET 1 OF 1
MATERIAL: PETG / DELRIN	UNITS: mm	TOL: ± 0.5 UNLESS NOTED

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

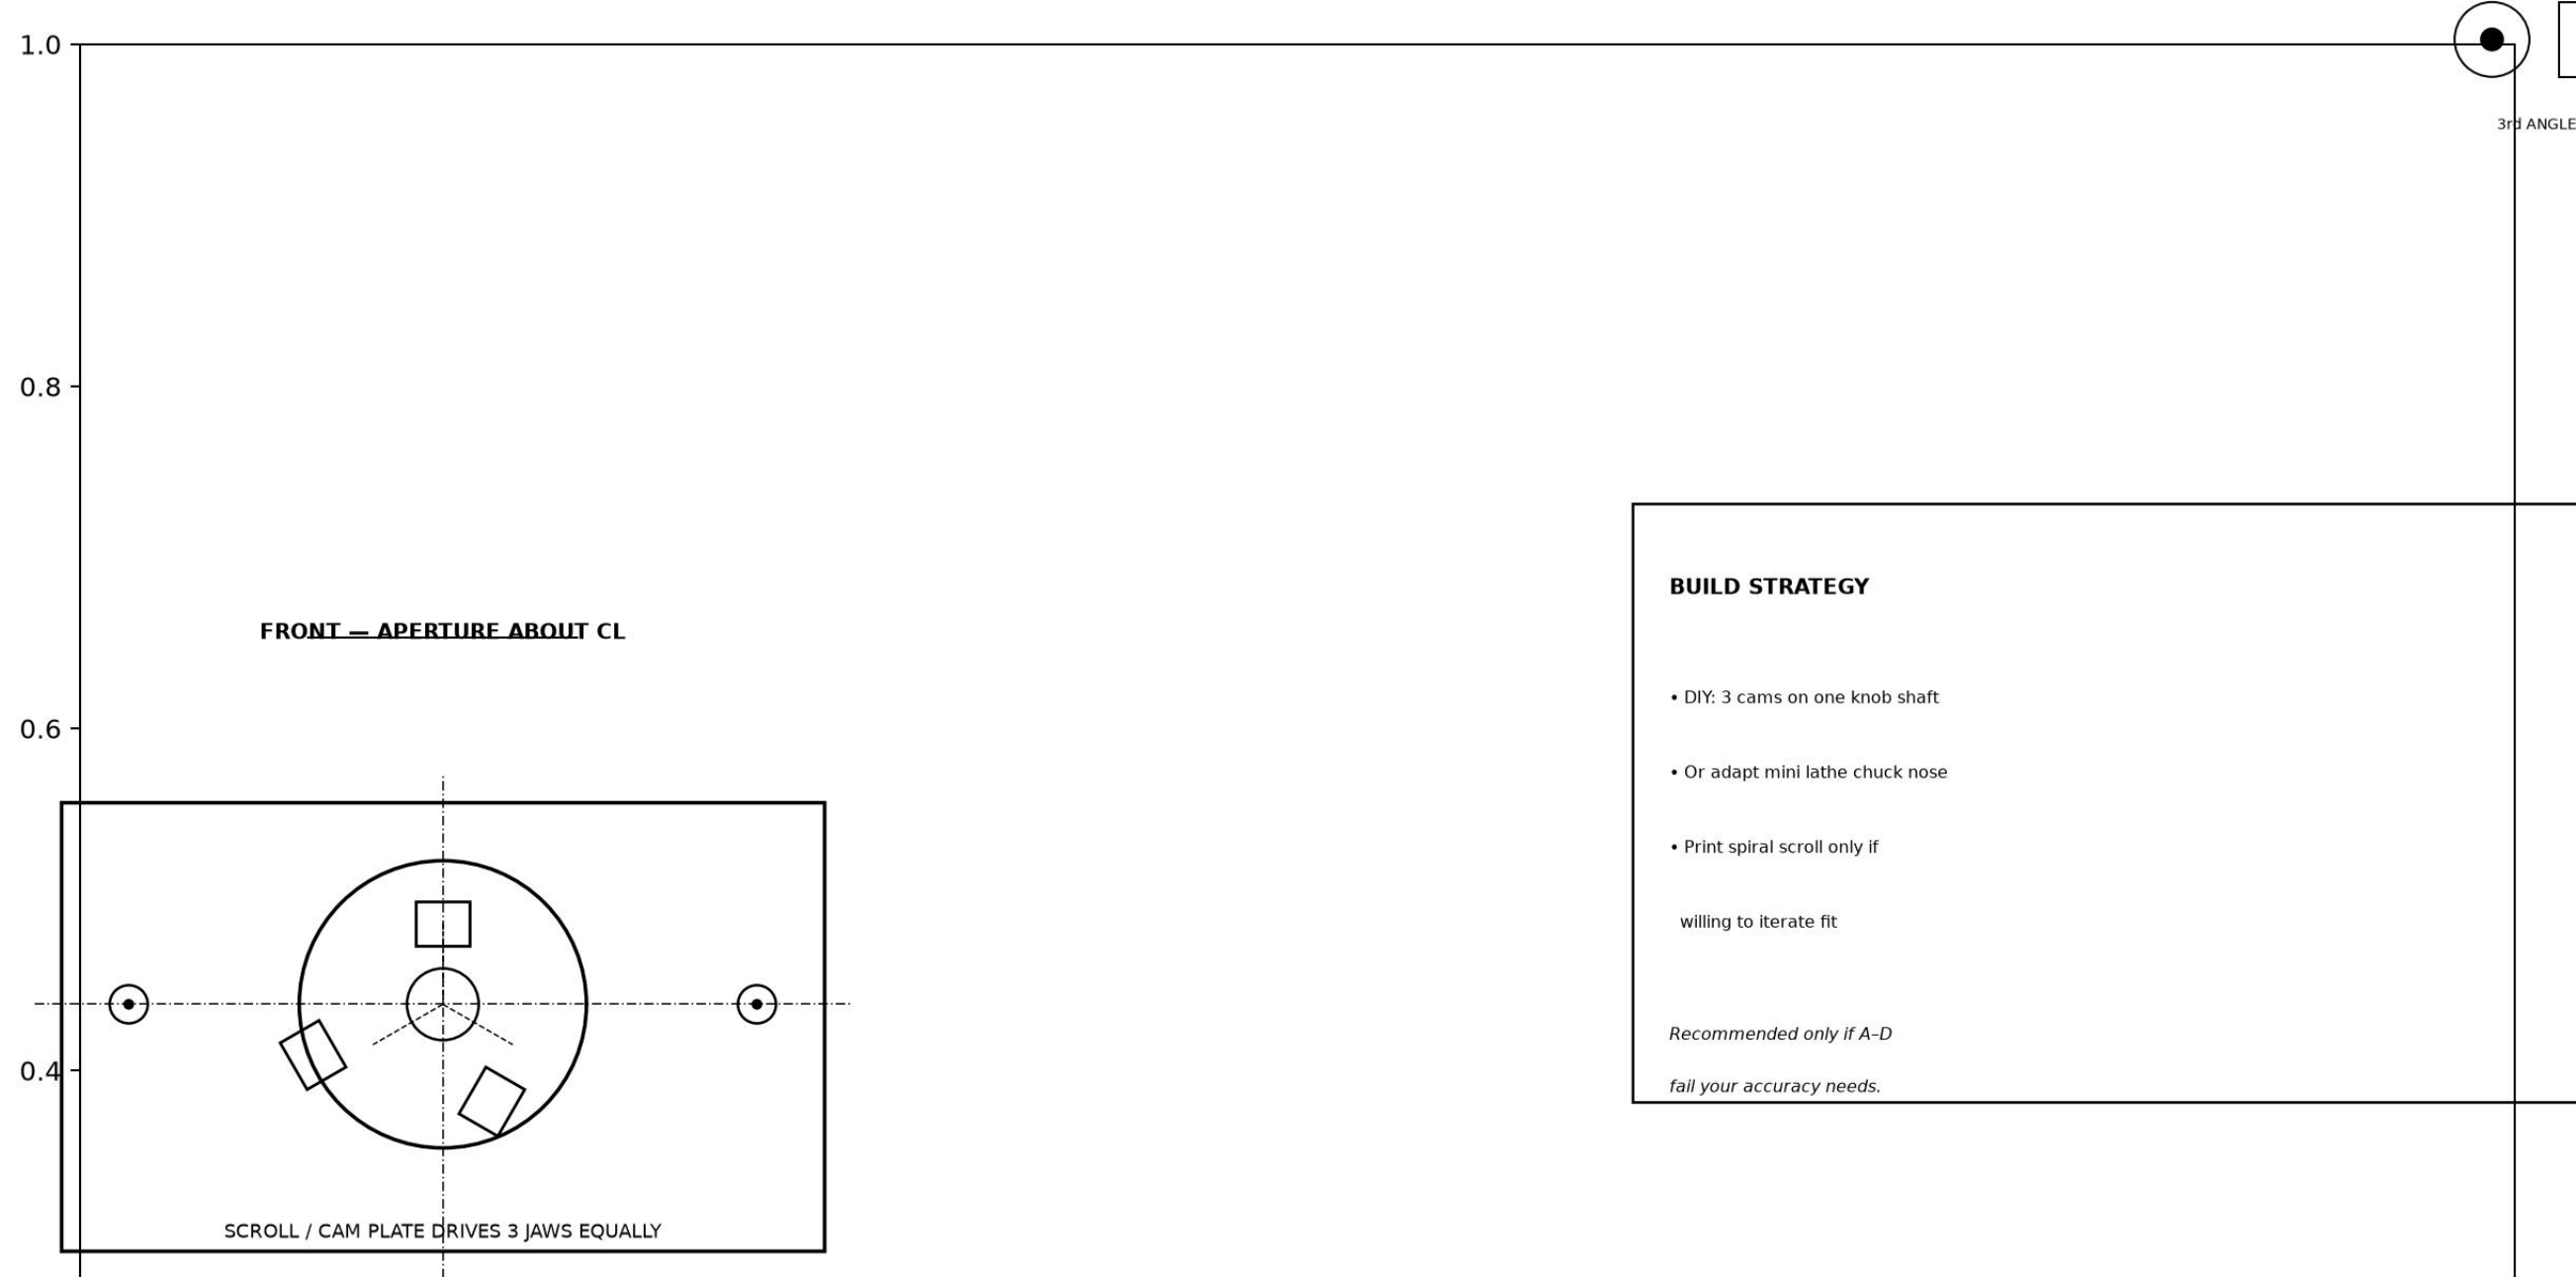

BUILD STRATEGY

- DIY: 3 cams on one knob shaft
- Or adapt mini lathe chuck nose
- Print spiral scroll only if willing to iterate fit

Recommended only if A-D fail your accuracy needs.

NOTES:


1. Highest center of accuracy; highest fab cost. Keep as stretch goal.
2. Jaw stroke must cover Ø1.5–38; scroll pitch sized accordingly.
3. Mount scroll housing to same thumbscrew interface; aperture CL = C.

REV	DESCRIPTION
A	MULTI-CONCEPT
—	DATE: 2026-08-05

CONCEPT E — THREE-JAW IRIS / SCROLL LAYOUT		
DWG NO: WSFG-E-001	SCALE: 1:2	SHEET 1 OF 1
MATERIAL: AL / BRASS SCROLL	UNITS: mm	TOL: ±0.5 UNLESS NOTED

CREWORKS FEED GUIDE — CONCEPT DESIGN PACKAGE

PROVISIONAL DIMENSIONS — VERIFY A, B, C ON MACHINE BEFORE FAB

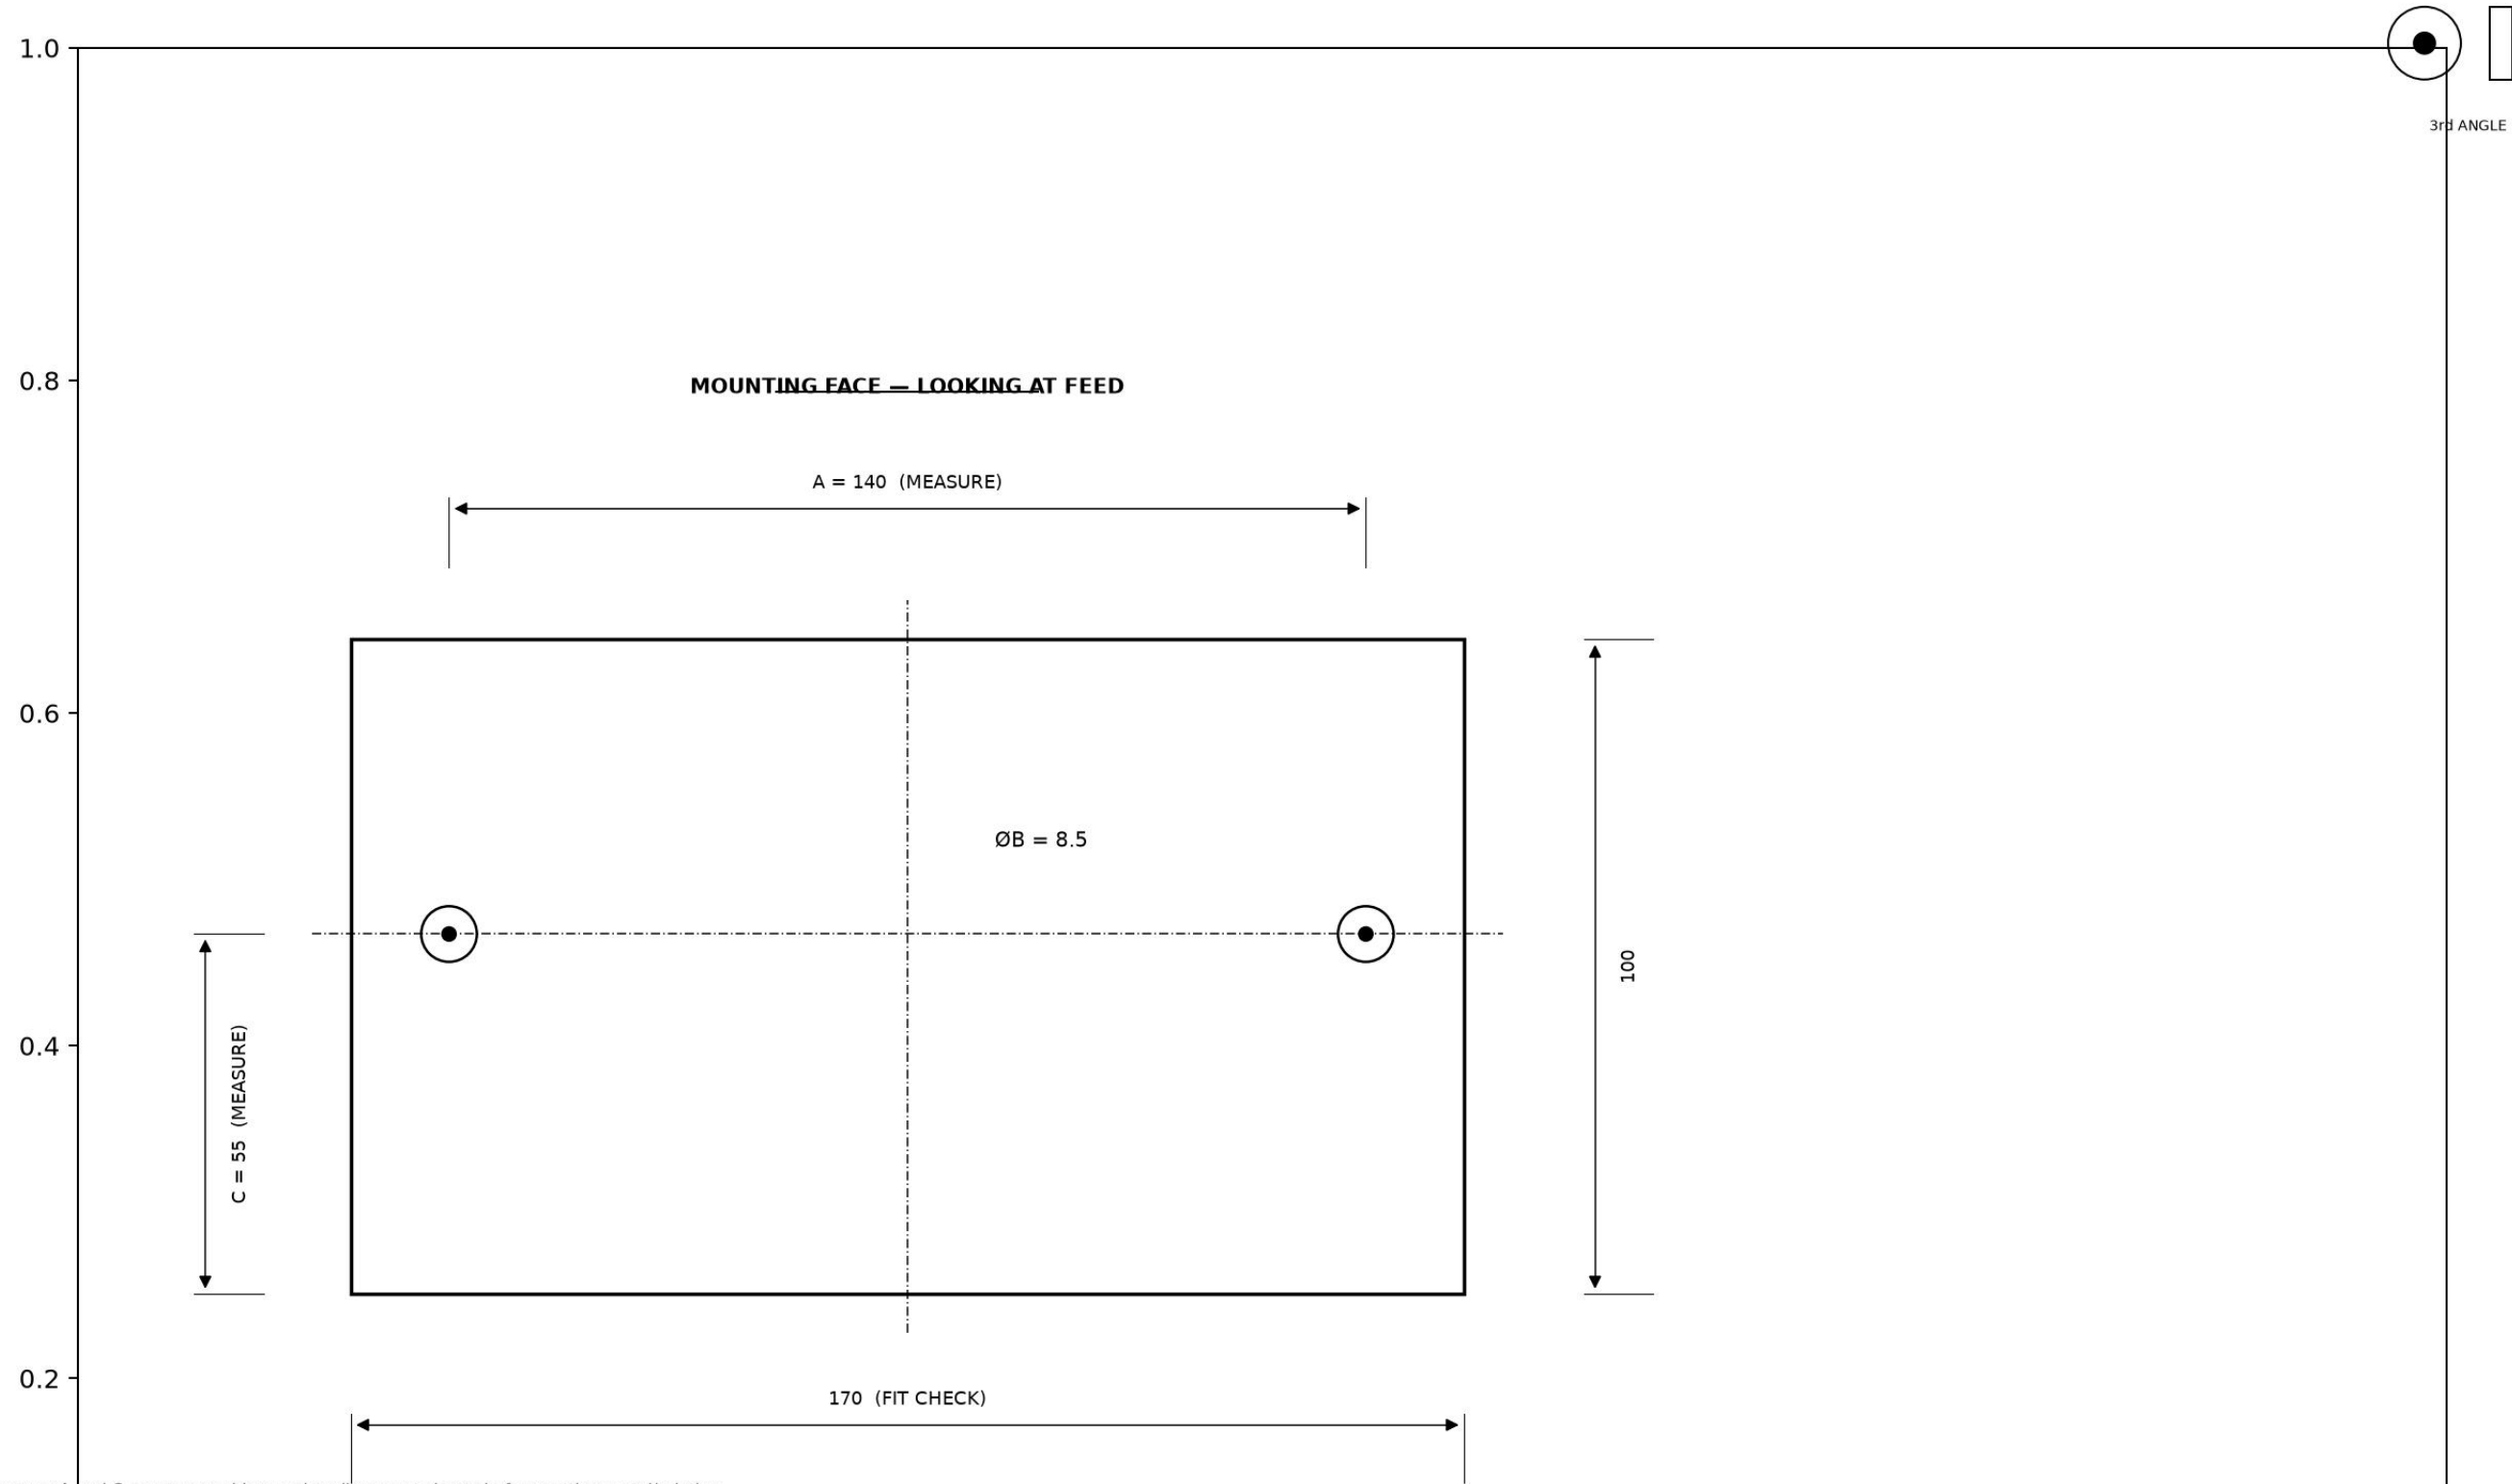

- NOTES:**
1. CRITICAL: Measure A and C on your machine; revise all concept sheets before cutting metal/printing.
 2. Use OEM 5-hole plate as drill template for A if calipers are awkward.
 3. Centerline C = deepest point of driven V-roller projected to mounting face.
 4. All concept datums: vertical CL through midspan of A, horizontal CL at height C.

REV		DESCRIPTION			MACHINE INTERFACE CONTROL DRAWING		
A		MULTI-CONCEPT 0.0			DWG NO: WSFG-IP 0.6	SCALE: 1:1 0.8	SHEET 1 OF 1 1.0
—		DATE: 2026-08-05			MATERIAL: — (REFERENCE)	UNITS: mm	TOL: ±0.5 UNLESS NOTED