

CC3200 SimpleLink Wi-Fi and Internet-of- Things Solution, a Single Chip Wireless MCU

Technical Reference Manual



Literature Number: SWRU367C
June 2014–Revised March 2016

1	Architecture Overview.....	21
1.1	Introduction.....	22
1.1.1	Related Documentation.....	22
1.1.2	Register Bit Conventions	22
1.2	Architecture Overview	23
1.3	Functional Overview	24
1.3.1	Processor Core	24
1.3.2	Memory	25
1.3.3	Micro Direct Memory Access Controller (μ DMA).....	26
1.3.4	General Purpose Timer (GPT)	26
1.3.5	Watch Dog Timer (WDT)	27
1.3.6	Multi-Channel Audio Serial Port (McASP)	27
1.3.7	Serial Peripheral Interface (SPI).....	27
1.3.8	Inter-Integrated Circuit Interface (I ² C).....	28
1.3.9	Universal Asynchronous Receiver/Transmitter (UART)	28
1.3.10	General Purpose Input / Output (GPIO).....	29
1.3.11	Analog to Digital Converter (ADC)	29
1.3.12	SD Card Host	29
1.3.13	Parallel Camera Interface	29
1.3.14	Debug Interface	29
1.3.15	Hardware Cryptography Accelerator.....	30
1.3.16	Clock, Reset, and Power Management	30
1.3.17	SimpleLink Subsystem	31
1.3.18	I/O Pads and Pin Multiplexing	31
2	Cortex-M4 Processor	32
2.1	Overview.....	33
2.1.1	Block Diagram	33
2.1.2	System-Level Interface	34
2.1.3	Integrated Configurable Debug	34
2.1.4	Trace Port Interface Unit (TPIU)	35
2.1.5	Cortex-M4 System Component Details.....	35
2.2	Functional Description	35
2.2.1	Programming Model	35
2.2.2	Register Description	36
2.2.3	Memory Model	40
2.2.4	Exception Model.....	43
2.2.5	Fault Handling	49
2.2.6	Power Management.....	51
2.2.7	Instruction Set Summary	53
3	Cortex-M4 Peripherals.....	58
3.1	Overview.....	59
3.2	Functional Description	59
3.2.1	System Timer (SysTick)	59
3.2.2	Nested Vectored Interrupt Controller (NVIC)	60
3.2.3	System Control Block (SCB).....	61

3.3	Register Map	61
3.3.1	PERIPHERAL Registers	65
4	Direct Memory Access (DMA)	96
4.1	Overview	97
4.2	Functional Description	97
4.2.1	Channel Assignment	98
4.2.2	Priority	99
4.2.3	Arbitration Size	99
4.2.4	Channel Configuration	99
4.2.5	Transfer Mode	100
4.2.6	Transfer Size and Increment	105
4.2.7	Peripheral Interface	106
4.2.8	Interrupts and Errors	106
4.3	Register Description	107
4.3.1	DMA Register Map	107
4.3.2	μ DMA Channel Control Structure	108
4.3.3	DMA Registers	109
5	General-Purpose Input/Outputs (GPIOs)	114
5.1	Overview	115
5.2	Functional Description	115
5.2.1	Data Control	116
5.3	Interrupt Control	117
5.3.1	μ DMA Trigger Source	117
5.4	Initialization and Configuration	117
5.5	GPIO_REGISTER_MAP Registers	119
5.5.1	GPIO Register Description	119
6	Universal Asynchronous Receivers/Transmitters (UARTs)	131
6.1	Overview	132
6.1.1	Block Diagram	133
6.2	Functional Description	133
6.2.1	Transmit/Receive Logic	133
6.2.2	Baud-Rate Generation	134
6.2.3	Data Transmission	134
6.2.4	Initialization and Configuration	137
6.3	Register Description	138
6.3.1	UART Registers	139
7	Inter-Integrated Circuit (I2C) Interface	161
7.1	Overview	162
7.1.1	Block Diagram	163
7.1.2	Signal Description	163
7.2	Functional Description	164
7.2.1	I2C Bus Functional Overview	164
7.2.2	Supported Speed Modes	168
7.2.3	Interrupts	169
7.2.4	Loopback Operation	169
7.2.5	FIFO and μ DMA Operation	169
7.2.6	Command Sequence Flow Charts	171
7.2.7	Initialization and Configuration	178
7.3	Register Map	179
7.3.1	I2C Registers	180
8	SPI (Serial Peripheral Interface)	219
8.1	Overview	220

8.1.1	Features.....	221
8.2	Functional Description.....	221
8.2.1	SPI interface.....	221
8.2.2	SPI Transmission	221
8.2.3	Master Mode	225
8.2.4	Slave Mode	233
8.2.5	Interrupts.....	235
8.2.6	DMA Requests	235
8.2.7	Reset	236
8.3	Initialization and Configuration	236
8.3.1	Basic Initialization.....	236
8.3.2	Master Mode Operation Without Interrupt (Polling)	236
8.3.3	Slave Mode Operation With Interrupt	237
8.3.4	Generic Interrupt Handler Implementation	237
8.4	Access to Data Registers	237
8.5	Module Initialization.....	238
8.5.1	Common Transfer Sequence.....	238
8.5.2	End of Transfer Sequences	239
8.5.3	FIFO Mode.....	240
8.6	SPI Registers.....	244
8.6.1	SPI Register Description.....	245
9	General-Purpose Timers	260
9.1	Overview	261
9.2	Block Diagram.....	261
9.3	Functional Description.....	262
9.3.1	GPTM Reset Conditions	262
9.3.2	Timer Modes	263
9.3.3	DMA Operation.....	269
9.3.4	Accessing Concatenated 16/32-Bit GPTM Register Values	269
9.4	Initialization and Configuration	269
9.4.1	One-Shot and Periodic Timer Mode.....	269
9.4.2	Input Edge-Count Mode.....	270
9.4.3	Input Edge-Time Mode	270
9.4.4	PWM Mode	271
9.5	TIMER Registers.....	272
9.5.1	GPT Register Description.....	272
10	Watchdog Timer	302
10.1	Overview	303
10.1.1	Block Diagram.....	303
10.2	Functional Description.....	304
10.2.1	Initialization and Configuration	304
10.3	Register Map	304
10.3.1	Register Description.....	305
10.4	MCU Watch Dog Controller Usage Caveats	313
10.4.1	System WatchDog	313
10.4.2	System WatchDog Recovery Sequence.....	314
11	SD Host Controller Interface	316
11.1	Overview	317
11.2	SD Host Features.....	317
11.3	1-Bit SD Interface	318
11.3.1	Clock and Reset Management.....	318
11.4	Initialization and Configuration Using Peripheral APIs.....	318
11.4.1	Basic Initialization and Configuration.....	319

11.4.2	Sending Command	319
11.4.3	Card Detection and Initialization	320
11.4.4	Block Read	322
11.4.5	Block Write	323
11.5	Performance and Testing	323
11.6	Peripheral Library APIs	324
12	Inter-Integrated Sound (I2S) Multi-Channel Audio Serial Port	329
12.1	Overview	330
12.1.1	I2S Format.....	330
12.2	Functional Description.....	331
12.3	Programming Model	331
12.3.1	Clock and Reset Management.....	331
12.3.2	I2S Data Port Interface.....	332
12.3.3	Initialization and Configuration	332
12.4	Peripheral Library APIs for I2S Configuration	334
12.4.1	Basic APIs for Enabling and Configuring the Interface	334
12.4.2	APIs for Data Access if DMA is Not Used.....	337
12.4.3	APIs for Setting Up, Handling Interrupts, or Getting Status from I2S Peripheral.....	339
12.4.4	APIs to Control FIFO Structures Associated with I2S Peripheral	343
13	Analog-to-Digital Converter [ADC]	345
13.1	Overview	346
13.2	Key Features	346
13.3	ADC Register Mapping.....	347
13.4	ADC_MODULE Registers	348
13.4.1	ADC Register Description	348
13.5	Initialization and Configuration	369
13.6	Peripheral Library APIs for ADC Operation	370
13.6.1	Overview	370
13.6.2	Configuring the ADC Channels	370
13.6.3	Basic APIs for Enabling and Configuring the Interface	370
13.6.4	APIs for Data Transfer [Direct Access to FIFO and DMA Setup]	371
13.6.5	APIs for Interrupt Usage	373
13.6.6	APIs for Setting Up ADC Timer for Time Stamping the Samples	375
14	Parallel Camera Interface Module	377
14.1	Overview	378
14.2	Image Sensor Interface	378
14.3	Functional Description.....	379
14.3.1	Modes of Operation	379
14.3.2	FIFO Buffer	381
14.3.3	Reset	381
14.3.4	Clock Generation	382
14.3.5	Interrupt Generation	382
14.3.6	DMA Interface	382
14.4	Programming Model	383
14.4.1	Camera Core Reset	383
14.4.2	Enable the Picture Acquisition	383
14.4.3	Disable the Picture Acquisition.....	384
14.5	Interrupt Handling.....	384
14.5.1	FIFO_OF_IRQ (FIFO overflow)	384
14.5.2	FIFO_UF_IRQ (FIFO underflow)	384
14.6	Camera Interface Module Functional Registers	385
14.6.1	Functional Register Description.....	385

14.6.2	Peripheral Library APIs	396
14.7	Developer's Guide	399
14.7.1	Using Peripheral Driver APIs for Capturing an Image	399
14.7.2	Using Peripheral Driver APIs for Communicating with Image Sensors.....	401
15	Power, Reset and Clock Management	403
	Trademarks	404
15.1	Overview	404
15.1.1	VBAT Wide-Voltage Connection.....	404
15.1.2	Pre-Regulated 1.85 V	404
15.1.3	Supply Brownout and Blackout	406
15.1.4	Application Processor Power Modes.....	406
15.2	Power Management Control Architecture	408
15.2.1	Global Power-Reset-Clock Manager (GPRCM)	410
15.2.2	Application Reset-Clock Manager (ARCM)	411
15.3	PRCM APIs.....	411
15.3.1	MCU Initialization	411
15.3.2	Reset Control.....	411
15.3.3	Peripheral Reset	411
15.3.4	Reset Cause.....	411
15.3.5	Clock Control	412
15.3.6	Low Power Modes	412
15.3.7	Sleep (SLEEP)	413
15.3.8	Deep Sleep (DEEPSLEEP)	413
15.3.9	Low-Power Deep Sleep (LPDS)	413
15.3.10	Hibernate (HIB)	415
15.3.11	Slow Clock Counter	417
15.4	Peripheral Macros	417
15.5	Power Management Framework.....	418
15.6	PRCM Registers	419
	15.6.1 PRCM Register Description	420
16	I/O Pads and Pin Multiplexing.....	471
16.1	Overview	472
16.2	I/O Pad Electrical Specifications	472
16.3	Analog-Digital Pin Multiplexing	474
16.4	Special Ana/DIG Pins	475
16.4.1	Pin 45 and 52	475
16.4.2	Pin 29 and 30	477
16.4.3	Pin 57, 58, 59, 60	477
16.5	Analog Mux Control Registers	477
16.6	Pins Available for Applications	479
16.7	Functional Pin Mux Configurations	481
16.8	Pin Mapping Recommendations	495
16.8.1	Pad Configuration Registers for Application Pins	496
16.8.2	PAD Behavior During Reset and Hibernate.....	498
16.8.3	Control Architecture	498
16.8.4	CC3200 Pin-mux Examples	499
16.8.5	Wake on Pad	502
16.8.6	Sense on Power	502
A	Software Development Kit Examples.....	505
B	CC3200 Miscellaneous Registers	506
B.1	Miscellaneous Register Summary	506
B.1.1	DMA_IMR Register (offset = 8Ch) [reset = FF0Fh]	507

B.1.2 DMA_IMS Register (offset = 90h) [reset = 0h].....	509
B.1.3 DMA_IMC Register (offset = 94h) [reset = 0h].....	511
B.1.4 DMA_ICR Register (offset = 9Ch) [reset = 0h]	513
B.1.5 DMA_MIS Register (offset = A0h) [reset = 0h]	515
B.1.6 DMA_RIS Register (offset = A4h) [reset = 0h].....	517
B.1.7 GPTTRIGSEL Register (offset = B0h) [reset = 0h].....	519
Revision History	520
Revision History	521
.....	521

List of Figures

1-1.	CC3200 MCU and WIFI System-on-Chip	23
2-1.	Application CPU Block Diagram.....	34
2-2.	TPIU Block Diagram	35
2-3.	Cortex-M4 Register Set	37
2-4.	Data Storage	42
2-5.	Vector Table	47
2-6.	Exception Stack Frame.....	49
2-7.	Power Management Architecture in CC3200 SoC.....	52
3-1.	ACTLR Register	66
3-2.	STCTRL Register	67
3-3.	STRELOAD Register	68
3-4.	STCURRENT Register	69
3-5.	EN_0 to EN_6 Register.....	70
3-6.	DIS_0 to DIS_6 Register	71
3-7.	PEND_0 to PEND_6 Register	72
3-8.	UNPEND_0 to UNPEND_6 Register	73
3-9.	ACTIVE_0 to ACTIVE_6 Register.....	74
3-10.	PRI_0 to PRI_49 Register.....	75
3-11.	CPUID Register.....	76
3-12.	INTCTRL Register.....	77
3-13.	VTABLE Register.....	79
3-14.	APINT Register	80
3-15.	SYSCTRL Register	81
3-16.	CFGCTRL Register	82
3-17.	SYSPRI1 Register.....	84
3-18.	SYSPRI2 Register.....	85
3-19.	SYSPRI3 Register.....	86
3-20.	SYSHNDCTRL Register.....	87
3-21.	FAULTSTAT Register	89
3-22.	HFAULTSTAT Register.....	93
3-23.	FAULTDDR Register.....	94
3-24.	SWTRIG Register	95
4-1.	DMA Channel Assignment	98
4-2.	Ping-Pong Mode	102
4-3.	Memory Scatter-Gather Mode	104
4-4.	Peripheral Scatter-Gather Mode	105
4-5.	DMA_SRCENDP Register.....	110
4-6.	DMA_DSTENDP Register	111
4-7.	DMA_CHCTL Register	112
5-1.	Digital I/O Pads	115
5-2.	GPIODATA Write Example	116
5-3.	GPIODATA Read Example.....	116
5-4.	GPIODATA Register	120
5-5.	GPIODIR Register	121
5-6.	GPIOIS Register	122
5-7.	GPIOIBE Register	123
5-8.	GPIOIEV Register	124

5-9.	GPIOIM Register	125
5-10.	GPIORIS Register	126
5-11.	GPIOVIS Register	127
5-12.	GPIOICR Register	128
6-1.	UART Module Block Diagram	133
6-2.	UART Character Frame	134
6-3.	UARTDR Register	140
6-4.	UARTRSR_UARTECR Register	141
6-5.	UARTFR Register	143
6-6.	UARTFBRD Register	146
6-7.	UARTLCRH Register	147
6-8.	UARTCTL Register	149
6-9.	UARTIFLS Register	151
6-10.	UARTIM Register	152
6-11.	UARTRIS Register	154
6-12.	UARTMIS Register	156
6-13.	UARTICR Register	158
6-14.	UARTDMACTL Register	160
7-1.	I2C Block Diagram	163
7-2.	I2C Bus Configuration	164
7-3.	START and STOP Conditions	165
7-4.	Complete Data Transfer with a 7-Bit Address	165
7-5.	R/S Bit in First Byte	165
7-6.	Data Validity During Bit Transfer on the I2C Bus	166
7-7.	Master Single TRANSMIT	172
7-8.	Master Single RECEIVE	173
7-9.	Master TRANSMIT of Multiple Data Bytes	174
7-10.	Master RECEIVE of Multiple Data Bytes	175
7-11.	Master RECEIVE with Repeated START after Master TRANSMIT	176
7-12.	Master TRANSMIT with Repeated START after Master RECEIVE	177
7-13.	Slave Command Sequence	178
7-14.	I2CMSA Register	181
7-15.	I2CMCS Register	182
7-16.	I2CMDR Register	184
7-17.	I2CMTPR Register	185
7-18.	I2CMIMR Register	186
7-19.	I2CMRIS Register	188
7-20.	I2CMMIS Register	190
7-21.	I2CMICR Register	192
7-22.	I2CMCR Register	194
7-23.	I2CMCLKOCNT Register	195
7-24.	I2CMBMON Register	196
7-25.	I2CMBLEN Register	197
7-26.	I2CMBCNT Register	198
7-27.	I2CSOAR Register	199
7-28.	I2CSCSR Register	200
7-29.	I2CSDR Register	202
7-30.	I2CSIMR Register	203
7-31.	I2CSRIS Register	205

7-32.	I2CSMIS Register.....	207
7-33.	I2CSICR Register.....	209
7-34.	I2CSOAR2 Register	211
7-35.	I2CSACKCTL Register	212
7-36.	I2CFIFODATA Register	213
7-37.	I2CFIFOCTL Register	214
7-38.	I2CFIFOSTATUS Register	216
7-39.	I2CPP Register.....	217
7-40.	I2CPC Register	218
8-1.	SPI Block Diagram.....	220
8-2.	SPI Full Duplex Transmission (Example).....	222
8-3.	Full Duplex Single Transfer Format with PHA = 0.....	224
8-4.	Full Duplex Single Transfer Format with PHA = 1.....	225
8-5.	Contiguous Transfers with SPIEN Kept Active (2 Data Pins Interface Mode).....	227
8-6.	Transmit/Receive Mode With no FIFO Used.....	229
8-7.	Transmit/Receive Mode With Only Receive FIFO Enabled	229
8-8.	Transmit/Receive Mode With Only Transmit FIFO Used	230
8-9.	Transmit/Receive Mode With Both FIFO Directions Used	230
8-10.	Buffer Almost Full Level (AFL)	231
8-11.	Buffer Almost Empty Level (AEL).....	231
8-12.	3-Pin Mode System Overview.....	232
8-13.	Flow Chart - Module Initialization	238
8-14.	Flow Chart - Common Transfer Sequence	239
8-15.	Flow Chart - Transmit and Receive (Master and Slave).....	240
8-16.	Flow Chart - FIFO Mode Common Sequence (Master)	242
8-17.	Flow Chart - FIFO Mode Transmit and Receive with Word Count (Master)	243
8-18.	Flow Chart - FIFO Mode Transmit and Receive without Word Count (Master)	244
8-19.	SPI_SYSCONFIG Register.....	246
8-20.	SPI_SYSSTATUS Register.....	247
8-21.	SPI_IRQSTATUS Register	248
8-22.	SPI_IRQENABLE Register	250
8-23.	SPI_MODULCTRL Register	251
8-24.	SPI_CHCONF Register	252
8-25.	SPI_CHSTAT Register	255
8-26.	SPI_CHCTRL Register	256
8-27.	SPI_TX Register	257
8-28.	SPI_RX Register	258
8-29.	SPI_XFERLEVEL Register	259
9-1.	GPTM Module Block Diagram	261
9-2.	Input Edge-Count Mode Example, Counting Down	266
9-3.	16-Bit Input Edge-Time Mode Example.....	267
9-4.	16-Bit PWM Mode Example	268
9-5.	GPTMCFG Register	273
9-6.	GPTMTAMR Register	274
9-7.	GPTMTBMR Register	276
9-8.	GPTMCTL Register.....	278
9-9.	GPTMIMR Register.....	280
9-10.	GPTMRIS Register	282
9-11.	GPTMMIS Register	284

9-12.	GPTMICR Register	286
9-13.	GPTMTAILR Register	288
9-14.	GPTMTBILR Register	289
9-15.	GPTMTAMATCHR Register.....	290
9-16.	GPTMTBMATCHR Register.....	291
9-17.	GPTMTAPR Register	292
9-18.	GPTMTBPR Register	293
9-19.	GPTMTAPMR Register	294
9-20.	GPTMTBPMR Register	295
9-21.	GPTMTAR Register	296
9-22.	GPTMTBR Register	297
9-23.	GPTMTAV Register	298
9-24.	GPTMTBV Register	299
9-25.	GPTMDMAEV Register	300
10-1.	WDT Module Block Diagram	303
10-2.	WDTLOAD Register	307
10-3.	WDTVALUE Register	308
10-4.	WDTCTL Register	309
10-5.	WDTICR Register.....	310
10-6.	WDTRIS Register.....	311
10-7.	WDTTEST Register	312
10-8.	WDTLOCK Register	313
10-9.	WatchDog Flow Chart.....	314
10-10.	System WatchDog Recovery Sequence.....	315
11-1.	SDHost Controller Interface Block Diagram.....	318
12-1.	I2S Protocol.....	330
12-2.	MCASP Module	331
12-3.	Logical Clock Path.....	332
13-1.	Architecture of the ADC Module in CC3200	346
13-2.	Operation of the ADC	347
13-3.	ADC_CTRL Register	349
13-4.	ADC_CH0_IRQ_EN Register	350
13-5.	ADC_CH2_IRQ_EN Register	351
13-6.	ADC_CH4_IRQ_EN Register	352
13-7.	ADC_CH6_IRQ_EN Register	353
13-8.	ADC_CH0_IRQ_STATUS Register	354
13-9.	ADC_CH2_IRQ_STATUS Register	355
13-10.	ADC_CH4_IRQ_STATUS Register	356
13-11.	ADC_CH6_IRQ_STATUS Register	357
13-12.	ADC_DMA_MODE_EN Register	358
13-13.	ADC_TIMER_CONFIGURATION Register.....	359
13-14.	ADC_TIMER_CURRENT_COUNT Register	360
13-15.	CHANNEL0FIFODATA Register.....	361
13-16.	CHANNEL2FIFODATA Register.....	362
13-17.	CHANNEL4FIFODATA Register.....	363
13-18.	CHANNEL6FIFODATA Register.....	364
13-19.	ADC_CH0_FIFO_LVL Register	365
13-20.	ADC_CH2_FIFO_LVL Register	366
13-21.	ADC_CH4_FIFO_LVL Register	367

13-22. ADC_CH6_FIFO_LVL Register	368
13-23. ADC_CH_ENABLE Register	369
14-1. The Camera Module Interfaces	378
14-2. Synchronization Signals and Frame Timing.....	379
14-3. Synchronization Signals and Data Timing.....	379
14-4. Different Scenarios of CAM_P_HS and CAM_P_VS	380
14-5. CAM_P_HS Toggles Between Pixels in Decimation.....	380
14-6. Parallel Camera I/F State Machine.....	380
14-7. FIFO Image Data Format	381
14-8. Assertion and De-Assertion of the DMA Request Signal.....	383
14-9. CC_SYSCONFIG Register	386
14-10. CC_SYSSTATUS Register	387
14-11. CC_IRQSTATUS Register.....	388
14-12. CC_IRQENABLE Register.....	390
14-13. CC_CTRL Register	392
14-14. CC_CTRL_DMA Register	394
14-15. CC_CTRL_XCLK Register	395
14-16. CC_FIFODATA Register.....	396
15-1. Power Management Unit Supports Two Supply Configurations.....	405
15-2. Sleep Modes	408
15-3. Power Management Control Architecture in CC3200.....	410
15-4. CAMCLKCFG Register	421
15-5. CAMCLKEN Register	422
15-6. CAMSWRST Register.....	423
15-7. MCASPCLKEN Register.....	424
15-8. MCASPSWRST Register	425
15-9. SDIOMCLKCFG Register.....	426
15-10. SDIOMCLKEN Register.....	427
15-11. SDIOMSWRST Register	428
15-12. APPSICLKCFG Register.....	429
15-13. APPSICLKEN Register	430
15-14. APPSISWRST Register	431
15-15. DMACLKEN Register	432
15-16. DMASWRST Register.....	433
15-17. GPIO0CLKEN Register	434
15-18. GPIO0SWRST Register	435
15-19. GPIO1CLKEN Register	436
15-20. GPIO1SWRST Register	437
15-21. GPIO2CLKEN Register	438
15-22. GPIO2SWRST Register	439
15-23. GPIO3CLKEN Register	440
15-24. GPIO3SWRST Register	441
15-25. GPIO4CLKEN Register	442
15-26. GPIO4SWRST Register	443
15-27. WDTCLKEN Register	444
15-28. WDTSWRST Register.....	445
15-29. UART0CLKEN Register	446
15-30. UART0SWRST Register	447
15-31. UART1CLKEN Register	448

15-32. UART1SWRST Register	449
15-33. GPT0CLKCFG Register	450
15-34. GPT0SWRST Register.....	451
15-35. GPT1CLKEN Register	452
15-36. GPT1SWRST Register.....	453
15-37. GPT2CLKEN Register	454
15-38. GPT2SWRST Register.....	455
15-39. GPT3CLKEN Register	456
15-40. GPT3SWRST Register.....	457
15-41. MCASPCLKCFG0 Register	458
15-42. MCASPCLKCFG1 Register	459
15-43. I2CLCKEN Register	460
15-44. I2CSWRST Register	461
15-45. LPDSREQ Register.....	462
15-46. TURBOREQ Register	463
15-47. DSLPWAKECFG Register.....	464
15-48. DSLPTIMRCFG Register	465
15-49. SLPWAKEEN Register.....	466
15-50. SLPTMRCFG Register	467
15-51. WAKENWP Register	468
15-52. RCM_IS Register	469
15-53. RCM_IEN Register	470
16-1. Board Configuration to Use Pins 45 and 52 as Digital Signals	475
16-2. Board Configuration to Use Pins 45 and 52 as Digital Signals	476
16-3. I/O Pad Data and Control Path Architecture in CC3200.....	499
16-4. Wake on Pad for Hibernate Mode	502
B-1. DMA_IMR Register	507
B-2. DMA_IMS Register	509
B-3. DMA_IMC Register	511
B-4. DMA_ICR Register	513
B-5. DMA_MIS Register	515
B-6. DMA_RIS Register	517
B-7. GPTTRIGSEL Register	519

List of Tables

1-1.	Register Bit Accessibility and Initial Condition	22
2-1.	Summary of Processor Mode, Privilege Level, and Stack Use	36
2-2.	Processor Register Map.....	37
2-3.	PSR Register Combinations	39
2-4.	Memory Map	40
2-5.	SRAM Memory Bit-Banding Regions	41
2-6.	Exception Types.....	45
2-7.	CC3200 Application Processor Interrupts.....	45
2-8.	Faults	49
2-9.	Fault Status and Fault Address Registers	51
2-10.	Cortex-M4 Instruction Summary.....	53
3-1.	Core Peripheral Register Regions	59
3-2.	Peripherals Register Map	61
3-3.	PERIPHERAL REGISTERS	65
3-4.	ACTLR Register Field Descriptions.....	66
3-5.	STCTRL Register Field Descriptions	67
3-6.	STRELOAD Register Field Descriptions	68
3-7.	STCURRENT Register Field Descriptions	69
3-8.	EN_0 to EN_6 Register Field Descriptions	70
3-9.	DIS_0 to DIS_6 Register Field Descriptions.....	71
3-10.	PEND_0 to PEND_6 Register Field Descriptions.....	72
3-11.	UNPEND_0 to UNPEND_6 Register Field Descriptions	73
3-12.	ACTIVE_0 to ACTIVE_6 Register Field Descriptions	74
3-13.	PRI_0 to PRI_49 Register Field Descriptions	75
3-14.	CPUID Register Field Descriptions	76
3-15.	INTCTRL Register Field Descriptions	77
3-16.	VTABLE Register Field Descriptions	79
3-17.	APINT Register Field Descriptions.....	80
3-18.	SYSCTRL Register Field Descriptions	81
3-19.	CFGCTRL Register Field Descriptions	82
3-20.	SYSPRI1 Register Field Descriptions	84
3-21.	SYSPRI2 Register Field Descriptions	85
3-22.	SYSPRI3 Register Field Descriptions	86
3-23.	SYSHNDCTRL Register Field Descriptions	87
3-24.	FAULTSTAT Register Field Descriptions	89
3-25.	HFAULTSTAT Register Field Descriptions	93
3-26.	FAULTDDR Register Field Descriptions	94
3-27.	SWTRIG Register Field Descriptions.....	95
4-1.	Channel Control Memory.....	99
4-2.	Individual Control Structure.....	100
4-3.	8-bit Data Peripheral Configuration.....	105
4-4.	μ DMA Register Map	107
4-5.	DMA Registers	109
4-6.	DMA_SRCENDP Register Field Descriptions	110
4-7.	DMA_DSTENDP Register Field Descriptions	111
4-8.	DMA_CHCTL Register Field Descriptions.....	112
5-1.	GPIO Pad Configuration Examples	117

5-2.	GPIO Interrupt Configuration Example.....	118
5-3.	GPIO_REGISTER_MAP Registers.....	119
5-4.	GPIODATA Register Field Descriptions	120
5-5.	GPIODIR Register Field Descriptions	121
5-6.	GPIOIS Register Field Descriptions	122
5-7.	GPIOIBE Register Field Descriptions	123
5-8.	GPIOIEV Register Field Descriptions	124
5-9.	GPIOIM Register Field Descriptions	125
5-10.	GPIOIRS Register Field Descriptions	126
5-11.	GPIOIMS Register Field Descriptions.....	127
5-12.	GPIOICR Register Field Descriptions	128
5-13.	GPIO_TRIG_EN Register Field Descriptions	129
5-14.	GPIO Mapping	129
6-1.	Flow Control Mode.....	135
6-2.	UART Register Map	138
6-3.	UART REGISTERS.....	139
6-4.	UARTDR Register Field Descriptions	140
6-5.	UARTRSR_UARTECR Register Field Descriptions.....	141
6-6.	UARTFR Register Field Descriptions	143
6-7.	UARTIBRD Register Field Descriptions	145
6-8.	UARTFBRD Register Field Descriptions	146
6-9.	UARTLCRH Register Field Descriptions	147
6-10.	UARTCTL Register Field Descriptions.....	149
6-11.	UARTIFLS Register Field Descriptions	151
6-12.	UARTIM Register Field Descriptions.....	152
6-13.	UARTRIS Register Field Descriptions	154
6-14.	UARTMIS Register Field Descriptions	156
6-15.	UARTICR Register Field Descriptions	158
6-16.	UARTDMACTL Register Field Descriptions.....	160
7-1.	I2C Signals (64QFN)	164
7-2.	Timer Periods	168
7-3.	I2C REGISTERS.....	180
7-4.	I2CMCSA Register Field Descriptions	181
7-5.	I2CMCS Register Field Descriptions	182
7-6.	I2CMDR Register Field Descriptions.....	184
7-7.	I2CMTPR Register Field Descriptions	185
7-8.	I2CMIMR Register Field Descriptions	186
7-9.	I2CMRIS Register Field Descriptions	188
7-10.	I2CMMIS Register Field Descriptions	190
7-11.	I2CMICR Register Field Descriptions	192
7-12.	I2CMCR Register Field Descriptions.....	194
7-13.	I2CMCLKOCONT Register Field Descriptions	195
7-14.	I2CMBMON Register Field Descriptions.....	196
7-15.	I2CMBLEN Register Field Descriptions.....	197
7-16.	I2CMBCNT Register Field Descriptions	198
7-17.	I2CSOAR Register Field Descriptions	199
7-18.	I2CSCCSR Register Field Descriptions	200
7-19.	I2CSDR Register Field Descriptions	202
7-20.	I2CSIMR Register Field Descriptions	203

7-21.	I2CSRIS Register Field Descriptions.....	205
7-22.	I2CSMIS Register Field Descriptions	207
7-23.	I2CSICR Register Field Descriptions	209
7-24.	I2CSOAR2 Register Field Descriptions.....	211
7-25.	I2CSACKCTL Register Field Descriptions	212
7-26.	I2CFIFODATA Register Field Descriptions.....	213
7-27.	I2CFIFOCTL Register Field Descriptions.....	214
7-28.	I2CFIFOSTATUS Register Field Descriptions	216
7-29.	I2CPP Register Field Descriptions	217
7-30.	I2CPC Register Field Descriptions	218
8-1.	SPI Interface	221
8-2.	Phase and Polarity Combinations	223
8-3.	Clock Ratio Granularity	228
8-4.	Granularity Examples	228
8-5.	SPI Word Length WL.....	228
8-6.	SPI Registers.....	245
8-7.	SPI_SYSCONFIG Register Field Descriptions	246
8-8.	SPI_SYSSTATUS Register Field Descriptions	247
8-9.	SPI_IRQSTATUS Register Field Descriptions.....	248
8-10.	SPI_IRQENABLE Register Field Descriptions.....	250
8-11.	SPI_MODULCTRL Register Field Descriptions	251
8-12.	SPI_CHCONF Register Field Descriptions.....	252
8-13.	SPI_CHSTAT Register Field Descriptions	255
8-14.	SPI_CHCTRL Register Field Descriptions	256
8-15.	SPI_TX Register Field Descriptions	257
8-16.	SPI_RX Register Field Descriptions.....	258
8-17.	SPI_XFERLEVEL Register Field Descriptions.....	259
9-1.	Available CCP Pins and PWM Outputs/Signals Pins	262
9-2.	General-Purpose Timer Capabilities	262
9-3.	Counter Values When the Timer is Enabled in Periodic or One-Shot Modes	263
9-4.	16-Bit Timer With Prescaler Configurations	264
9-5.	Counter Values When the Timer is Enabled in Input Edge-Count Mode.....	265
9-6.	Counter Values When the Timer is Enabled in Input Event-Count Mode	266
9-7.	Counter Values When the Timer is Enabled in PWM Mode	267
9-8.	TIMER Registers.....	272
9-9.	GPTMCFG Register Field Descriptions.....	273
9-10.	GPTMTAMR Register Field Descriptions.....	274
9-11.	GPTMTBMR Register Field Descriptions.....	276
9-12.	GPTMCTL Register Field Descriptions	278
9-13.	GPTMIMR Register Field Descriptions	280
9-14.	GPTMRIS Register Field Descriptions	282
9-15.	GPTMMIS Register Field Descriptions.....	284
9-16.	GPTMICR Register Field Descriptions.....	286
9-17.	GPTMTAILR Register Field Descriptions.....	288
9-18.	GPTMTBILR Register Field Descriptions.....	289
9-19.	GPTMTAMATCHR Register Field Descriptions	290
9-20.	GPTMTBMATCHR Register Field Descriptions	291
9-21.	GPTMTAPR Register Field Descriptions	292
9-22.	GPTMTBPR Register Field Descriptions	293

9-23.	GPTMTAPMR Register Field Descriptions	294
9-24.	GPTMTBPMR Register Field Descriptions	295
9-25.	GPTMTAR Register Field Descriptions	296
9-26.	GPTMTBR Register Field Descriptions	297
9-27.	GPTMTAV Register Field Descriptions	298
9-28.	GPTMTBV Register Field Descriptions	299
9-29.	GPTMDMAEV Register Field Descriptions.....	300
10-1.	Watchdog Timers Register Map	305
10-2.	WATCHDOG Registers	306
10-3.	WDTLOAD Register Field Descriptions.....	307
10-4.	WDTVALUE Register Field Descriptions	308
10-5.	WDTCTL Register Field Descriptions	309
10-6.	WDTICR Register Field Descriptions	310
10-7.	WDTRIS Register Field Descriptions	311
10-8.	WDTTEST Register Field Descriptions	312
10-9.	WDTLOCK Register Field Descriptions.....	313
11-1.	Card Types	324
11-2.	Throughput Data	324
12-1.	ullIntFlags Parameter	341
12-2.	ulStatFlags Parameter	341
13-1.	ADC Registers	347
13-2.	ADC_MODULE Registers	348
13-3.	ADC_CTRL Register Field Descriptions	349
13-4.	ADC_CH0_IRQ_EN Register Field Descriptions	350
13-5.	ADC_CH2_IRQ_EN Register Field Descriptions	351
13-6.	ADC_CH4_IRQ_EN Register Field Descriptions	352
13-7.	ADC_CH6_IRQ_EN Register Field Descriptions	353
13-8.	ADC_CH0_IRQ_STATUS Register Field Descriptions	354
13-9.	ADC_CH2_IRQ_STATUS Register Field Descriptions	355
13-10.	ADC_CH4_IRQ_STATUS Register Field Descriptions	356
13-11.	ADC_CH6_IRQ_STATUS Register Field Descriptions	357
13-12.	ADC_DMA_MODE_EN Register Field Descriptions	358
13-13.	ADC_TIMER_CONFIGURATION Register Field Descriptions	359
13-14.	ADC_TIMER_CURRENT_COUNT Register Field Descriptions.....	360
13-15.	CHANNEL0FIFODATA Register Field Descriptions	361
13-16.	CHANNEL2FIFODATA Register Field Descriptions	362
13-17.	CHANNEL4FIFODATA Register Field Descriptions	363
13-18.	CHANNEL6FIFODATA Register Field Descriptions	364
13-19.	ADC_CH0_FIFO_LVL Register Field Descriptions.....	365
13-20.	ADC_CH2_FIFO_LVL Register Field Descriptions.....	366
13-21.	ADC_CH4_FIFO_LVL Register Field Descriptions.....	367
13-22.	ADC_CH6_FIFO_LVL Register Field Descriptions.....	368
13-23.	ADC_CH_ENABLE Register Field Descriptions	369
13-24.	ulChannel Tags	370
13-25.	ullIntFlags Tags.....	370
14-1.	Image Sensor Interface Signals	378
14-2.	Ratio of the XCLK Frequency Generator	382
14-3.	CAMERA REGISTERS	385
14-4.	CC_SYSCONFIG Register Field Descriptions	386

14-5. CC_SYSSTATUS Register Field Descriptions	387
14-6. CC_IRQSTATUS Register Field Descriptions	388
14-7. CC_IRQENABLE Register Field Descriptions	390
14-8. CC_CTRL Register Field Descriptions	392
14-9. CC_CTRL_DMA Register Field Descriptions	394
14-10. CC_CTRL_XCLK Register Field Descriptions	395
14-11. CC_FIFODATA Register Field Descriptions	396
15-1. Possible PM State Combinations of Application Processor and Network Subsystem (NWP+WLAN)	409
15-2. Peripheral Macro Table	417
15-3. PRCM Registers	419
15-4. CAMCLKCFG Register Field Descriptions	421
15-5. CAMCLKEN Register Field Descriptions	422
15-6. CAMSWRST Register Field Descriptions	423
15-7. MCASPCLKEN Register Field Descriptions	424
15-8. MCASPSWRST Register Field Descriptions	425
15-9. SDIOMCLKCFG Register Field Descriptions	426
15-10. SDIOMCLKEN Register Field Descriptions	427
15-11. SDIOMSWRST Register Field Descriptions	428
15-12. APPSPICLKCFG Register Field Descriptions	429
15-13. APPSPICLKEN Register Field Descriptions	430
15-14. APPSPISWRST Register Field Descriptions	431
15-15. DMACLKEN Register Field Descriptions	432
15-16. DMASWRST Register Field Descriptions	433
15-17. GPIO0CLKEN Register Field Descriptions	434
15-18. GPIO0SWRST Register Field Descriptions	435
15-19. GPIO1CLKEN Register Field Descriptions	436
15-20. GPIO1SWRST Register Field Descriptions	437
15-21. GPIO2CLKEN Register Field Descriptions	438
15-22. GPIO2SWRST Register Field Descriptions	439
15-23. GPIO3CLKEN Register Field Descriptions	440
15-24. GPIO3SWRST Register Field Descriptions	441
15-25. GPIO4CLKEN Register Field Descriptions	442
15-26. GPIO4SWRST Register Field Descriptions	443
15-27. WDTCLKEN Register Field Descriptions	444
15-28. WDTSWRST Register Field Descriptions	445
15-29. UART0CLKEN Register Field Descriptions	446
15-30. UART0SWRST Register Field Descriptions	447
15-31. UART1CLKEN Register Field Descriptions	448
15-32. UART1SWRST Register Field Descriptions	449
15-33. GPT0CLKCFG Register Field Descriptions	450
15-34. GPT0SWRST Register Field Descriptions	451
15-35. GPT1CLKEN Register Field Descriptions	452
15-36. GPT1SWRST Register Field Descriptions	453
15-37. GPT2CLKEN Register Field Descriptions	454
15-38. GPT2SWRST Register Field Descriptions	455
15-39. GPT3CLKEN Register Field Descriptions	456
15-40. GPT3SWRST Register Field Descriptions	457
15-41. MCASPCLKCFG0 Register Field Descriptions	458
15-42. MCASPCLKCFG1 Register Field Descriptions	459

15-43. I2CLCKEN Register Field Descriptions	460
15-44. I2CSRST Register Field Descriptions	461
15-45. LPDSREQ Register Field Descriptions	462
15-46. TURBOREQ Register Field Descriptions	463
15-47. DSLPWAKECFG Register Field Descriptions	464
15-48. DSLOPTIMRCFG Register Field Descriptions	465
15-49. SLPWAKEEN Register Field Descriptions	466
15-50. SLPTMRCFG Register Field Descriptions	467
15-51. WAKENWP Register Field Descriptions	468
15-52. RCM_IS Register Field Descriptions	469
15-53. RCM_IEN Register Field Descriptions	470
16-1. GPIO Pin Electrical Specifications (25 C)(Except Pin 29, 30, 45, 50, 52 , 53)	472
16-2. GPIO Pin Electrical Specifications (25 C) For Pins 29, 30, 45, 50, 52 , 53	473
16-3. Pin Internal Pullup and Pulldown Electrical Specifications (25 C).....	474
16-4. Analog Mux Control Registers and Bits.....	477
16-5. Board Level Behavior	478
16-6. GPIO/Pins Available for Application.....	479
16-7. Pin Multiplexing	482
16-8. Pin Groups for I2S	496
16-9. Pin Groups for SPI.....	496
16-10. Pin Groups for SD-Card I/F	496
16-11. Pad Configuration Registers	496
16-12. GPIO_PAD_CONFIG_0 to GPIO_PAD_CONFIG_32 Register Description	497
16-13. Recommended Pin Multiplexing Configurations	500
16-14. Sense-on-Power Configurations	504
A-1. Peripheral Samples.....	505
B-1. Miscellaneous Register Summary	506
B-2. DMA_IMR Register Field Descriptions.....	507
B-3. DMA_IMS Register Field Descriptions.....	509
B-4. DMA_IMC Register Field Descriptions.....	511
B-5. DMA_ICR Register Field Descriptions	513
B-6. DMA_MIS Register Field Descriptions	515
B-7. DMA_RIS Register Field Descriptions	517
B-8. GPTTRIGSEL Register Field Descriptions	519

Architecture Overview

Topic	Page
1.1 Introduction	22
1.2 Architecture Overview	23
1.3 Functional Overview	24

1.1 Introduction

Created for the Internet of Things (IoT), the SimpleLink CC3200 device is a wireless MCU that integrates a high-performance ARM Cortex-M4 MCU, allowing customers to develop an entire application with a single IC. With on-chip Wi-Fi, Internet, and robust security protocols, no prior Wi-Fi experience is required for faster development.

The applications MCU subsystem contains an industry-standard ARM Cortex-M4 core running at 80 MHz. The device includes a wide variety of peripherals, including a fast parallel camera interface, I2S, SD/MMC, UART, SPI, I2C, and four-channel ADC. The CC3200 family includes flexible embedded RAM for code and data and ROM with external serial flash bootloader and peripheral drivers.

The Wi-Fi network processor subsystem features a Wi-Fi Internet-on-a-chip, and contains an additional dedicated ARM MCU that completely offloads the applications MCU. This subsystem includes an 802.11 b/g/n radio, baseband, and MAC with a powerful crypto engine for fast, secure Internet connections with 256-bit encryption. The CC3200 device supports Station, Access Point, and Wi-Fi Direct modes. The device also supports WPA2 personal and enterprise security and WPS 2.0. The Wi-Fi Internet-on-a-chip includes embedded TCP/IP and TLS/SSL stacks, HTTP server, and multiple Internet protocols.

About This Manual

This manual describes the modules and peripherals of the SimpleLink CC3200 wireless MCU. Each description presents the module or peripheral in a general sense. Not all features and functions of all modules or peripherals may be present on all devices. Pin functions, internal signal connections, and operational parameters differ from device to device. The user should consult the device-specific data sheet for these details.

1.1.1 Related Documentation

Additional documentation about the device can be accessed from these links from Texas Instruments <http://www.ti.com/simplelinkwifi> and <http://www.ti.com/simplelinkwifi-wiki>

1.1.2 Register Bit Conventions

Each register is shown with a key indicating the accessibility of the individual bit, and the initial condition:


Table 1-1. Register Bit Accessibility and Initial Condition

Key Bit	Accessibility
rw	Read/write
r	Read only
r0	Read as 0
r1	Read as 1
w	Write only
w0	Write as 0
w1	Write as 1
(w)	No register bit implemented; writing a 1 results in a pulse. The register bit is always read as 0.
h0	Cleared by hardware
h1	Set by hardware
-0, -1	Condition after PUC
-(0), -(1)	Condition after POR
-[0], -[1]	Condition after BOR
-{0},-{1}	Condition after Brownout

1.2 Architecture Overview

The building blocks of CC3200 system-on-chip are shown in [Figure 1-1](#)

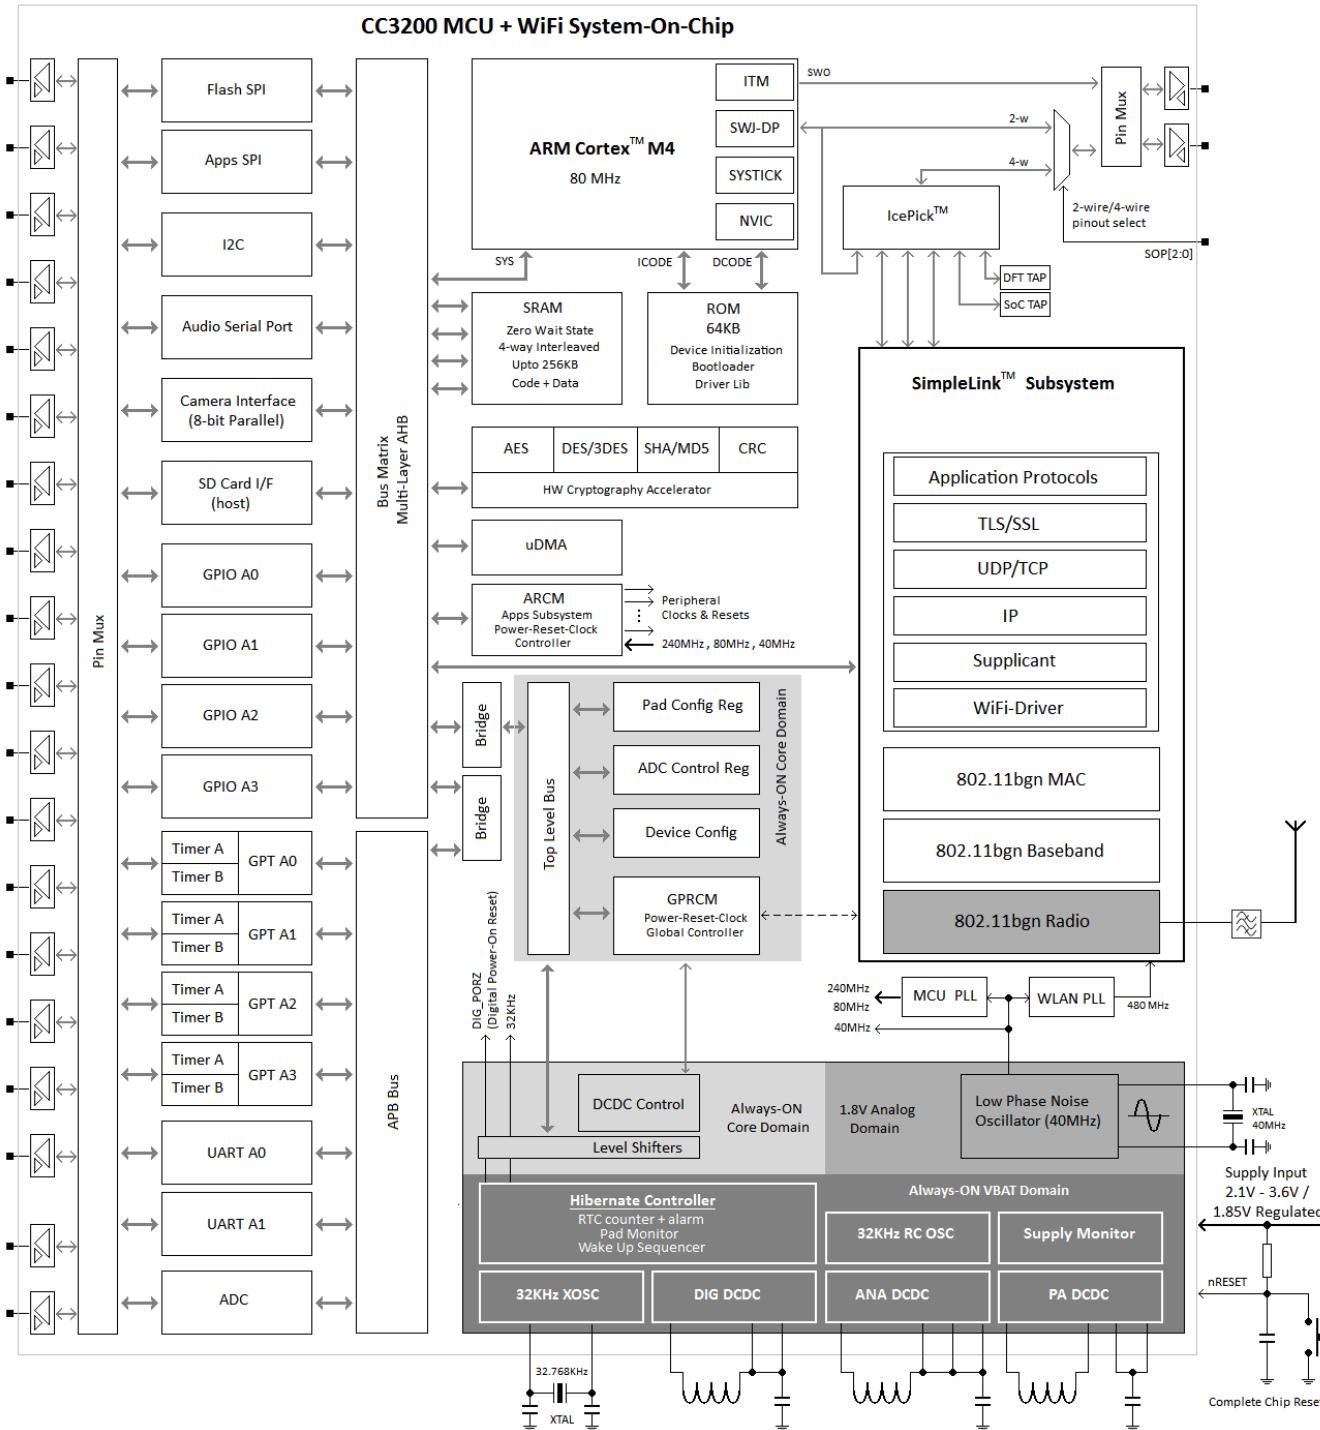Figure 1-1. CC3200 MCU and WiFi System-on-Chip



1.3 Functional Overview

The following sections provide an overview of the main components of the CC3200 system on chip (SoC) from a microcontroller point of view.

1.3.1 Processor Core

1.3.1.1 ARM Cortex™ M4 Processor Core

The CC3200 application MCU subsystem is built around an ARM Cortex-M4 processor core, which provides outstanding computational performance and exceptional system response to interrupts at low power consumption while optimizing memory footprint – making it an ideal fit for embedded applications.

Key features of ARM Cortex-M4 processor core are:

- Thumb-2 mixed 16- and 32-bit instruction set delivers the high performance expected of a 32-bit ARM core in a compact memory size – enabling richer applications within a given device memory size.
- Single-cycle multiply instruction and hardware divide
- Atomic bit manipulation (bit-banding), delivering maximum memory use and streamlined peripheral control
- Unaligned data access, enabling data to be efficiently packed into memory
- Fast code execution, permitting slower processor clock or increased sleep mode time.
- Hardware division and fast multiplier
- Deterministic, high-performance interrupt handling for time-critical applications
- Bit-band support for memory and select peripherals that includes atomic bit-band write and read operations
- Configurable 4-pin JTAG and 2-pin (SWJ-DP) debug access
- Flash patch and breakpoint (FPB) unit to implement breakpoints and code patches
- Ultra-low power sleep modes
- Low active power consumption
- 80-MHz operation

1.3.1.2 System Timer (SysTick)

The ARM Cortex-M4 processor core includes an integrated system timer, SysTick. SysTick provides a simple, 24-bit, clear-on-write, decrementing, wrap-on-zero counter with a flexible control mechanism. The counter is clocked on the system clock.

SysTick makes OS porting between Cortex-M4 devices much easier because there is no need to change the OS system timer code. The SysTick timer integrates with the NVIC and can generate a SysTick exception (exception type 15). In many OSes, a hardware timer generates interrupts so that the OS can perform task management (for example, to allow multiple tasks to run at different time slots and to ensure that no single task can lock up the entire system). To perform this function, the timer must be able to generate interrupts and, if possible, be protected from user tasks so that user applications cannot change the timer behavior.

The counter can be used in several different ways; for example:

- An RTOS tick timer that fires at a programmable rate (for example, 100 Hz) and invokes a SysTick routine
- A high-speed alarm timer using the system clock
- A simple counter used to measure time to completion and time used
- An internal clock-source control based on missing or meeting durations

1.3.1.3 Nested Vector Interrupt Controller (NVIC)

CC3200 includes the ARM NVIC. The NVIC and Cortex-M3 prioritize and handle all exceptions in handler mode. The processor state is automatically stored to the stack on an exception and automatically restored from the stack at the end of the interrupt service routine (ISR). The interrupt vector is fetched in parallel to the state saving, thus enabling efficient interrupt entry. The processor supports tail-chaining, meaning that back-to-back interrupts can be performed without the overhead of state saving and restoration. The NVIC and Cortex-M4 processor prioritize and handle all exceptions in handler mode. The NVIC and the processor core interface are closely coupled to enable low-latency interrupt processing and efficient processing of late-arriving interrupts. The NVIC maintains knowledge of the stacked, or nested, interrupts to enable tail-chaining of interrupts.

Key features are:

- Exceptional interrupt handling through hardware implementation of required register manipulations
- Deterministic, fast interrupt processing: always 12 cycles, or just 6 cycles with tail-chaining
- Programmable priority level for each interrupt
- Low-latency interrupt and exception handling
- Level and pulse detection of interrupt signals
- Grouping of interrupts into group priority and sub-priority interrupts
- Tail chaining of interrupts

1.3.1.4 System Control Block

The system control block (SCB) provides system implementation information and system control, including configuration, control, and reporting of system exceptions.

1.3.2 Memory

1.3.2.1 On-Chip SRAM

To enable low-cost applications, the CC3200 device family follows a flash-less approach. CC3200 has up to 256KB of zero wait state, on-chip SRAM, to which application programs are downloaded and executed. The SRAM is used for both code and data, and is connected to the Multi-Layer-AHB bus-matrix of the chip. There is no restriction on relative size or partitioning of code and data.

The micro direct memory access (μ DMA) controller can transfer data to and from SRAM and various peripherals. The SRAM banks implement an advanced 4-way interleaved architecture which almost eliminates the performance penalty when DMA and processor simultaneously access the SRAM.

Internal RAM has selective retention capability during low-power deep-sleep (LPDS) mode. Based on need, during LPDS mode the application can choose to retain 256KB, 192KB, 128KB or 64KB. Retaining the memory during low power mode provides a faster wakeup. TI provides an easy to use power management framework for processor and peripheral context save and restore mechanism based on SRAM retention. For more information, refer to the Power Management Framework User Guide in [Section 15.5](#).

1.3.2.2 ROM

CC3200 comes with factory programmed zero-wait-state ROM with the following firmware components:

- Device initialization
- Bootloader
- Peripheral driver library (DriverLib) release for product-specific peripherals and interfaces

When CC3200 powers up, or chip reset is released or returns from hibernate mode, the device initialization procedure is executed first. After the chip hardware has been correctly configured, the bootloader is executed, which loads the application code from non-volatile memory into on-chip SRAM and makes a jump to the application code entry point.

The CC3200 DriverLib is a software library that controls on-chip peripherals. The library performs both peripheral initialization and control functions, with a choice of polled or interrupt-driven peripheral support.

The ROM DriverLib provides a rich set of drivers for peripheral and chip. It is aimed at reducing application development time and improving solution robustness. TI recommends that applications make extensive use of the DriverLib APIs to optimize memory and MIPS requirement of end applications.

1.3.3 Micro Direct Memory Access Controller (μ DMA)

The CC3200 microcontroller includes a multichannel DMA controller, or μ DMA. The μ DMA controller provides a way to offload data-transfer tasks from the Cortex-M4 processor, allowing more efficient use of the processor and the available bus bandwidth. The μ DMA controller can perform transfers between memory and peripherals; it has dedicated channels for each supported on-chip module. The μ DMA controller can be programmed to automatically perform transfers between peripherals and memory as the peripheral is ready to transfer more data.

The μ DMA controller provides the following features:

- 32 configurable channels
- 80-MHz operation
- Support for memory to memory, memory to peripheral, and peripheral to memory in multiple transfer modes
 - Basic and simple transfer scenarios
 - Ping-Pong for continuous data flow
 - Scatter-gather for a programmable list of arbitrary transfers initiated from a single request
- Highly flexible and configurable channel operation
 - Independently configured and operated channels
 - Dedicated channels for supported on-chip modules
 - One channel each for receive and transmit path for bidirectional modules
 - Dedicated channel for software-initiated transfers
 - Per-channel configurable bus arbitration scheme
 - Software-initiated requests for any channel
- Two levels of priority
- Design optimizations for improved bus access performance between the μ DMA controller and the processor core
 - μ DMA controller access subordinate to core access
 - Simultaneous concurrent access
- Data sizes of 8, 16, and 32 bits
- Transfer size is programmable in binary steps from 1 to 1024
- Source and destination address increment size of byte, half-word, word, or no increment
- Maskable peripheral requests
- Interrupt on transfer completion, with a separate interrupt per channel

1.3.4 General Purpose Timer (GPT)

The CC3200 includes 4 instances of 32-bit user-programmable general purpose timers. GPTs count or time external events that drive the timer input pins. Each GPT module (GPTM) block provides two 16-bit timers or counters that can be configured to operate independently as timers or event counters, or configured to operate as one 32-bit timer. The GPTM contains GPTM blocks with the following functional options:

- Operating modes:
 - 16- or 32-bit programmable one-shot timer
 - 16- or 32-bit programmable periodic timer

- 16-bit general-purpose timer with an 8-bit prescaler
- 16-bit input-edge count or time-capture modes
- 16-bit pulse-width modulation (PWM) mode with software-programmable output inversion of the PWM signal
- Count up or down
- Ability to determine the elapsed time between the assertion of the timer interrupt and entry into the ISR
- Can trigger efficient transfers using the µDMA.
 - Dedicated channel for each timer
 - Burst request generated on timer interrupt

1.3.5 Watch Dog Timer (WDT)

The watchdog timer in the CC3200 restarts the system when it gets stuck due to an error and does not respond as expected. The watchdog timer can be configured to generate an interrupt to the microcontroller on its first time-out, and to generate a reset signal on its second time-out. Once the watchdog timer is configured, the lock register can be written to prevent the timer configuration from being inadvertently altered.

The watchdog timer provides the following features:

- 32-bit down-counter with a programmable load register
- Programmable interrupt generation logic with interrupt masking
- Lock register protection from runaway software
- Reset generation logic

1.3.6 Multi-Channel Audio Serial Port (McASP)

CC3200 includes a configurable multichannel audio serial port for glue-less interfacing to audio CODEC and DAC (speaker drivers). The audio port has two serializer / deserializers that can be individually enabled to either transmit or receive and operate synchronously. Key features are:

- Two stereo I2S channels
 - One stereo receive and one stereo transmit lines
 - Two stereo transmit lines
- Programmable clock and frame-sync polarity (rising or falling edge)
- Programmable word length (bits per word): 16 and 24 bits
- Programmable fractional divider for bit-clock generation, up to 9 MHz.

1.3.7 Serial Peripheral Interface (SPI)

The serial peripheral interface (SPI) is a four-wire bidirectional communications interface that converts data between parallel and serial. The SPI module performs serial-to-parallel conversion on data received from a peripheral device, and parallel-to-serial conversion on data transmitted to a peripheral device. The SPI allows a duplex serial communication between a local host and SPI-compliant external devices.

The CC3200 includes one SPI port dedicated to the application. Key features are

- Programmable interface operation for Freescale SPI, MICROWIRE, or TI synchronous serial interfaces master and slave modes
- 3-pin and 4-pin mode
- Full duplex and half duplex
- Serial clock with programmable frequency, polarity, and phase
- Up to 20-MHz operation
- Programmable chip select polarity
- Programmable delay before the first SPI word is transmitted
- Programmable timing control between chip select and external clock generation

- No dead cycle between two successive words in slave mode
- SPI word lengths of 8, 16, and 32 bits
- Efficient transfers using the μDMA controller
- Programmable interface operation for Freescale SPI, MICROWIRE, or TI-SSI

1.3.8 Inter-Integrated Circuit Interface (I2C)

The inter-integrated circuit (I2C) bus provides bidirectional data transfer through a two-wire design (a serial data line SDA and a serial clock line SCL). The I2C bus interfaces to a wide variety of external I2C devices such as sensors, serial memory, control ports of image sensors, and audio codecs. Multiple slave devices can be connected to the same I2C bus. The CC3200 microcontroller includes one I2C module with the following features:

- Master and slave modes of operation
- Master with arbitration and clock synchronization
- Multi-master support
- 7-bit addressing mode
- Standard (100 Kbps) and fast (400 Kbps) modes

1.3.9 Universal Asynchronous Receiver/Transmitter (UART)

A universal asynchronous receiver/transmitter (UART) is an integrated circuit used for RS-232 serial communications. UARTs contain a transmitter (parallel-to-serial converter) and a receiver (serial-to-parallel converter), each clocked separately.

The CC3200 device includes two fully programmable UARTs. The UART can generate individually-masked interrupts from the RX, TX, modem status, and error conditions. The module generates a single combined interrupt when any of the interrupts are asserted and unmasked.

The UARTs include the following features:

- Programmable baud-rate generator, allowing speeds up to 3 Mbps
- Separate 16×8 transmit (TX) and receive (RX) FIFOs to reduce CPU interrupt service loading
- Programmable FIFO length, including 1-byte deep operation providing conventional double-buffered interface
- FIFO trigger levels of 1/8, 1/4, 1/2, 3/4, and 7/8
- Standard asynchronous communication bits for start, stop, and parity
- Line-break generation and detection
- Fully programmable serial interface characteristics:
 - 5, 6, 7, or 8 data bits
 - Even, odd, stick, or no-parity bit generation and detection
 - 1 or 2 stop-bit generation
- RTS and CTS modem handshake support
- Standard FIFO-level and end-of-transmission interrupts
- Efficient transfers using μDMA
 - Separate channels for transmit and receive
 - Receive single request asserted when data is in the FIFO; burst request asserted at programmed FIFO level
 - Transmit single request asserted when there is space in the FIFO; burst request asserted at programmed FIFO level

1.3.10 General Purpose Input / Output (GPIO)

All digital pins of the CC3200 device and some of the analog pins can be used as a general-purpose input/output (GPIO). The GPIOs are grouped as 4 instance GPIO modules, each 8-bit. Supported features include:

- Up to 24 GPIOs, depending on the functional pin configuration
- Interrupt capability for all GPIO pins
 - Level or edge sensitive
 - Rising or falling edge
 - Selective interrupt masking
- Can trigger DMA operation
- Selectable wakeup source (one out of 6 pins)
- Programmable pad configuration
 - Internal 5 μ A pull-up and pull-down
 - Configurable drive strength of 2, 4, 6, 8, 10, 12, and 14 mA
 - Open-drain mode
- GPIO register readable through the high-speed internal bus matrix

1.3.11 Analog to Digital Converter (ADC)

The ADC peripheral converts a continuous analog voltage into a discrete digital number. The CC3200 device includes ADC modules with four input channels. Each ADC module features 12-bit conversion resolution for the four input channels. Features include:

- Number of bits: 12-bit
- Effective nominal accuracy: 10 bits
- Four analog input channels
- Automatic round-robin sampling
- Fixed sampling interval of 16 μ s per channel
- Automatic 16-bit time-stamping of every ADC samples based on the system clock
- Dedicated DMA channel to transfer ADC channel data to the application RAM.

1.3.12 SD Card Host

The CC3200 includes an SD-Host interface for applications that require mass storage. The SD-Host interface support is limited to 1-bit mode due to chip pin constraints.

1.3.13 Parallel Camera Interface

The CC3200 includes an 8-bit parallel camera port to enable image sensor-based applications.

1.3.14 Debug Interface

The CC3200 supports both IEEE Standard 1149.1 JTAG (4-wire) and the low-pin-count ARM SWD (2-wire) debug interfaces. Depending on the board level configuration of the sense-on-power pull resistors, by default the chip powers up with either the 4-wire JTAG or the 2-wire SWD interface.

As shown in [Figure 1-1](#), the 4-wire JTAG signals from the chip pins are routed through an IcePick module. TAPs other than the application MCU are reserved for TI production testing. A TAP select sequence must be sent to the device to connect to the ARM Cortex M4 JTAG TAP. The 2-wire mode, however, directly routes the ARM SWD-TMS and SWD-TCK pins directly to the respective chip pins. Further details about the debug interface will be addressed in the revision of this manual.

1.3.15 Hardware Cryptography Accelerator

The secure variant of the CC3200 includes a suite of high-throughput, state-of-the-art hardware accelerators for fast computation of ciphers (AES, DES, 3-DES), hashing (SHA, MD5), and CRC algorithms by the application. It is also referred as the data hashing and transform engine (DTHE). Further details about the hardware cryptography accelerator will be addressed in the revision of this manual.

NOTE: Present production devices have the Crypto unlocked (Fuse Farm); a user application can use these.

NOTE: Secure MCU ensures secure booting of the user application using the crypto engines. This feature will be available in future revisions of the device.

1.3.16 Clock, Reset, and Power Management

The CC3200 system-on-chip includes the necessary clock and power management functionalities to build a standalone battery-operated low power solution. Key features are:

- Primary clocks
 - Slow clock: 32.768 KHz (+/-250 ppm)
 - Used in RTC, Wi-Fi beacon listen timing in low power IDLE mode and some of the chip internal sequencing
 - On-chip, low power 32-KHz Xtal oscillator
 - Support for externally-fed 32.768 KHz clock
 - On-chip 32-KHz RC oscillator for initial wakeup
 - Fast clock: 40 MHz (+/-20 ppm)
 - Used in Wi-Fi radio and MCU.
 - On-chip low phase-noise 40-MHz Xtal oscillator
 - Support for externally-fed clean 40 MHz clock (such as TCXO)
 - System and peripheral clocks are derived from internal PLL producing 240 MHz
- Flexible reset scheme
 - The following resets are supported in CC3200
 - External chip reset pin: the entire chip, including power management, is reset when the nRESET pin is held low.
 - Reset on hibernate: the entire core is reset when the chip goes through a hibernate cycle.
 - Reset on watchdog: the application MCU is reset when the watchdog timer expires.
 - Soft-reset: the application MCU is reset by software
 - Complete system recovery from any stuck-at scenario can be achieved by using a combination of WDT reset and hibernate sleep.
- On-chip power management
 - The CC3200 supports two supply configurations:
 - Wide voltage mode: 2.1 V to 3.6 V
 - Powered by battery (2x1.5 V) or a regulated 3.3-V supply.
 - Regulated 1.85 V
 - For applications with on-board DCDC regulator
 - A set of 3 on-chip high-efficiency DCDC converters produce the internal module supply voltages when they are needed. These switching converters and their frequency plan are optimized to minimize interference to WLAN radio.
 - DIG-DCDC: Produces 0.9 V to 1.2 V for the core digital logic
 - ANA1-DCDC: Produces low-ripple 1.8-V supply for the analog and RF. This is bypassed in the

regulated 1.85-V configuration.

- PA-DCDC: Produces regulated 1.8 V with extremely fast transient regulation for the WLAN RF Transmit Power Amplifier. This is bypassed in the regulated 1.85-V configuration.
- A set of low dropout regulators (LDOs) are used in the radio subsystem to further regulate and filter the ANA1-DCDC output before being fed to the analog circuits.
- On-chip factory-trimmed accurate band-gap voltage reference ensures the regulator outputs are stable across process and temperature.

1.3.17 SimpleLink Subsystem

The SimpleLink subsystem provides fast, secured WLAN and Internet connections with 256-bit encryption. The CC3200 device supports station, AP, and Wi-Fi Direct modes. The device also supports WPA2 personal and enterprise security and WPS 2.0. The Wi-Fi network processor includes an embedded IPv4 TCP/IP stack.

This multi-processor subsystem consists of the following:

- IPv4 network processor and Wi-Fi driver
- 802.11 b/g/n MAC
- 802.11 b/g/n PHY
- 802.11 b/g/n Radio

The SimpleLink subsystem is accessible from the application MCU over an asynchronous link, and can be controlled through a complete set of SimpleLink host driver APIs provided as part of the ROM driver library. The mode of usage is similar to that of an external MCU using the CC3100 device.

The co-location of the Wi-Fi subsystem on the same die imposes a few restrictions on the application MCU. These will be covered in detail in [Chapter 15](#).

1.3.18 I/O Pads and Pin Multiplexing

The device makes extensive use of pin multiplexing to accommodate the large number of peripheral functions in the smallest possible package. To achieve this configuration, pin multiplexing is controlled using a combination of hardware configuration (at device reset) and register control.

The I/O pad and pin mux sections feature flexible wide-voltage I/Os. Supported features include:

- Programmable drive strength from 2 mA to 14 mA (nominal condition) in steps of 2 mA.
- Open drain mode
- Output buffer isolation
- Automatic output isolation during reset and hibernate
- Configurable pull-up and pull-down (10 μ A nominal)
- Software-configurable pad state retention during LPDS
- All digital I/Os are nonfail-safe.

Cortex-M4 Processor

Topic	Page
2.1 Overview	33
2.2 Functional Description.....	35

2.1 Overview

The CC3200 incorporates a dedicated instance of the ARM Cortex-M4 CPU core for executing application code with or without RTOS. This processor core is not used in any manner for running any networking or device management task.

This dedicated ARM Cortex-M4 core, along with large on-chip SRAM, a rich set of peripherals, and advanced DC-DC-based power management, provides a robust, contention-free, high-performance application platform at much lower power, lower cost, and smaller solution size when compared to solutions based on discrete MCUs.

Features include:

- 32-bit ARM Cortex-M4 architecture optimized for small-footprint embedded applications
- 80-MHz operation
- Fast interrupt handling
- Thumb-2 mixed 16-/32-bit instruction set delivers the high performance expected of a 32-bit ARM core in a compact memory size usually associated with 8- and 16-bit devices, typically in the range of a few kilobytes of memory for microcontroller-class applications.
 - Single-cycle multiply instruction and hardware divide
 - Atomic bit manipulation (bit-banding), delivering maximum memory utilization and streamlined peripheral control
 - Unaligned data access, enabling data to be efficiently packed into memory
- 16-bit SIMD vector processing unit
- 3-stage pipeline Harvard architecture
- Hardware division and fast digital-signal-processing orientated multiply accumulate
- Saturating arithmetic for signal processing
- Deterministic, high-performance interrupt handling for time-critical applications
- Enhanced system debug with extensive breakpoints
- Serial-wire debug and serial-wire trace reduce the number of pins required for debugging and tracing
- Low-power consumption with multiple sleep modes

The ARM Cortex-M4 application processor core in the CC3200 does not include the floating point unit and memory protection unit (FPU and MPU).


This chapter provides information on the implementation of the Cortex-M4 application processor in the CC3200, including the programming model, the memory model, the exception model, fault handling, and power management.

For technical details on the instruction set, see the Cortex-M4 instruction set chapter in the *ARM® Cortex™-M4 Devices Generic User Guide* ([ARM DUI 0553A](#)).

2.1.1 Block Diagram

The block diagram is shown in [Figure 2-1](#).

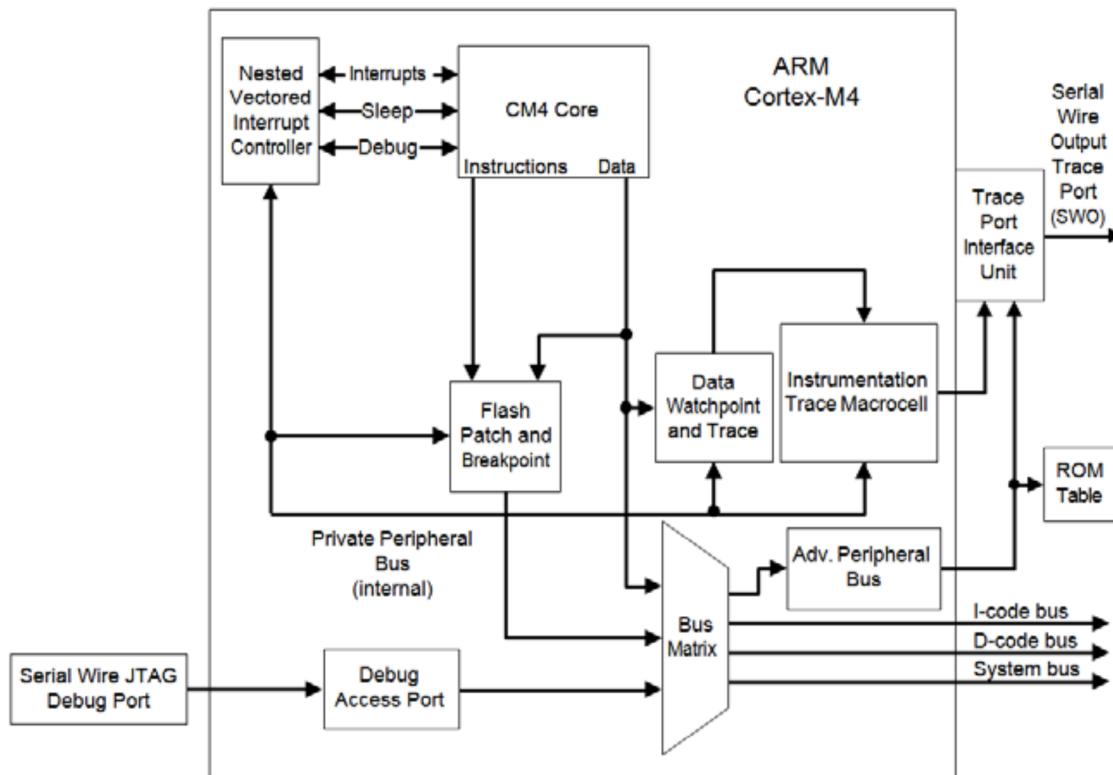Figure 2-1. Application CPU Block Diagram



2.1.2 System-Level Interface

The Cortex-M4 application processor in the CC3200 provides multiple interfaces using AMBA™ technology to provide high-speed, low-latency memory accesses. The core supports unaligned data accesses and implements atomic bit manipulation that enables faster peripheral controls, system spinlocks, and thread-safe Boolean data handling.

2.1.3 Integrated Configurable Debug

The Cortex-M4 application processor implements an ARM CoreSight™-compliant serial wire JTAG-debug port (SWJ-DP) interface. The SWJ-DP interface combines the SWD and JTAG debug ports into one module. See the ARM Debug Interface V5 Architecture Specification for details on SWJ-DP.

The 4-bit trace interface from embedded trace macrocell (ETM) is not supported in the CC3200 due to pin limitations. Instead, the processor integrates an instrumentation trace macrocell (ITM) alongside data watchpoints and a profiling unit. A serial-wire viewer (SWV) can export a stream of software-generated messages (printf style debug), data trace, and profiling information through a single pin to enable simple and cost-effective profiling of the system trace events.


The flash patch and breakpoint unit (FPB) provides up to eight hardware breakpoint comparators for debugging. The comparators in the FPB also provide remap functions for up to eight words of program code in the code memory region. FPB also provides code patching capability; however, as the CC3200 application processor implements and executes from SRAM architecture, this type of patching is no longer required.

For more information on the Cortex-M4 debug capabilities, see the ARM Debug Interface V5 Architecture Specification.

2.1.4 Trace Port Interface Unit (TPIU)

The TPIU acts as a bridge between the Cortex-M4 trace data from the ITM, and an off-chip trace port analyzer, as shown in [Figure 2-2](#).

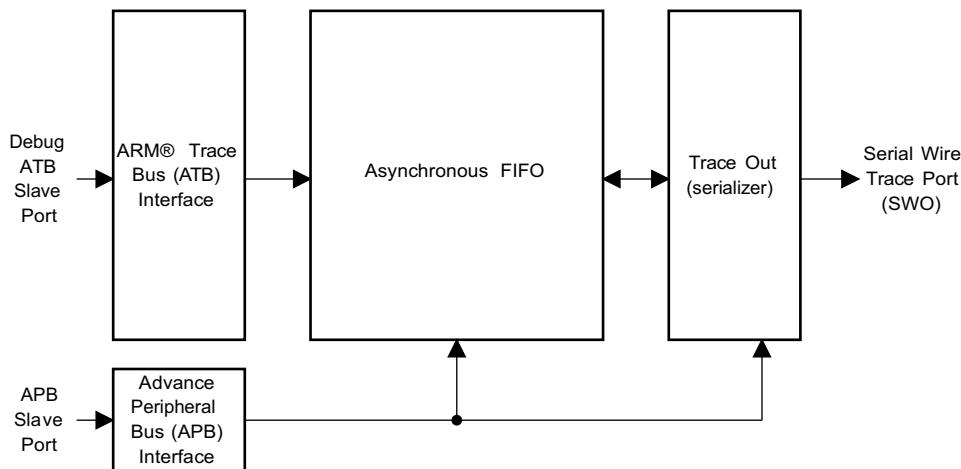Figure 2-2. TPIU Block Diagram



2.1.5 Cortex-M4 System Component Details

The Cortex-M4 application processor core includes the following system components:

- SysTck
A 24-bit count-down timer used as a real-time operating system (RTOS) tick timer or as a simple counter (see [Section 3.2.1](#)).
- Nested Vectored Interrupt Controller (NVIC)
An embedded interrupt controller that supports low-latency interrupt processing (see *Nested Vectored Interrupt Controller (NVIC)* in [Section 3.2.2](#)).
- System Control Block (SCB)
The programming model interface to the processor. The SCB provides system implementation information and system control, including configuration, control, and reporting of system exceptions (see *System Control Block (SCB)* in [Section 3.2.3](#)).

2.2 Functional Description

2.2.1 Programming Model

This section describes the Cortex-M4 programming model and includes the individual core register descriptions, information about the processor modes, and privilege levels for software execution and stacks.

2.2.1.1 Processor Mode and Privilege Levels for Software Execution

The Cortex-M4 has two modes of operation:

- Thread mode, to execute application software. The processor enters thread mode when it comes out of reset.
- Handler mode, to handle exceptions. When the processor has finished exception processing, it returns to thread mode.

In addition, the Cortex-M4 has two privilege levels:

- Underprivileged
In this mode, the software has the following restrictions:
 - Limited access to the MSR and MRS instructions, and no use of the CPS instruction
 - No access to the system timer, NVIC, or system control block

- Possibly restricted access to memory or peripherals
 - Privileged
 - In this mode, the software can use all instructions and has access to all resources
- In thread mode, the CONTROL register controls whether software execution is privileged or unprivileged. In handler mode, software execution is always privileged.
- Only privileged software can write to the CONTROL register to change the privilege level for software execution in thread mode. Unprivileged software can use the SVC instruction to make a supervisor call to transfer control to privileged software.

2.2.1.2 Stacks

The processor uses a full descending stack, meaning that the stack pointer indicates the last stacked item on the memory. When the processor pushes a new item onto the stack, it decrements the stack pointer, then writes the item to the new memory location. The processor implements two stacks: the main stack and the process stack, with a pointer for each held in independent registers (see the SP register).

In thread mode, the CONTROL register controls whether the processor uses the main stack or the process stack. In handler mode, the processor always uses the main stack. The options for processor operations are shown in [Table 2-1](#).

Table 2-1. Summary of Processor Mode, Privilege Level, and Stack Use

Processor Mode	Use	Privilege Level	Stack Used
Thread	Applications	Privileged or unprivileged ⁽¹⁾	⁽¹⁾ Main stack or process stack
Handler	Exception handlers	Always privileged	Main stack


⁽¹⁾ See CONTROL register in [Section 2.2.2.1.2.8](#).

2.2.2 Register Description

2.2.2.1 Registers

2.2.2.1.1 Register Map

[Figure 2-2](#) shows the Cortex-M4 register set. [Table 2-2](#) lists the core registers. The core registers are not memory-mapped and are accessed by register name, so the base address is n/a (not applicable) and there is no offset.

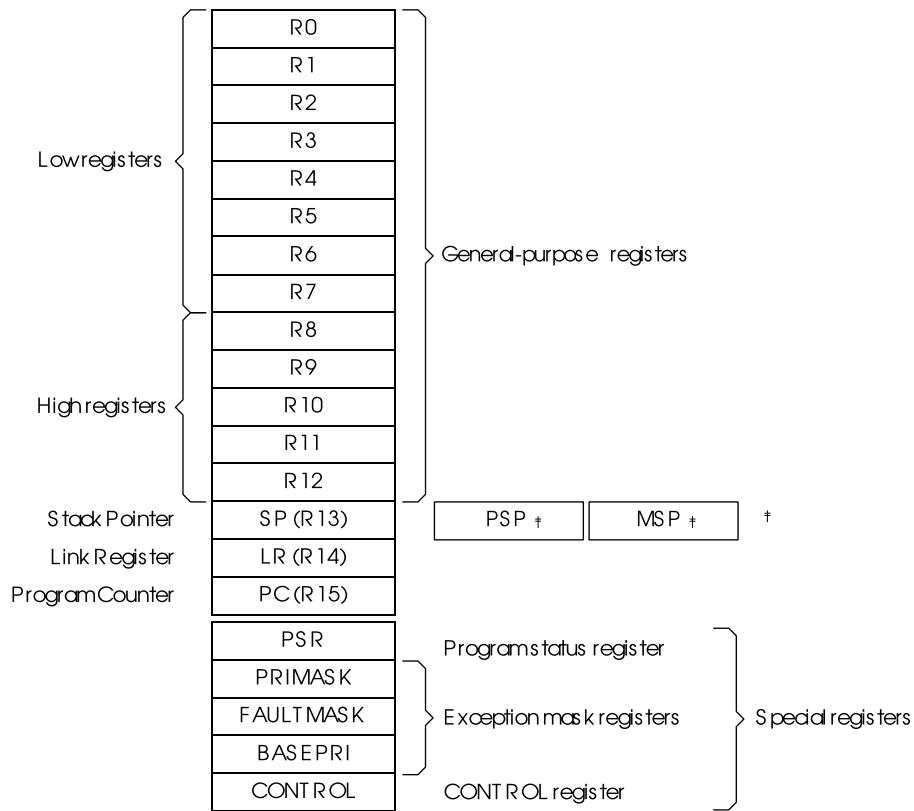Figure 2-3. Cortex-M4 Register Set

Table 2-2. Processor Register Map

Offset	Name	Type	Reset	Description
-	R0	R/W	-	Cortex General-Purpose Register 0
-	R1	R/W	-	Cortex General-Purpose Register 1
-	R2	R/W	-	Cortex General-Purpose Register 2
-	R3	R/W	-	Cortex General-Purpose Register 3
-	R4	R/W	-	Cortex General-Purpose Register 4
-	R5	R/W	-	Cortex General-Purpose Register 5
-	R6	R/W	-	Cortex General-Purpose Register 6
-	R7	R/W	-	Cortex General-Purpose Register 7
-	R8	R/W	-	Cortex General-Purpose Register 8
-	R9	R/W	-	Cortex General-Purpose Register 9
-	R10	R/W	-	Cortex General-Purpose Register 10
-	R11	R/W	-	Cortex General-Purpose Register 11
-	R12	R/W	-	Cortex General-Purpose Register 12
-	SP	R/W	-	Stack Pointer
-	LR	R/W	0xFFFF.FFFF	Link Register
-	PC	R/W	-	Program Counter
-	PSR	R/W	0x0100.0000	Program Status Register
-	PRIMASK	R/W	0x0000.0000	Priority Mask Register
-	FAULTMASK	R/W	0x0000.0000	Fault Mask Register
-	BASEPRI	R/W	0x0000.0000	Base Priority Mask Register
-	CONTROL	R/W	0x0000.0000	Control Register

Table 2-2. Processor Register Map (continued)

Offset	Name	Type	Reset	Description
-	FPSC	R/W	-	Floating-Point Status Control (N/A for CC3200)

2.2.2.1.2 Register Descriptions

This section lists and describes the Cortex-M4 registers. The core registers are not memory-mapped, and are accessed by register name rather than offset.

NOTE: The register type shown in the register descriptions refers to type during program execution in thread mode and handler mode. Debug access may differ.

The Rn registers are 32-bit general-purpose registers for data operations, and can be accessed from either privileged or unprivileged mode.

2.2.2.1.2.1 Stack Pointer (SP)

In thread mode, the function of this register changes depending on the ASP bit in the Control Register (CONTROL) register. When the ASP bit is clear, this register is the main stack pointer (MSP). When the ASP bit is set, this register is the process stack pointer (PSP). On reset, the ASP bit is clear, and the processor loads the MSP with the value from address 0x0000 0000. The MSP can only be accessed in privileged mode; the PSP can be accessed in either privileged or unprivileged mode.

2.2.2.1.2.2 Link Register (LR)

The Link register (LR) stores the return information for subroutines, function calls, and exceptions. The Link register can be accessed from either privileged or unprivileged mode.

EXC_RETURN is loaded into the LR on exception entry.

2.2.2.1.2.3 Program Counter (PC)

The program counter (PC) contains the current program address. On reset, the processor loads the PC with the value of the reset vector, which is at address 0x0000 0004. Bit 0 of the reset vector is loaded into the THUMB bit of the EPSR at reset and must be 1. The PC register can be accessed in either privileged or unprivileged mode.

2.2.2.1.2.4 Program Status Register (PSR)

NOTE: This register is also referred to as xPSR.

The Program Status (PSR) register has three functions, and the register bits are assigned to the different functions:

- Application Program Status (APSR) register, bits 31:27, bits 19:16
- Execution Program Status (EPSR) register, bits 26:24, 15:10
- Interrupt Program Status (IPSR) register, bits 7:0

The PSR, IPSR, and EPSR registers can only be accessed in privileged mode; the APSR register can be accessed in either privileged or unprivileged mode.

APSR contains the current state of the condition flags from previous instruction executions. EPSR contains the Thumb state bit and the execution state bits for the if-then (IT) instruction or the interruptible-continuable instruction (ICI) field for an interrupted load multiple or store multiple instruction. Attempts to read the EPSR directly through application software using the MSR instruction always return zero. Attempts to write the EPSR using the MSR instruction in application software are always ignored. Fault handlers can examine the EPSR value in the stacked PSR to determine the operation that faulted.

IPSR contains the exception type number of the current interrupt service routine (ISR).

These registers can be accessed individually, or as a combination of any two or all three registers, using the register name as an argument to the MSR or MRS instructions. For example, all of the registers can be read using PSR with the MRS instruction, or APSR only can be written to using APSR with the MSR instruction. [Table 2-3](#) shows the possible register combinations for the PSR. See the MRS and MSR instruction descriptions in the Cortex-M4 instruction set chapter in the ARM Cortex-M4 Devices Generic User Guide ([ARM DUI 0553A](#)) for more information about how to access the program status registers.

Table 2-3. PSR Register Combinations

Register	Type	Combination
PSR	PSR R/W ⁽¹⁾ ⁽²⁾	APSR, EPSR, and IPSR
IEPSR	RO	EPSR and IPSR
IAPSR	R/W ⁽¹⁾	APSR and IPSR
EAPSR	R/W ⁽²⁾	APSR and EPSR

⁽¹⁾ The processor ignores writes to the IPSR bits.

⁽²⁾ Reads of the EPSR bits return zero, and the processor ignores writes to these bits

2.2.2.1.2.5 Priority Mask Register (PRIMASK)

The PRIMASK register prevents activation of all exceptions with programmable priority. Reset, non-maskable interrupt (NMI), and hard fault are the only exceptions with fixed priority. Exceptions should be disabled when they might impact the timing of critical tasks. This register is only accessible in privileged mode. The MSR and MRS instructions are used to access the PRIMASK register, and the CPS instruction may be used to change the value of the PRIMASK register. See the Cortex-M4 instruction set chapter in the ARM Cortex-M4 Devices Generic User Guide ([ARM DUI 0553A](#)) for more information on these instructions.

2.2.2.1.2.6 Fault Mask Register (FAULTMASK)

The FAULTMASK register prevents activation of all exceptions except for the Non-Maskable Interrupt (NMI). Exceptions should be disabled when they might impact the timing of critical tasks. This register is only accessible in privileged mode. The MSR and MRS instructions are used to access the FAULTMASK register, and the CPS instruction may be used to change the value of the FAULTMASK register. See the Cortex™-M4 instruction set chapter in the ARM® Cortex™-M4 Devices Generic User Guide ([ARM DUI 0553A](#)) for more information on these instructions.

2.2.2.1.2.7 Base Priority Mask Register (BASEPRI)

The BASEPRI register defines the minimum priority for exception processing. When BASEPRI is set to a nonzero value, it prevents the activation of all exceptions with the same or lower priority level as the BASEPRI value. Exceptions should be disabled when they might impact the timing of critical tasks. This register is only accessible in privileged mode.

2.2.2.1.2.8 Control Register (CONTROL)

The CONTROL register controls the stack used and the privilege level for software execution when the processor is in thread mode, and indicates whether the FPU state is active. This register is only accessible in privileged mode.

Handler mode always uses the MSP, so the processor ignores explicit writes to the ASP bit of the CONTROL register when in handler mode. The exception entry and return mechanisms automatically update the CONTROL register based on the EXC_RETURN value. In an OS environment, threads running in thread mode should use the process stack, and the kernel and exception handlers should use the main stack. By default, thread mode uses the MSP. To switch the stack pointer used in thread mode to the PSP, either use the MSR instruction to set the ASP bit, as detailed in the Cortex-M4 instruction set chapter in the ARM Cortex-M4 Devices Generic User Guide ([ARM DUI 0553A](#)), or perform an exception return to thread mode with the appropriate EXC_RETURN value.

NOTE: When changing the stack pointer, software must use an ISB instruction immediately after the MSR instruction, ensuring that instructions after the ISB execute use the new stack pointer. See the Cortex-M4 instruction set chapter in the ARM Cortex-M4 Devices Generic User Guide ([ARM DUI 0553A](#)).

2.2.2.1.3 Exceptions and Interrupts

The Cortex-M4 application processor in the CC3200 supports interrupts and system exceptions. The processor and the nested vectored interrupt controller (NVIC) prioritize and handle all exceptions. An exception changes the normal flow of software control. The processor uses handler mode to handle all exceptions except for reset. See [Section 2.2.4.7](#) for more information.

The NVIC registers control interrupt handling. See nested vectored interrupt controller (NVIC) for more information.

2.2.2.1.4 Data Types

The Cortex-M4 supports 32-bit words, 16-bit halfwords, and 8-bit bytes. The processor also supports 64-bit data transfer instructions. All instruction and data memory accesses are little endian.

2.2.3 Memory Model

This section describes the processor memory map, the behavior of memory accesses, and the bit-banding features. The processor has a fixed memory map that provides up to 4 GB of addressable memory.

The memory map of the CC3200 microcontroller subsystem is provided in [Table 2-4](#). In this manual, register addresses are given as a hexadecimal increment, relative to the base address of the module, as shown in the memory map.

The regions for SRAM and peripherals include bit-band regions. Bit-banding provides atomic operations to bit data (see [Section 2.2.3.1](#)).

The processor reserves regions of the private peripheral bus (PPB) address range for core peripheral registers (see the *Cortex-M4 Peripherals, Chapter 3*).

NOTE: Within the memory map, attempts to read or write addresses in reserved spaces result in a bus fault. In addition, attempts to write addresses in the flash range also result in a bus fault.

Table 2-4. Memory Map

Start Address	End Address	Description	Comment
0x0000.0000	0x0007.FFFF	On-chip ROM (Bootloader + DriverLib)	
0x2000.0000	0x2003.FFFF	Bit-banded on-chip SRAM	
0x2200.0000	0x23FF.FFFF	Bit-band alias of 0x2000.0000 through 0x200F.FFFF	
0x4000.0000	0x4000.0FFF	Watchdog timer A0	
0x4000.4000	0x4000.4FFF	GPIO port A0	
0x4000.5000	0x4000.5FFF	GPIO port A1	
0x4000.6000	0x4000.6FFF	GPIO port A2	
0x4000.7000	0x4000.7FFF	GPIO port A3	
0x4000.C000	0x4000.CFFF	UART A0	
0x4000.D000	0x4000.DFFF	UART A1	
0x4002.0000	0x4002.07FF	I ² C A0 (Master)	
0x4002.0800	0x4002.0FFF	I ² C A0 (Slave)	
0x4003.0000	0x4003.0FFF	General-purpose timer A0	
0x4003.1000	0x4003.1FFF	General-purpose timer A1	
0x4003.2000	0x4003.2FFF	General-purpose timer A2	

Table 2-4. Memory Map (continued)

Start Address	End Address	Description	Comment
0x04003.3000	0x4003.3FFF	General-purpose timer A3	
0x400F.7000	0x400F.7FFF	Configuration registers	
0x400F.E000	0x400F.EFFF	System control	
0x400F.F000	0x400F.FFFF	μ DMA	
0x4200.0000	0x43FF.FFFF	Bit band alias of 0x4000.0000 through 0x400F.FFFF	
0x4401.C000	0x4401.EFFF	McASP	
0x4402.0000	0x4402.0FFF	FlashSPI	Used for external serial flash
0x4402.1000	0x4402.2FFF	GSPI	Used by application processor
0x4402.5000	0x4402.5FFF	MCU reset clock manager	
0x4402.6000	0x4402.6FFF	MCU configuration space	
0xE000.0000	0xE000.0FFF	Instrumentation trace Macrocell™	
0xE000.1000	0xE000.1FFF	Data watchpoint and trace (DWT)	
0xE000.2000	0xE000.2FFF	Flash patch and breakpoint (FPB)	
0xE000.E000	0xE000.EFFF	Cortex-M4 Peripherals (NVIC, SysTick,SCB)	
0xE004.0000	0xE004.0FFF	Trace port interface unit (TPIU)	
0xE004.1000	0xE004.1FFF	Reserved for embedded trace macrocell (ETM)	

2.2.3.1 Bit-Banding

A bit-band region maps each word in a bit-band alias region to a single bit in the bit-band region. In ARM Cortex-M4 architecture, the bit-band regions occupy the lowest 1 MB of the SRAM. Accesses to the 32-MB SRAM alias region map to the 1-MB SRAM bit-band region, as shown in [Table 2-5](#).

NOTE: A word access to the SRAM or the peripheral bit-band alias region maps to a single bit in the SRAM or peripheral bit-band region.

A word access to a bit-band address results in a word access to the underlying memory, and similarly for halfword and byte accesses. This allows bit-band accesses to match the access requirements of the underlying peripheral.

The CC3200 family of Wi-Fi microcontrollers support up to 256 Kbyte of on-chip SRAM for code and data. The SRAM starts from address 0x2000 0000.

Table 2-5. SRAM Memory Bit-Banding Regions

Address Range		Memory Region	Instruction and Data Accesses
Start	End	Memory Region	Instruction and Data Accesses
0x2000.0000	0x2003.FFFF	SRAM bit-band region	Direct accesses to this memory range behave as SRAM memory accesses, but this region is also bit addressable through bit-band alias.
0x2200.0000	0x23FF.FFFF	SRAM bit-band alias	Data accesses to this region are remapped to bit band region. A write operation is performed as read-modify-write. Instruction accesses are not remapped.

Bit-banding for peripherals is not supported in the CC3200.

2.2.3.1.1 Directly Accessing an Alias Region

Writing to a word in the alias region updates a single bit in the bit-band region.

Bit 0 of the value written to a word in the alias region determines the value written to the targeted bit in the bit-band region. Writing a value with bit 0 set writes a 1 to the bit-band bit, and writing a value with bit 0 clear writes a 0 to the bit-band bit.

Bits 31:1 of the alias word have no effect on the bit-band bit. Writing 0x01 has the same effect as writing 0xFF. Writing 0x00 has the same effect as writing 0x0E.

When reading a word in the alias region, 0x0000 0000 indicates that the targeted bit in the bit-band region is clear and 0x0000 0001 indicates that the targeted bit in the bit-band region is set.


2.2.3.1.2 Directly Accessing a Bit-Band Region

Behavior of memory accesses describes the behavior of direct byte, halfword, or word accesses to the bit-band regions.

2.2.3.2 Data Storage

The processor views memory as a linear collection of bytes numbered in ascending order from zero. For example, bytes 0-3 hold the first stored word, and bytes 4-7 hold the second stored word. Data is stored in little-endian format, with the least-significant byte (lsbyte) of a word stored at the lowest-numbered byte, and the most-significant byte (msbyte) stored at the highest-numbered byte. [Figure 2-4](#) illustrates how data is stored.

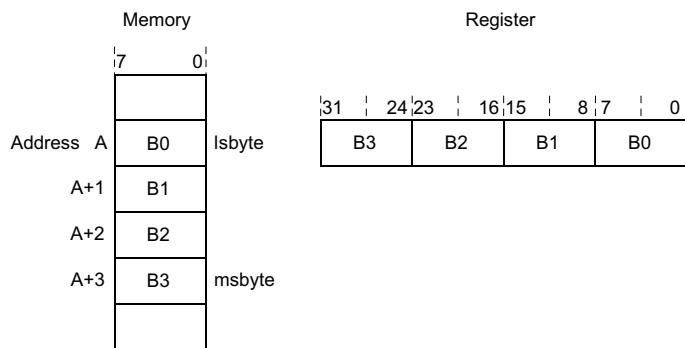Figure 2-4. Data Storage



2.2.3.3 Synchronization Primitives

The Cortex-M4 instruction set includes pairs of synchronization primitives which provide a non-blocking mechanism that a thread or process can use to obtain exclusive access to a memory location. Software can use these primitives to perform a guaranteed read-modify-write memory update sequence or for a semaphore mechanism.

A pair of synchronization primitives consists of:

- A load-exclusive instruction, to read the value of a memory location and request exclusive access to that location.
- A store-exclusive instruction, to attempt to write to the same memory location and return a status bit to a register. If this status bit is clear, it indicates that the thread or process gained exclusive access to the memory and the write succeeds; if this status bit is set, it indicates that the thread or process did not gain exclusive access to the memory and no write was performed.

The pairs of load-exclusive and store-exclusive instructions are:

- The word instructions LDREX and STREX
- The halfword instructions LDREXH and STREXH
- The byte instructions LDREXB and STREXB

Software must use a load-exclusive instruction with the corresponding store-exclusive instruction. To perform an exclusive read-modify-write of a memory location, software must:

1. Use a load-exclusive instruction to read the value of the location.
2. Modify the value, as required.
3. Use a store-exclusive instruction to attempt to write the new value back to the memory location.
4. Test the returned status bit. If the status bit is clear, the read-modify-write completed successfully. If the status bit is set, no write was performed, which indicates that the value returned at Step 1 might be out of date. The software must retry the entire read-modify-write sequence.

Software can use the synchronization primitives to implement a semaphore as follows:

1. Use a load-exclusive instruction to read from the semaphore address, to check whether the semaphore is free.
2. If the semaphore is free, use a store-exclusive to write the claim value to the semaphore address.
3. If the returned status bit from Step 2 indicates that the store-exclusive succeeded, then the software has claimed the semaphore. However, if the store-exclusive failed, another process might have claimed the semaphore after the software performed Step 1.

The Cortex-M4 includes an exclusive access monitor that tags the fact that the processor has executed a load-exclusive instruction. The processor removes its exclusive access tag if:

- It executes a CLREX instruction.
- It executes a store-exclusive instruction, regardless of whether the write succeeds.
- An exception occurs, which means the processor can resolve semaphore conflicts between different threads.

For more information about the synchronization primitive instructions, see the Cortex-M4 instruction set chapter in the ARM Cortex-M4 Devices Generic User Guide ([ARM DUI 0553A](#)).

2.2.4 Exception Model

The ARM Cortex-M4 application processor in the CC3200 and the nested vectored interrupt controller (NVIC) prioritize and handle all exceptions in handler mode. The processor state is automatically stored to the stack on an exception, and automatically restored from the stack at the end of the interrupt service routine (ISR). The vector is fetched in parallel to the state saving, enabling efficient interrupt entry. The processor supports tail-chaining, which enables back-to-back interrupts to be performed without the overhead of state saving and restoration.

Table 2-6 lists all exception types. Software can set eight priority levels on seven of these exceptions (system handlers) as well as on 70 interrupts (listed in **Table 2-6**). Priorities on the system handlers are set with the NVIC System Handler Priority n (SYSPRIn) registers. Interrupts are enabled through the NVIC Interrupt Set Enable n (ENn) register and prioritized with the NVIC Interrupt Priority n (PRIn) registers. Priorities can be grouped by splitting priority levels into preemption priorities and subpriorities. All the interrupt registers are described in [Section 3.2.2](#).

Internally, the highest user-programmable priority (0) is treated as fourth priority, after a reset, non-maskable interrupt (NMI), and a hard fault, in that order. Note that 0 is the default priority for all the programmable priorities.

NOTE: After a write to clear an interrupt source, it may take several processor cycles for the NVIC to see the interrupt source de-assert. Thus, if the interrupt clear is done as the last action in an interrupt handler, it is possible for the interrupt handler to complete while the NVIC sees the interrupt as still asserted, causing the interrupt handler to be re-entered errantly. This situation can be avoided by either clearing the interrupt source at the beginning of the interrupt handler or by performing a read or write after the write to clear the interrupt source (and flush the write buffer).

See nested vectored interrupt controller (NVIC) for more information on exceptions and interrupts.

2.2.4.1 Exception States

Each exception is in one of the following states:

- Inactive: The exception is not active and not pending.
- Pending: The exception is waiting to be serviced by the processor. An interrupt request from a peripheral or from software can change the state of the corresponding interrupt to pending.
- Active: An exception being serviced by the processor but has not completed. An exception handler can interrupt the execution of another exception handler. In this case, both exceptions are in the active state.
- Active and Pending: The exception is being serviced by the processor, and there is a pending exception from the same source.

2.2.4.2 Exception Types

The exception types are:

- Reset: Reset is invoked on power up or a warm reset. The exception model treats reset as a special form of exception. When reset is asserted, the operation of the processor stops, potentially at any point in an instruction. When reset is deasserted, execution restarts from the address provided by the reset entry in the vector table. Execution restarts as privileged execution in thread mode.
- NMI: A non-maskable interrupt (NMI) can be signaled using the NMI signal, or triggered by software using the Interrupt Control and State (INTCTRL) register. This exception has the highest priority other than reset. NMI is permanently enabled and has a fixed priority of -2. NMIs cannot be masked or prevented from activation by any other exception or preempted by any exception other than reset. NMI in the CC3200 is reserved for the internal system, and is not available for application usage.
- Hard Fault: A hard fault is an exception that occurs because of an error during exception processing, or because an exception cannot be managed by any other exception mechanism. Hard faults have a fixed priority of -1, meaning they have higher priority than any exception with configurable priority.
- Memory Management Fault: A memory management fault is an exception that occurs because of a memory-protection-related fault, including access violation and no match. The MPU or the fixed-memory protection constraints determine this fault, for both instruction and data memory transactions. This fault is used to abort instruction accesses to Execute Never (XN) memory regions, even if the MPU is disabled.
- Bus Fault: A bus fault is an exception that occurs because of a memory-related fault for an instruction or data memory transaction such as a prefetch fault or a memory access fault. This fault can be enabled or disabled.
- Usage Fault: A usage fault is an exception that occurs because of a fault related to instruction execution, such as:
 - An undefined instruction
 - An illegal unaligned access
 - Invalid state on instruction execution
 - An error on exception return. An unaligned address on a word or halfword memory access or division by zero can cause a usage fault when the core is properly configured.
- SVCall: A supervisor call (SVC) is an exception that is triggered by the SVC instruction. In an OS environment, applications can use SVC instructions to access OS kernel functions and device drivers.
- Debug Monitor: This exception is caused by the debug monitor (when not halting). This exception is only active when enabled. This exception does not activate if it is a lower priority than the current activation.
- PendSV: PendSV is a pendable, interrupt-driven request for system-level service. In an OS environment, use PendSV for context switching when no other exception is active. PendSV is triggered using the Interrupt Control and State (INTCTRL) register.
- SysTick: A SysTick exception is an exception that the system timer generates when it reaches zero when enabled to generate an interrupt. Software can also generate a SysTick exception using the Interrupt Control and State (INTCTRL) register. In an OS environment, the processor can use this exception as system tick.

- **Interrupt (IRQ):** An interrupt, or IRQ, is an exception signaled by a peripheral or generated by a software request and fed through the NVIC (prioritized). All interrupts are asynchronous to instruction execution. In the system, peripherals use interrupts to communicate with the processor. [Table 2-5](#) lists the interrupts on the CC3200 application processor

For an asynchronous exception, other than reset, the processor can execute another instruction between when the exception is triggered and when the processor enters the exception handler.

Privileged software can disable the exceptions that [Table 2-6](#) show as having configurable priority (see the SYSHNDCTRL register and the DIS0 register).

For more information about hard faults, memory management faults, bus faults, and usage faults, see [Section 2.2.5](#).

Table 2-6. Exception Types

Exception Type	Vector Number	Priority ⁽¹⁾	Vector Address or Offset ⁽²⁾	Activation
-	0	-	0x0000.0000	Stack top is loaded from the first entry of the vector table on reset.
Reset	1	-3 (highest)	0x0000.0004	Asynchronous
Non-Maskable Interrupt (NMI)	2	-2	0x0000.0008	Asynchronous
Hard Fault	3	-1	0x0000.000C	-
Memory Management	4	programmable ⁽³⁾	0x0000.0010	Synchronous
Bus Fault	5	programmable ⁽³⁾	0x0000.0014	Synchronous when precise and asynchronous when imprecise
Usage Fault	6	programmable ⁽³⁾	0x0000.0018	Synchronous
-	10-Jul	-	-	Reserved
SVCall	11	programmable ⁽³⁾	0x0000.002C	Synchronous
Debug Monitor	12	programmable ⁽³⁾	0x0000.0030	Synchronous
-	13	-	-	Reserved
PendSV	14	programmable ⁽³⁾	0x0000.0038	Asynchronous
SysTick	15	programmable ⁽³⁾	0x0000.003C	Asynchronous
Interrupts	16 and above	programmable ⁽⁴⁾	0x0000.0040 and above	Asynchronous

⁽¹⁾ a. 0 is the default priority for all the programmable priorities.

⁽²⁾ b. See [Figure 2-5](#).

⁽³⁾ See SYSPRI1 on [Table 3-3](#).

⁽⁴⁾ d. See PRIn registers.

Table 2-7. CC3200 Application Processor Interrupts

Interrupt Number (Bit in Interrupt Registers)	Vector Address or Offset	Description	Type
0	0x0000.0040	GPIO Port 0 (GPIO 0-7)	
1	0x0000.0044	GPIO Port A1 (GPIO 8-15)	
2	0x0000.0048	GPIO Port A2 (GPIO 16-23)	
3	0x0000.004C	GPIO Port A3 (GPIO 24-31)	
5	0x0000.0054	UART0	
6	0x0000.0058	UART1	
8	0x0000.0060	I2C	
14	0x0000.0078	ADC Channel-0	
15	0x0000.007C	ADC Channel-1	
16	0x0000.0080	ADC Channel-2	

Table 2-7. CC3200 Application Processor Interrupts (continued)

Interrupt Number (Bit in Interrupt Registers)	Vector Address or Offset	Description	Type
17	0x0000.0084	ADC Channel-3	
18	0x0000.0088	WDT	
19	0x0000.008C	16/32-Bit Timer A0A	
20	0x0000.0090	16/32-Bit Timer A0B	
21	0x0000.0094	16/32-Bit Timer A1A	
22	0x0000.0098	16/32-Bit Timer A1B	
23	0x0000.009C	16/32-Bit Timer A2A	
24	0x0000.00A0	16/32-Bit Timer A2B	
35	0x0000.00CC	16/32-Bit Timer A3A	
36	0x0000.00D0	16/32-Bit Timer A3B	
46	0x0000.00F8	uDMA Software Intr	
47	0x0000.00FC	uDMA Error Intr	
161	0x0000.02C4	I2S	
163	0x0000.02CC	Camera	
168	0x0000.02E0	RAM WR Error	
171	0x0000.02EC	Network Intr	
176	0x0000.0300	SPI	

2.2.4.3 Exception Handlers

The processor handles exceptions using:

- Interrupt service routines (ISRs): Interrupts (IRQx) are the exceptions handled by ISRs.
- Fault handlers: Hard fault, memory-management fault, usage fault, and bus fault are fault exceptions handled by the fault handlers.
- System handlers: NMI, PendSV, SVCALL, SysTick, and the fault exceptions are all system exceptions handled by system handlers.

2.2.4.4 Vector Table

The vector table contains the reset value of the stack pointer and the start addresses, also called exception vectors, for all exception handlers. The vector table is constructed using the vector address or offset shown in [Table 2-6](#). [Figure 2-5](#) shows the order of the exception vectors in the vector table. The least-significant bit of each vector must be 1, indicating that the exception handler is thumb code.

Figure 2-5. Vector Table

Exception number	IRQ number	Offset	Vector
(N+16)	(N)	0x040 + 0x(N*4)	IRQ N
.	.	.	.
.	.	0x004C	.
18	2	0x0048	IRQ2
17	1	0x0044	IRQ1
16	0	0x0040	IRQ0
15	-1	0x003C	Systick
14	-2	0x0038	PendSV
13			Reserve
12			d
11	-5	0x002C	Reserved for Debug
10			SVCall
9			
8			Reserved
7			
6	-10	0x0018	
5	-11	0x0014	Usage
4	-12	0x0010	fault Bus
3	-13	0x000C	fault
2	-14	0x0008	Memory management
1		0x0004	fault Hard fault
0		0x0000	NMI
			Reset
			Initial SP value

On system reset, the vector table is fixed at address 0x0000 0000. Privileged software can write to the Vector Table Offset (VTABLE) register to relocate the vector table start address to a different memory location, in the range 0x0000 0400 to 0x3FFF FC00. When configuring the VTABLE register, the offset must be aligned on a 1024-byte boundary.

2.2.4.5 Exception Priorities

As shown in [Table 2-6](#), all exceptions have an associated priority, with a lower priority value indicating a higher priority and configurable priorities for all exceptions except reset, hard fault, and NMI. If software does not configure any priorities, then all exceptions with a configurable priority have a priority of 0.

NOTE: Configurable priority values for the CC3200 implementation are in the range 0-7. This means that the reset, hard fault, and NMI exceptions (NMI is reserved for use by the system) with fixed negative priority values always have higher priority than any other exception.

For example, assigning a higher priority value to IRQ[0] and a lower priority value to IRQ[1] means that IRQ[1] has higher priority than IRQ[0]. If both IRQ[1] and IRQ[0] are asserted, IRQ[1] is processed before IRQ[0].

If multiple pending exceptions have the same priority, the pending exception with the lowest exception number takes precedence. For example, if both IRQ[0] and IRQ[1] are pending and have the same priority, then IRQ[0] is processed before IRQ[1].

When the processor is executing an exception handler, the exception handler is preempted if a higher priority exception occurs. If an exception occurs with the same priority as the exception being handled, the handler is not preempted, irrespective of the exception number. However, the status of the new interrupt changes to pending.

2.2.4.6 Interrupt Priority Grouping

To increase priority control in systems with interrupts, the NVIC supports priority grouping. This grouping divides each interrupt priority register entry into two fields:

- An upper field that defines the group priority
- A lower field that defines a subpriority within the group

Only the group priority determines preemption of interrupt exceptions. When the processor is executing an interrupt exception handler, another interrupt with the same group priority as the interrupt being handled does not preempt the handler.

If multiple pending interrupts have the same group priority, the subpriority field determines the order in which they are processed. If multiple pending interrupts have the same group priority and subpriority, the interrupt with the lowest IRQ number is processed first.

2.2.4.7 Exception Entry and Return

Descriptions of exception handling use the following terms:


- Preemption: When the processor is executing an exception handler, an exception can preempt the exception handler if its priority is higher than the priority of the exception being handled. See [Section 2.2.4.6](#) for more information about preemption by an interrupt. When one exception preempts another, the exceptions are called nested exceptions.
- Return: Return occurs when the exception handler is completed, there is no pending exception with sufficient priority to be serviced, and the completed exception handler was not handling a late-arriving exception. The processor pops the stack and restores the processor state to the state it had before the interrupt occurred.
- Tail-chaining: This mechanism speeds up exception servicing. On completion of an exception handler, if there is a pending exception that meets the requirements for exception entry, the stack pop is skipped and control transfers to the new exception handler.
- Late-arriving: This mechanism speeds up preemption. If a higher priority exception occurs during state saving for a previous exception, the processor switches to handle the higher priority exception and initiates the vector fetch for that exception. State-saving is not affected by late arrival because the state saved is the same for both exceptions. Therefore, the state-saving continues uninterrupted. The processor can accept a late-arriving exception until the first instruction of the exception handler of the original exception enters the execute stage of the processor. On return from the exception handler of the late-arriving exception, the normal tail-chaining rules apply.

2.2.4.7.1 Exception Entry

Exception entry occurs when there is a pending exception with sufficient priority and either the processor is in thread mode or the new exception is of higher priority than the exception being handled, in which case the new exception preempts the original exception. When one exception preempts another, the exceptions are nested.

Sufficient priority means the exception has more priority than any limits set by the mask registers (see PRIMASK FAULTMASK, and BASEPRI registers). An exception with less priority than this is pending but is not handled by the processor. When the processor takes an exception, unless the exception is a tail-chained or a late-arriving exception, the processor pushes information onto the current stack. This operation is referred to as stacking, and the structure of eight data words is referred to as stack frame.

[Figure 2-6](#) shows the Cortex-M4 stack frame layout, which is similar to that of ARMv7-M implementations without an FPU.

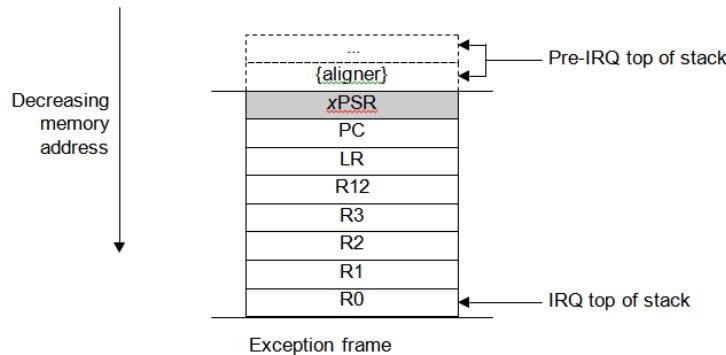Figure 2-6. Exception Stack Frame


Immediately after stacking, the stack pointer indicates the lowest address in the stack frame.

The stack frame includes the return address, which is the address of the next instruction in the interrupted program. This value is restored to the PC at exception return so that the interrupted program resumes.

In parallel with the stacking operation, the processor performs a vector fetch that reads the exception handler start address from the vector table. When stacking is complete, the processor starts executing the exception handler. At the same time, the processor writes an EXC_RETURN value to the LR, indicating which stack pointer corresponds to the stack frame and what operation mode the processor was in before the entry occurred.

If no higher-priority exception occurs during exception entry, the processor starts executing the exception handler and automatically changes the status of the corresponding pending interrupt to active.

If another higher-priority exception occurs during exception entry, known as late arrival, the processor starts executing the exception handler for this exception and does not change the pending status of the earlier exception.

2.2.5 Fault Handling

Faults are a subset of the exceptions (see [Section 2.2.4](#)). The following conditions generate a fault:

- A bus error on an instruction fetch, vector table load, or a data access.
- An internally detected error, such as an undefined instruction or an attempt to change state with a BX instruction.
- Attempting to execute an instruction from a memory region marked as non-executable (XN).

2.2.5.1 Fault Types

[Table 2-8](#) shows the types of fault, the handler used for the fault, the corresponding fault status register, and the register bit that indicates the fault has occurred.

Table 2-8. Faults

Fault	Handler	Fault Status Register	Bit Name
Bus error on a vector read	Hard fault	Hard Fault Status (HFAULTSTAT)	VECT
Fault escalated to a hard fault	Hard fault	Hard Fault Status (HFAULTSTAT)	FORCED
Default memory mismatch on instruction access	Memory management fault	Memory Management Fault Status (MFAULTSTAT)	IERR ⁽¹⁾
Default memory mismatch on data access	Memory management fault	Memory Management Fault Status (MFAULTSTAT)	DERR
Default memory mismatch on exception stacking	Memory management fault	Memory Management Fault Status (MFAULTSTAT)	MSTKE

⁽¹⁾ Occurs on an access to an XN region.

Table 2-8. Faults (continued)

Fault	Handler	Fault Status Register	Bit Name
Default memory mismatch on exception unstacking	Memory management fault	Memory Management Fault Status (MFAULTSTAT)	MUSTKE
Bus error during exception stacking	Bus fault	Bus Fault Status (BFAULTSTAT)	BSTKE
Bus error during exception unstacking	Bus fault	Bus Fault Status (BFAULTSTAT)	BUSTKE
Bus error during instruction prefetch	Bus fault	Bus Fault Status (BFAULTSTAT)	IBUS
Precise data bus error	Bus fault	Bus Fault Status (BFAULTSTAT)	PRECISE
Imprecise data bus error	Bus fault	Bus Fault Status (BFAULTSTAT)	IMPRE
Attempt to access a coprocessor	Usage fault	Usage Fault Status (UFAULTSTAT)	NOCP
Undefined instruction	Usage fault	Usage Fault Status (UFAULTSTAT)	UNDEF
Attempt to enter an invalid instruction set state ⁽²⁾	Usage fault	Usage Fault Status (UFAULTSTAT)	INVSTAT
Invalid EXC_RETURN value	Usage fault	Usage Fault Status (UFAULTSTAT)	INVPC
Illegal unaligned load or store	Usage fault	Usage Fault Status (UFAULTSTAT)	UNALIGN
Divide by 0	Usage fault	Usage Fault Status (UFAULTSTAT)	DIV0

⁽²⁾ Attempting to use an instruction set other than the Thumb instruction set, or returning to a non load-store-multiple instruction with ICI continuation

2.2.5.2 Fault Escalation and Hard Faults

All fault exceptions except for hard fault have configurable exception priority (see SYSPRI1 in [Section 3.3.1.17](#)). Software can disable execution of the handlers for these faults (see SYSHNDCTRL).

Usually the exception priority, together with the values of the exception mask registers, determines whether the processor enters the fault handler, and whether a fault handler can preempt another fault handler as described in [Section 2.2.4](#).

In some situations, a fault with configurable priority is treated as a hard fault. This process is called priority escalation, and the fault is described as escalated to hard fault. Escalation to hard fault occurs when:

- A fault handler causes the same kind of fault as the one it is servicing. This escalation to hard fault occurs because a fault handler cannot preempt itself, as it must have the same priority as the current priority level.
- A fault handler causes a fault with the same or lower priority as the fault it is servicing. This situation happens because the handler for the new fault cannot preempt the currently executing fault handler.
- An exception handler causes a fault for which the priority is the same as or lower than the currently executing exception.
- A fault occurs and the handler for that fault is not enabled.

If a bus fault occurs during a stack push when entering a bus fault handler, the bus fault does not escalate to a hard fault. Thus, if a corrupted stack causes a fault, the fault handler executes even though the stack push for the handler failed. The fault handler operates but the stack contents are corrupted.

NOTE: Only reset and NMI can preempt the fixed-priority hard fault. A hard fault can preempt any exception other than reset, NMI, or another hard fault.

2.2.5.3 Fault Status Registers and Fault Address Registers

The fault status registers indicate the cause of a fault. For bus faults and memory management faults, the fault address register indicates the address accessed by the operation that caused the fault, as shown in [Table 2-9](#).

Table 2-9. Fault Status and Fault Address Registers

Handler	Status Register Name	Address Register Name	Register Description
Hard fault	Hard Fault Status (HFAULTSTAT)	-	Section 3.3.1.22
Memory management fault	Memory Management Fault Status (MFAULTSTAT)	Memory Management Fault Address (MMADDR)	Section 3.3.1.23
Bus fault	Bus Fault Status (BFAULTSTAT)	Bus Fault Address (FAULTADDR)	Section 3.3.1.23
Usage fault	Usage Fault Status (UFAULTSTAT)	-	Section 3.3.1.23

2.2.5.4 Lockup

The processor enters a lockup state if a hard fault occurs when executing the NMI or hard fault handlers. When the processor is in the lockup state, it does not execute any instructions. The processor remains in lockup state until it is reset, an NMI occurs, or it is halted by a debugger.

2.2.6 Power Management

The CC3200 Wi-Fi microcontroller is a multi-processor system-on-chip. An advanced power management scheme has been implemented at chip level that delivers the best-in-class energy efficiency across a wide class of application profiles, while handling the asynchronous sleep-wake requirements of multiple high performance processors and Wi-Fi radio subsystems. The Cortex-M4 application processor subsystem (consisting of the CM4 core and application peripherals) is a subset of this.

The chip-level power management scheme is such that the application program is unaware of the power state transitions of the other subsystems. This approach insulates the user from the complexities of a multi-processor system and simplifies the application development process.

From the Cortex-M4 application processor standpoint, CC3200 supports the typical SLEEP and DEEPSLEEP modes similar to those in discrete microcontrollers. The following section describe these two modes.


In addition to SLEEP and DEEPSLEEP, two additional sleep modes are offered. These two modes consume much lower power than the DEEPSLEEP mode in CC3200.

- Low Power Deep Sleep Mode (LPDS)
 - Recommended for ultra-low power always-connected cloud and Wi-Fi applications
 - Up to 256Kbyte of SRAM retention and fast wakeup (<5 mS)
 - When networking and Wi-Fi subsystems are disabled, the MCU draws less than 100 μ A with 256Kbyte of SRAM retained (code and data). Total system current (incl Wi-Fi and network periodic wake-up) as low as 700 μ A
 - Processor and peripheral registers are not retained. Global always ON configurations at SoC level are retained.
- Hibernate Mode (HIB)
 - Recommended for ultra-low power in-frequently connected cloud and Wi-Fi applications
 - Ultra low current of 4 μ A, including RTC
 - Wake on RTC or selected GPIO
 - No SRAM or logic retention. 2 \times 32 bit register retention.

LPDS and HIB modes will be covered in more detail in the *Power Clock and Reset Management* chapter.

Figure 2-7 shows the architecture of the CC3200 SoC level power management, especially from the application point of view.

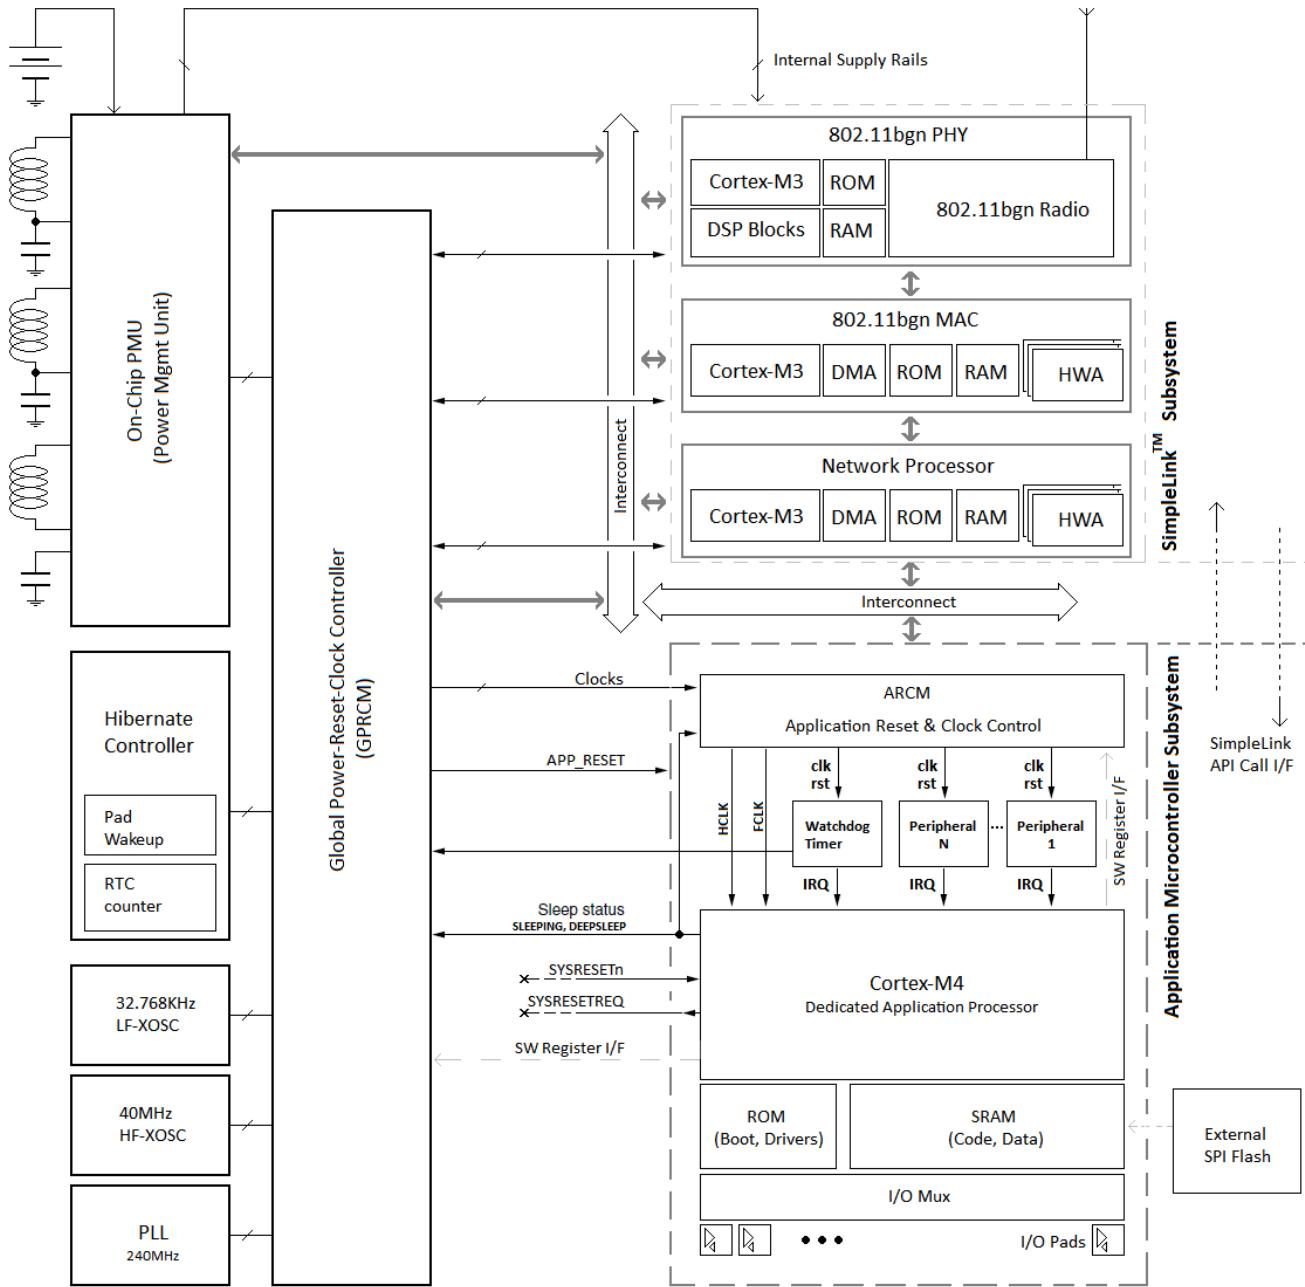Figure 2-7. Power Management Architecture in CC3200 SoC



The Cortex-M4 processor implementation inside the CC3200 multiprocessor SoC has a few differences when compared to a discrete MCU. While typical SLEEP and DEEPSLEEP modes are supported, in the CC3200 these two modes are limited in energy consumption savings.

Ultra-low power applications should be architected such that time spent in LPDS or hibernate mode is maximized. The Cortex-M4 application processor can be configured wake up on selected events, for example network events such as an incoming data packet, timer, or I/O pad toggle. The time spent in RUN (or ACTIVE) state should then be minimized. The dedicated Cortex-M4 application processor in CC3200 is particularly suited for this mode of operation due to its advanced power management, DMA, zero wait state multi-layer AHB interconnect, fast execution and retention over the entire range of zero-wait state SRAM.

- SLEEP: Sleep mode stops the processor clock (clock gating).
- DEEPSLEEP: Deep-sleep mode stops the application process system clock and switches off the PLL.

2.2.7 Instruction Set Summary

The processor implements a version of the Thumb instruction set. [Table 2-10](#) lists the supported instructions.

Note: In this table:

- Angle brackets, < >, enclose alternative forms of the operand
- Braces, {} enclose optional operands
- The Operands column is not exhaustive
- Op2 is a flexible second operand that can be either a register or a constant
- Most instructions can use an optional condition code suffix

For more information on the instructions and operands, see the instruction descriptions in the *ARM® Cortex™-M4 Technical Reference Manual*.

Table 2-10. Cortex-M4 Instruction Summary

Mnemonic	Operands	Brief Description	Flags
ADC, ADCS	{Rd,} Rn, Op2	Add with carry	N,Z,C,V
ADD, ADDS	{Rd,} Rn, Op2	Add	N,Z,C,V
ADD, ADDW	{Rd,} Rn , #imm12	Add	-
ADR	Rd, label	Load PC-relative address	-
AND, ANDS	{Rd,} Rn, Op2	Logical AND	N,Z,C
ASR, ASRS	Rd, Rm, <Rs#n>	Arithmetic shift right	N,Z,C
B	label	Branch	-
BFC	Rd, #lsb, #width	Bit field clear	-
BFI	Rd, Rn, #lsb, #width	Bit field insert	-
BIC, BICS	{Rd,} Rn, Op2	Bit clear	N,Z,C
BKPT	#imm	Breakpoint	-
BL	label	Branch with link	-
BLX	Rm	Branch indirect with link	-
BX	Rm	Branch indirect	-
CBNZ	Rn, label	Compare and branch if non-zero	-
CBZ	Rn, label	Compare and branch if zero	-
CLREX	-	Clear exclusive	-
CLZ	Rd, Rm	Count leading zeros	-
CMN	Rn, Op2	Compare negative	N,Z,C,V
CMP	Rn, Op2	Compare	N,Z,C,V
CPSID	i	Change processor state, disable interrupts	-
CPSIE	i	Change processor state, enable interrupts	-
DMB	-	Data memory barrier	-
DSB	-	Data synchronization barrier	-

Table 2-10. Cortex-M4 Instruction Summary (continued)

EOR, EORS	{Rd,} Rn, Op2	Exclusive OR	N,Z,C
ISB	-	Instruction synchronization barrier	-
IT	-	If-Then condition block	-
LDM	Rn{!}, reglist	Load multiple registers, increment after	-
LDMDB, LDMEA	Rn{!}, reglist	Load multiple registers, decrement before	-
LDMFD, LDMIA	Rn{!}, reglist	Load multiple registers, increment after	-
LDR	Rt, [Rn, #offset]	Load register with word	-
LDRB, LDRBT	Rt, [Rn, #offset]	Load register with byte	-
LDRD	Rt, Rt2, [Rn, #offset]	Load register with two bytes	-
LDREX	Rt, [Rn, #offset]	Load register exclusive	-
LDREXB	Rt, [Rn]	Load register exclusive with byte	-
LDREXH	Rt, [Rn]	Load register exclusive with halfword	-
LDRH, LDRHT	Rt, [Rn, #offset]	Load register with halfword	-
LDRSB, LDRSBT	Rt, [Rn, #offset]	Load register with signed byte	-
LDRSH, LDRSHT	Rt, [Rn, #offset]	Load register with signed halfword	-
LDRT	Rt, [Rn, #offset]	Load register with word	-
LSL, LSLS	Rd, Rm, <Rs#n>	Logical shift left	N,Z,C
LSR, LSRS	Rd, Rm, <Rs#n>	Logical shift right	N,Z,C
MLA	Rd, Rn, Rm, Ra	Multiply with accumulate, 32-bit result	-
MLS	Rd, Rn, Rm, Ra	Multiply and subtract, 32-bit result	-
MOV, MOVS	Rd, Op2	Move	N,Z,C
MOV, MOVW	Rd, #imm16	Move 16-bit constant	N,Z,C
MOVT	Rd, #imm16	Move top	-
MRS	Rd, spec_reg	Move from special register to general register	-
MSR	spec_reg, Rm	Move from general register to special register	N,Z,C,V
MUL, MULS	{Rd,} Rn, Rm	Multiply, 32-bit result	N,Z
MVN, MVNS	Rd, Op2	Move NOT	N,Z,C
NOP	-	No operation	-
ORN, ORNS	{Rd,} Rn, Op2	Logical OR NOT	N,Z,C
ORR, ORRS	{Rd,} Rn, Op2	Logical OR	N,Z,C
PKHTB, PKHBT	{Rd,} Rn, Rm, Op2	Pack halfword	-
POP	reglist	Pop registers from stack	-
PUSH	reglist	Push registers onto stack	-
QADD	{Rd,} Rn, Rm	Saturating add	Q
QADD16	{Rd,} Rn, Rm	Saturating add 16	-
QADD8	{Rd,} Rn, Rm	Saturating add 8	-
QASX	{Rd,} Rn, Rm	Saturating add and subtract with exchange	-
QDADD	{Rd,} Rn, Rm	Saturating double and add	Q
QDSUB	{Rd,} Rn, Rm	Saturating double and subtract	Q

Table 2-10. Cortex-M4 Instruction Summary (continued)

QSAX	{Rd,} Rn, Rm	Saturating subtract and add with exchange	-
QSUB	{Rd,} Rn, Rm	Saturating subtract	Q
QSUB16	{Rd,} Rn, Rm	Saturating subtract 16	-
QSUB8	{Rd,} Rn, Rm	Saturating subtract 8	-
RBIT	Rd, Rn	Reverse bits	-
REV	Rd, Rn	Reverse byte order in a word	-
REV16	Rd, Rn	Reverse byte order in each halfword	-
REVSH	Rd, Rn	Reverse byte order in bottom halfword and sign extend	-
ROR, RORS	Rd, Rm, <Rs#n>	Rotate right	N,Z,C
RRX, RRXS	Rd, Rm	Rotate right with extend	N,Z,C
RSB, RSBS	{Rd,} Rn, Op2	Reverse subtract	N,Z,C,V
SADD16	{Rd,} Rn, Rm	Signed add 16	GE
SADD8	{Rd,} Rn, Rm	Signed add 8	GE
SASX	{Rd,} Rn, Rm	Signed add and subtract with exchange	GE
SBC, SBCS	{Rd,} Rn, Op2	Subtract with carry	N,Z,C,V
SBFX	Rd, Rn, #lsb, #width	Signed bit field extract	-
SDIV	{Rd,} Rn, Rm	Signed divide	-
SEL	{Rd,} Rn, Rm	Select bytes	-
SEV	-	Send event	-
SHADD16	{Rd,} Rn, Rm	Signed halving add 16	-
SHADD8	{Rd,} Rn, Rm	Signed halving add 8	-
SHASX	{Rd,} Rn, Rm	Signed halving add and subtract with exchange	-
SHSAX	{Rd,} Rn, Rm	Signed halving add and subtract with exchange	-
SHSUB16	{Rd,} Rn, Rm	Signed halving subtract 16	-
SHSUB8	{Rd,} Rn, Rm	Signed halving subtract 8	-
SMLABB, SMLABT, SMLATB, SMLATT	Rd, Rn, Rm, Ra	Signed multiply accumulate long (halfwords)	Q
SMLAD, SMLADX	Rd, Rn, Rm, Ra	Signed multiply accumulate dual	Q
SMLAL	RdLo, RdHi, Rn, Rm	Signed multiply with accumulate (32x32+64), 64-bit result	-
SMLALBB, SMLALBT, SMLALTB, SMLALTT	RdLo, RdHi, Rn, Rm	Signed multiply accumulate long (halfwords)	-
SMLALD, SMLALDX	RdLo, RdHi, Rn, Rm	Signed multiply accumulate long dual	-
SMLAWB,SMLAWT	Rd, Rn, Rm, Ra	Signed multiply accumulate, word by halfword	Q
SMLSD SMLSDX	Rd, Rn, Rm, Ra	Signed multiply subtract dual	Q
SMLSDF SMLSDFX	RdLo, RdHi, Rn, Rm	Signed multiply subtract long dual	
SMMLA	Rd, Rn, Rm, Ra	Signed most significant word multiply accumulate	-
SMMLS, SMMLR	Rd, Rn, Rm, Ra	Signed most significant word multiply subtract	-
SMMUL, SMMULR	{Rd,} Rn, Rm	Signed most significant word multiply	-
SMUAD SMUADX	{Rd,} Rn, Rm	Signed dual multiply add	Q

Table 2-10. Cortex-M4 Instruction Summary (continued)

SMULBB, SMULBT, SMULTB, SMULLT	{Rd,} Rn, Rm	Signed multiply halfwords	-
SMULL	RdLo, RdHi, Rn, Rm	Signed multiply (32x32), 64-bit result	-
SMULWB, SMULWT	{Rd,} Rn, Rm	Signed multiply by halfword	-
SMUSD, SMUSDX	{Rd,} Rn, Rm	Signed dual multiply subtract	-
SSAT	Rd, #n, Rm {,shift #s}	Signed saturate	Q
SSAT16	Rd, #n, Rm	Signed saturate 16	Q
SSAX	{Rd,} Rn, Rm	Saturating subtract and add with exchange	GE
SSUB16	{Rd,} Rn, Rm	Signed subtract 16	-
SSUB8	{Rd,} Rn, Rm	Signed subtract 8	-
STM	Rn{!}, reglist	Store multiple registers, increment after	-
Mnemonic	Operands	Brief Description	Flags
STMDB, STMEA	Rn{!}, reglist	Store multiple registers, decrement before	-
STMFD, STMIA	Rn{!}, reglist	Store multiple registers, increment after	-
STR	Rt, [Rn {, #offset}]	Store register word	-
STRB, STRBT	Rt, [Rn {, #offset}]	Store register byte	-
STRD	Rt, Rt2, [Rn {, #offset}]	Store register two words	-
STREX	Rt, Rt, [Rn {, #offset}]	Store register exclusive	-
STREXB	Rd, Rt, [Rn]	Store register exclusive byte	-
STREXH	Rd, Rt, [Rn]	Store register exclusive halfword	-
STRH, STRHT	Rt, [Rn {, #offset}]	Store register halfword	-
STRSB, STRSBT	Rt, [Rn {, #offset}]	Store register signed byte	-
STRSH, STRSHT	Rt, [Rn {, #offset}]	Store register signed halfword	-
STRT	Rt, [Rn {, #offset}]	Store register word	-
SUB, SUBS	{Rd,} Rn, Op2	Subtract	N,Z,C,V
SUB, SUBW	{Rd,} Rn, #imm12	Subtract 12-bit constant	N,Z,C,V
SVC	#imm	Supervisor call	-
SXTAB	{Rd,} Rn, Rm, {,ROR #}	Extend 8 bits to 32 and add	-
SXTAB16	{Rd,} Rn, Rm,{,ROR #}	Dual extend 8 bits to 16 and add	-
SXTAH	{Rd,} Rn, Rm,{,ROR #}	Extend 16 bits to 32 and add	-
SXTB16	{Rd,} Rm {,ROR #n}	Signed extend byte 16	-
SXTB	{Rd,} Rm {,ROR #n}	Sign extend a byte	-
SXTH	{Rd,} Rm {,ROR #n}	Sign extend a halfword	-
TBB	[Rn, Rm]	Table branch byte	-
TBH	[Rn, Rm, LSL #1]	Table branch halfword	-
TEQ	Rn, Op2	Test equivalence	N,Z,C
TST	Rn, Op2	Test	N,Z,C
UADD16	{Rd,} Rn, Rm	Unsigned add 16	GE
UADD8	{Rd,} Rn, Rm	Unsigned add 8	GE
UASX	{Rd,} Rn, Rm	Unsigned add and subtract with exchange	GE
UHADD16	{Rd,} Rn, Rm	Unsigned halving add 16	-
UHADD8	{Rd,} Rn, Rm	Unsigned halving add 8	-

Table 2-10. Cortex-M4 Instruction Summary (continued)

UHASX	{Rd,} Rn, Rm	Unsigned halving add and subtract with exchange	-
UHSAX	{Rd,} Rn, Rm	Unsigned halving subtract and add with exchange	-
UHSUB16	{Rd,} Rn, Rm	Unsigned halving subtract 16	-
UHSUB8	{Rd,} Rn, Rm	Unsigned halving subtract 8	-
UBFX	Rd, Rn, #lsb, #width	Unsigned bit field extract	-
UDIV	{Rd,} Rn, Rm	Unsigned divide	-
UMAAL	RdLo, RdHi, Rn, Rm	Unsigned multiply accumulate accumulate long (32x32+64), 64-bit result	-
UMLAL	RdLo, RdHi, Rn, Rm	Unsigned multiply with accumulate (32x32+32+32), 64-bit result	-
UMULL	RdLo, RdHi, Rn, Rm	Unsigned multiply (32x 2), 64-bit result	-
UQADD16	{Rd,} Rn, Rm	Unsigned Saturating Add 16	-
UQADD8	{Rd,} Rn, Rm	Unsigned Saturating Add 8	-
UQASX	{Rd,} Rn, Rm	Unsigned Saturating Add and Subtract with Exchange	-
UQSAX	{Rd,} Rn, Rm	Unsigned Saturating Subtract and Add with Exchange	-
UQSUB16	{Rd,} Rn, Rm	Unsigned Saturating Subtract 16	-
UQSUB8	{Rd,} Rn, Rm	Unsigned Saturating Subtract 8	-
USAD8	{Rd,} Rn, Rm	Unsigned Sum of Absolute Differences	-
USADA8	{Rd,} Rn, Rm, Ra	Unsigned Sum of Absolute Differences and Accumulate	-
USAT	Rd, #n, Rm {,shift #s}	Unsigned Saturate	Q
USAT16	Rd, #n, Rm	Unsigned Saturate 16	Q
USAX	{Rd,} Rn, Rm	Unsigned Subtract and add with Exchange	GE
USUB16	{Rd,} Rn, Rm	Unsigned Subtract 16	GE
USUB8	{Rd,} Rn, Rm	Unsigned Subtract 8	GE
UXTAB	{Rd,} Rn, Rm, {,ROR #}	Rotate, extend 8 bits to 32 and Add	-
UXTAB16	{Rd,} Rn, Rm, {,ROR #}	Rotate, dual extend 8 bits to 16 and Add	-
UXTAH	{Rd,} Rn, Rm, {,ROR #}	Rotate, unsigned extend and Add Halfword	-
UXTB	{Rd,} Rm, {,ROR #n}	Zero extend a Byte	-
UXTB16	{Rd,} Rm, {,ROR #n}	Unsigned Extend Byte 16	-
UXTH	{Rd,} Rm, {,ROR #n}	Zero extend a Halfword	-
WFE	-	Wait for event	-
WFI	-	Wait for interrupt	-

Cortex-M4 Peripherals

Topic	Page
3.1 Overview	59
3.2 Functional Description.....	59
3.3 Register Map	61

3.1 Overview

This chapter provides information on the CC3200 implementation of the Cortex-M4 application processor in CC3200 peripherals, including:

- SysTick (see [Section 3.2.1](#)) – Provides a simple, 24-bit clear-on-write, decrementing, wrap-on-zero counter with a flexible control mechanism.
- Nested Vectored Interrupt Controller (NVIC) (see [Section 3.2.2](#)) – Facilitates low-latency exception and interrupt handling, controls power management, and implements system control registers.
- System Control Block (SCB) (see [Section 3.2.3](#)) – Provides system implementation information and system control, including configuration, control, and reporting of system exceptions.

[Table 3-1](#) shows the address map of the private peripheral bus (PPB). Some peripheral register regions are split into two address regions, as indicated by two addresses listed.

Table 3-1. Core Peripheral Register Regions

Address	Core Peripheral
0xE000.E010-0xE000.E01F	System timer
0xE000.E100-0xE000.E4EF	Nested vectored interrupt controller
0xE000.EF00-0xE000.EF03	
0xE000.E008-0xE000.E00F 0xE000.ED00-0xE000.ED3F	System control block

3.2 Functional Description

This chapter provides information on the CC3200 implementation of the Cortex-M4 application processor in CC3200 peripherals: SysTick, NVIC, and SCB.

3.2.1 System Timer (SysTick)

SysTick is an integrated system timer which provides a simple, 24-bit clear-on-write, decrementing, wrap-on-zero counter with a flexible control mechanism. The counter can be used in several different ways:

- An RTOS tick timer that fires at a programmable rate (for example, 100 Hz) and invokes a SysTick routine.
- A high-speed alarm timer using the system clock.
- A variable rate alarm or signal timer – The duration is range-dependent on the reference clock used and the dynamic range of the counter.
- A simple counter measuring time to completion and time used.
- An internal clock source control based on missing or meeting durations. The COUNT bit in the STCTRL control and status register can be used to determine if an action completed within a set duration, as part of a dynamic clock management control loop.

When enabled, the timer counts down on each clock from the reload value to zero, reloads (wraps) to the value in the STRELOAD register on the next clock edge, then decrements on subsequent clocks. Clearing the STRELOAD register disables the counter on the next wrap. When the counter reaches zero, the COUNT status bit is set. The COUNT bit clears on reads.

Writing to the STCURRENT register clears the register and the COUNT status bit. The write does not trigger the SysTick exception logic. On a read, the current value is the value of the register at the time the register is accessed.

The SysTick counter runs on the system clock. If this clock signal is stopped for low power mode, the SysTick counter stops. Ensure software uses aligned word accesses to access the SysTick registers.

The SysTick counter reload and current value are undefined at reset; the correct initialization sequence for the SysTick counter is:

1. Program the value in the STRELOAD register.
2. Clear the STCURRENT register by writing to it with any value.

3. Configure the STCTRL register for the required operation.

NOTE: When the processor is halted for debugging, the counter does not decrement.

3.2.2 Nested Vectored Interrupt Controller (NVIC)

This section describes the nested vectored interrupt controller (NVIC) and the registers it uses. The NVIC supports:

- A programmable priority level of 0-7 for each interrupt. A higher level corresponds to a lower priority, so level 0 is the highest interrupt priority.
- Low-latency exception and interrupt handling
- Level and pulse detection of interrupt signals
- Dynamic reprioritization of interrupts
- Grouping of priority values into group priority and subpriority fields
- Interrupt tail-chaining
- An external non-maskable interrupt (NMI)

The processor automatically stacks its state on exception entry and unstacks this state on exception exit, with no instruction overhead, providing low latency exception handling.

3.2.2.1 Level-Sensitive and Pulse Interrupts

The processor supports both level-sensitive and pulse interrupts. Pulse interrupts are also described as edge-triggered interrupts.

A level-sensitive interrupt is held asserted until the peripheral deasserts the interrupt signal. Typically this happens because the ISR accesses the peripheral, causing it to clear the interrupt request. A pulse interrupt is an interrupt signal sampled synchronously on the rising edge of the processor clock. To ensure the NVIC detects the interrupt, the peripheral must assert the interrupt signal for at least one clock cycle, during which the NVIC detects the pulse and latches the interrupt.

When the processor enters the ISR, it automatically removes the pending state from the interrupt (see [Section 3.2.2.2](#) for more information). For a level-sensitive interrupt, if the signal is not deasserted before the processor returns from the ISR, the interrupt becomes pending again, and the processor must execute its ISR again. As a result, the peripheral can hold the interrupt signal asserted until it no longer needs servicing.

3.2.2.2 Hardware and Software Control of Interrupts

The Cortex-M4 latches all interrupts. A peripheral interrupt becomes pending for one of the following reasons:

- The NVIC detects that the interrupt signal is High and the interrupt is not active.
- The NVIC detects a rising edge on the interrupt signal.
- Software writes to the corresponding interrupt set-pending register bit, or to the Software Trigger Interrupt (SWTRIG) register to make a software-generated interrupt pending. See the INT bit in the PEND0 register or SWTRIG register.

A pending interrupt remains pending until one of the following:

- The processor enters the ISR for the interrupt, changing the state of the interrupt from pending to active. Then:
 - For a level-sensitive interrupt, when the processor returns from the ISR, the NVIC samples the interrupt signal. If the signal is asserted, the state of the interrupt changes to pending, which might cause the processor to immediately re-enter the ISR. Otherwise, the state of the interrupt changes to inactive.
 - For a pulse interrupt, the NVIC continues to monitor the interrupt signal, and if this is pulsed, the state of the interrupt changes to pending and active. In this case, when the processor returns from the ISR the state of the interrupt changes to pending, which might cause the processor to

immediately re-enter the ISR.

If the interrupt signal is not pulsed while the processor is in the ISR, when the processor returns from the ISR the state of the interrupt changes to inactive.

- Software writes to the corresponding interrupt clear-pending register bit
 - For a level-sensitive interrupt, if the interrupt signal is still asserted, the state of the interrupt does not change. Otherwise, the state of the interrupt changes to inactive.
 - For a pulse interrupt, the state of the interrupt changes to inactive, if the state was pending or to active, if the state was active and pending.

3.2.3 System Control Block (SCB)

The system control block (SCB) provides system implementation information and system control, including configuration, control, and reporting of the system exceptions.

3.3 Register Map

Table 3-2 lists the Cortex-M4 Peripheral SysTick, NVIC, and SCB registers. The offset listed is a hexadecimal increment to the address of the register, relative to the core peripherals base address of 0xE000 E000.

NOTE: Register spaces that are not used are reserved for future or internal use. Software should not modify any reserved memory address.

Table 3-2. Peripherals Register Map

Offset	Name	Type	Reset	Description
System Timer (SysTick) Registers				
0x010	STCTRL	R/W	0x0000.0000	SysTick Control and Status Register
0x014	STRELOAD	R/W	-	SysTick Reload Value Register
0x018	STCURRENT	R/WC	-	SysTick Current Value Register
Nested Vectored Interrupt Controller (NVIC) Registers				
0x100	EN0	R/W	0x0000.0000	Interrupt 0-31 Set Enable
0x104	EN1	R/W	0x0000.0000	Interrupt 32-63 Set Enable
0x108	EN2	R/W	0x0000.0000	Interrupt 64-95 Set Enable
0x10C	EN3	R/W	0x0000.0000	Interrupt 96-127 Set Enable
0x110	EN4	R/W	0x0000.0000	Interrupt 128-159 Set Enable
0x114	EN5	R/W	0x0000.0000	Interrupt 160- 191 Set Enable
0x118	EN6	R/W	0x0000.0000	Interrupt 192- 199 Set Enable
0x180	DIS0	R/W	0x0000.0000	Interrupt 0-31 Clear Enable
0x184	DIS1	R/W	0x0000.0000	Interrupt 32-63 Clear Enable
0x188	DIS2	R/W	0x0000.0000	Interrupt 64-95 Clear Enable
0x18C	DIS3	R/W	0x0000.0000	Interrupt 96-127 Clear Enable

Table 3-2. Peripherals Register Map (continued)

Offset	Name	Type	Reset	Description
0x190	DIS4	R/W	0x0000.0000	Interrupt 128-159 Clear Enable
0x194	DIS5	R/W	0x0000.0000	Interrupt 160-191 Clear Enable
0x198	DIS6	R/W	0x0000.0000	Interrupt 192 - 199 Clear Enable
0x200	PEND0	R/W	0x0000.0000	Interrupt 0-31 Set Pending
0x204	PEND1	R/W	0x0000.0000	Interrupt 32-63 Set Pending
0x208	PEND2	R/W	0x0000.0000	Interrupt 64-95 Set Pending
0x20C	PEND3	R/W	0x0000.0000	Interrupt 96-127 Set Pending
0x210	PEND4	R/W	0x0000.0000	Interrupt 128-159 Set Pending
0x214	PEND5	R/W	0x0000.0000	Interrupt 160-191 Set Pending
0x218	PEND6	R/W	0x0000.0000	Interrupt 192-199 Set Pending
0x280	UNPEND0	R/W	0x0000.0000	Interrupt 0-31 Clear Pending
0x284	UNPEND1	R/W	0x0000.0000	Interrupt 32-63 Clear Pending
0x288	UNPEND2	R/W	0x0000.0000	Interrupt 64-95 Clear Pending
0x28C	UNPEND3	R/W	0x0000.0000	Interrupt 96-127 Clear Pending
0x290	UNPEND4	R/W	0x0000.0000	Interrupt 128-159 Clear Pending
0x294	UNPEND5	R/W	0x0000.0000	Interrupt 160-191 Clear Pending
0x298	UNPEND6	R/W	0x0000.0000	Interrupt 192- 199 Clear Pending
0x300	ACTIVE0	RO	0x0000.0000	Interrupt 0-31 Active Bit
0x304	ACTIVE1	RO	0x0000.0000	Interrupt 32-63 Active Bit
0x308	ACTIVE2	RO	0x0000.0000	Interrupt 64-95 Active Bit
0x30C	ACTIVE3	RO	0x0000.0000	Interrupt 96-127 Active Bit
0x310	ACTIVE4	RO	0x0000.0000	Interrupt 128-159 Active Bit
0x314	ACTIVE5	RO	0x0000.0000	Interrupt 160-191 Active Bit
0x318	ACTIVE6	RO	0x0000.0000	Interrupt 192-199 Active Bit
0x400	PRI0	R/W	0x0000.0000	Interrupt 0-3 Priority
0x404	PRI1	R/W	0x0000.0000	Interrupt 4-7 Priority
0x408	PRI2	R/W	0x0000.0000	Interrupt 8-11 Priority
0x40C	PRI3	R/W	0x0000.0000	Interrupt 12-15 Priority
0x410	PRI4	R/W	0x0000.0000	Interrupt 16-19 Priority
0x414	PRI5	R/W	0x0000.0000	Interrupt 20-23 Priority
0x418	PRI6	R/W	0x0000.0000	Interrupt 24-27 Priority
0x41C	PRI7	R/W	0x0000.0000	Interrupt 28-31 Priority
0x420	PRI8	R/W	0x0000.0000	Interrupt 32-35 Priority

Table 3-2. Peripherals Register Map (continued)

Offset	Name	Type	Reset	Description
0x424	PRI9	R/W	0x0000.0000	Interrupt 36-39 Priority
0x428	PRI10	R/W	0x0000.0000	Interrupt 40-43 Priority
0x42C	PRI11	R/W	0x0000.0000	Interrupt 44-47 Priority
0x430	PRI12	R/W	0x0000.0000	Interrupt 48-51 Priority
0x434	PRI13	R/W	0x0000.0000	Interrupt 52-55 Priority
0x438	PRI14	R/W	0x0000.0000	Interrupt 56-59 Priority
0x43C	PRI15	R/W	0x0000.0000	Interrupt 60-63 Priority
0x440	PRI16	R/W	0x0000.0000	Interrupt 64-67 Priority
0x444	PRI17	R/W	0x0000.0000	Interrupt 68-71 Priority
0x448	PRI18	R/W	0x0000.0000	Interrupt 72-75 Priority
0x44C	PRI19	R/W	0x0000.0000	Interrupt 76-79 Priority
0x450	PRI20	R/W	0x0000.0000	Interrupt 80-83 Priority
0x454	PRI21	R/W	0x0000.0000	Interrupt 84-87 Priority
0x458	PRI22	R/W	0x0000.0000	Interrupt 88-91 Priority
0x45C	PRI23	R/W	0x0000.0000	Interrupt 92-95 Priority
0x460	PRI24	R/W	0x0000.0000	Interrupt 96-99 Priority
0x464	PRI25	R/W	0x0000.0000	Interrupt 100-103 Priority
0x468	PRI26	R/W	0x0000.0000	Interrupt 104-107 Priority
0x46C	PRI27	R/W	0x0000.0000	Interrupt 108-111 Priority
0x470	PRI28	R/W	0x0000.0000	Interrupt 112-115 Priority
0x474	PRI29	R/W	0x0000.0000	Interrupt 116-119 Priority
0x478	PRI30	R/W	0x0000.0000	Interrupt 120-123 Priority
0x47C	PRI31	R/W	0x0000.0000	Interrupt 124-127 Priority
0x480	PRI32	R/W	0x0000.0000	Interrupt 128-131 Priority
0x484	PRI33	R/W	0x0000.0000	Interrupt 132-135 Priority
0x488	PRI34	R/W	0x0000.0000	Interrupt 136-139 Priority
0x48C	PRI35	R/W	0x0000.0000	Interrupt 140-143 Priority
0x490	PRI36	R/W	0x0000.0000	Interrupt 144-147 Priority
0x494	PRI37	R/W	0x0000.0000	Interrupt 148-151 Priority
0x498	PRI38	R/W	0x0000.0000	Interrupt 152-155 Priority
0x49C	PRI39	R/W	0x0000.0000	Interrupt 156-159 Priority
0x4A0	PRI40	R/W	0x0000.0000	Interrupt 160-163 Priority
0x4A4	PRI41	R/W	0x0000.0000	Interrupt 164-167 Priority
0x4A8	PRI42	R/W	0x0000.0000	Interrupt 168-171 Priority

Table 3-2. Peripherals Register Map (continued)

Offset	Name	Type	Reset	Description
0x4AC	PRI43	R/W	0x0000.0000	Interrupt 172-175 Priority
0x4B0	PRI44	R/W	0x0000.0000	Interrupt 176-179 Priority
0x4B4	PRI45	R/W	0x0000.0000	Interrupt 180-183 Priority
0x4B8	PRI46	R/W	0x0000.0000	Interrupt 184-187 Priority
0x4BC	PRI47	R/W	0x0000.0000	Interrupt 188-191 Priority
0x4C0	PRI48	R/W	0x0000.0000	Interrupt 192-195 Priority
0x4C4	PRI49	R/W	0x0000.0000	Interrupt 196-199 Priority
0xF00	SWTRIG	WO	0x0000.0000	Software Trigger Interrupt
System Control Block (SCB) Registers				
0x008	ACTLR	R/W	0x0000.0000	Auxiliary Control
0xD00	CPUID	RO	0x410F.C241	CPU ID Base
0xD04	INTCTRL	R/W	0x0000.0000	Interrupt Control and State
0xD08	VTABLE	R/W	0x0000.0000	Vector Table Offset
0xD0C	APINT	R/W	0xFA05.0000	Application Interrupt and Reset Control
0xD10	SYSCTRL	R/W	0x0000.0000	System Control
0xD14	CFGCTRL	R/W	0x0000.0200	Configuration and Control
0xD18	SYSPRI1	R/W	0x0000.0000	System Handler Priority 1
0xD1C	SYSPRI2	R/W	0x0000.0000	System Handler Priority 2
0xD20	SYSPRI3	R/W	0x0000.0000	System Handler Priority 3
0xD24	SYSHNDCTRL	R/W	0x0000.0000	System Handler Control and State
0xD28	FAULTSTAT	R/W1C	0x0000.0000	Configurable Fault Status
0xD2C	HFAULTSTAT	R/W1C	0x0000.0000	Hard Fault Status
0xD34	MMADDR	R/W	-	Memory Management Fault Address
0xD38	FAULTADDR	R/W	-	Bus Fault Address

3.3.1 PERIPHERAL Registers

Table 3-3 lists the memory-mapped registers for the PERIPHERAL. All register offset addresses not listed in [Table 3-3](#) should be considered as reserved locations and the register contents should not be modified.

The offset listed is a hexadecimal increment to the register's address, relative to the Core Peripherals base address of 0xE000.E000.

Note: Register spaces that are not used are reserved for future or internal use. Software should not modify any reserved memory address.

Table 3-3. PERIPHERAL REGISTERS


Offset	Acronym	Register Name	Section
8h	ACTLR	Auxiliary Control	Section 3.3.1.1
10h	STCTRL	SysTick Control and Status Register	Section 3.3.1.2
14h	STRELOAD	SysTick Reload Value Register	Section 3.3.1.3
18h	STCURRENT	SysTick Current Value Register	Section 3.3.1.4
100h to 118h	EN_0 to EN_6	Interrupt Set Enable	Section 3.3.1.5
180h to 198h	DIS_0 to DIS_6	Interrupt Clear Enable	Section 3.3.1.6
200h to 218h	PEND_0 to PEND_6	Interrupt Set Pending	Section 3.3.1.7
280h to 298h	UNPEND_0 to UNPEND_6	Interrupt Clear Pending	Section 3.3.1.8
300h to 318h	ACTIVE_0 to ACTIVE_6	Interrupt Active Bit	Section 3.3.1.9
400h to 4C4h	PRI_0 to PRI_49	Interrupt Priority	Section 3.3.1.10
D00h	CPUID	CPU ID Base	Section 3.3.1.11
D04h	INTCTRL	Interrupt Control and State	Section 3.3.1.12
D08h	VTABLE	Vector Table Offset	Section 3.3.1.13
D0Ch	APINT	Application Interrupt and Reset Control	Section 3.3.1.14
D10h	SYSCTRL	System Control	Section 3.3.1.15
D14h	CFGCTRL	Configuration Control	Section 3.3.1.16
D18h	SYSPRI1	System Handler Priority 1	Section 3.3.1.17
D1Ch	SYSPRI2	System Handler Priority 2	Section 3.3.1.18
D20h	SYSPRI3	System Handler Priority 3	Section 3.3.1.19
D24h	SYSHNDCTRL	System Handler Control and State	Section 3.3.1.20
D28h	FAULTSTAT	Configurable Fault Status	Section 3.3.1.21
D2Ch	HFAULTSTAT	Hard Fault Status	Section 3.3.1.22
D38h	FAULTDDR	Bus Fault Address	Section 3.3.1.23
F00h	SWTRIG	Software Trigger Interrupt	Section 3.3.1.24

3.3.1.1 ACTLR Register (offset = 8h) [reset = 0h]

ACTLR is shown in [Figure 3-1](#) and described in [Table 3-4](#).

NOTE: his register can only be accessed from privileged mode. The ACTLR register provides disable bits for IT folding, write buffer use for accesses to the default memory map, and interruption of multi-cycle instructions. By default, this register is set to provide optimum performance from the Cortex-M4 application processor in CC3200 and does not normally require modification.

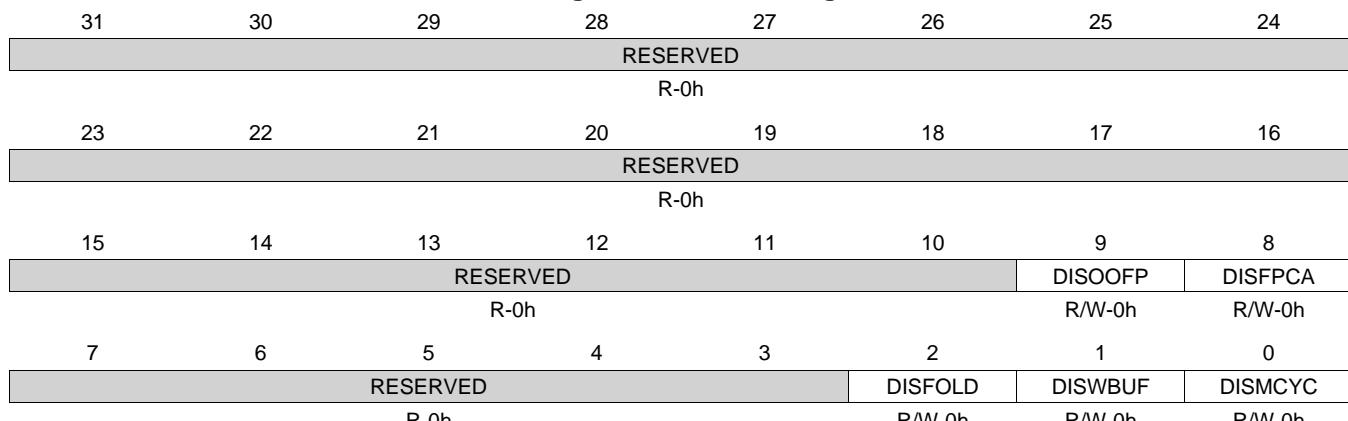Figure 3-1. ACTLR Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-4. ACTLR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-10	RESERVED	R	0h	
9	DISOOPF	R/W	0h	Disable Out-Of-Order Floating Point. N/A for CC3200.
8	DISFPCA	R/W	0h	
7-3	RESERVED	R	0h	
2	DISFOLD	R/W	0h	Disable IT Folding In some situations, the processor can start executing the first instruction in an IT block while it is still executing the IT instruction. This behavior is called IT folding, and improves performance, However, IT folding can cause jitter in looping. If a task must avoid jitter, set the DISFOLD bit before executing the task, to disable IT folding. 0h = No effect. 1h = Disables IT folding.
1	DISWBUF	R/W	0h	Disable IT Folding In some situations, the processor can start executing the first instruction in an IT block while it is still executing the IT instruction. This behavior is called IT folding, and improves performance, However, IT folding can cause jitter in looping. If a task must avoid jitter, set the DISFOLD bit before executing the task, to disable IT folding. 0h = No effect. 1h = Disables IT folding.
0	DISMCYC	R/W	0h	Disable Interrupts of Multiple Cycle Instructions In this situation, the interrupt latency of the processor is increased because any LDM or STM must complete before the processor can stack the current state and enter the interrupt handler. 0h = No effect. 1h = Disables interruption of load multiple and store multiple instructions.

3.3.1.2 STCTRL Register (offset = 10h) [reset = 0h]

STCTRL is shown in [Figure 3-2](#) and described in [Table 3-5](#).

NOTE: This register can only be accessed from privileged mode. The SysTick **STCTRL** register enables the SysTick features.

Figure 3-2. STCTRL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED				CLK_SRC		INTEN	ENABLE
R-0h				R/W-0h		R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-5. STCTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-17	RESERVED	R	0h	
16	COUNT	R	0h	Count Flag This bit is cleared by a read of the register or if the STCURRENT register is written with any value. If read by the debugger using the DAP, this bit is cleared only if the MasterType bit in the AHB-AP Control Register is clear. Otherwise, the COUNT bit is not changed by the debugger read. See the ARM Debug Interface V5 Architecture Specification for more information on MasterType. 0h = The SysTick timer has not counted to 0 since the last time this bit was read. 1h = The SysTick timer has counted to 0 since the last time this bit was read.
15-3	RESERVED	R	0h	
2	CLK_SRC	R/W	0h	Clock Source 0h = Precision internal oscillator (PIOSC) divided by 4 1h = System clock
1	INTEN	R/W	0h	Interrupt Enable 0h = Interrupt generation is disabled. Software can use the COUNT bit to determine if the counter has ever reached 0. 1h = An interrupt is generated to the NVIC when SysTick counts to 0.
0	ENABLE	R/W	0h	Enable 0h = The counter is disabled. 1h = Enables SysTick to operate in a multi-shot way. That is, the counter loads the RELOAD value and begins counting down. On reaching 0, the COUNT bit is set and an interrupt is generated if enabled by INTEN. The counter then loads the RELOAD value again and begins counting.

3.3.1.3 STRELOAD Register (offset = 14h) [reset = 0h]

STRELOAD is shown in [Figure 3-3](#) and described in [Table 3-6](#).

NOTE: This register can only be accessed from privileged mode. The **STRELOAD** register specifies the start value to load into the **SysTick Current Value (STCURRENT)** register when the counter reaches 0. The start value can be between 0x1 and 0x00FF.FFFF. A start value of 0 is possible but has no effect because the SysTick interrupt and the COUNT bit are activated when counting from 1 to 0. SysTick can be configured as a multi-shot timer, repeated over and over, firing every N+1 clock pulses, where N is any value from 1 to 0x00FF.FFFF. For example, if a tick interrupt is required every 100 clock pulses, 99 must be written into the RELOAD field. Note that in order to access this register correctly, the system clock must be faster than 8 MHz.

Figure 3-3. STRELOAD Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																RELOAD															
R-0h																R/W-0h															

LEGEND: R/W = Read/Write; R = Read only; W1toCI = Write 1 to clear bit; -n = value after reset

Table 3-6. STRELOAD Register Field Descriptions

Bit	Field	Type	Reset	Description
31-24	RESERVED	R	0h	
23-0	RELOAD	R/W	0h	Reload Value Value to load into the SysTick Current Value (STCURRENT) register when the counter reaches 0.

3.3.1.4 STCURRENT Register (offset = 18h) [reset = 0h]

STCURRENT is shown in [Figure 3-4](#) and described in [Table 3-7](#).

NOTE: This register can only be accessed from privileged mode. The **STCURRENT** register contains the current value of the SysTick counter.

Figure 3-4. STCURRENT Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED								CURRENT																R/WC-0h							
R-0h																R/WC-0h															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-7. STCURRENT Register Field Descriptions


Bit	Field	Type	Reset	Description
31-24	RESERVED	R	0h	
23-0	CURRENT	R/WC	0h	Current Value This field contains the current value at the time the register is accessed. No read-modify-write protection is provided, so change with care. This register is write-clear. Writing to it with any value clears the register. Clearing this register also clears the COUNT bit of the STCTRL register.

3.3.1.5 EN_0 to EN_6 Register (offset = 100h to 118h) [reset = 0h]

EN_0 to EN_6 is shown in [Figure 3-5](#) and described in [Table 3-8](#).

NOTE: This register can only be accessed from privileged mode. The ENn registers enable interrupts and show which interrupts are enabled. Bit 0 of EN0 corresponds to Interrupt 0; bit 31 corresponds to Interrupt 31. Bit 0 of EN1 corresponds to Interrupt 32; bit 31 corresponds to Interrupt 63. Bit 0 of EN2 corresponds to Interrupt 64; bit 31 corresponds to Interrupt 95. Bit 0 of EN3 corresponds to Interrupt 96; bit 31 corresponds to Interrupt 127. Bit 0 of EN4 corresponds to Interrupt 128; bit 31 corresponds to Interrupt 159. Bit 0 of EN5 corresponds to Interrupt 160; bit 31 corresponds to Interrupt 191. Bit 0 of EN6 corresponds to interrupt 192; bit 7 corresponds to interrupt 199. If a pending interrupt is enabled, the NVIC activates the interrupt based on its priority. If an interrupt is not enabled, asserting its interrupt signal changes the interrupt state to pending, but the NVIC never activates the interrupt, regardless of its priority.

Figure 3-5. EN_0 to EN_6 Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-8. EN_0 to EN_6 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	INT	R/W	0h	<p>Interrupt Enable A bit can only be cleared by setting the corresponding INT[n] bit in the DISn register.</p> <p>0h (W) = On a write, no effect.</p> <p>0h (R) = On a read, indicates the interrupt is disabled.</p> <p>1h (W) = On a write, enables the interrupt.</p> <p>1h (R) = On a read, indicates the interrupt is enabled.</p>

3.3.1.6 DIS_0 to DIS_6 Register (offset = 180h to 198h) [reset = 0h]

DIS_0 to DIS_6 is shown in [Figure 3-6](#) and described in [Table 3-9](#).

NOTE: This register can only be accessed from privileged mode. The DISn registers disable interrupts. Bit 0 of DIS0 corresponds to Interrupt 0; bit 31 corresponds to Interrupt 31. Bit 0 of DIS1 corresponds to Interrupt 32; bit 31 corresponds to Interrupt 63. Bit 0 of DIS2 corresponds to Interrupt 64; bit 31 corresponds to Interrupt 95. Bit 0 of DIS3 corresponds to Interrupt 96; bit 31 corresponds to Interrupt 127. Bit 0 of DIS4 corresponds to Interrupt 128; bit 31 corresponds to Interrupt 159. Bit 0 of DIS5 corresponds to Interrupt 160; bit 31 corresponds to Interrupt 191. Bit 0 of DIS6 corresponds to Interrupt 192; bit 7 corresponds to Interrupt 199.

Figure 3-6. DIS_0 to DIS_6 Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
INT																															
R/W-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-9. DIS_0 to DIS_6 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	INT	R/W	0h	Interrupt Disable EN5 (for DIS5) register EN6 (for DIS6) register 0h (R) = On a read, indicates the interrupt is disabled. 1h (W) = On a write, no effect. 1h (R) = On a read, indicates the interrupt is enabled.

3.3.1.7 PEND_0 to PEND_6 Register (offset = 200h to 218h) [reset = 0h]

PEND_0 to PEND_6 is shown in [Figure 3-7](#) and described in [Table 3-10](#).

NOTE: This register can only be accessed from privileged mode. The PENDn registers force interrupts into the pending state and show which interrupts are pending. Bit 0 of PEND0 corresponds to Interrupt 0; bit 31 corresponds to Interrupt 31. Bit 0 of PEND1 corresponds to Interrupt 32; bit 31 corresponds to Interrupt 63. Bit 0 of PEND2 corresponds to Interrupt 64; bit 31 corresponds to Interrupt 95. Bit 0 of PEND3 corresponds to Interrupt 96; bit 31 corresponds to Interrupt 127. Bit 0 of PEND4 corresponds to Interrupt 128; bit 31 corresponds to Interrupt 159. Bit 0 of PEND5 corresponds to Interrupt 160; bit 31 corresponds to Interrupt 191. Bit 0 of PEND6 corresponds to Interrupt 192; bit 7 corresponds to Interrupt 199.

Figure 3-7. PEND_0 to PEND_6 Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
INT																															
R/W-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-10. PEND_0 to PEND_6 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	INT	R/W	0h	<p>Interrupt Set Pending If the corresponding interrupt is already pending, setting a bit has no effect.</p> <p>A bit can only be cleared by setting the corresponding INT[n] bit in the UNPEND0 (for PEND0 to PEND3) register UNPEND4 (for PEND4) register UNPEND5 (for PEND5) register UNPEND6 (for PEND6) register</p> <p>0h (W) = On a write, no effect.</p> <p>0h (R) = On a read, indicates that the interrupt is not pending.</p> <p>1h (W) = On a write, the corresponding interrupt is set to pending even if it is disabled.</p> <p>1h (R) = On a read, indicates that the interrupt is pending.</p>

3.3.1.8 UNPEND_0 to UNPEND_6 Register (offset = 280h to 298h) [reset = 0h]

UNPEND_0 to UNPEND_6 is shown in [Figure 3-8](#) and described in [Table 3-11](#).

NOTE: This register can only be accessed from privileged mode. The UNPENDn registers show which interrupts are pending and remove the pending state from interrupts. Bit 0 of UNPEND0 corresponds to Interrupt 0; bit 31 corresponds to Interrupt 31. Bit 0 of UNPEND1 corresponds to Interrupt 32; bit 31 corresponds to Interrupt 63. Bit 0 of UNPEND2 corresponds to Interrupt 64; bit 31 corresponds to Interrupt 95. Bit 0 of UNPEND3 corresponds to Interrupt 96; bit 31 corresponds to Interrupt 127. Bit 0 of UNPEND4 corresponds to Interrupt 128; bit 10 corresponds to Interrupt 159. Bit 0 of UNPEND5 corresponds to Interrupt 160; bit 31 corresponds to interrupt 191. Bit 0 of UNPEND6 corresponds to Interrupt 192; bit 7 corresponds to Interrupt 199.

Figure 3-8. UNPEND_0 to UNPEND_6 Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
INT																															
R/W-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-11. UNPEND_0 to UNPEND_6 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	INT	R/W	0h	<p>Interrupt Clear Pending Setting a bit does not affect the active state of the corresponding interrupt. 0h (W) = On a write, no effect. 0h (R) = On a read, indicates that the interrupt is not pending. 1h (W) = On a write, clears the corresponding INT[n] bit in the PEND0 (for UNPEND0 to UNPEND3) register PEND4 (for UNPEND4) register PEND5 (for UNPEND5) register PEND6 (for UNPEND6) register so that interrupt [n] is no longer pending. 1h (R) = On a read, indicates that the interrupt is pending.</p>

3.3.1.9 ACTIVE_0 to ACTIVE_6 Register (offset = 300h to 318h) [reset = 0h]

ACTIVE_0 to ACTIVE_6 is shown in [Figure 3-9](#) and described in [Table 3-12](#).

The UNPENDn registers indicate which interrupts are active. Bit 0 of ACTIVE0 corresponds to Interrupt 0; bit 31 corresponds to Interrupt 31. Bit 0 of ACTIVE1 corresponds to Interrupt 32; bit 31 corresponds to Interrupt 63. Bit 0 of ACTIVE2 corresponds to Interrupt 64; bit 31 corresponds to Interrupt 95. Bit 0 of ACTIVE3 corresponds to Interrupt 96; bit 31 corresponds to Interrupt 127. Bit 0 of ACTIVE4 corresponds to Interrupt 128; bit 31 corresponds to Interrupt 159. Bit 0 of ACTIVE5 corresponds to Interrupt 160; bit 31 corresponds to Interrupt 191. Bit 0 of ACTIVE6 corresponds to Interrupt 192; bit 7 corresponds to Interrupt 199. **CAUTION:** Do not manually set or clear the bits in this register.

Figure 3-9. ACTIVE_0 to ACTIVE_6 Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
INT																															
R-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-12. ACTIVE_0 to ACTIVE_6 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	INT	R	0h	Interrupt Active 0h = The corresponding interrupt is not active. 1h = The corresponding interrupt is active, or active and pending.

3.3.1.10 PRI_0 to PRI_49 Register (offset = 400h to 4C4h) [reset = 0h]

PRI_0 to PRI_49 is shown in [Figure 3-10](#) and described in [Table 3-13](#).

NOTE: This register can only be accessed from privileged mode. The PRIn registers provide 3-bit priority fields for each interrupt. These registers are byte accessible. Each register holds four priority fields that are assigned to interrupts as follows: bits 31 to 29 have interrupt [4n+3], bits 23 to 21 have interrupt [4n+2], bits 15 to 13 have interrupt [4n+1], and bits 7 to have interrupt [4n]. Each priority level can be split into separate group priority and subpriority fields. The PRIGROUP field in the Application Interrupt and Reset Control (APINT) register indicates the position of the binary point that splits the priority and subpriority fields. These registers can only be accessed from privileged mode.

Figure 3-10. PRI_0 to PRI_49 Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
INTD		RESERVED				INTC		RESERVED							
R/W-0h		R-0h				R/W-0h		R-0h							
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
INTB		RESERVED				INTA		RESERVED							
R/W-0h		R-0h				R/W-0h		R-0h							

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-13. PRI_0 to PRI_49 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-29	INTD	R/W	0h	Interrupt Priority for Interrupt [4n+3] This field holds a priority value, 0-7, for the interrupt with the number [4n+3], where n is the number of the Interrupt Priority register (n=0 for PRI0, and so on). The lower the value, the greater the priority of the corresponding interrupt.
28-24	RESERVED	R	0h	
23-21	INTC	R/W	0h	Interrupt Priority for Interrupt [4n+2] This field holds a priority value, 0-7, for the interrupt with the number [4n+2], where n is the number of the Interrupt Priority register (n=0 for PRI0, and so on). The lower the value, the greater the priority of the corresponding interrupt.
20-16	RESERVED	R	0h	
15-13	INTB	R/W	0h	Interrupt Priority for Interrupt [4n+1] This field holds a priority value, 0-7, for the interrupt with the number [4n+1], where n is the number of the Interrupt Priority register (n=0 for PRI0, and so on). The lower the value, the greater the priority of the corresponding interrupt.
12-8	RESERVED	R	0h	
7-5	INTA	R/W	0h	Interrupt Priority for Interrupt [4n] This field holds a priority value, 0-7, for the interrupt with the number [4n], where n is the number of the Interrupt Priority register (n=0 for PRI0, and so on). The lower the value, the greater the priority of the corresponding interrupt.
4-0	RESERVED	R	0h	

3.3.1.11 CPUID Register (offset = D00h) [reset = 410FC241h]

CPUID is shown in [Figure 3-11](#) and described in [Table 3-14](#).

NOTE: his register can only be accessed from privileged mode. The CPUID register contains the ARM Cortex -M4 processor part number, version, and implementation information.

Figure 3-11. CPUID Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
IMP					VAR					CON					PARTNO					REV											
R-41h					R-0h					R-Fh					R-C24h					R-1h											

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-14. CPUID Register Field Descriptions

Bit	Field	Type	Reset	Description
31-24	IMP	R	41h	Implementer Code 41h = ARM
23-20	VAR	R	0h	Variant Number 0h = The rn value in the rnpn product revision identifier, for example, the 0 in r0p0.
19-16	CON	R	Fh	Variant Number 0h = The rn value in the rnpn product revision identifier, for example, the 0 in r0p0.
15-4	PARTNO	R	C24h	Part Number C24h = Cortex-M4 application processor in CC3200.
3-0	REV	R	1h	Revision Number 1h = The pn value in the rnpn product revision identifier, for example, the 1 in r0p1.

3.3.1.12 INTCTRL Register (offset = D04h) [reset = 0h]

INTCTRL is shown in [Figure 3-12](#) and described in [Table 3-15](#).

Figure 3-12. INTCTRL Register

31	30	29	28	27	26	25	24
NMISET	RESERVED		PENDSV	UNPENDSV	PENDSTSET	PENDSTCLR	RESERVED
R/W-0h	R-0h		R/W-0h	W-0h	R/W-0h	W-0h	R-0h
23	22	21	20	19	18	17	16
ISRPRE	ISRPEND	RESERVED			VECPEND		
R-0h	R-0h	R-0h			R-0h		
15	14	13	12	11	10	9	8
	VECPEND			RETBASE		RESERVED	
	R-0h			R-0h		R-0h	
7	6	5	4	3	2	1	0
		VECACT					
			R-0h				

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-15. INTCTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31	NMISET	R/W	0h	NMI Set Pending Because NMI is the highest-priority exception, normally the processor enters the NMI exception handler as soon as it registers the setting of this bit, and clears this bit on entering the interrupt handler. A read of this bit by the NMI exception handler returns 1 only if the NMI signal is reasserted while the processor is executing that handler. 0h (W) = On a write, no effect. 0h (R) = On a read, indicates an NMI exception is not pending. 1h (W) = On a write, changes the NMI exception state to pending. 1h (R) = On a read, indicates an NMI exception is pending.
30-29	RESERVED	R	0h	
28	PENDSV	R/W	0h	PendSV Set Pending Setting this bit is the only way to set the PendSV exception state to pending. This bit is cleared by writing a 1 to the UNPENDSV bit. 0h (W) = On a write, no effect. 0h (R) = On a read, indicates a PendSV exception is not pending. 1h (W) = On a write, changes the PendSV exception state to pending. 1h (R) = On a read, indicates a PendSV exception is pending.
27	UNPENDSV	W	0h	PendSV Clear Pending This bit is write only on a register read, its value is unknown. 0h = On a write, no effect. 1h = On a write, removes the pending state from the PendSV exception.
26	PENDSTSET	R/W	0h	SysTick Set Pending This bit is cleared by writing a 1 to the PENDSTCLR bit. 0h (W) = On a write, no effect. 0h (R) = On a read, indicates a SysTick exception is not pending. 1h (W) = On a write, changes the SysTick exception state to pending. 1h (R) = On a read, indicates a SysTick exception is pending.

Table 3-15. INTCTRL Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
25	PENDSTCLR	W	0h	SysTick Clear Pending This bit is write only on a register read, its value is unknown. 0h = On a write, no effect. 1h = On a write, removes the pending state from the SysTick exception.
24	RESERVED	R	0h	
23	ISRPRE	R	0h	Debug Interrupt Handling This bit is only meaningful in Debug mode and reads as zero when the processor is not in Debug mode. 0h = The release from halt does not take an interrupt. 1h = The release from halt takes an interrupt.
22	ISRPEND	R	0h	Interrupt Pending This bit provides status for all interrupts excluding NMI and Faults. 0h = No interrupt is pending. 1h = An interrupt is pending.
21-20	RESERVED	R	0h	
19-12	VECPEND	R	0h	Interrupt Pending Vector Number This field contains the exception number of the highest priority pending enabled exception. The value indicated by this field includes the effect of the BASEPRI and FAULTMASK registers, but not any effect of the PRIMASK register. 7h- Ah = Reserved ... 0h = No exceptions are pending 1h = Reserved 2h = NMI 3h = Hard fault 4h = Memory management fault 5h = Bus fault 6h = Usage fault Bh = SVCall Ch = Reserved for Debug Dh = Reserved Eh = PendSV Fh = SysTick 10h = Interrupt Vector 0 11h = Interrupt Vector 1 D9h = Interrupt Vector 199
11	RETBASE	R	0h	Return to Base This bit provides status for all interrupts excluding NMI and Faults. This bit only has meaning if the processor is currently executing an ISR (the Interrupt Program Status (IPSR) register is non-zero). 0h = There are preempted active exceptions to execute. 1h = There are no active exceptions, or the currently executing exception is the only active exception.
10-8	RESERVED	R	0h	
7-0	VECACT	R	0h	Interrupt Pending Vector Number This field contains the active exception number. The exception numbers can be found in the description for the VECPEND field. If this field is clear, the processor is in Thread mode. This field contains the same value as the ISRNUM field in the IPSR register. Subtract 16 from this value to obtain the IRQ number required to index into the Interrupt Set Enable (ENn), Interrupt Clear Enable (DISn), Interrupt Set Pending (PENDn), Interrupt Clear Pending (UNPENDn), and Interrupt Priority (PRIn) registers.

3.3.1.13 VTABLE Register (offset = D08h) [reset = 0h]

VTABLE is shown in [Figure 3-13](#) and described in [Table 3-16](#).

NOTE: his register can only be accessed from privileged mode. The VTABLE register indicates the offset of the vector table base address from memory address 0x0000.0000.

Figure 3-13. VTABLE Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
OFFSET															RESERVED															R-0h	
R/W-0h															R-0h																

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-16. VTABLE Register Field Descriptions

Bit	Field	Type	Reset	Description
31-10	OFFSET	R/W	0h	Vector Table Offset When configuring the OFFSET field, the offset must be aligned to the number of exception entries in the vector table. Because there are 199 interrupts, the offset must be aligned on a 1024-byte boundary.
9-0	RESERVED	R	0h	

3.3.1.14 APINT Register (offset = D0Ch) [reset = FA050000h]

APINT is shown in [Figure 3-14](#) and described in [Table 3-17](#).

NOTE: his register can only be accessed from privileged mode. The APINT register provides priority grouping control for the exception model, endian status for data accesses, and reset control of the system. To write to this register, 0x05FA must be written to the VECTKEY field, otherwise the write is ignored. The PRIGROUP field indicates the position of the binary point that splits the INTx fields in the Interrupt Priority (PRIx) registers into separate group priority and subpriority fields. The bit numbers in the Group Priority Field and Subpriority Field columns in the table refer to the bits in the INTA field. For the INTB field, the corresponding bits are 15:13; for INTC, 23:21; and for INTD, 31:29. **NOTE:** Determining preemption of an exception uses only the group priority field. PRIGROUP Bit Field = Binary Point = Group Priority Field = Subpriority Field = Group Priorities = Subpriorities 0h-4h = bxxx = [7:5] = None = 8 = 1 5h = bxx.y = [7:6] = [5] = 4 = 2 6h = bx.yy = [7] = [6:5] = 2 = 4 7h = b.yyy = None = [7:5] = 1 = 8 INTx field showing the binary point. An x denotes a group priority field bit, and a y denotes a subpriority field bit.

Figure 3-14. APINT Register

31	30	29	28	27	26	25	24
VECTKEY							
R/W-FA05h							
23	22	21	20	19	18	17	16
VECTKEY							
R/W-FA05h							
15	14	13	12	11	10	9	8
ENDIANESS	RESERVED				PRIGROUP		
R-0h	R-0h				R/W-0h		
7	6	5	4	3	2	1	0
RESERVED					SYSRESREQ	VECTCLRACT	VECTRESET
R-0h					W-0h	W-0h	W-0h
W-0h					W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-17. APINT Register Field Descriptions


Bit	Field	Type	Reset	Description
31-16	VECTKEY	R/W	FA05h	Register Key This field is used to guard against accidental writes to this register. 0x05FA must be written to this field in order to change the bits in this register. On a read, 0xFA05 is returned.
15	ENDIANESS	R	0h	Data Endianess The CC3200 implementation uses only little-endian mode so this is cleared to 0.
14-11	RESERVED	R	0h	
10-8	PRIGROUP	R/W	0h	Interrupt Priority Grouping This field determines the split of group priority from subpriority
7-3	RESERVED	R	0h	
2	SYSRESREQ	W	0h	System Reset Request This bit is automatically cleared during the reset of the core and reads as 0. 0h = No effect. 1h = Resets the core and all on-chip peripherals except the Debug interface.
1	VECTCLRACT	W	0h	Clear Active NMI / Fault This bit is reserved for Debug use and reads as 0. This bit must be written as a 0, otherwise behavior is unpredictable.
0	VECTRESET	W	0h	System Reset This bit is reserved for Debug use and reads as 0. This bit must be written as a 0, otherwise behavior is unpredictable.

3.3.1.15 SYSCTRL Register (offset = D10h) [reset = 0h]

SYSCTRL is shown in [Figure 3-15](#) and described in [Table 3-18](#).

NOTE: his register can only be accessed from privileged mode. The SYSCTRL register controls features of entry to and exit from low-power state.

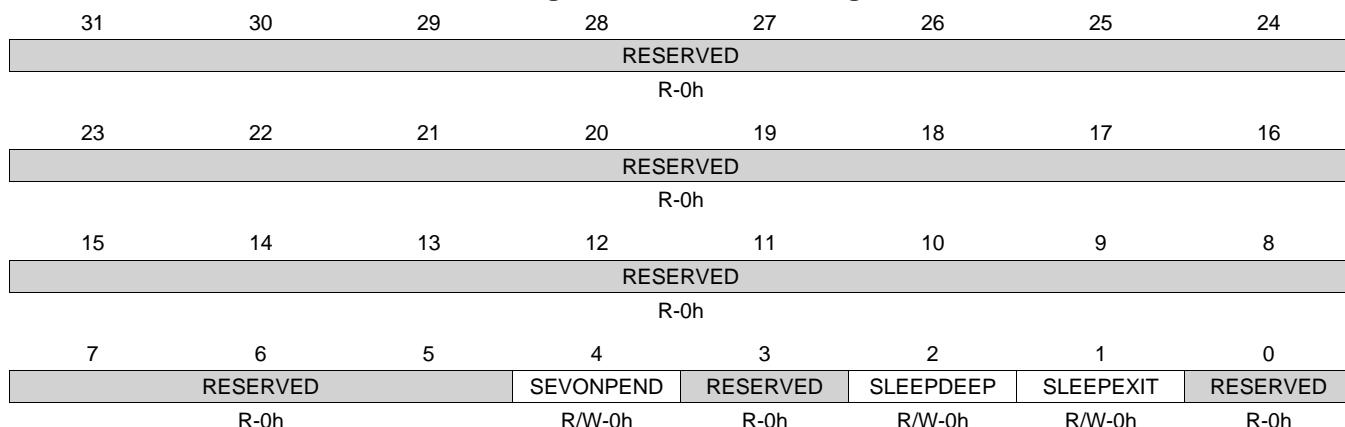Figure 3-15. SYSCTRL Register



LEGEND: R/W = Read/Write; R = Read only; W1toCI = Write 1 to clear bit; -n = value after reset

Table 3-18. SYSCTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-5	RESERVED	R	0h	
4	SEVONPEND	R/W	0h	Wake Up on Pending 0h = Only enabled interrupts or events can wake up the processor; disabled interrupts are excluded. 1h = Enabled events and all interrupts, including disabled interrupts, can wake up the processor.
3	RESERVED	R	0h	
2	SLEEPDEEP	R/W	0h	Deep Sleep Enable 0h = Use Sleep mode as the low power mode. 1h = Use Deep-sleep mode as the low power mode.
1	SLEEP EXIT	R/W	0h	Sleep on ISR Exit Setting this bit enables an interrupt-driven application to avoid returning to an empty main application. 0h = When returning from Handler mode to Thread mode, do not sleep when returning to Thread mode. 1h = When returning from Handler mode to Thread mode, enter sleep or deep sleep on return from an ISR.
0	RESERVED	R	0h	

3.3.1.16 CFGCTRL Register (offset = D14h) [reset = 200h]

CFGCTRL is shown in [Figure 3-16](#) and described in [Table 3-19](#).

NOTE: his register can only be accessed from privileged mode. The CFGCTRL register controls entry to Thread mode and enables: the handlers for NMI, hard fault and faults escalated by the FAULTMASK register to ignore bus faults; trapping of divide by zero and unaligned accesses; and access to the SWTRIG register by unprivileged software.

Figure 3-16. CFGCTRL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED						STKALIGN	BFHFMIGN
R-0h							
7	6	5	4	3	2	1	0
RESERVED			DIV0	UNALIGNED	RESERVED	MANIPEND	BASETHR
R-0h			R/W-0h	R/W-0h	R-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-19. CFGCTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-10	RESERVED	R	0h	
9	STKALIGN	R/W	1h	Stack Alignment on Exception Entry On exception entry, the processor uses bit 9 of the stacked PSR to indicate the stack alignment. On return from the exception, it uses this stacked bit to restore the correct stack alignment. 0h = The stack is 4-byte aligned. 1h = The stack is 8-byte aligned.
8	BFHFMIGN	R/W	0h	Ignore Bus Fault in NMI and Fault This bit enables handlers with priority -1 or -2 to ignore data bus faults caused by load and store instructions. The setting of this bit applies to the hard fault, NMI, and FAULTMASK escalated handlers. Set this bit only when the handler and its data are in absolutely safe memory. The normal use of this bit is to probe system devices and bridges to detect control path problems and fix them. 0h = Data bus faults caused by load and store instructions cause a lock-up. 1h = Handlers running at priority -1 and -2 ignore data bus faults caused by load and store instructions.
7-5	RESERVED	R	0h	
4	DIV0	R/W	0h	Trap on Divide by 0 This bit enables faulting or halting when the processor executes an SDIV or UDIV instruction with a divisor of 0. 0h = Do not trap on divide by 0. A divide by zero returns a quotient of 0. 1h = Trap on divide by 0.
3	UNALIGNED	R/W	0h	Trap on Unaligned Access Unaligned LDM, STM, LDRD, and STRD instructions always fault regardless of whether UNALIGNED is set. 0h = Do not trap on unaligned halfword and word accesses. 1h = Trap on unaligned halfword and word accesses. An unaligned access generates a usage fault.

Table 3-19. CFGCTRL Register Field Descriptions (continued)


Bit	Field	Type	Reset	Description
2	RESERVED	R	0h	
1	MANIPEND	R/W	0h	Allow Main Interrupt Trigger 0h = Disables unprivileged software access to the SWTRIG register. 1h = Enables unprivileged software access to the SWTRIG register.
0	BASETHR	R/W	0h	Thread State Control 0h = The processor can enter Thread mode only when no exception is active. 1h = The processor can enter Thread mode from any level under the control of an EXC_RETURN value.

3.3.1.17 SYSPRI1 Register (offset = D18h) [reset = 0h]

SYSPRI1 is shown in [Figure 3-17](#) and described in [Table 3-20](#).

NOTE: his register can only be accessed from privileged mode. The SYSPRI1 register configures the priority level, 0 to 7 of the usage fault, bus fault, and memory management fault exception handlers. This register is byte-accessible.

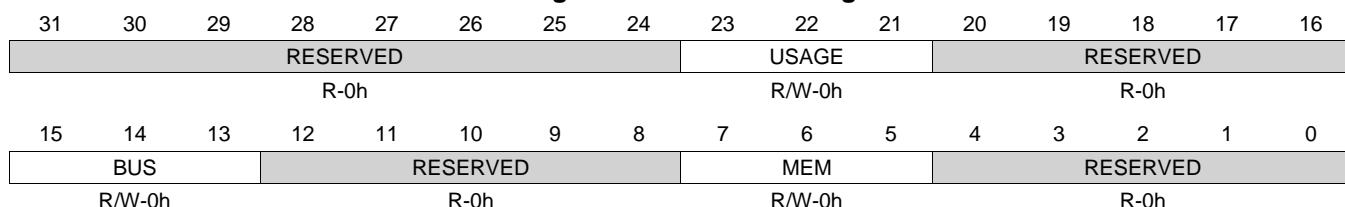Figure 3-17. SYSPRI1 Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-20. SYSPRI1 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-24	RESERVED	R	0h	
23-21	USAGE	R/W	0h	Usage Fault Priority This field configures the priority level of the usage fault. Configurable priority values are in the range 0-7, with lower values having higher priority.
20-16	RESERVED	R	0h	
15-13	BUS	R/W	0h	Bus Fault Priority This field configures the priority level of the bus fault. Configurable priority values are in the range 0-7, with lower values having higher priority.
12-8	RESERVED	R	0h	
7-5	MEM	R/W	0h	Memory Management Fault Priority This field configures the priority level of the memory management fault. Configurable priority values are in the range 0-7, with lower values having higher priority.
4-0	RESERVED	R	0h	

3.3.1.18 SYSPRI2 Register (offset = D1Ch) [reset = 0h]

SYSPRI2 is shown in [Figure 3-18](#) and described in [Table 3-21](#).

NOTE: his register can only be accessed from privileged mode. The SYSPRI2 register configures the priority level, 0 to 7 of the SVC call handler. This register is byte-accessible.

Figure 3-18. SYSPRI2 Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
SVC	RESERVED																														
R/W-0h	R-0h																														

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-21. SYSPRI2 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-29	SVC	R/W	0h	SVC call Priority. This field configures the priority level of SVC call. Configurable priority values are in the range 0-7, with lower values having higher priority.
28-0	RESERVED	R	0h	

3.3.1.19 SYSPRI3 Register (offset = D20h) [reset = 0h]

SYSPRI3 is shown in [Figure 3-19](#) and described in [Table 3-22](#).

NOTE: his register can only be accessed from privileged mode. The SYSPRI3 register configures the priority level, 0 to 7 of the SysTick exception and PendSV handlers. This register is byte-accessible.

Figure 3-19. SYSPRI3 Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
TICK				RESERVED				PENDSV			RESERVED				
R/W-0h				R-0h				R/W-0h			R-0h				
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED				DEBUG				RESERVED				R-0h			
R-0h				R/W-0h				R-0h				R-0h			

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-22. SYSPRI3 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-29	TICK	R/W	0h	SysTick Exception Priority This field configures the priority level of the SysTick exception. Configurable priority values are in the range 0-7, with lower values having higher priority.
28-24	RESERVED	R	0h	
23-21	PENDSV	R/W	0h	PendSV Priority This field configures the priority level of PendSV. Configurable priority values are in the range 0-7, with lower values having higher priority.
20-8	RESERVED	R	0h	
7-5	DEBUG	R/W	0h	Debug Priority This field configures the priority level of Debug. Configurable priority values are in the range 0-7, with lower values having higher priority.
4-0	RESERVED	R	0h	

3.3.1.20 SYSHNDCTRL Register (offset = D24h) [reset = 0h]

SYSHNDCTRL is shown in [Figure 3-20](#) and described in [Table 3-23](#).

NOTE: This register can only be accessed from privileged mode. The SYSHNDCTRL register enables the system handlers, and indicates the pending status of the usage fault, bus fault, memory management fault, and SVC exceptions as well as the active status of the system handlers. If a system handler is disabled and the corresponding fault occurs, the processor treats the fault as a hard fault. This register can be modified to change the pending or active status of system exceptions. An OS kernel can write to the active bits to perform a context switch that changes the current exception type. **CAUTION:** Software that changes the value of an active bit in this register without correct adjustment to the stacked content can cause the processor to generate a fault exception. Ensure software that writes to this register retains and subsequently restores the current active status. If the value of a bit in this register must be modified after enabling the system handlers, a read-modify-write procedure must be used to ensure that only the required bit is modified.

Figure 3-20. SYSHNDCTRL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED				R/W-0h	USAGE	BUS	MEM
R-0h							
15	14	13	12	11	10	9	8
SVC	BUSP	MEMP	USAGEP	TICK	PNDSV	RESERVED	MON
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R-0h	R/W-0h
7	6	5	4	3	2	1	0
SVCA	RESERVED			USGA	RESERVED	BUSA	MEMA
R/W-0h	R-0h			R/W-0h	R-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-23. SYSHNDCTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-19	RESERVED	R	0h	
18	USAGE	R/W	0h	Usage Fault Enable 0h = Disables the usage fault exception. 1h = Enables the usage fault exception.
17	BUS	R/W	0h	Bus Fault Enable 0h = Disables the bus fault exception. 1h = Enables the bus fault exception.
16	MEM	R/W	0h	Memory Management Fault Enable 0h = Disables the memory management fault exception. 1h = Enables the memory management fault exception.
15	SVC	R/W	0h	SVC Call Pending This bit can be modified to change the pending status of the SVC call exception. 0h = An SVC call exception is not pending. 1h = An SVC call exception is pending.
14	BUSP	R/W	0h	Bus Fault Pending This bit can be modified to change the pending status of the bus fault exception. 0h = A bus fault exception is not pending. 1h = A bus fault exception is pending.

Table 3-23. SYSHNDCTRL Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
13	MEMP	R/W	0h	Memory Management Fault Pending This bit can be modified to change the pending status of the memory management fault exception. 0 = A memory management fault exception is not pending. 1 = A memory management fault exception is pending.
12	USAGEP	R/W	0h	Usage Fault Pending This bit can be modified to change the pending status of the usage fault exception. 0h = A usage fault exception is not pending. 1h = A usage fault exception is pending.
11	TICK	R/W	0h	SysTick Exception Active This bit can be modified to change the active status of the SysTick exception, however, see the Caution above before setting this bit. 0h = A SysTick exception is not active. 1h = A SysTick exception is active.
10	PNDSV	R/W	0h	PendSV Exception Active This bit can be modified to change the active status of the PendSV exception, however, see the Caution above before setting this bit. 0h = A PendSV exception is not active. 1h = A PendSV exception is active.
9	RESERVED	R	0h	
8	MON	R/W	0h	Debug Monitor Active 0h = The Debug monitor is not active. 1h = The Debug monitor is active.
7	SVCA	R/W	0h	SVC Call Active This bit can be modified to change the active status of the SVC call exception, however, see the Caution above before setting this bit. 0h = SVC call is not active. 1h = SVC call is active.
6-4	RESERVED	R	0h	
3	USGA	R/W	0h	Usage Fault Active This bit can be modified to change the active status of the usage fault exception, however, see the Caution above before setting this bit. 0h = Usage fault is not active. 1h = Usage fault is active.
2	RESERVED	R	0h	
1	BUSA	R/W	0h	Bus Fault Active This bit can be modified to change the active status of the bus fault exception, however, see the Caution above before setting this bit. 0h = Bus fault is not active. 1h = Bus fault is active.
0	MEMA	R/W	0h	Memory Management Fault Active This bit can be modified to change the active status of the memory management fault exception, however, see the Caution above before setting this bit. 0h = Memory management fault is not active. 1h = Memory management fault is active.

3.3.1.21 FAULTSTAT Register (offset = D28h) [reset = 0h]

FAULTSTAT is shown in [Figure 3-21](#) and described in [Table 3-24](#).

NOTE: This register can only be accessed from privileged mode. The FAULTSTAT register indicates the cause of a memory management fault, bus fault, or usage fault. Each of these functions is assigned to a subregister as follows: Usage Fault Status (UFAULTSTAT), bits 31:16 Bus Fault Status (BFAULTSTAT), bits 15:8 Memory Management Fault Status (MFAULTSTAT), bits 7:0 (Not applicable for CC3200) FAULTSTAT is byte accessible. FAULTSTAT or its subregisters can be accessed as follows: The complete FAULTSTAT register, with a word access to offset 0xD28 The MFAULTSTAT, with a byte access to offset 0xD28 The MFAULTSTAT and BFAULTSTAT, with a halfword access to offset 0xD28 The BFAULTSTAT, with a byte access to offset 0xD29 The UFAULTSTAT, with a halfword access to offset 0xD2A Bits are cleared by writing a 1 to them. In a fault handler, the true faulting address can be determined by: 1. Read and save the Memory Management Fault Address (MMADDR) or Bus Fault Address (FAULTADDR) value. 2. Read the MMARV bit in MFAULTSTAT, or the BFARV bit in BFAULTSTAT to determine if the MMADDR or FAULTADDR contents are valid. Software must follow this sequence because another higher priority exception might change the MMADDR or FAULTADDR value. For example, if a higher priority handler preempts the current fault handler, the other fault might change the MMADDR or FAULTADDR value.

Figure 3-21. FAULTSTAT Register

31	30	29	28	27	26	25	24	
RESERVED					DIV0	UNALIGN		
R-0h					R/W1C-0h	R/W1C-0h		
23	22	21	20	19	18	17	16	
RESERVED					NOCP	INVPC	INVSTAT	UNDEF
R-0h					R/W1C-0h	R/W1C-0h	R/W1C-0h	R/W1C-0h
15	14	13	12	11	10	9	8	
BFARV	RESERVED	BLSPERR	BSTKE	BUSTKE	IMPRE	PRECISE	IBUS	
R/W1C-0h	R-0h	R/W1C-0h	R/W1C-0h	R/W1C-0h	R/W1C-0h	R/W1C-0h	R/W1C-0h	
7	6	5	4	3	2	1	0	
MMARV	RESERVED	MLSPERR	MSTKE	MUSTKE	RESERVED	DERR	IERR	
R/W1C-0h	R-0h	R/W1C-0h	R/W1C-0h	R/W1C-0h	R-0h	R/W1C-0h	R/W1C-0h	

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-24. FAULTSTAT Register Field Descriptions

Bit	Field	Type	Reset	Description
31-26	RESERVED	R	0h	
25	DIV0	R/W1C	0h	Divide-by-Zero Usage Fault When this bit is set, the PC value stacked for the exception return points to the instruction that performed the divide by zero. Trapping on divide-by-zero is enabled by setting the DIV0 bit in the Configuration and Control (CFGCTRL) register. This bit is cleared by writing a 1 to it. 0h = No divide-by-zero fault has occurred, or divide-by-zero trapping is not enabled. 1h = The processor has executed an SDIV or UDIV instruction with a divisor of 0.
24	UNALIGN	R/W1C	0h	Unaligned Access Usage Fault Unaligned LDM, STM, LDRD, and STRD instructions always fault regardless of the configuration of this bit. Trapping on unaligned access is enabled by setting the UNALIGNED bit in the CFGCTRL register. This bit is cleared by writing a 1 to it. 0h = No unaligned access fault has occurred, or unaligned access trapping is not enabled. 1h = The processor has made an unaligned memory access.
23-20	RESERVED	R	0h	

Table 3-24. FAULTSTAT Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
19	NOCP	R/W1C	0h	No Coprocessor Usage Fault This bit is cleared by writing a 1 to it. 0h = A usage fault has not been caused by attempting to access a coprocessor. 1h = The processor has attempted to access a coprocessor.
18	INVPC	R/W1C	0h	Invalid PC Load Usage Fault When this bit is set, the PC value stacked for the exception return points to the instruction that tried to perform the illegal load of the PC. This bit is cleared by writing a 1 to it. 0h = A usage fault has not been caused by attempting to load an invalid PC value. 1h = The processor has attempted an illegal load of EXC_RETURN to the PC as a result of an invalid context or an invalid EXC_RETURN value.
17	INVSTAT	R/W1C	0h	Invalid State Usage Fault When this bit is set, the PC value stacked for the exception return points to the instruction that attempted the illegal use of the Execution Program Status Register (EPSR) register. This bit is not set if an undefined instruction uses the EPSR register. This bit is cleared by writing a 1 to it. 0h = A usage fault has not been caused by an invalid state. 1h = The processor has attempted to execute an instruction that makes illegal use of the EPSR register.
16	UNDEF	R/W1C	0h	Undefined Instruction Usage Fault When this bit is set, the PC value stacked for the exception return points to the undefined instruction. An undefined instruction is an instruction that the processor cannot decode. This bit is cleared by writing a 1 to it. 0h = A usage fault has not been caused by an undefined instruction. 1h = The processor has attempted to execute an undefined instruction.
15	BFARV	R/W1C	0h	Bus Fault Address Register Valid This bit is set after a bus fault, where the address is known. Other faults can clear this bit, such as a memory management fault occurring later. If a bus fault occurs and is escalated to a hard fault because of priority, the hard fault handler must clear this bit. This action prevents problems if returning to a stacked active bus fault handler whose FAULTADDR register value has been overwritten. This bit is cleared by writing a 1 to it. 0h = The value in the Bus Fault Address (FAULTADDR) register is not a valid fault address. 1h = The FAULTADDR register is holding a valid fault address.
14	RESERVED	R	0h	
13	BLSPERR	R/W1C	0h	N/A
12	BSTKE	R/W1C	0h	Stack Bus Fault When this bit is set, the SP is still adjusted but the values in the context area on the stack might be incorrect. A fault address is not written to the FAULTADDR register. This bit is cleared by writing a 1 to it. 0h = No bus fault has occurred on stacking for exception entry. 1h = Stacking for an exception entry has caused one or more bus faults.
11	BUSTKE	R/W1C	0h	Unstack Bus Fault This fault is chained to the handler. Thus, when this bit is set, the original return stack is still present. The SP is not adjusted from the failing return, a new save is not performed, and a fault address is not written to the FAULTADDR register. This bit is cleared by writing a 1 to it. 0h = No bus fault has occurred on unstacking for a return from exception. 1h = Unstacking for a return from exception has caused one or more bus faults.

Table 3-24. FAULTSTAT Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
10	IMPRE	R/W1C	0h	<p>Imprecise Data Bus Error When this bit is set, a fault address is not written to the FAULTADDR register.</p> <p>This fault is asynchronous.</p> <p>Therefore, if the fault is detected when the priority of the current process is higher than the bus fault priority, the bus fault becomes pending and becomes active only when the processor returns from all higher-priority processes.</p> <p>If a precise fault occurs before the processor enters the handler for the imprecise bus fault, the handler detects that both the IMPRE bit is set and one of the precise fault status bits is set.</p> <p>This bit is cleared by writing a 1 to it.</p> <p>0h = An imprecise data bus error has not occurred.</p> <p>1h = A data bus error has occurred, but the return address in the stack frame is not related to the instruction that caused the error.</p>
9	PRECISE	R/W1C	0h	<p>Precise Data Bus Error When this bit is set, the fault address is written to the FAULTADDR register.</p> <p>This bit is cleared by writing a 1 to it.</p> <p>0h = A precise data bus error has not occurred.</p> <p>1h = A data bus error has occurred, and the PC value stacked for the exception return points to the instruction that caused the fault.</p>
8	IBUS	R/W1C	0h	<p>Instruction Bus Error The processor detects the instruction bus error on prefetching an instruction, but sets this bit only if it attempts to issue the faulting instruction.</p> <p>When this bit is set, a fault address is not written to the FAULTADDR register.</p> <p>This bit is cleared by writing a 1 to it.</p> <p>0h = An instruction bus error has not occurred.</p> <p>1h = An instruction bus error has occurred.</p>
7	MMARV	R/W1C	0h	<p>Memory Management Fault Address Register Valid If a memory management fault occurs and is escalated to a hard fault because of priority, the hard fault handler must clear this bit.</p> <p>This action prevents problems if returning to a stacked active memory management fault handler whose MMADDR register value has been overwritten.</p> <p>0h = The This bit is cleared by writing a 1 to it. value in the Memory Management Fault Address (MMADDR) register is not a valid fault address.</p> <p>1h = The MMADDR register is holding a valid fault address.</p>
6	RESERVED	R	0h	
5	MLSPERR	R/W1C	0h	N/A
4	MSTKE	R/W1C	0h	<p>Stack Access Violation When this bit is set, the SP is still adjusted but the values in the context area on the stack might be incorrect.</p> <p>A fault address is not written to the MMADDR register.</p> <p>This bit is cleared by writing a 1 to it.</p> <p>0h = No memory management fault has occurred on stacking for exception entry.</p> <p>1h = Stacking for an exception entry has caused one or more access violations.</p>
3	MUSTKE	R/W1C	0h	<p>Unstack Access Violation This fault is chained to the handler.</p> <p>Thus, when this bit is set, the original return stack is still present.</p> <p>The SP is not adjusted from the failing return, a new save is not performed, and a fault address is not written to the MMADDR register.</p> <p>This bit is cleared by writing a 1 to it.</p> <p>0h = No memory management fault has occurred on unstacking for a return from exception.</p> <p>1h = Unstacking for a return from exception has caused one or more access violations.</p>
2	RESERVED	R	0h	

Table 3-24. FAULTSTAT Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
1	DERR	R/W1C	0h	<p>Data Access Violation When this bit is set, the PC value stacked for the exception return points to the faulting instruction and the address of the attempted access is written to the MMADDR register.</p> <p>This bit is cleared by writing a 1 to it.</p> <p>0h = A data access violation has not occurred.</p> <p>1h = The processor attempted a load or store at a location that does not permit the operation.</p>
0	IERR	R/W1C	0h	<p>Instruction Access Violation This fault occurs on any access to an XN region.</p> <p>When this bit is set, the PC value stacked for the exception return points to the faulting instruction and the address of the attempted access is not written to the MMADDR register.</p> <p>This bit is cleared by writing a 1 to it.</p> <p>0h = An instruction access violation has not occurred.</p> <p>1h = The processor attempted an instruction fetch from a location that does not permit execution.</p>

3.3.1.22 HFAULTSTAT Register (offset = D2Ch) [reset = 0h]

HFAULTSTAT is shown in [Figure 3-22](#) and described in [Table 3-25](#).

NOTE: his register can only be accessed from privileged mode. The HFAULTSTAT register gives information about events that activate the hard fault handler. Bits are cleared by writing a 1 to them.

Figure 3-22. HFAULTSTAT Register

31	30	29	28	27	26	25	24
DBG	FORCED			RESERVED			
R/W1C-0h	R/W1C-0h			R-0h			
23	22	21	20	19	18	17	16
				RESERVED			
				R-0h			
15	14	13	12	11	10	9	8
				RESERVED			
				R-0h			
7	6	5	4	3	2	1	0
			RESERVED		VECT	RESERVED	
			R-0h		R/W1C-0h		R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-25. HFAULTSTAT Register Field Descriptions

Bit	Field	Type	Reset	Description
31	DBG	R/W1C	0h	Debug Event This bit is reserved for Debug use. This bit must be written as a 0, otherwise behavior is unpredictable.
30	FORCED	R/W1C	0h	Forced Hard Fault When this bit is set, the hard fault handler must read the other fault status registers to find the cause of the fault. This bit is cleared by writing a 1 to it. 0h = No forced hard fault has occurred. 1h = A forced hard fault has been generated by escalation of a fault with configurable priority that cannot be handled, either because of priority or because it is disabled.
29-2	RESERVED	R	0h	
1	VECT	R/W1C	0h	Vector Table Read Fault This error is always handled by the hard fault handler. When this bit is set, the PC value stacked for the exception return points to the instruction that was preempted by the exception. This bit is cleared by writing a 1 to it. 0h = No bus fault has occurred on a vector table read. 1h = A bus fault occurred on a vector table read.
0	RESERVED	R	0h	

3.3.1.23 FAULTDDR Register (offset = D38h) [reset = 0h]

FAULTDDR is shown in [Figure 3-23](#) and described in [Table 3-26](#).

NOTE: This register can only be accessed from privileged mode. The FAULTADDR register contains the address of the location that generated a bus fault. When an unaligned access faults, the address in the FAULTADDR register is the one requested by the instruction, even if it is not the address of the fault. Bits in the Bus Fault Status (BFAULTSTAT) register indicate the cause of the fault and whether the value in the FAULTADDR register is valid.

Figure 3-23. FAULTDDR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ADDR																															
R/W-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-26. FAULTDDR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	ADDR	R/W	0h	Fault Address When the FAULTADDRV bit of BFAULTSTAT is set, this field holds the address of the location that generated the bus fault.

3.3.1.24 SWTRIG Register (offset = F00h) [reset = 0h]

SWTRIG is shown in [Figure 3-24](#) and described in [Table 3-27](#).

NOTE: Only privileged software can enable unprivileged access to the SWTRIG register. Writing an interrupt number to the SWTRIG register generates a Software Generated Interrupt (SGI). When the MAINPEND bit in the Configuration and Control (CFGCTRL) register is set, unprivileged software can access the SWTRIG register.

Figure 3-24. SWTRIG Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																								INTID							
R-0h																								W-0h							

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 3-27. SWTRIG Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	INTID	W	0h	Interrupt ID This field holds the interrupt ID of the required SGI. For example, a value of 0x3 generates an interrupt on IRQ3.

Direct Memory Access (DMA)

Topic	Page
4.1 Overview	97
4.2 Functional Description.....	97
4.3 Register Description	107

4.1 Overview

The CC3200 microcontroller includes a Direct Memory Access (DMA) controller, known as micro-DMA (μ DMA). The μ DMA controller provides a way to offload data transfer tasks from the Cortex-M4 processor, allowing for more efficient use of the processor and the available bus bandwidth. The μ DMA controller can perform transfers between memory and peripherals. It has dedicated channels for each supported on-chip module and can be programmed to automatically perform transfers between peripherals and memory, as the peripheral is ready to transfer more data.

The μ DMA controller provides the following features:

- 32-channel configurable μ DMA controller
- Support for memory-to-memory, memory-to-peripheral, and peripheral-to-memory in multiple transfer modes
 - Basic for simple transfer scenarios
 - Ping-pong for continuous data flow
 - Scatter-gather for a programmable list of up to 256 arbitrary transfers initiated from a single request
- Highly flexible and configurable channel operation
 - Independently configured and operated channels
 - Dedicated channels for supported on-chip modules
 - One channel each for receive and transmit path for bidirectional modules
 - Dedicated channel for software-initiated transfers
 - Optional software-initiated requests for any channel
- Two levels of priority
- Design optimizations for improved bus access performance between μ DMA controller and the processor core
 - μ DMA controller access is subordinate to core access
- Data sizes of 8, 16, and 32 bits
- Transfer size is programmable in binary steps from 1 to 1024
- Source and destination address increment size of byte, half-word, word, or no increment
- Interrupt on transfer completion, with a separate interrupt per channel

4.2 Functional Description

The μ DMA controller is a flexible and highly configurable DMA controller designed to work efficiently with the Cortex-M4 processor core. It supports multiple data sizes and address increment schemes, multiple levels of priority among DMA channels, and several transfer modes to allow for sophisticated programmed data transfers. The μ DMA controller's usage of the bus is always subordinate to the processor core, so it never delays a bus transaction by the processor.

Because the μ DMA controller is only using otherwise-idle bus cycles, the data transfer bandwidth it provides is essentially free, with no impact on the rest of the system. The bus architecture has been optimized to greatly enhance the ability of the processor core and the μ DMA controller to efficiently share the on-chip bus, thus improving performance. The optimizations include peripheral bus segmentation, which in many cases allow both the processor core and the μ DMA controller to access the bus and perform simultaneous data transfers.

Each supported peripheral function has a dedicated channel on the μ DMA controller that can be configured independently. The μ DMA controller implements a configuration method using channel control structures maintained in system memory by the processor. While simple transfer modes are supported, it is also possible to build up sophisticated task lists in memory that allow the μ DMA controller to perform arbitrary-sized transfers to and from arbitrary locations as part of a single transfer request. The μ DMA controller also supports the use of ping-pong buffering to accommodate constant streaming of data to or from a peripheral.

Each channel also has a configurable arbitration size. The arbitration size is the number of items transferred in a burst before the µDMA controller re-arbitrates for channel priority. Using the arbitration size, it is possible to control exactly how many items are transferred to or from a peripheral each time it makes a µDMA service request.

4.2.1 Channel Assignment

Figure 4-1 depicts µDMA channel allocation. There are 32 DMA channels assigned to various peripherals. Peripherals are mapped at multiple places to address the application need where any combination of peripheral can be used in tandem.

Figure 4-1. DMA Channel Assignment

DMACHMAPi Encoding	0	1	2	3
CH #				
0	GPTimer A0-A	SHA Cin		Software
1	GPTimer A0-B	SHA Din		Software
2	GPTimer A1-A	SHA Cout		Software
3	GPTimer A1-B	DES Cin		Software
4	GPTimer A2-A	DES Din	I2S (RX)	Software
5	GPTimer A2-B	DES Dout	I2S (TX)	Software
6	GPTimer A3-A	GSPI (RX)	GPIO A2	Software
7	GPTimer A3-B	GSPI (TX)	GPIO A3	Software
8	UART A0 (RX)	GPTimer A0-A	GPTimer A2-A	Software
9	UART A0 (TX)	GPTimer A0-B	GPTimer A2-B	Software
10	UART A1 (RX)	GPTimer A1-A	GPTimer A3-A	Software
11	UART A1 (TX)	GPTimer A1-B	GPTimer A3-B	Software
12	LSPI(RX) (link)			Software
13	LSPI(TX) (link)			Software
14	ADC 0		SDHOST RX	Software
15	ADC 2		SDHOST TX	Software
16	ADC 4	GPTimer A2-A		Software
17	ADC 6	GPTimer A2-B		Software
18	GPIO A0	AES Cin	McASP A0 (RX)	Software
19	GPIO A1	AES Cout	McASP A0 (TX)	Software
20	GPIO A2	AES Din		Software
21	GPIO A3	AES Dout		Software
22	Camera			Software
23	SDHOST RX	GPTimer A3-A	GPTimer A2-A	Software
24	SDHOST TX	GPTimer A3-B	GPTimer A2-B	Software
25	SSPI (RX) (Shared)	I2C A0 RX		Software
26	SSPI (TX) (Shared)	I2C A0 TX		Software
27		GPIO A0		Software
28		GPIO A1		Software
29				Software
30	GSPI (RX)	SDHOST RX	I2C A0 RX	Software
31	GSPI (TX)	SDHOST TX	I2C A0 TX	Software

4.2.2 Priority

The μDMA controller assigns priority to each channel based on the channel number and the priority level bit for the channel. Channel number 0 has the highest priority, and as the channel number increases, the priority of a channel decreases. Each channel has a priority level bit to provide two levels of priority: default priority and high priority. If the priority level bit is set, then that channel has higher priority than all other channels at default priority. If multiple channels are set for high priority, then the channel number determines relative priority among all the high priority channels.

The priority bit for a channel can be set using the DMA Channel Priority Set (PPIOSET) register and cleared with the DMA Channel Priority Clear (PPIOCLR) register.

4.2.3 Arbitration Size

When a μDMA channel requests a transfer, the μDMA controller arbitrates among all the channels making a request, then services the μDMA channel with the highest priority. Once a transfer begins, it continues for a selectable number of transfers before re-arbitrating among the requesting channels again. The arbitration size can be configured for each channel, ranging from 1 to 1024 item transfers. After the μDMA controller transfers the number of items specified by the arbitration size, it then checks among all the channels making a request, and services the channel with the highest priority. If a lower priority μDMA channel uses a large arbitration size, the latency for higher priority channels is increased, as the μDMA controller completes the lower priority burst before checking for higher priority requests. Therefore, lower priority channels should not use a large arbitration size for best response on high priority channels.

The arbitration size can also be thought of as a burst size, as it is the maximum number of items that are transferred at any one time in a burst. Here, the term arbitration refers to determination of μDMA channel priority, not arbitration for the bus. When the μDMA controller arbitrates for the bus, the processor always takes priority. Furthermore, the μDMA controller is held off whenever the processor must perform a bus transaction on the same bus, even in the middle of a burst transfer.

4.2.4 Channel Configuration

The μDMA controller uses an area of system memory to store a set of channel control structures in a table. The control table may have one or two entries for each μDMA channel. Each entry in the table structure contains source and destination pointers, transfer size, and transfer mode. The control table can be located anywhere in system memory, but it must be contiguous and aligned on a 1024-byte boundary.

Table 4-1 shows the layout in memory of the channel control table. Each channel may have one or two control structures in the control table: a primary control structure and an optional alternate control structure. The table is organized so that all of the primary entries are in the first half of the table, and all the alternate structures are in the second half of the table. The primary entry is used for simple transfer modes, where transfers can be reconfigured and restarted after each transfer is complete. In this case, the alternate control structures are not used and therefore only the first half of the table must be allocated in memory; the second half of the control table is not necessary, and that memory can be used for something else. If a more complex transfer mode is used such as ping-pong or scatter-gather, then the alternate control structure is also used and memory space should be allocated for the entire table.

Any unused memory in the control table may be used by the application. This includes the control structures for any channels that are unused by the application, as well as the unused control word for each channel.

Table 4-1. Channel Control Memory

Offset	Channel
0x0	Channel 0 – primary
0x10	Channel 1 – primary
....	
0x1F0	Channel 31 – primary
0x200	Channel 0 – alternate
0x210	Channel 1 – alternate
....	

Table 4-1. Channel Control Memory (continued)

Offset	Channel
0x3F0	Channel 31 – alternate

Table 4-2 shows an individual control structure entry in the control table. Each entry is aligned on a 16-byte boundary. The entry contains four long words: the source end pointer, the destination end pointer, the control word, and an unused entry. The end pointers point to the ending address of the transfer and are inclusive. If the source or destination is non-incrementing (as for a peripheral register), the pointer should point to the transfer address.

Table 4-2. Individual Control Structure

Offset	Description
0x000	Source end pointer
0x004	Destination end pointer
0x008	Control word
0x00C	Reserved

Transfer size is part of the control word. At the end of a transfer, the transfer size indicates 0, and the transfer mode indicates "stopped." Because the control word is modified by the μDMA controller, it must be reconfigured before each new transfer. The source and destination end pointers are not modified, so they can be left unchanged if the source or destination addresses remain the same.

Prior to starting a transfer, a μDMA channel must be enabled by setting the appropriate bit in the DMA Channel Enable Set (ENASET) register. A channel can be disabled by setting the channel bit in the DMA Channel Enable Clear (ENACLR) register. At the end of a complete μDMA transfer, the controller automatically disables the channel.

4.2.5 Transfer Mode

The μDMA controller supports several transfer modes. Two of the modes support simple one-time transfers. Several complex modes support a continuous flow of data.

4.2.5.1 Stop Mode

While stop is not actually a transfer mode, it is a valid value for the mode field of the control word. When the mode field has this value, the μDMA controller does not perform any transfers, and disables the channel if it is enabled.

4.2.5.2 Basic Mode


In basic mode, the μDMA controller performs transfers as long as there are more items to transfer, and a transfer request is present. This mode is used with peripherals that assert a μDMA request signal whenever the peripheral is ready for a data transfer. Basic mode should not be used in any situation where the request is momentary, even though the entire transfer should be completed. For example, a software-initiated transfer creates a momentary request, and in basic mode, only the number of transfers specified by the ARBSIZE field in the DMA Channel Control Word register are transferred on a software request, even if there is more data to transfer. When all of the items have been transferred using basic mode, the μDMA controller sets the channel to stop mode.

4.2.5.3 Auto Mode

Auto mode is similar to basic mode, except that once a transfer request is received, the transfer runs to completion, even if the μDMA request is removed. This mode is suitable for software-triggered transfers. Generally, auto mode is not used with a peripheral. When all the items have been transferred using auto mode, the μDMA controller sets the mode for that channel to stop.

4.2.5.4 Ping-Pong Mode

Ping-pong mode supports a continuous data flow to or from a peripheral. To use ping-pong mode, both the primary and alternate data structures must be implemented. Both structures are set up by the processor for data transfer between memory and a peripheral. The transfer is started using the primary control structure. When the transfer using the primary control structure is complete, the μ DMA controller reads the alternate control structure for that channel to continue the transfer. Each time this happens, an interrupt is generated, and the processor can reload the control structure for the just-completed transfer. Data flow can continue indefinitely this way, using the primary and alternate control structures to switch back and forth between buffers as the data flows to or from the peripheral.

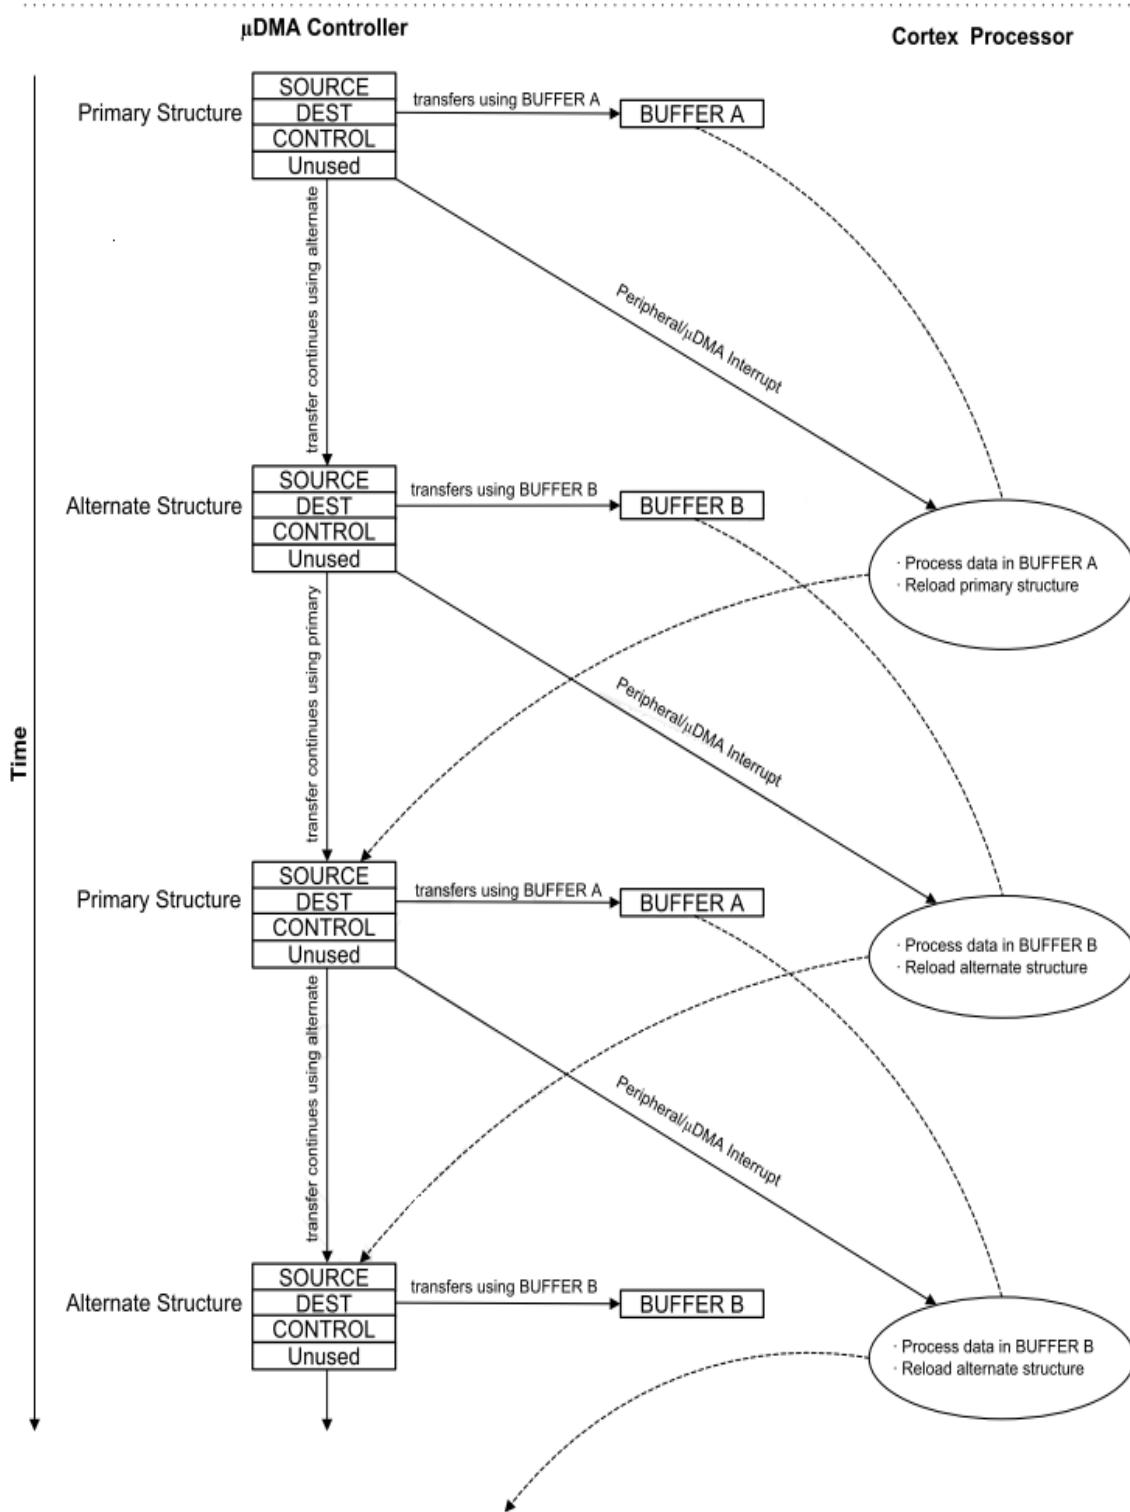Figure 4-2. Ping-Pong Mode


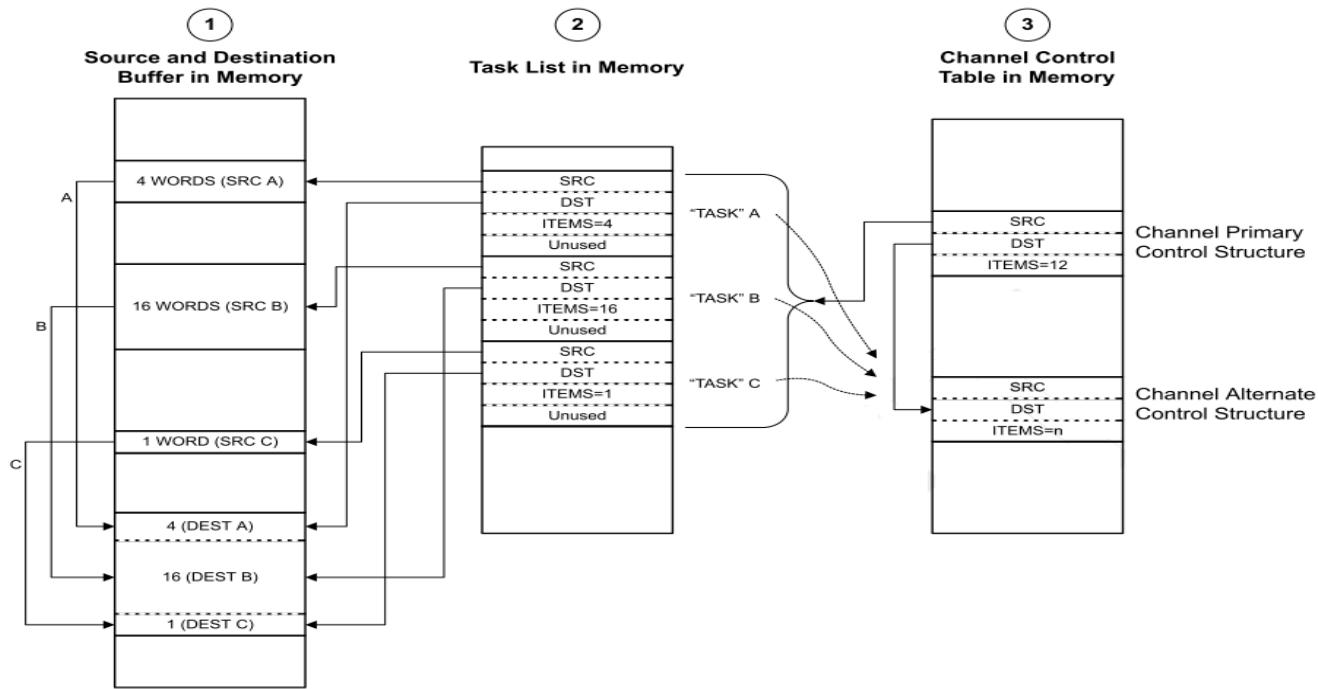
4.2.5.5 Memory Scatter-Gather

Memory scatter-gather mode is a complex mode used when data must be transferred to or from varied locations in memory instead of a set of contiguous locations in a memory buffer. For example, a gather μDMA operation could selectively read the payload of several stored packets of a communication protocol and store them together in sequence in a memory buffer.

In memory scatter-gather mode, the primary control structure programs the alternate control structure from a table in memory. The table is set up by the processor software and contains a list of control structures, each containing the source and destination end pointers, and the control word for a specific transfer. The mode of each control word must be set to scatter-gather mode. Each entry in the table is in turn copied to the alternate structure where it is then executed. The μDMA controller alternates between using the primary control structure to copy the next transfer instruction from the list, and then executing the new transfer instruction. The end of the list is marked by programming the control word for the last entry to use basic transfer mode. Once the last transfer is performed using basic mode, the μDMA controller stops. A completion interrupt is generated only after the last transfer. It is possible to loop the list by having the last entry copy the primary control structure to point back to the beginning of the list (or to a new list). It is also possible to trigger a set of other channels to perform a transfer, either directly, by programming a write to the software trigger for another channel, or indirectly, by causing a peripheral action that results in a μDMA request.

By programming the μDMA controller using this method, a set of arbitrary transfers can be performed based on a single μDMA request.

[Figure 4-3](#) shows an example of operation in memory scatter-gather mode. This example shows a gather operation, where data in three separate buffers in memory is copied together into one buffer. [Figure 4-3](#) shows how the application sets up a μDMA task list in memory used by the controller to perform three sets of copy operations from different locations in memory. The primary control structure for the channel used for the operation is configured to copy from the task list to the alternate control structure.


Figure 4-3. Memory Scatter-Gather Mode


- (1) Application must copy data items from three separate locations in memory into one combined buffer.
- (2) Application sets up a μDMA task list in memory, which contains the pointers and control configuration for three μDMA copy tasks.
- (3) Application sets up the channel primary control structure to copy each task configuration, one at a time, to the alternate control structure, where it is executed by the μDMA controller

4.2.5.6 Peripheral Scatter-Gather

Peripheral scatter-gather mode is very similar to memory scatter-gather, except that the transfers are controlled by a peripheral making a μDMA request. Upon detecting a request from the peripheral, the μDMA controller uses the primary control structure to copy one entry from the list to the alternate control structure, and then performs the transfer. At the end of this transfer, the next transfer is started only if the peripheral again asserts a μDMA request. The μDMA controller continues to perform transfers from the list only when the peripheral is making a request, until the last transfer is complete. A completion interrupt is generated only after the last transfer.

By using this method, the μDMA controller can transfer data to or from a peripheral from a set of arbitrary locations whenever the peripheral is ready to transfer data.

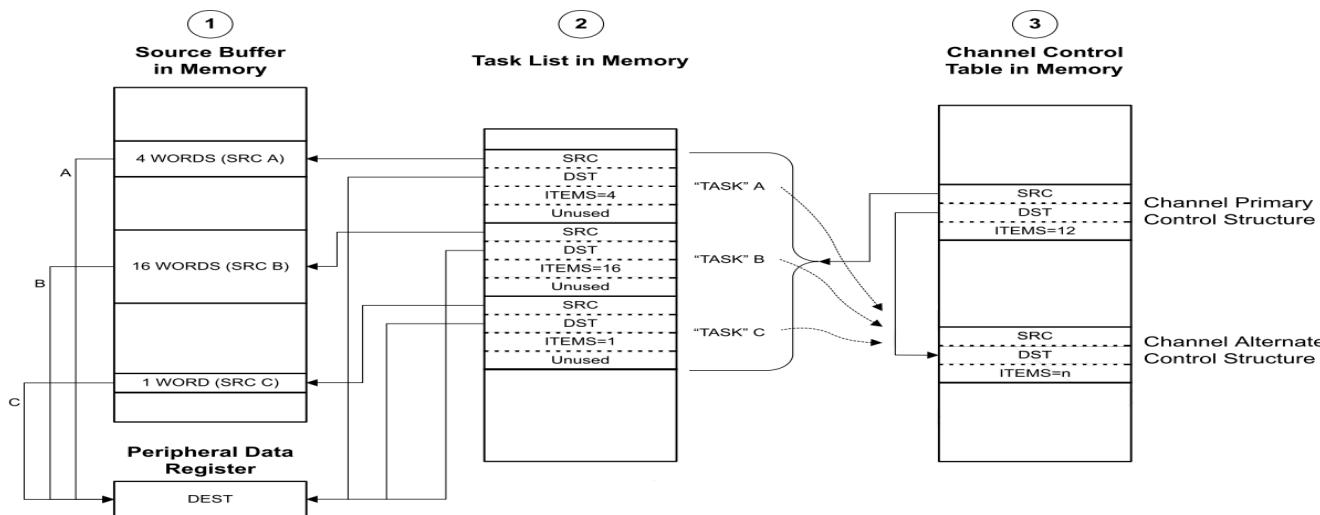Figure 4-4. Peripheral Scatter-Gather Mode


- (1) Application has a need to copy data items from three separate locations in memory into a peripheral data register.
- (2) Application sets up a µDMA “task list” in memory, which contains the pointers and control configuration for three µDMA copy “tasks.”
- (3) Application sets up the channel primary control structure to copy each task configuration, one at a time, to the alternate control structure, where it is executed by the µDMA controller

4.2.6 Transfer Size and Increment

The µDMA controller supports transfer data sizes of 8, 16, or 32 bits. The source and destination data size must be the same for any given transfer. The source and destination address can be auto-incremented by bytes, half-words, or words, or can be set to no increment. The source and destination address increment values can be set independently, and it is not necessary for the address increment to match the data size as long as the increment is the same or larger than the data size. For example, it is possible to perform a transfer using 8-bit data size, but using an address increment of full words (4 bytes). The data to be transferred must be aligned in memory according to the data size (8, 16, or 32 bits).

Table 4-3 shows the configuration to read from a peripheral that supplies 8-bit data.

Table 4-3. 8-bit Data Peripheral Configuration

Field	Configuration
Source data size	8 bit
Destination data size	8 bit
Source address increment	No
Destination address increment	Byte
Source end pointer	Peripheral FIFO register
Destination end pointer	End of data buffer in memory

4.2.7 Peripheral Interface

There are two main classes of μDMA-connected peripherals:

- Peripherals with FIFOs serviced by the μDMA to transmit or receive data
- Peripherals that provide trigger inputs to the μDMA

4.2.7.1 FIFO Peripherals

FIFO peripherals contain a FIFO of data to be sent and a FIFO of data that has been received. The μDMA controller transfers data between these FIFOs and system memory. For example, when a UART FIFO contains one or more entries, a single transfer request is sent to the μDMA for processing. If this request has not been processed and the UART FIFO reaches the interrupt FIFO level, another interrupt is sent to the μDMA which is higher priority than the single-transfer request. In this instance, an ARBSIZ transfer is performed as configured in the DMACHCTL register. After the transfer is complete, the μDMA sends a receive or transmit complete interrupt to the UART register.

If the SETn bit of the FIFO peripheral is set in the DMA Channel Useburst Set (DMAUSEBURSTSET) register, then the μDMA only performs transfers defined by the ARBSIZ bit field in the DMACHCTL register for better bus utilization. For peripherals that tend to transmit and receive in bursts, such as the UART, TI recommends against the use of this configuration because it could cause the tail end of transmissions to stick in the FIFO.

4.2.7.2 Trigger Peripherals

Certain peripherals, such as the general purpose timer, trigger an interrupt to the μDMA controller when a programmed event occurs. When a trigger event occurs, the μDMA executes a transfer defined by the ARBSIZ bit field in the DMACHCTL register. If only a single transfer is needed for a μDMA trigger, then the ARBSIZ field is set to 0x1. If the trigger peripheral generates another μDMA request while the prior one is being serviced and that particular channel is the highest priority asserted channel, the second request is processed as soon as the handling of the first is complete. If two additional trigger peripheral μDMA requests are generated prior to the completion of the first, the third request is lost.

4.2.7.3 Software Request

Few μDMA channels are dedicated to software-initiated transfers. This channel also has a dedicated interrupt to signal completion of a μDMA transfer. A transfer is initiated by software by first configuring and enabling the transfer, and then issuing a software request using the DMA Channel Software Request (DMASWREQ) register. For software-based transfers, use the auto transfer mode.

The DMASWREQ register can initiate a transfer on any channel. If a request is initiated by software using a peripheral μDMA channel, then the completion interrupt occurs on the interrupt vector for the peripheral instead of the software interrupt vector. Any channel may be used for software requests, as long as the corresponding peripheral is not using μDMA for data transfer.

4.2.8 Interrupts and Errors

When a μDMA transfer is complete, a `dma_done` signal is sent to the peripheral that initiated the μDMA event. Interrupts can be enabled within the peripheral to trigger on μDMA transfer completion. If the transfer uses the software μDMA channel, then the completion interrupt occurs on the dedicated software μDMA interrupt vector. If the μDMA controller encounters a bus or memory protection error as it attempts to perform a data transfer, it disables the μDMA channel that caused the error and generates an interrupt on the μDMA error interrupt vector. The processor can read the DMA Bus Error Clear (DMAERRCLR) register to determine if an error is pending. The `ERRCLR` bit is set if an error occurred. The error can be cleared by writing a 1 to the `ERRCLR` bit.

4.3 Register Description

4.3.1 DMA Register Map

Table 4-4 lists the μDMA channel control structures and registers. The channel control structure shows the layout of one entry in the channel control table. The channel control table is located in system memory, and the location is determined by the application; thus, the base address is n/a (not applicable) and noted as so above the register descriptions. In **Table 4-4**, the offset for the channel control structures is the offset from the entry in the channel control table. See **Table 4-1** for a description of how the entries in the channel control table are located in memory. The μDMA register addresses are given as a hexadecimal increment, relative to the μDMA base address of 0x400F.F000. Note that the μDMA module clock must be enabled before the registers can be programmed. There must be a delay of three system clocks after the μDMA module clock is enabled before any μDMA module registers are accessed.

Table 4-4. μDMA Register Map

Offset	Name	Type	Reset	Description
μDMA Channel Control Structure (Offset from Channel Control Table Base)				
0x000	DMA_SRCENDP	R/W	-	DMA Channel Source Address End Pointer
0x004	DMA_DSTENDP	R/W	-	DMA Channel Destination Address End
				Pointer
0x008	DMA_CHCTL	R/W	-	DMA Channel Control Word
μDMA Registers (Offset from μDMA Base Address)				
0x000	DMA_STAT	RO	0x001F.0000	
0x004	DMA_CFG	WO	-	DMA Configuration
0x008	DMA_CTLBASE	R	0x0000.0000	DMA Channel Control Base Pointer
0x00C	DMA_ALTBASE	RO	0x0000.0200	DMA Alternate Channel Control Base
				Pointer
0x010	DMA_WAITSTAT	RO	0x03C3.CF00	DMA Channel Wait-on-Request Status
0x014	DMA_SWREQ	WO	-	DMA Channel Software Request
0x018	DMA_USEBURSTSET	R/W	0x0000.0000	DMA Channel Useburst Set
0x01C	DMA_USEBURSTCLR	WO	-	DMA Channel Useburst Clear
0x020	DMA_REQMASKSET	R/W	0x0000.0000	DMA Channel Request Mask Set
0x024	DMA_REQMASKCLR	WO	-	DMA Channel Request Mask Clear
0x028	DMA_ENASET	R/W	0x0000.0000	DMA Channel Enable Set
0x02C	DMA_ENACLR	WO	-	DMA Channel Enable Clear
0x030	DMA_ALTSET	R/W	0x0000.0000	DMA Channel Primary Alternate Set
0x034	DMA_ALTCLR	WO	-	DMA Channel Primary Alternate Clear
0x038	DMA_PRIOSET	R/W	0x0000.0000	DMA Channel Priority Set
0x03C	DMA_PRIOCLR	WO	-	DMA Channel Priority Clear
0x04C	DMA_ERRCLR	R/W	0x0000.0000	DMA Bus Error Clear

Table 4-4. μDMA Register Map (continued)

Offset	Name	Type	Reset	Description
0x500	DMA_CHASGN	R/W	0x0000.0000	DMA Channel Assignment
0x510	DMA_CHMAP0	R/W	0x0000.0000	DMA Channel Map Select 0
0x514	DMA_CHMAP1	R/W	0x0000.0000	DMA Channel Map Select 1
0x518	DMA_CHMAP2	R/W	0x0000.0000	DMA Channel Map Select 2
0x51C	DMA_CHMAP3	R/W	0x0000.0000	DMA Channel Map Select 3
0xFB0	DMA_PV	RO	0x0000.0200	DMA peripheral Version

4.3.2 μDMA Channel Control Structure

The μDMA channel control structure holds the transfer settings for a μDMA channel. Each channel has two control structures, which are located in a table in system memory. The channel control structure is one entry in the channel control table. Each channel has a primary and alternate structure. The primary control structures are located at offsets 0x0, 0x10, 0x20 and so on. The alternate control structures are located at offsets 0x200, 0x210, 0x220, and so on.

4.3.3 DMA Registers

Table 4-5 lists the memory-mapped registers for the DMA_(OFFSET_FROM_CHANNEL_CONTROL_TABLE_BASE). All register offset addresses not listed in **Table 4-5** should be considered as reserved locations and the register contents should not be modified.

Table below lists the DMA channel control structures and registers. The channel control structure shows the layout of one entry in the channel control table. The channel control table is located in system memory, and the location is determined by the application, thus, the base address is n/a (not applicable) and noted as so above the register descriptions. In the table below, the offset for the channel control structures is the offset from the entry in the channel control table. See Channel Configuration table for description of how the entries in the channel control table are located in memory. The DMA register addresses are given as a hexadecimal increment, relative to the DMA base address of 0x400F.F000. Note that the DMA module clock must be enabled before the registers can be programmed. There must be a delay of 3 system clocks after the DMA module clock is enabled before any DMA module registers are accessed. The DMA Channel Control Structure holds the transfer settings for a DMA channel. Each channel has two control structures, which are located in a table in system memory. The channel control structure is one entry in the channel control table. Each channel has a primary and alternate structure. The primary control structures are located at offsets 0x0, 0x10, 0x20 and so on. The alternate control structures are located at offsets 0x200, 0x210, 0x220, and so on.

Table 4-5. DMA Registers

Offset	Acronym	Register Name	Section
0h	DMA_SRCENDP	DMA Channel Source Address End Pointer	Section 4.3.3.1
4h	DMA_DSTENDP	DMA Channel Destination Address End Pointer	Section 4.3.3.2
8h	DMA_CHCTL	DMA Channel Control Word	Section 4.3.3.3

4.3.3.1 DMA_SRCENDP Register (offset = 0h) [reset = 0h]

DMA_SRCENDP is shown in [Figure 4-5](#) and described in [Table 4-6](#).

Figure 4-5. DMA_SRCENDP Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ADDR																															
R/W-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 4-6. DMA_SRCENDP Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	ADDR	R/W	0h	Source Address End Pointer. This field points to the last address of the DMA transfer source (inclusive). If the source address is not incrementing (the SRCINC field in the DMACHCTL register is 0x3), then this field points at the source location itself (such as a peripheral data register).

4.3.3.2 DMA_DSTENDP Register (offset = 4h) [reset = 0h]

DMA_DSTENDP is shown in [Figure 4-6](#) and described in [Table 4-7](#).

Figure 4-6. DMA_DSTENDP Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
ADDR																															
R/W-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 4-7. DMA_DSTENDP Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	ADDR	R/W	0h	Destination Address End Pointer. This field points to the last address of the DMA transfer destination (inclusive). If the destination address is not incrementing (the DSTINC field in the DMACHCTL register is 0x3), then this field points at the source location itself (such as a peripheral data register).

4.3.3.3 DMA_CHCTL Register (offset = 8h) [reset = 0h]

DMA_CHCTL is shown in [Figure 4-7](#) and described in [Table 4-8](#).

Figure 4-7. DMA_CHCTL Register

31	30	29	28	27	26	25	24
DSTINC		DSTSIZE		SRCINC		SRCSIZE	
R/W-0h		R/W-0h		R/W-0h		R/W-0h	
23	22	21	20	19	18	17	16
RESERVED					ARBSIZE		
R-0h					R/W-0h		
15	14	13	12	11	10	9	8
ARBSIZE		XFERSIZE					
R/W-0h		R/W-0h					
7	6	5	4	3	2	1	0
XFERSIZE				NXTUSEBURST	XFERMODE		
R/W-0h				R/W-0h	R/W-0h		

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 4-8. DMA_CHCTL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-30	DSTINC	R/W	0h	Destination Address Increment. This field configures the destination address increment. The address increment value must be equal or greater than the value of the destination size (DSTSIZE) 0h = Increment by 8-bit location 1h = Half word Increment by 16-bit location 2h = Word Increment by 32-bit location 3h = No increment Address remains set to the value of the Destination Address End Pointer (DMADSTENDP) for the channel
29-28	DSTSIZE	R/W	0h	Destination Data Size. This field configures the destination item data size. Note: DSTSIZE must be the same as SRCSIZE 0h = Increment by 8-bit location 1h = Half word Increment by 16-bit location 2h = Word Increment by 32-bit location 3h = No increment Address remains set to the value of the Destination Address End Pointer (DMADSTENDP) for the channel
27-26	SRCINC	R/W	0h	Source Address Increment. This field configures the destination address increment. The address increment value must be equal or greater than the value of the source size (SRCSIZE) 0h = Increment by 8-bit location 1h = Half word Increment by 16-bit location 2h = Word Increment by 32-bit location 3h = No increment Address remains set to the value of the source Address End Pointer (DMADSTENDP) for the channel
25-24	SRCSIZE	R/W	0h	Source Data Size. This field configures the source item data size. Note: DSTSIZE must be the same as SRCSIZE 0h = Increment by 8-bit location 1h = Half word Increment by 16-bit location 2h = Word Increment by 32-bit location 3h = No increment Address remains set to the value of the Destination Address End Pointer (DMADSTENDP) for the channel
23-18	RESERVED	R	0h	

Table 4-8. DMA_CHCTL Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
17-14	ARBSIZE	R/W	0h	This field configures the number of transfers that can occur before the DMA controller re-arbitrates. The possible arbitration rate configurations represent powers of 2 and are shown below. 0xA-0xF = 1024 transfer 0h = 1 transfer 1h = 2 transfer 2h = 4 transfer 3h = 8 transfer 4h = 16 transfer 5h = 32 transfer 6h = 64 transfer 7h = 128 transfer 8h = 256 transfer
13-4	XFERSIZE	R/W	0h	Transfer Size (minus 1). This field configures the total number of items to transfer. The value of this field is 1 less than the number to transfer (value 0 means transfer 1 item). The maximum value for this 10-bit field is 1023 which represents a transfer size of 1024 items. The transfer size is the number of items, not the number of bytes. If the data size is 32 bits, then this value is the number of 32-bit words to transfer. The DMA controller updates this field immediately prior to entering the arbitration process, so it contains the number of outstanding items that is necessary to complete the DMA cycle
3	NXTUSEBURST	R/W	0h	Next Useburst. This field controls whether the Useburst SET[n] bit is automatically set for the last transfer of a peripheral scatter gather operation. Normally, for the last transfer, if the number of remaining items to transfer is less than the arbitration size, the DMA controller uses single transfers to complete the transaction. If this bit is set, then the controller uses a burst transfer to complete the last transfer.
2-0	XFERMODE	R/W	0h	DMA Transfer Mode. This field configures the operating mode of the DMA cycle. Because this register is in system RAM, it has no reset value. Therefore, this field should be initialized to 0 before the channel is enabled. 0h = Stop 1h = Basic 2h = Auto-request 3h = Ping-pong 4h = Memory Scatter-Gather 5h = Alternate memory scatter gather 6h = Peripheral scatter gather 7h = Alternate peripheral scatter gather

General-Purpose Input/Outputs (GPIOs)

Topic	Page
5.1 Overview	115
5.2 Functional Description	115
5.3 Interrupt Control.....	117
5.4 Initialization and Configuration	117
5.5 GPIO_REGISTER_MAP Registers	119

5.1 Overview

This chapter describes the general purpose input/output module and the I/O pad cells in the CC3200.

The GPIO module is composed of 4 physical GPIO blocks, each corresponding to an individual GPIO port (Port 0, Port A1, Port A2, Port A3). The GPIO module supports up to 32 programmable input/output pins when GPIO function is selected in I/O pin muxing.


The GPIO module has the following features:

- Up to 26 GPIOs depending on pin mux configuration, excluding the two SWD pins (TMS, TCK) and the two pins dedicated for antenna switch control (diversity selection):
 - 2-wire debug corresponds to the SOP mode (sense-on-power).
 - If 4-wire JTAG mode is used instead (by pulling the sense on power pin 2:0 to 000 using board-level pull-down resistors), then the number of digital I/Os, excluding JTAG and antenna diversity controls, is 24.
- Programmable control for GPIO interrupts:
 - Interrupt generation masking
 - Edge-triggered on rising, falling, or both
 - Level-sensitive on High or Low values

5.2 Functional Description

Each GPIO port is a separate hardware instance of the same physical block. The CC3200 microcontroller contains four ports and thus four of these physical GPIO blocks. Each GPIO block has 8 bits. The available GPIOs are a subset of these 32 GPIO signals. For details on the usable GPIOs, refer to [Table 16-6](#).

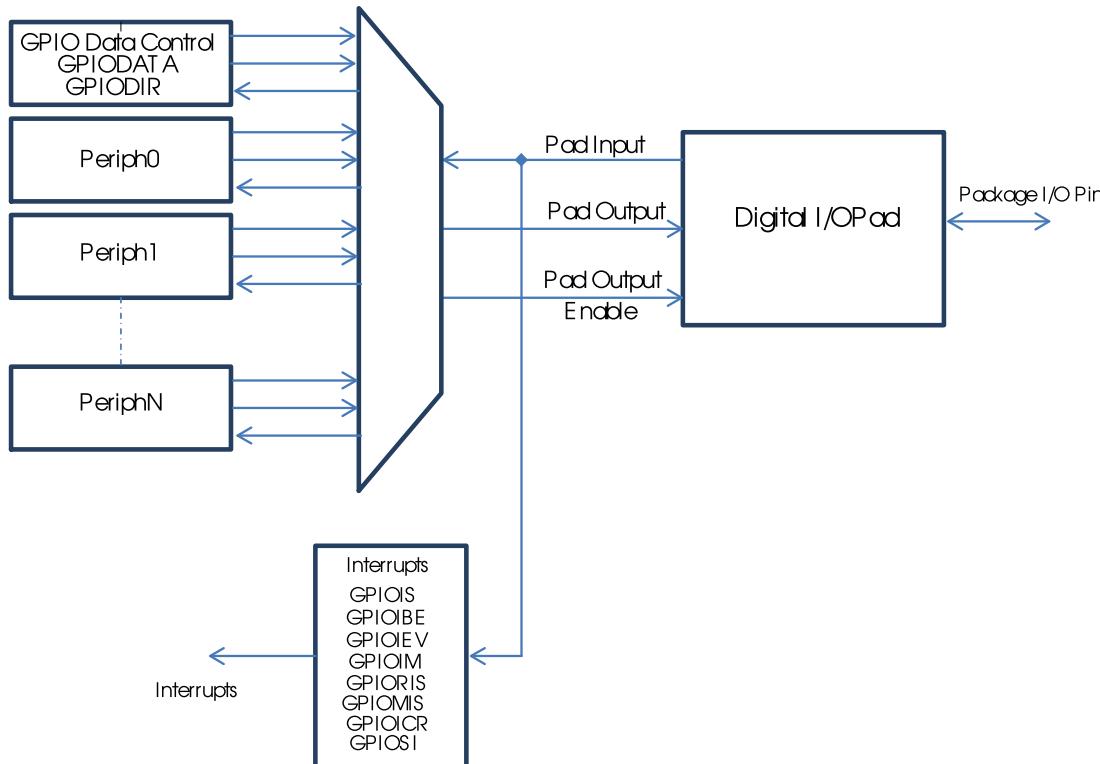Figure 5-1. Digital I/O Pads



5.2.1 Data Control

The data direction register GPIODIR configures the GPIO as an input or an output, while the data register GPIODATA either captures incoming data or drives it out to the pads.

5.2.1.1 Data Direction Operation


The GPIO Direction (GPIODIR) register configures each individual pin as an input or output. When the data direction bit is cleared, the GPIO is configured as an input, and the corresponding data register bit captures and stores the value on the GPIO port. When the data direction bit is set, the GPIO is configured as an output, and the corresponding data register bit is driven out on the GPIO port.

5.2.1.2 Data Register Operation

To aid in the efficiency of software, the GPIO ports allow for the modification of individual bits in the GPIO Data (GPIODATA) register by using bits [9:2] of the address bus as a mask. In this manner, software drivers can modify individual GPIO pins in a single instruction without affecting the state of the other pins. This method is more efficient than the conventional method of performing a read-modify-write operation to set or clear an individual GPIO pin. To implement this feature, the GPIODATA register covers 256 locations in the memory map.


During a write, if the address bit associated with that data bit is set, the value of the GPIODATA register is altered. If the address bit is cleared, the data bit is left unchanged. For example, writing a value of 0xEB to the address GPIODATA + 0x098 has the results shown in [Figure 5-2](#), where u indicates that data is unchanged by the write. This example demonstrates how GPIODATA bits 5, 2, and 1 are written with a single operation by using GPIODATA address alias 0x098 (offset address with regards to the base of the respective GPIO instance A0 to A4).

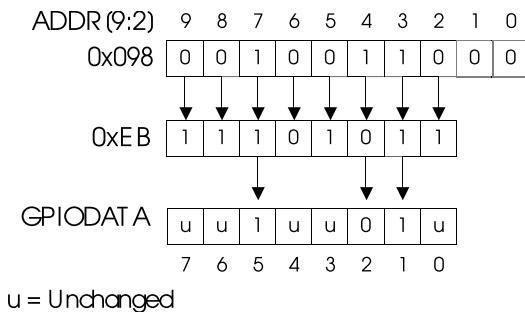Figure 5-2. GPIODATA Write Example



During a read, if the address bit associated with the data bit is set, the value is read. If the address bit associated with the data bit is cleared, the data bit is read as a zero, regardless of its actual value. For example, reading address GPIODATA + 0x0C4 yields as shown in [Figure 5-3](#). This example shows how to read GPIODATA bits 5, 4, and 0 with a single operation by using GPIODATA address alias 0x0C4 (offset address with regard to the base of the respective GPIO instance S0 to S4).

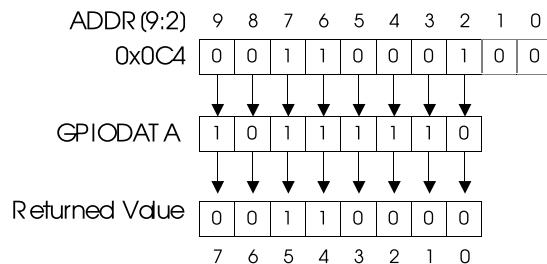Figure 5-3. GPIODATA Read Example



5.3 Interrupt Control

The interrupt capabilities of each GPIO port are controlled by a set of seven registers (refer to [Section 5.5](#)). These registers select the source of the interrupt, its polarity, and the edge properties. When one or more GPIO inputs cause an interrupt, a single interrupt output is sent to the interrupt controller for the entire GPIO port.

Three registers define the edge or sense that causes interrupts:

- GPIO Interrupt Sense (GPIOIS) register
- GPIO Interrupt Both Edges (GPIOIBE) register
- GPIO Interrupt Event (GPIOIEV) register

Interrupts are enabled or disabled through the GPIO Interrupt Mask (GPIOIM) register.

When an interrupt condition occurs, the state of the interrupt signal can be viewed in two locations: the GPIO Raw Interrupt Status (GPIORIS) and GPIO Masked Interrupt Status (GPIOIM) registers. As the name implies, the GPIOIM register only shows interrupt conditions that are allowed to be passed to the interrupt controller. The GPIORIS register indicates that a GPIO pin meets the conditions for an interrupt, but has not necessarily been sent to the interrupt controller.

For a GPIO level-detect interrupt, the interrupt signal generating the interrupt must be held until serviced. Once the input signal de-asserts from the interrupt generating logical sense, the corresponding RIS bit in the GPIORIS register clears. For a GPIO edge-detect interrupt, the RIS bit in the GPIORIS register is cleared by writing a 1 to the corresponding bit in the GPIO Interrupt Clear (GPIOICR) register. The corresponding GPIOIM bit reflects the masked value of the RIS bit.

When programming the interrupt control registers (GPIOIS, GPIOIBE, or GPIOIEV), the interrupts should be masked (GPIOIM cleared). Writing any value to an interrupt control register can generate a spurious interrupt if the corresponding bits are enabled.

5.3.1 μDMA Trigger Source

Any GPIO pin can be configured as an external trigger for the μDMA, using the Apps Gpio Trigger Enable (APPS_GPIO_TRIG_EN) register. If the μDMA is configured to start a transfer based on the GPIO signal, a transfer is initiated.

5.4 Initialization and Configuration

To configure the GPIO pins of a particular port:

1. Enable the clock to the port by setting the appropriate bits in the GPIO0CLKEN, GPIO1CLKEN, GPIO2CLKEN, GPIO3CLKEN, and GPIO4CLKEN registers.
2. Set the direction of the GPIO port pins by programming the GPIODIR register. A write of a 1 indicates output, and a write of a 0 indicates input.
3. Configure the GPIO_PAD_CONFIG_# register to program each bit as a GPIO or other peripheral function. The GPIOACTL register can program a GPIO pin as a μDMA trigger.
4. Program the GPIOIS, GPIOIBE, GPIOEV, and GPIOIM registers to configure the type, event, and mask of the interrupts for each port. **Note:** To prevent false interrupts, the following steps should be taken when re-configuring GPIO edge and interrupt sense registers:
 - (a) Mask the corresponding port by clearing the IME field in the GPIOIM register.
 - (b) Configure the IS field in the GPIOIS register and the IBE field in the GPIOIBE register.
 - (c) Clear the GPIORIS register.
 - (d) Unmask the port by setting the IME field in the GPIOIM register.

Table 5-1. GPIO Pad Configuration Examples

Configuration	GPIO Register Bit Value	
	DIR	
Digital Input (GPIO)		0
Digital Output (GPIO)		1

Use the DATA register to drive required value on GPIO pin (When DIR = 1) or to read value on GPIO pin (when DIR = 0).

Table 5-2. GPIO Interrupt Configuration Example

Register	Desired Interrupt Event Trigger	Pin 2 Bit Value							
		7	6	5	4	3	2	1	0
GPIOIS	0=edge 1=level	X	X	X	X	X	0	X	X
GPIOIBE	0=single edge 1=both edges	X	X	X	X	X	0	X	X
GPIOIEV	0=Low level, or falling edge 1=High level, or rising edge	X	X	X	X	X	1	X	X
GPIOIM	0=masked 1=not masked	0	0	0	0	0	1	0	0

5.5 GPIO_REGISTER_MAP Registers

Table 5-3 lists the memory-mapped registers for the GPIO_REGISTER_MAP. Each GPIO port can be accessed through the advanced peripheral bus (APB). The offset listed is a hexadecimal increment to the register address, relative to the base address of that GPIO port:

- GPIO Port A0: 0x4000.4000
- GPIO Port A1: 0x4000.5000
- GPIO Port A2: 0x4000.6000
- GPIO Port A3: 0x4000.7000

Each GPIO module clock must be enabled before the registers can be programmed. There must be a delay of 3 system clocks after the GPIO module clock is enabled before any GPIO module registers are accessed.

Table 5-3. GPIO_REGISTER_MAP Registers

Offset	Acronym	Register Name	Section
0h	GPIODATA	GPIO Data	Section 5.5.1.1
400h	GPIODIR	GPIO Direction	Section 5.5.1.2
404h	GPIOIS	GPIO Interrupt Sense	Section 5.5.1.3
408h	GPIOIBE	GPIO Interrupt Both Edges	Section 5.5.1.4
40Ch	GPIOIEV	GPIO Interrupt Event	Section 5.5.1.5
410h	GPIOIM	GPIO Interrupt Mask	Section 5.5.1.6
414h	GPIOIRIS	GPIO Raw Interrupt Status	Section 5.5.1.7
418h	GPIOIMIS	GPIO Masked Interrupt Status	Section 5.5.1.8
41Ch	GPIOICR	GPIO Interrupt Clear	Section 5.5.1.9

5.5.1 GPIO Register Description

The remainder of this section lists and describes the GPIO registers.

5.5.1.1 GPIO DATA Register (offset = 0h) [reset = 0h]

GPIO DATA is shown in [Figure 5-4](#) and described in [Table 5-4](#).

The GPIO DATA register is the data register. In software control mode, values written in the GPIO DATA register are transferred onto the GPIO port pins if the respective pins have been configured as outputs through the GPIO Direction (GPIO DIR) register.

The GPIO DATA register has 256 aliased addresses from offset 0x000 to 0x3FF. A different address alias is used to directly read or write any combination of the 8 signal bits. This feature can help avoid time-consuming read-modify-writes and bit-masking operation for read-in software.

In this scheme, to write to GPIO DATA, the corresponding bits in the mask, represented by the address bus bits [9:2], must be set. Otherwise, the bit values remain unchanged by the write.

Similarly, the values read from this register are determined for each bit by the mask bit derived from the alias address used to access the data register, bits [9:2]. Bits set in the address mask cause the corresponding bits in GPIO DATA to be read, and bits that are clear in the address mask cause the corresponding bits in GPIO DATA to be read as 0, regardless of their value.

A read from GPIO DATA returns the last bit value written if the respective pins are configured as outputs, or it returns the value on the corresponding input pin when these are configured as inputs. All bits are cleared by a reset.

Figure 5-4. GPIO DATA Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																	DATA														
R-0h																	R/W-0h														

Table 5-4. GPIO DATA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	Software should not rely on the value of a reserved bit. To provide compatibility with future products, the value of a reserved bit should be preserved across a read-modify-write operation.
7-0	DATA	R/W	0h	GPIO Data This register is virtually mapped to 256 locations in the address space. To facilitate the reading and writing of data to these registers by independent drivers, the data read from and written to the registers are masked by the eight address lines [9:2]. Reads from this register return its current state. Writes to this register only affect bits that are not masked by ADDR[9:2] and are configured as outputs.

5.5.1.2 GPIODIR Register (offset = 400h) [reset = 0h]

GPIODIR is shown in [Figure 5-5](#) and described in [Table 5-5](#).

The GPIODIR register is the data direction register. Setting a bit in the GPIODIR register configures the corresponding pin to be an output, while clearing a bit configures the corresponding pin to be an input. All bits are cleared by a reset, meaning all GPIO pins are inputs by default.

Figure 5-5. GPIODIR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																DIR															
R-0h																R/W-0h															

Table 5-5. GPIODIR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	DIR	R/W	0h	GPIO Data Direction 0h = Corresponding pin is an input. 1h = Corresponding pins is an output.

5.5.1.3 GPIOIS Register (offset = 404h) [reset = 0h]

GPIOIS is shown in [Figure 5-6](#) and described in [Table 5-6](#).

The GPIOIS register is the interrupt sense register. Setting a bit in the GPIOIS register configures the corresponding pin to detect levels, while clearing a bit configures the corresponding pin to detect edges. All bits are cleared by a reset.

To prevent false interrupts, the following steps should be taken when re-configuring GPIO edge and interrupt sense registers:

1. Mask the corresponding port by clearing the IME field in the GPIOIM register.
2. Configure the IS field in the GPIOIS register and the IBE field in the GPIOIBE register.
3. Clear the GPIOISR register.
4. Unmask the port by setting the IME field in the GPIOIM register.

Figure 5-6. GPIOIS Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																										IS					
R-0h																										R/W-0h					

Table 5-6. GPIOIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	IS	R/W	0h	GPIO Interrupt Sense 0h = The edge on the corresponding pin is detected (edge-sensitive). 1h = The level on the corresponding pin is detected (level-sensitive).

5.5.1.4 GPIOIBE Register (offset = 408h) [reset = 0h]

GPIOIBE is shown in [Figure 5-7](#) and described in [Table 5-7](#).

The GPIOIBE register allows both edges to cause interrupts. When the corresponding bit in the GPIO Interrupt Sense (GPIOIS) register is set to detect edges, setting a bit in the GPIOIBE register configures the corresponding pin to detect both rising and falling edges, regardless of the corresponding bit in the GPIO Interrupt Event (GPIOIEV) register. Clearing a bit configures the pin to be controlled by the GPIOIEV register. All bits are cleared by a reset.

To prevent false interrupts, the following steps should be taken when re-configuring GPIO edge and interrupt sense registers:

1. Mask the corresponding port by clearing the IME field in the GPIOIM register.
2. Configure the IS field in the GPIOIS register and the IBE field in the GPIOIBE register.
3. Clear the GPIOISR register.
4. Unmask the port by setting the IME field in the GPIOIM register.

Figure 5-7. GPIOIBE Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																										IBE					
R-0h																										R/W-0h					

Table 5-7. GPIOIBE Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	IBE	R/W	0h	GPIO Interrupt Both Edges 0h = Interrupt generation is controlled by the GPIO Interrupt Event (GPIOIEV) register. 1h = Both edges on the corresponding pin trigger an interrupt.

5.5.1.5 GPIOIEV Register (offset = 40Ch) [reset = 0h]

GPIOIEV is shown in [Figure 5-8](#) and described in [Table 5-8](#).

The GPIOIEV register is the interrupt event register. Setting a bit in the GPIOIEV register configures the corresponding pin to detect rising edges or high levels, depending on the corresponding bit value in the GPIO Interrupt Sense (GPIOIS) register. Clearing a bit configures the pin to detect falling edges or low levels, depending on the corresponding bit value in the GPIOIS register. All bits are cleared by a reset.

Figure 5-8. GPIOIEV Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED															IEV																
R-0h															R/W-0h																

Table 5-8. GPIOIEV Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	IEV	R/W	0h	GPIO Interrupt Event 0h = A falling edge or a Low level on the corresponding pin triggers an interrupt. 1h = A rising edge or a High level on the corresponding pin triggers an interrupt.

5.5.1.6 GPIOIM Register (offset = 410h) [reset = 0h]

GPIOIM is shown in [Figure 5-9](#) and described in [Table 5-9](#).

The GPIOIM register is the interrupt mask register. Setting a bit in the GPIOIM register allows interrupts generated by the corresponding pin to be sent to the interrupt controller on the combined interrupt signal. Clearing a bit prevents an interrupt on the corresponding pin from being sent to the interrupt controller. All bits are cleared by a reset.

Figure 5-9. GPIOIM Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED															IME																
R-0h															R/W-0h																

Table 5-9. GPIOIM Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	IME	R/W	0h	GPIO Interrupt Mask Enable 0h = The interrupt from the corresponding pin is masked. 1h = The interrupt from the corresponding pin is sent to the interrupt controller.

5.5.1.7 GPIOVIS Register (offset = 414h) [reset = 0h]

GPIOVIS is shown in [Figure 5-10](#) and described in [Table 5-10](#).

The GPIOVIS register is the raw interrupt status register. A bit in this register is set when an interrupt condition occurs on the corresponding GPIO pin. If the corresponding bit in the GPIO Interrupt Mask (GPIOIM) register is set, the interrupt is sent to the interrupt controller. Bits read as zero indicate that corresponding input pins have not initiated an interrupt. For a GPIO level-detect interrupt, the interrupt signal generating the interrupt must be held until serviced. Once the input signal de-asserts from the interrupt generating logical sense, the corresponding RIS bit in the GPIOVIS register clears. For a GPIO edge-detect interrupt, the RIS bit in the GPIOVIS register is cleared by writing a 1 to the corresponding bit in the GPIO Interrupt Clear (GPIOICR) register. The corresponding GPIOIM bit reflects the masked value of the RIS bit.

Figure 5-10. GPIOVIS Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																										RIS					
R-0h																										R-0h					

Table 5-10. GPIOVIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	RIS	R	0h	<p>GPIO Interrupt Raw Status</p> <p>For edge-detect interrupts, this bit is cleared by writing a 1 to the corresponding bit in the GPIOICR register. For a GPIO level-detect interrupt, the bit is cleared when the level is deasserted.</p> <p>0h = An interrupt condition has not occurred on the corresponding pin.</p> <p>1h = An interrupt condition has occurred on the corresponding pin.</p>

5.5.1.8 GPIOMIS Register (offset = 418h) [reset = 0h]

GPIOMIS is shown in [Figure 5-11](#) and described in [Table 5-11](#).

The GPIOMIS register is the masked interrupt status register. If a bit is set in this register, the corresponding interrupt has triggered an interrupt to the interrupt controller. If a bit is clear, either no interrupt has been generated, or the interrupt is masked.

GPIOMIS is the state of the interrupt after masking.

Figure 5-11. GPIOMIS Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED															MIS																
R-0h															R-0h																

Table 5-11. GPIOMIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	MIS	R	0h	<p>GPIO Masked Interrupt Status</p> <p>For edge-detect interrupts, this bit is cleared by writing a 1 to the corresponding bit in the GPIOICR register. For a GPIO level-detect interrupt, the bit is cleared when the level is deasserted.</p> <p>0h = An interrupt condition on the corresponding pin is masked or has not occurred.</p> <p>1h = An interrupt condition on the corresponding pin has triggered an interrupt to the interrupt controller.</p>

5.5.1.9 GPIOICR Register (offset = 41Ch) [reset = 0h]

GPIOICR is shown in [Figure 5-12](#) and described in [Table 5-12](#).

The GPIOICR register is the interrupt clear register. For edge-detect interrupts, writing a 1 to the IC bit in the GPIOICR register clears the corresponding bit in the GPIORIS and GPIOMIS registers. If the interrupt is a level-detect, the IC bit in this register has no effect. In addition, writing a 0 to any of the bits in the GPIOICR register has no effect.

Figure 5-12. GPIOICR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																IC															
R-0h																W1C-0h															

Table 5-12. GPIOICR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	IC	W1C	0h	GPIO Interrupt Clear 0h = The corresponding interrupt is unaffected. 1h = The corresponding interrupt is cleared.

5.5.1.10 GPIO_TRIG_EN Register

Register Outside GPIO Module : GPIO Trigger Enable (GPIO_TRIG_EN): This register configures a GPIO pin as a source for the DMA trigger. Setting a bit in the GPIO_TRIG_EN register allows to trigger DMA upon any pin toggle correspond that GPIO module.

Physical Address: 0x400F 70C8.

Table 5-13. GPIO_TRIG_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	TRIG	R/W	0h	<p>GPIO DMA Trigger Enable.</p> <p>Bit 0: when 1, enable GPIO 0 trigger. This bit enables trigger for all GPIO 0 pins (GPIO 0 to GPIO7).</p> <p>Bit 1: when 1, enable GPIO 1 trigger. This bit enables trigger for all GPIO 1 pins (GPIO8 to GPIO15).</p> <p>Bit 2: when 1, enable GPIO 2 trigger. This bit enables trigger for all GPIO 2 pins (GPIO16 to GPIO23).</p> <p>Bit 3: when 1, enable GPIO 3 trigger. This bit enables trigger for all GPIO 3 pins (GPIO24 to GPIO31).</p>

Table 5-14. GPIO Mapping

GPIO Module Instance	GPIO Bit	GPIO #
GPIOA0	0	GPIO_00 (PM/Dig Mux)
GPIOA0	1	GPIO_01
GPIOA0	2	GPIO_02 (Dig/ADC Mux)
GPIOA0	3	GPIO_03 (Dig/ADC Mux)
GPIOA0	4	GPIO_04 (Dig/ADC Mux)
GPIOA0	5	GPIO_05 (Dig/ADC Mux)
GPIOA0	6	GPIO_06
GPIOA0	7	GPIO_07
GPIOA1	0	GPIO_08
GPIOA1	1	GPIO_09
GPIOA1	2	GPIO_10
GPIOA1	3	GPIO_11
GPIOA1	4	GPIO_12
GPIOA1	5	GPIO_13
GPIOA1	6	GPIO_14
GPIOA1	7	GPIO_15
GPIOA2	0	GPIO_16
GPIOA2	1	GPIO_17
GPIOA2	2	GPIO_18 (Reserved)
GPIOA2	3	GPIO_19 (Reserved)
GPIOA2	4	GPIO_20 (Reserved)
GPIOA2	5	GPIO_21 (Reserved)
GPIOA2	6	GPIO_22
GPIOA2	7	GPIO_23
GPIOA3	0	GPIO_24
GPIOA3	1	GPIO_25
GPIOA3	2	GPIO_26 (Restricted Use; Antenna Selection 1 Only)
GPIOA3	3	GPIO_27 (Restricted Use; Antenna Selection 2 Only)
GPIOA3	4	GPIO_28

Table 5-14. GPIO Mapping (continued)

GPIO Module Instance	GPIO Bit	GPIO #
GPIOA3	5	GPIO_29
GPIOA3	6	GPIO_30 (PM/Dig Mux)
GPIOA3	7	GPIO_31 (PM/Dig Mux)

Universal Asynchronous Receivers/Transmitters (UARTs)

Topic	Page
6.1 Overview	132
6.2 Functional Description	133
6.3 Register Description	138


6.1 Overview

The CC3200 includes two Universal Asynchronous Receivers/Transmitters (UART) with the following features:

- Programmable baud-rate generator allowing speeds up to 3 Mbps.
- Separate 16x8 transmit (TX) and receive (RX) FIFOs to reduce CPU interrupt service loading
- Programmable FIFO length, including 1-byte deep operation providing conventional double-buffered interface
- FIFO trigger levels of 1/8, 1/4, 1/2, 3/4, and 7/8
- Standard asynchronous communication bits for start, stop, and parity
- Line-break generation and detection
- Fully programmable serial interface characteristics
 - 5, 6, 7, or 8 data bits
 - Even, odd, stick, or no-parity bit generation and detection
 - 1 or 2 stop bit generation
- RTS and CTS hardware flow support
- Standard FIFO-level and end-of-transmission interrupts
- Efficient transfers using micro-direct memory access controller (μ DMA)
 - Separate channels for transmit and receive
 - Receive single request asserted when data is in the FIFO; burst request asserted at programmed FIFO level
 - Transmit single request asserted when there is space in the FIFO; burst request asserted at programmed FIFO level
- System clock generates the baud clock.

6.1.1 Block Diagram

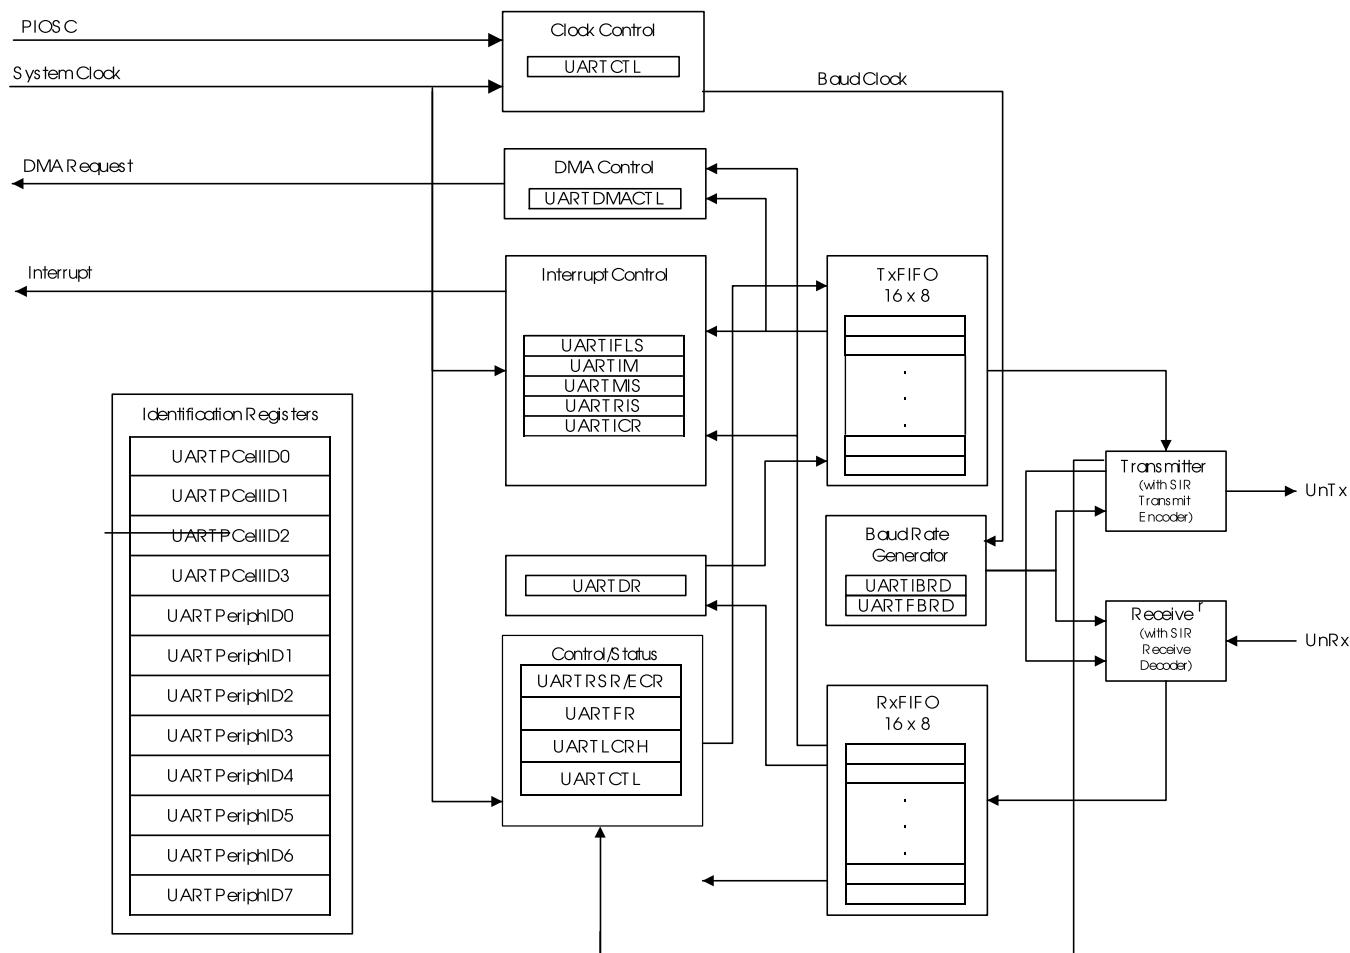Figure 6-1. UART Module Block Diagram



6.2 Functional Description


Each CC3200 UART performs the functions of parallel-to-serial and serial-to-parallel conversions.

The UART is configured for transmit and receive through the TXE and RXE bits of the UART Control (UARTCTL) register. Transmit and receive are both enabled out of reset. Before any control registers are programmed, the UART must be disabled by clearing the UARTEN bit in the UARTCTL register. If the UART is disabled during a TX or RX operation, the current transaction is completed prior to the UART stopping.

6.2.1 Transmit/Receive Logic

The transmit logic performs parallel-to-serial conversion on the data read from the transmit FIFO. The control logic outputs the serial bit stream, beginning with a start bit and followed by the data bits (LSB first), parity bit, and the stop bits according to the programmed configuration in the control registers. See [Figure 6-2](#) for details.

The receive logic performs serial-to-parallel conversion on the received bit stream after a valid start pulse has been detected. Overrun, parity, frame error checking, and line-break detection are also performed, and their status accompanies the data written to the receive FIFO.

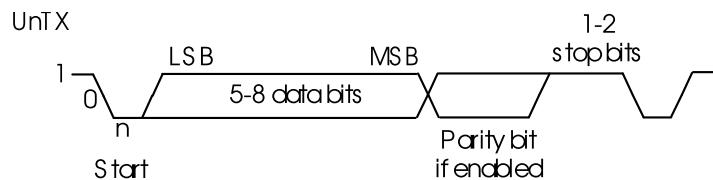Figure 6-2. UART Character Frame

6.2.2 Baud-Rate Generation

The baud-rate divisor is a 22-bit number consisting of a 16-bit integer and a 6-bit fractional part. The number formed by these two values is used by the baud-rate generator to determine the bit period. Having a fractional baud-rate divisor allows the UART to generate all the standard baud rates.

The 16-bit integer is loaded through the UART Integer Baud-Rate Divisor (UARTIBRD) register and the 6-bit fractional part is loaded with the UART Fractional Baud-Rate Divisor (UARTFBRD) register. The baud-rate divisor (BRD) has the following relationship to the system clock (where BRDI is the integer part of the BRD and BRDF is the fractional part, separated by a decimal place.)

$$BRD = BRDI + BRDF = \text{UARTSysClk} / (\text{ClkDiv} * \text{Baud Rate})$$

where `UARTSysClk` is the system clock connected to the UART, and `ClkDiv` is either 16 (if HSE in `UARTCTL` is clear) or 8 (if HSE is set). By default, this is the main system clock described in [Section 15.3.5](#).

The 6-bit fractional number (loaded into the DIVFRAC bit field in the `UARTFBRD` register) can be calculated by taking the fractional part of the baud-rate divisor, multiplying it by 64, and adding 0.5 to account for rounding errors:

$$\text{UARTFBRD}[DIVFRAC] = \text{integer}(BRDF * 64 + 0.5)$$

The UART generates an internal baud-rate reference clock at 8x or 16x the baud-rate (referred to as Baud8 and Baud16, depending on the setting of the HSE bit (bit 5) in `UARTCTL`). This reference clock is divided by 8 or 16 to generate the transmit clock, and used for error detection during receive operations.

Along with the UART Line Control, High Byte (`UARTLCRH`) register, the `UARTIBRD` and `UARTFBRD` registers form an internal 30-bit register. This internal register is only updated when a write operation to `UARTLCRH` is performed, so any changes to the baud-rate divisor must be followed by a write to the `UARTLCRH` register for the changes to take effect. To update the baud-rate registers, there are four possible sequences:

- `UARTI` BRD write, `UARTF` BRD write, and `UARTLCRH` write
- `UARTF` BRD write, `UARTI` BRD write, and `UARTLCRH` write
- `UARTI` BRD write and `UARTLCRH` write
- `UARTF` BRD write and `UARTLCRH` write

6.2.3 Data Transmission

Data received or transmitted is stored in two 16-byte FIFOs, though the receive FIFO has an extra four bits per character for status information. For transmission, data is written into the transmit FIFO. If the UART is enabled, it causes a data frame to start transmitting with the parameters indicated in the `UARTLCRH` register. Data continues to be transmitted until there is no data left in the transmit FIFO. The `BUSY` bit in the `UART Flag` (`UARTFR`) register is asserted when data is written to the transmit FIFO (if the FIFO is non-empty) and remains asserted while data is being transmitted. The `BUSY` bit is negated only when the transmit FIFO is empty, and the last character has been transmitted from the shift register, including the stop bits. The UART can indicate that it is busy even though the UART may no longer be enabled.

When the receiver is idle (the `UnRx` signal is continuously 1), and the data input goes low (a start bit has been received), the receive counter begins running and data is sampled on the eighth cycle of Baud16 or fourth cycle of Baud8 depending on the setting of the HSE bit (bit 5) in `UARTCTL`.

The start bit is valid and recognized if the UnRx signal is still low on the eighth cycle of Baud16 (HSE clear) or the fourth cycle of Baud8 (HSE set), otherwise it is ignored. After a valid start bit is detected, successive data bits are sampled on every 16th cycle of Baud16 or 8th cycle of Baud8 (that is, one bit period later) according to the programmed length of the data characters and value of the HSE bit in UARTCTL. The parity bit is then checked if parity mode is enabled. Data length and parity are defined in the UARTLCRH register.

Lastly, a valid stop bit is confirmed if the UnRx signal is high, otherwise a framing error has occurred. When a full word is received, the data is stored in the receive FIFO along with any error bits associated with that word.

6.2.3.1 Flow Control

Flow control can be accomplished by either hardware or software. The following sections describe the different methods.

6.2.3.1.1 Hardware Flow Control (RTS/CTS)

Hardware flow control between two devices is accomplished by connecting the U1RTS output to the clear-to-send input on the receiving device, and connecting the request-to-send output on the receiving device to the U1RTS input.

The U1RTS input controls the transmitter. The transmitter may only transmit data when the U1RTS input is asserted. The U1RTS output signal indicates the state of the receive FIFO. U1CTS remains asserted until the preprogrammed watermark level is reached, indicating that the receive FIFO has no space to store additional characters.

The UARTCTL register bits 15 (CTSEN) and 14 (RTSEN) specify the flow control mode as shown in [Table 6-1](#).

Table 6-1. Flow Control Mode

CTSEN	RTSEN	Description
1	1	RTS and CTS flow control enabled
1	0	Only CTS flow control enabled
0	1	Only RTS Flow Control enabled
0	0	Both RTS and CTS flow control disabled

When RTSEN is 1, software cannot modify the U1RTS output value through the UARTCTL register request-to-send (RTS) bit, and the status of the RTS bit should be ignored.

6.2.3.1.2 Software Flow Control (Modem Status Interrupts)

Software flow control between two devices is accomplished by using interrupts to indicate the status of the UART. Interrupts may be generated for the U1CTS and U1RI signals using bit 1 of the UARTIM register, respectively. The raw and masked interrupt status may be checked using the UARTRIS and UARTRMIS registers. These interrupts may be cleared using the UARTICR register.

6.2.3.2 FIFO Operation

The UART has two 16x8 FIFOs; one for transmit and one for receive. Both FIFOs are accessed through the UART Data (UARTDR) register. Read operations of the UARTDR register return a 12-bit value consisting of 8 data bits and 4 error flags, while write operations place 8-bit data in the transmit FIFO.

Out of reset, both FIFOs are disabled and act as 1-byte-deep holding registers. The FIFOs are enabled by setting the FEN bit in UARTLCRH.

FIFO status can be monitored via the UART Flag (UARTFR) register and the UART Receive Status (UARTRSR) register. Hardware monitors empty, full, and overrun conditions. The UARTFR register contains empty and full flags (TXFE, TXFF, RXFE, and RXFF bits), and the UARTRSR register shows overrun status through the OE bit. If the FIFOs are disabled, the empty and full flags are set according to the status of the 1-byte-deep holding registers.

The trigger points at which the FIFOs generate interrupts are controlled through the UART Interrupt FIFO Level Select (UARTIFLS) register. Both FIFOs can be individually configured to trigger interrupts at different levels. Available configurations include $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, and $\frac{7}{8}$. For example, if the $\frac{1}{4}$ option is selected for the receive FIFO, the UART generates a receive interrupt after 4 data bytes are received. Out of reset, both FIFOs are configured to trigger an interrupt at the $\frac{1}{2}$ mark.

6.2.3.3 Interrupts

The UART can generate interrupts when the following conditions are observed:

- Overrun error
- Break error
- Parity error
- Framing error
- Receive timeout
- Transmit (when the condition defined in the TXIFLSEL bit in the UARTIFLS register is met, or if the EOT bit in UARTCTL is set, when the last bit of all transmitted data leaves the serializer)
- Receive (when the condition defined in the RXIFLSEL bit in the UARTIFLS register is met)

All of the interrupt events are ORed together before being sent to the interrupt controller, so the UART can only generate a single interrupt request to the controller at any given time. Software can service multiple interrupt events in a single interrupt service routine by reading the UART Masked Interrupt Status (UARTMIS) register.

The interrupt events that can trigger a controller-level interrupt are defined in the UART Interrupt Mask (UARTIM) register by setting the corresponding IM bits. If interrupts are not used, the raw interrupt status is always visible through the UART Raw Interrupt Status (UARTRIS) register.

Interrupts are always cleared (for both the UARTMIS and UARTRIS registers) by writing a 1 to the corresponding bit in the UART Interrupt Clear (UARTICR) register.

The receive timeout interrupt is asserted when the receive FIFO is not empty, and no further data is received over a 32-bit period when the HSE bit is clear, or over a 64-bit period when the HSE bit is set. The receive timeout interrupt is cleared either when the FIFO becomes empty through reading all the data (or by reading the holding register), or when a 1 is written to the corresponding bit in the UARTICR register.

The receive interrupt changes state when one of the following events occurs:

- If the FIFOs are enabled and the receive FIFO reaches the programmed trigger level, the RXRIS bit is set. The receive interrupt is cleared by reading data from the receive FIFO until it becomes less than the trigger level, or by clearing the interrupt by writing a 1 to the RXIC bit.
- If the FIFOs are disabled (have a depth of one location) and data is received thereby filling the location, the RXRIS bit is set. The receive interrupt is cleared by performing a single read of the receive FIFO, or by clearing the interrupt by writing a 1 to the RXIC bit.

The transmit interrupt changes state when one of the following events occurs:

- If the FIFOs are enabled and the transmit FIFO progresses through the programmed trigger level, the TXRIS bit is set. The transmit interrupt is based on a transition through level, therefore the FIFO must be written past the programmed trigger level or no further transmit interrupts will be generated. The transmit interrupt is cleared by writing data to the transmit FIFO until it becomes greater than the trigger level, or by clearing the interrupt by writing a 1 to the TXIC bit.
- If the FIFOs are disabled (have a depth of one location) and there is no data present in the transmitters single location, the TXRIS bit is set. It is cleared by performing a single write to the transmit FIFO, or by clearing the interrupt by writing a 1 to the TXIC bit.

6.2.3.4 Loopback Operation

The UART can be placed into an internal loopback mode for diagnostic or debug work by setting the LBE bit in the UARTCTL register. In loopback mode, data transmitted on the UnTx output is received on the UnRx input. Note that the LBE bit should be set before the UART is enabled.

6.2.3.5 DMA Operation

The UART provides an interface to the μDMA controller with separate channels for transmit and receive. The DMA operation of the UART is enabled through the UART DMA Control (UARTDMACTL) register. When DMA operation is enabled, the UART asserts a DMA request on the receive or transmit channel whenever the associated FIFO can transfer data. For the receive channel, a single transfer request is asserted whenever any data is in the receive FIFO. A burst transfer request is asserted whenever the amount of data in the receive FIFO is at or above the FIFO trigger level configured in the UARTIFLS register. For the transmit channel, a single transfer request is asserted whenever there is at least one empty location in the transmit FIFO. The burst request is asserted whenever the transmit FIFO contains fewer characters than the FIFO trigger level. The single and burst DMA transfer requests are handled automatically by the μDMA controller, depending on how the DMA channel is configured.

To enable DMA operation for the receive channel, set the RXDMAE bit of the DMA Control (UARTDMACTL) register. To enable DMA operation for the transmit channel, set the TXDMAE bit of the UARTDMACTL register. The UART can also be configured to stop using DMA for the receive channel if a receive error occurs. If the DMAERR bit of the UARTDMACR register is set and a receive error occurs, the DMA receive requests are automatically disabled. This error condition can be cleared by clearing the appropriate UART error interrupt.

If DMA is enabled, then the μDMA controller triggers an interrupt when a transfer is complete. The interrupt occurs on the UART interrupt vector. Therefore, if interrupts are used for UART operation and DMA is enabled, the UART interrupt handler must be designed to handle the μDMA completion interrupt.

6.2.4 Initialization and Configuration

To enable and initialize the UART, the following steps are necessary:

1. Enable the UART module using the UART0CLKEN/UART1CLKEN register.
2. Set the GPIO_PAD_CONFIG CONFMODE bits for the appropriate pins.

This section discusses the steps required to use a UART module. For this example, the UART clock is assumed to be 80 MHz, and the desired UART configuration is:

- 115200 baud rate
- Data length of 8 bits
- One stop bit
- No parity
- FIFOs disabled
- No interrupts

The first thing to consider when programming the UART is the baud-rate divisor (BRD), because the UARTI BRD and UARTRF BRD registers must be written before the UARTRLCRH register. Using the equation described in [Section 6.2.2](#), the BRD can be calculated:

$$\text{BRD} = 80,000,000 / (16 * 115,200) = \\ 43.410590$$

which means that the DIVINT field of the UARTRIBRD register should be set to 43 decimal or 0x2B. The value to be loaded into the UARTRFBRD register is calculated by the equation:

$$\text{UARTRFBRD}[\text{DIVFRAC}] = \text{integer}(0.410590 * 64 + \\ 0.5) = 26$$

With the BRD values in hand, the UART configuration is written to the module in the following order:

1. Disable the UART by clearing the UARTEN bit in the UARTCTL register.
2. Write the integer portion of the BRD to the UARTRIBRD register.

3. Write the fractional portion of the BRD to the UARTFBRD register.
4. Write the desired serial parameters to the UARTLCRH register (in this case, a value of 0x0000.0060).
5. Optionally, configure the µDMA channel and enable the DMA options in the UARTDMACTL register.
6. Enable the UART by setting the UARTEN bit in the UARTCTL register.

6.3 Register Description

Table 6-2 lists the UART registers. The offset listed is a hexadecimal increment to the address of the register, relative to base address of that UART:

- UART0: 0x4000.C000
- UART1: 0x4000.D000

The UART module clock must be enabled before the registers can be programmed. There must be a delay of 3 system clocks after the UART module clock is enabled before any UART module registers are accessed.

The UART must be disabled before any of the control registers are reprogrammed. When the UART is disabled during a TX or RX operation, the current transaction is completed prior to the UART stopping.

Table 6-2. UART Register Map

Offset	Name	Type	Reset	Description
0x000	UARTDTR	R/W	0x0000.0000	UART Data
0x004	UARTRSR/UARTECR	R/W	0x0000.0000	UART Receive Status/Error Clear
0x018	UARTFRR	RO	0x0000.0090	UART Flag
0x020	UARTILPR	R/W	0x0000.0000	Reserved
0x024	UARTIBRD	R/W	0x0000.0000	UART Integer Baud-Rate Divisor
0x028	UARTFBRD	R/W	0x0000.0000	UART Fractional Baud-Rate Divisor
0x02C	UARTLCRH	R/W	0x0000.0000	UART Line Control
0x030	UARTCTL	R/W	0x0000.0300	UART Control
0x034	UARTIFLS	R/W	0x0000.0012	UART Interrupt FIFO Level Select
0x038	UARTIM	R/W	0x0000.0000	UART Interrupt Mask
0x03C	UARTRIS	RO	0x0000.0000	UART Raw Interrupt Status
0x040	UARTMIS	RO	0x0000.0000	UART Masked Interrupt Status
0x044	UARTICR	W1C	0x0000.0000	UART Interrupt Clear
0x048	UARDMACTL	R/W	0x0000.0000	UART DMA Control

6.3.1 UART Registers

Table 6-3 lists the memory-mapped registers for the UART. All register offset addresses not listed in Table 6-3 should be considered as reserved locations and the register contents should not be modified.

The offset listed is a hexadecimal increment to the register's address, relative to that UART's base address:

UART0: 0x4000.C000

UART1: 0x4000.D000

The UART module clock must be enabled before the registers can be programmed. There must be a delay of 3 system clocks after the UART module clock is enabled before any UART module registers are accessed.

The UART must be disabled (see the UARTEN bit in the UARTCTL register) before any of the control registers are reprogrammed. When the UART is disabled during a TX or RX operation, the current transaction is completed prior to the UART stopping.

Table 6-3. UART REGISTERS

Offset	Acronym	Register Name	Section
0h	UARTDR	UART Data	Section 6.3.1.1
4h	UARTRSR_UARTECR	UART Receive Status/Error Clear	Section 6.3.1.2
18h	UARTFR	UART Flag	Section 6.3.1.3
24h	UARTIBRD	UART Integer Baud-Rate Divisor	Section 6.3.1.4
28h	UARTFBRD	UART Fractional Baud-Rate Divisor	Section 6.3.1.5
2Ch	UARTLCRH	UART Line Control	Section 6.3.1.6
30h	UARTCTL	UART Control	Section 6.3.1.7
34h	UARTIFLS	UART Interrupt FIFO Level Select	Section 6.3.1.8
38h	UARTIM	UART Interrupt Mask	Section 6.3.1.9
3Ch	UARTRIS	UART Raw Interrupt Status	Section 6.3.1.10
40h	UARTMIS	UART Masked Interrupt Status	Section 6.3.1.11
44h	UARTICR	UART Interrupt Clear	Section 6.3.1.12
48h	UARTDMACTL	UART DMA Control	Section 6.3.1.13

6.3.1.1 UARTDR Register (offset = 0h) [reset = 0h]

UARTDR is shown in [Figure 6-3](#) and described in [Table 6-4](#).

NOTE: This register is read-sensitive. See the register description for details.

This register is the data register (the interface to the FIFOs).

For transmitted data, if the FIFO is enabled, data written to this location is pushed onto the transmit FIFO. If the FIFO is disabled, data is stored in the transmitter holding register (the bottom word of the transmit FIFO). A write to this register initiates a transmission from the UART.

For received data, if the FIFO is enabled, the data byte and the 4-bit status (break, frame, parity, and overrun) is pushed onto the 12-bit wide receive FIFO. If the FIFO is disabled, the data byte and status are stored in the receiving holding register (the bottom word of the receive FIFO). The received data can be retrieved by reading this register.

Figure 6-3. UARTDR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED				OE	BE	PE	FE	DATA							
R-0h				R-0h	R-0h	R-0h	R-0h	R/W-0h							

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-4. UARTDR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-12	RESERVED	R	0h	
11	OE	R	0h	UART Overrun Error 0h = No data has been lost due to a FIFO overrun. 1h = New data was received when the FIFO was full, resulting in data loss.
10	BE	R	0h	UART Break Error 0h = No break condition has occurred 1h = A break condition has been detected, indicating that the receive data input was held Low for longer than a full-word transmission time (defined as start, data, parity, and stop bits). In FIFO mode, this error is associated with the character at the top of the FIFO. When a break occurs, only one 0 character is loaded into the FIFO. The next character is only enabled after the received data input goes to a 1 (marking state), and the next valid start bit is received.
9	PE	R	0h	UART Parity Error In FIFO mode, this error is associated with the character at the top of the FIFO. 0h = No parity error has occurred 1h = The parity of the received data character does not match the parity defined by bits 2 and 7 of the UARLCSR register.
8	FE	R	0h	UART Framing Error 0h = No framing error has occurred 1h = The received character does not have a valid stop bit (a valid stop bit is 1).
7-0	DATA	R/W	0h	Data Transmitted or Received Data that is to be transmitted via the UART is written to this field. When read, this field contains the data that was received by the UART.

6.3.1.2 UARTRSR_UARTECR Register (offset = 4h) [reset = 0h]

UARTRSR_UARTECR is shown in [Figure 6-4](#) and described in [Table 6-5](#).

The UARTRSR/UARTECR register is the receive status register/error clear register.

In addition to the UARTDR register, receive status can also be read from the UARTRSR register. If the status is read from this register, then the status information corresponds to the entry read from UARTDR prior to reading UARTRSR. The status information for overrun is set immediately when an overrun condition occurs.

The UARTRSR register cannot be written.

A write of any value to the UARTECR register clears the framing, parity, break, and overrun errors. All the bits are cleared on reset.

Figure 6-4. UARTRSR_UARTECR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED				OE_OR_DATA	BE_OR_DATA	PE_OR_DATA	FE_OR_DATA
R-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-5. UARTRSR_UARTECR Register Field Descriptions

Bit	Field	Type	Reset	Description
7-4	DATA	W	0h	Error Clear A write to this register of any data clears the framing, parity, break, and overrun flags.
31-4	RESERVED	R	0h	
3	OE_OR_DATA	R/W	0h	UART Overrun Error (R) or Error Clear (W) 0h (R) = No data has been lost due to a FIFO overrun. 1h (R) = New data was received when the FIFO was full, resulting in data loss. This bit is cleared by a write to UARTECR. The FIFO contents remain valid because no further data is written when the FIFO is full, only the contents of the shift register are overwritten. The CPU must read the data in order to empty the FIFO.
2	BE_OR_DATA	R/W	0h	UART Break Error (R) or Error Clear (W) 0h (R) = No break condition has occurred 1h (R) = A break condition has been detected, indicating that the receive data input was held Low for longer than a full-word transmission time (defined as start, data, parity, and stop bits). This bit is cleared to 0 by a write to UARTECR. In FIFO mode, this error is associated with the character at the top of the FIFO. When a break occurs, only one 0 character is loaded into the FIFO. The next character is only enabled after the receive data input goes to a 1 (marking state) and the next valid start bit is received.

Table 6-5. UARTRSR_UARTECR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
1	PE_OR_DATA	R/W	0h	UART Parity Error (R) or Error Clear (W) 0h (R) = No parity error has occurred 1h (R) = The parity of the received data character does not match the parity defined by bits 2 and 7 of the UARTLCRH register. This bit is cleared to 0 by a write to UARTECR.
0	FE_OR_DATA	R/W	0h	UART Framing Error (R) or Error Clear (W) 0h (R) = No framing error has occurred 1h (R) = The received character does not have a valid stop bit (a valid stop bit is 1). This bit is cleared to 0 by a write to UARTECR. In FIFO mode, this error is associated with the character at the top of the FIFO.

6.3.1.3 UARTFR Register (offset = 18h) [reset = 90h]

UARTFR is shown in [Figure 6-5](#) and described in [Table 6-6](#). The UARTFR register is the flag register. After reset, the TXFF, RXFF, and BUSY bits are 0, and TXFE and RXFE bits are 1. The RI and CTS bits indicate the modem flow control and status. Note that the modem bits are only implemented on UART1 and are reserved on UART0.

Figure 6-5. UARTFR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
TXFE	RXFF	TXFF	EXFE	BUSY	DCD	DSR	CTS
R-1h	R-0h	R-0h	R-1h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-6. UARTFR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-9	RESERVED	R	0h	
8	RI	R	0h	Reserved
7	TXFE	R	1h	UART Transmit FIFO Empty The meaning of this bit depends on the state of the FEN bit in the UARTLCRH register. 0h = The transmitter has data to transmit. 1h = If the FIFO is disabled (FEN is 0), the transmit holding register is empty. If the FIFO is enabled (FEN is 1), the transmit FIFO is empty.
6	RXFF	R	0h	UART Receive FIFO Full The meaning of this bit depends on the state of the FEN bit in the UARTLCRH register. 0h = The receiver can receive data. 1h = If the FIFO is disabled (FEN is 0), the receive holding register is full. If the FIFO is enabled (FEN is 1), the receive FIFO is full.
5	TXFF	R	0h	UART Transmit FIFO Full The meaning of this bit depends on the state of the FEN bit in the UARTLCRH register. 0h = The transmitter is not full. 1h = If the FIFO is disabled (FEN is 0), the transmit holding register is full. If the FIFO is enabled (FEN is 1), the transmit FIFO is full.
4	EXFE	R	1h	UART Receive FIFO Empty The meaning of this bit depends on the state of the FEN bit in the UARTLCRH register. 0h = The receiver is not empty. 1h = If the FIFO is disabled (FEN is 0), the receive holding register is empty. If the FIFO is enabled (FEN is 1), the receive FIFO is empty.

Table 6-6. UARTFR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
3	BUSY	R	0h	UART Busy 0h = The UART is not busy. 1h = The UART is busy transmitting data. This bit remains set until the complete byte, including all stop bits, has been sent from the shift register. This bit is set as soon as the transmit FIFO becomes non-empty (regardless of whether UART is enabled).
2	DCD	R	0h	Reserved
1	DSR	R	0h	Reserved
0	CTS	R	0h	Clear To Send 0h = The U1CTS signal is not asserted. 1h = The U1CTS signal is asserted. This bit is implemented only on UART1 and is reserved for UART0

6.3.1.4 UARTIBRD Register (offset = 24h) [reset = 0h]

The UARTIBRD register is the integer part of the baud-rate divisor value. All the bits are cleared on reset. The minimum possible divide ratio is 1 (when UARTIBRD=0), in which case the UARTFBRD register is ignored. When changing the UARTIBRD register, the new value does not take effect until transmission/reception of the current character is complete. Any changes to the baud-rate divisor must be followed by a write to the UARTLCRH register.


Table 6-7. UARTIBRD Register Field Descriptions

Bit	Field	Type	Reset	Description
31-16	RESERVED	R	0	
15-0	DIVINT	R/W	0	Integer Baud-Rate Divisor

6.3.1.5 UARTFBRD Register (offset = 28h) [reset = 0h]

UARTFBRD is shown in [Figure 6-6](#) and described in [Table 6-8](#). The UARTFBRD register is the fractional part of the baud-rate divisor value. All the bits are cleared on reset. When changing the UARTFBRD register, the new value does not take effect until transmission/reception of the current character is complete. Any changes to the baud-rate divisor must be followed by a write to the UARLTCRH register.

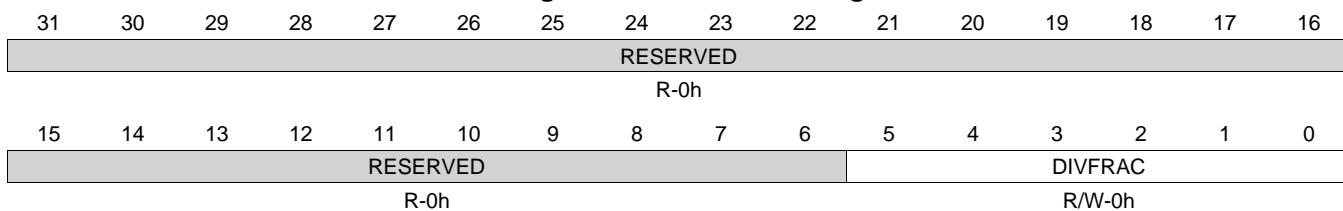Figure 6-6. UARTFBRD Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-8. UARTFBRD Register Field Descriptions

Bit	Field	Type	Reset	Description
31-6	RESERVED	R	0h	
5-0	DIVFRAC	R/W	0h	Fractional Baud-Rate Divisor


6.3.1.6 UARTLCRH Register (offset = 2Ch) [reset = 0h]

UARTLCRH is shown in [Figure 6-7](#) and described in [Table 6-9](#).

The UARTLCRH register is the line control register. Serial parameters such as data length, parity, and stop bit selection are implemented in this register.

When updating the baud-rate divisor (UARTIBRD and/or UARTIFRD), the UARTLCRH register must also be written. The write strobe for the baud-rate divisor registers is tied to the UARTLCRH register.

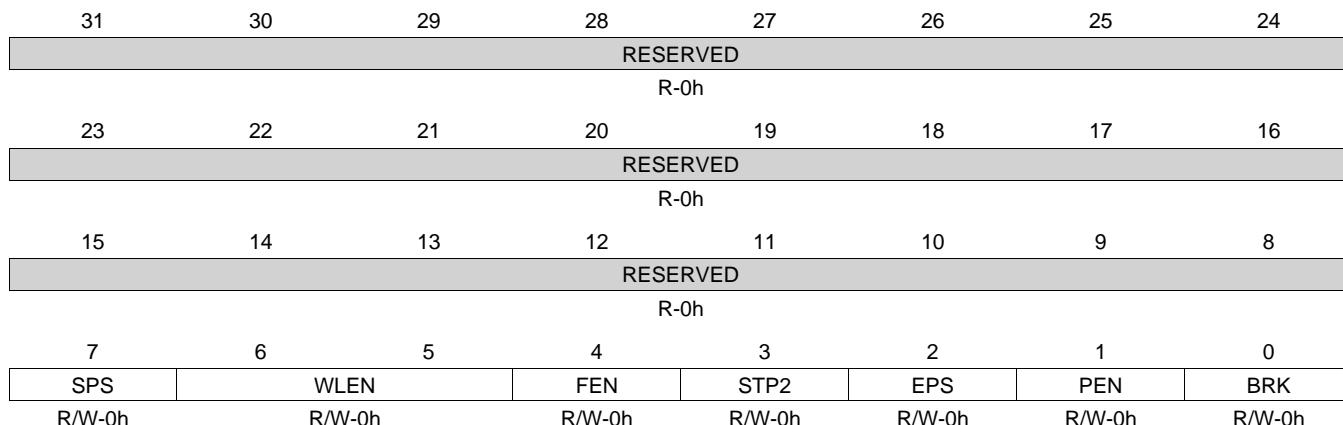Figure 6-7. UARTLCRH Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-9. UARTLCRH Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7	SPS	R/W	0h	UART Stick Parity Select When bits 1, 2, and 7 of UARTLCRH are set, the parity bit is transmitted and checked as a 0. When bits 1 and 7 are set and 2 is cleared, the parity bit is transmitted and checked as a 1. When this bit is cleared, stick parity is disabled.
6-5	WLEN	R/W	0h	UART Word Length The bits indicate the number of data bits transmitted or received in a frame as follows: 0h = 5 bits (default) 1h = 6 bits 2h = 7 bits 3h = 8 bits
4	FEN	R/W	0h	UART Enable FIFOs 0h = The FIFOs are disabled (Character mode). The FIFOs become 1-byte-deep holding registers. 1h = The transmit and receive FIFO buffers are enabled (FIFO mode).
3	STP2	R/W	0h	UART Two Stop Bits Select 0h = One stop bit is transmitted at the end of a frame. 1h = Two stop bits are transmitted at the end of a frame. The receive logic does not check for two stop bits being received. When in 7816 smartcard mode (the SMART bit is set in the UARTCTL register), the number of stop bits is forced to 2.

Table 6-9. UARTLCRH Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
2	EPS	R/W	0h	UART Even Parity Select 0h = Odd parity is performed, which checks for an odd number of 1s. 1h = Even parity generation and checking is performed during transmission and reception, which checks for an even number of 1s in data and parity bits. This bit has no effect when parity is disabled by the PEN bit.
1	PEN	R/W	0h	UART Parity Enable 0h = Parity is disabled and no parity bit is added to the data frame. 1h = Parity checking and generation is enabled.
0	BRK	R/W	0h	UART Parity Enable 0h = Parity is disabled and no parity bit is added to the data frame. 1h = Parity checking and generation is enabled.

6.3.1.7 UARTCTL Register (offset = 30h) [reset = 300h]

UARTCTL is shown in [Figure 6-8](#) and described in [Table 6-10](#).

The UARTCTL register is the control register. All the bits are cleared on reset except for the Transmit Enable (TXE) and Receive Enable (RXE) bits, which are set.

To enable the UART module, the UARLEN bit must be set. If software requires a configuration change in the module, the UARLEN bit must be cleared before the configuration changes are written. If the UART is disabled during a transmit or receive operation, the current transaction is completed prior to the UART stopping.

NOTE:

The UARTCTL register should not be changed while the UART is enabled or else the results are unpredictable. The following sequence is recommended for making changes to the UARTCTL register.

1. Disable the UART.
2. Wait for the end of transmission or reception of the current character.
3. Flush the transmit FIFO by clearing bit 4 (FEN) in the line control register (UARTLCRH).
4. Reprogram the control register.
5. Enable the UART.

Figure 6-8. UARTCTL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
CTSEN	RTSEN	RESERVED		RTS	DTR	RXE	TXE
R/W-0h	R/W-0h	R-0h		R/W-0h	R/W-0h	R/W-1h	R/W-1h
7	6	5	4	3	2	1	0
LBE	RESERVED	HSE	EOT	RESERVED	RESERVED	SIREN	UARTEN
R/W-0h	R-0h	R/W-0h	R/W-0h	R-0h	R-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-10. UARTCTL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-16	RESERVED	R	0h	
15	CTSEN	R/W	0h	Enable Clear To Send 0h = CTS hardware flow control is disabled. 1h = CTS hardware flow control is enabled. Data is only transmitted when the U1CTS signal is asserted.
14	RTSEN	R/W	0h	Enable Request to Send 0h = RTS hardware flow control is disabled. 1h = RTS hardware flow control is enabled. Data is only requested (by asserting U1RTS) when the receive FIFO has available entries.
13-12	RESERVED	R	0h	
11	RTS	R/W	0h	Request to Send When RTSEN is clear, the status of this bit is reflected on the U1RTS signal. If RTSEN is set, this bit is ignored on a write and should be ignored on read.
10	DTR	R/W	0h	Reserved

Table 6-10. UARTCTL Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
9	RXE	R/W	1h	UART Receive Enable 0h = The receive section of the UART is disabled. 1h = The receive section of the UART is enabled. If the UART is disabled in the middle of a receive, it completes the current character before stopping. Note: To enable reception, the UARTEN bit must also be set.
8	TXE	R/W	1h	UART Transmit Enable 0h = The transmit section of the UART is disabled. 1h = The transmit section of the UART is enabled. If the UART is disabled in the middle of a transmission, it completes the current character before stopping. Note: To enable transmission, the UARTEN bit must also be set.
7	LBE	R/W	0h	UART Loop Back Enable 0h = Normal operation. 1h = The UnTx path is fed through the UnRx path.
6	RESERVED	R	0h	
5	HSE	R/W	0h	High-Speed Enable 0h = The UART is clocked using the system clock divided by 16. 1h = The UART is clocked using the system clock divided by 8. Note: System clock used is also dependent on the baud-rate divisor configuration. The state of this bit has no effect on clock generation in ISO 7816 smart card mode (the SMART bit is set).
4	EOT	R/W	0h	End of Transmission This bit determines the behavior of the TXRIS bit in the UARTRIS register. 0h = The TXRIS bit is set when the transmit FIFO condition specified in UARTIFLS is met. 1h = The TXRIS bit is set only after all transmitted data, including stop bits, have cleared the serializer.
3	RESERVED	R	0h	
2	RESERVED	R	0h	
1	SIREN	R/W	0h	RESERVED
0	UARTEN	R/W	0h	UART Enable 0h = The UART is disabled. 1h = The UART is enabled. If the UART is disabled in the middle of transmission or reception, it completes the current character before stopping.

6.3.1.8 UARTIFLS Register (offset = 34h) [reset = 12h]

UARTIFLS is shown in [Figure 6-9](#) and described in [Table 6-11](#).

The UARTIFLS register is the interrupt FIFO level select register. You can use this register to define the FIFO level at which the TXRIS and RXRIS bits in the UARTRIS register are triggered.

The interrupts are generated based on a transition through a level rather than being based on the level. That is, the interrupts are generated when the fill level progresses through the trigger level. For example, if the receive trigger level is set to the half-way mark, the interrupt is triggered as the module is receiving the 9th character.

Out of reset, the TXIFLSEL and RXIFLSEL bits are configured so that the FIFOs trigger an interrupt at the half-way mark.

Figure 6-9. UARTIFLS Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED								RXIFLSEL				TXIFSEL			
R-0h								R/W-2h				R/W-2h			

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-11. UARTIFLS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-6	RESERVED	R	0h	
5-3	RXIFLSEL	R/W	2h	<p>UART Receive Interrupt FIFO Level Select</p> <p>The trigger points for the receive interrupt are as follows:</p> <p>0h = Reserved</p> <p>1h = RX FIFO full</p> <p>2h = RX FIFO full (default)</p> <p>3h = RX FIFO full</p> <p>4h = RX FIFO full</p>
2-0	TXIFSEL	R/W	2h	<p>UART Transmit Interrupt FIFO Level Select</p> <p>The trigger points for the transmit interrupt are as follows:</p> <p>0h = Reserved</p> <p>1h = TX FIFO empty</p> <p>2h = TX FIFO empty (default)</p> <p>3h = TX FIFO empty</p> <p>4h = TX FIFO empty</p> <p>Note: If the EOT bit in UARTCTL is set, the transmit interrupt is generated once the FIFO is completely empty and all data including stop bits have left the transmit serializer. In this case, the setting of TXIFLSEL is ignored.</p>

6.3.1.9 UARTIM Register (offset = 38h) [reset = 0h]

UARTIM is shown in [Figure 6-10](#) and described in [Table 6-12](#).

The UARTIM register is the interrupt mask set/clear register.

On a read, this register gives the current value of the mask on the relevant interrupt. Setting a bit allows the corresponding raw interrupt signal to be routed to the interrupt controller. Clearing a bit prevents the raw interrupt signal from being sent to the interrupt controller.

Figure 6-10. UARTIM Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED		9BITIM		EOTIM		OEIM	
R-0h		R/W-0h		R/W-0h		R/W-0h	
7	6	5	4	3	2	1	0
FEIM	RTIM	TXIM	RXIM	DSRIM	DCDIM	CTSIM	RIIM
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-12. UARTIM Register Field Descriptions

Bit	Field	Type	Reset	Description
31-18	RESERVED	R	0h	
17	DMATXIM	R/W	0h	Transmit DMA Interrupt Mask 0h = The DMATXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the DMATXRIS bit in the UARTRIS register is set.
16	DMARXIM	R/W	0h	Receive DMA Interrupt Mask 0h = The DMARXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the DMARXRIS bit in the UARTRIS register is set.
15-13	RESERVED	R	0h	
12	9BITIM	R/W	0h	Reserved
11	EOTIM	R/W	0h	End of Transmission Interrupt Mask 0h = The EOTRIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the EOTRIS bit in the UARTRIS register is set.
10	OEIM	R/W	0h	UART Overrun Error Interrupt Mask 0h = The OERIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the OERIS bit in the UARTRIS register is set.
9	BEIM	R/W	0h	UART Break Error Interrupt Mask 0h = The BERIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the BERIS bit in the UARTRIS register is set.

Table 6-12. UARTIM Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
8	PEIM	R/W	0h	UART Parity Error Interrupt Mask 0h = The PERIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the PERIS bit in the UARTRIS register is set.
7	FEIM	R/W	0h	UART Framing Error Interrupt Mask 0h = The FERIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the FERIS bit in the UARTRIS register is set.
6	RTIM	R/W	0h	UART Receive Time-Out Interrupt Mask 0h = The RTRIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the RTRIS bit in the UARTRIS register is set.
5	TXIM	R/W	0h	UART Transmit Interrupt Mask 0h = The TXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the TXRIS bit in the UARTRIS register is set.
4	RXIM	R/W	0h	UART Receive Interrupt Mask 0h = The RXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the RXRIS bit in the UARTRIS register is set.
3	DSRIM	R/W	0h	Reserved
2	DCDIM	R/W	0h	Reserved
1	CTSIM	R/W	0h	UART Clear to Send Modem Interrupt Mask 0h = The CTSRIS interrupt is suppressed and not sent to the interrupt controller. 1h = An interrupt is sent to the interrupt controller when the CTSRIS bit in the UARTRIS register is set.
0	RIIM	R/W	0h	Reserved

6.3.1.10 UARTRIS Register (offset = 3Ch) [reset = 0h]

UARTRIS is shown in [Figure 6-11](#) and described in [Table 6-13](#).

The UARTRIS register is the raw interrupt status register. On a read, this register gives the current raw status value of the corresponding interrupt. A write has no effect.

Figure 6-11. UARTRIS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED		RESERVED		EOTRIS	OERIS	BERIS	PERIS
R-0h		R-0h		R-0h	R-0h	R-0h	R-0h
7	6	5	4	3	2	1	0
FERIS	RTRIS	TXRIS	RXRIS	DSRRIS	DCDRIS	CTSRIS	RIRIS
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-13. UARTRIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-18	RESERVED	R	0h	
17	DMATXRIS	R	0h	Transmit DMA Raw Interrupt Status 0h = No interrupt 1h = The transmit DMA has completed. This bit is cleared by writing a 1 to the DMATXIC bit in the UARTICR register.
16	DMARXRIS	R	0h	Receive DMA Raw Interrupt Status 0h = No interrupt 1h = The receive DMA has completed. This bit is cleared by writing a 1 to the DMARXIC bit in the UARTICR register.
15-13	RESERVED	R	0h	
12	RESERVED	R	0h	
11	EOTRIS	R	0h	End of Transmission Raw Interrupt Status 0h = No interrupt 1h = The last bit of all transmitted data and flags has left the serializer. This bit is cleared by writing a 1 to the EOTIC bit in the UARTICR register.
10	OERIS	R	0h	UART Overrun Error Raw Interrupt Status 0h = No interrupt 1h = An overrun error has occurred. This bit is cleared by writing a 1 to the OEIC bit in the UARTICR register.
9	BERIS	R	0h	UART Break Error Raw Interrupt Status 0h = No interrupt 1h = A break error has occurred. This bit is cleared by writing a 1 to the BEIC bit in the UARTICR register.

Table 6-13. UARTRIS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
8	PERIS	R	0h	UART Parity Error Raw Interrupt Status 0h = No interrupt 1h = A parity error has occurred. This bit is cleared by writing a 1 to the PEIC bit in the UARTICR register.
7	FERIS	R	0h	UART Framing Error Raw Interrupt Status 0h = No interrupt 1h = A framing error has occurred. This bit is cleared by writing a 1 to the FEIC bit in the UARTICR register.
6	RTRIS	R	0h	UART Receive Time-Out Raw Interrupt Status 0h = No interrupt 1h = A receive time out has occurred. This bit is cleared by writing a 1 to the RTIC bit in the UARTICR register.
5	TXRIS	R	0h	UART Transmit Raw Interrupt Status 0h = No interrupt 1h = If the EOT bit in the UARTCTL register is clear, the transmit FIFO level has passed through the condition defined in the UARTIFLS register. If the EOT bit is set, the last bit of all transmitted data and flags has left the serializer. This bit is cleared by writing a 1 to the TXIC bit in the UARTICR register or by writing data to the transmit FIFO until it becomes greater than the trigger level, if the FIFO is enabled, or by writing a single byte if the FIFO is disabled.
4	RXRIS	R	0h	UART Receive Raw Interrupt Status Value Description 0 No interrupt 1 The receive FIFO level has passed through the condition defined in the UARTIFLS register. This bit is cleared by writing a 1 to the RXIC bit in the UARTICR register or by reading data from the receive FIFO until it becomes less than the trigger level, if the FIFO is enabled, or by reading a single byte if the FIFO is disabled.
3	DSRRIS	R	0h	Reserved
2	DCDRIS	R	0h	Reserved
1	CTSRIS	R	0h	UART Clear to Send Modem Raw Interrupt Status 0h = No interrupt 1h = Clear to Send used for software flow control. This bit is cleared by writing a 1 to the CTSIC bit in the UARTICR register.
0	RIRIS	R	0h	Reserved

6.3.1.11 UARTMIS Register (offset = 40h) [reset = 0h]

UARTMIS is shown in [Figure 6-12](#) and described in [Table 6-14](#).

The UARTMIS register is the masked interrupt status register. On a read, this register gives the current masked status value of the corresponding interrupt. A write has no effect.

Figure 6-12. UARTMIS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED		RESERVED		EOTMIS	OEMIS	BEMIS	PEMIS
R-0h		R-0h		R-0h	R-0h	R-0h	R-0h
7	6	5	4	3	2	1	0
FEMIS	RTMIS	TXMIS	RXMIS	DSRMIS	DCDMIS	CTSMIS	RIMIS
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-14. UARTMIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-18	RESERVED	R	0h	
17	DMATXMIS	R	0h	Transmit DMA Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to the completion of the transmit DMA. This bit is cleared by writing a 1 to the DMATXIC bit in the UARTICR register.
16	DMARXMIS	R	0h	Receive DMA Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to the completion of the receive DMA. This bit is cleared by writing a 1 to the DMARXIC bit in the UARTICR register.
15-13	RESERVED	R	0h	
12	RESERVED	R	0h	
11	EOTMIS	R	0h	End of Transmission Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to the transmission of the last data bit. This bit is cleared by writing a 1 to the EOTIC bit in the UARTICR register.
10	OEMIS	R	0h	UART Overrun Error Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to an overrun error. This bit is cleared by writing a 1 to the OEIC bit in the UARTICR register.
9	BEMIS	R	0h	UART Break Error Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to a break error. This bit is cleared by writing a 1 to the BEIC bit in the UARTICR register.

Table 6-14. UARTMIS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
8	PEMIS	R	0h	UART Parity Error Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to a parity error. This bit is cleared by writing a 1 to the PEIC bit in the UARTICR register.
7	FEMIS	R	0h	UART Framing Error Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to a framing error. This bit is cleared by writing a 1 to the FEIC bit in the UARTICR register.
6	RTMIS	R	0h	UART Receive Time-Out Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to a receive time out. This bit is cleared by writing a 1 to the RTIC bit in the UARTICR register.
5	TXMIS	R	0h	UART Transmit Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to passing through the specified transmit FIFO level (if the EOT bit is clear) or due to the transmission of the last data bit (if the EOT bit is set). This bit is cleared by writing a 1 to the TXIC bit in the UARTICR register or by writing data to the transmit FIFO until it becomes greater than the trigger level, if the FIFO is enabled, or by writing a single byte if the FIFO is disabled.
4	RXMIS	R	0h	UART Receive Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to passing through the specified receive FIFO level. This bit is cleared by writing a 1 to the RXIC bit in the UARTICR register or by reading data from the receive FIFO until it becomes less than the trigger level, if the FIFO is enabled, or by reading a single byte if the FIFO is disabled.
3	DSRMIS	R	0h	Reserved
2	DCDMIS	R	0h	Reserved
1	CTSMIS	R	0h	UART Clear to Send Modem Masked Interrupt Status 0h = An interrupt has not occurred or is masked. 1h = An unmasked interrupt was signaled due to Clear to Send. This bit is cleared by writing a 1 to the CTSIC bit in the UARTICR register.
0	RIMIS	R	0h	Reserved

6.3.1.12 UARTICR Register (offset = 44h) [reset = 0h]

UARTICR is shown in [Figure 6-13](#) and described in [Table 6-15](#).

The UARTICR register is the interrupt clear register. On a write of 1, the corresponding interrupt (both raw interrupt and masked interrupt, if enabled) is cleared. A write of 0 has no effect.

Figure 6-13. UARTICR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED		RESERVED		EOTIC	OEIC	BEIC	PEIC
R-0h		R-0h		W1C-0h	W1C-0h	W1C-0h	W1C-0h
7	6	5	4	3	2	1	0
FEIC	RTIC	TXIC	RXIC	DSRMIC	DCDMIC	CTSMIC	RIMIC
W1C-0h	W1C-0h	W1C-0h	W1C-0h	W1C-0h	W1C-0h	W1C-0h	W1C-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCI = Write 1 to clear bit; -n = value after reset

Table 6-15. UARTICR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-18	RESERVED	R	0h	
17	DMATXIC	W1C	0h	Transmit DMA Interrupt Clear Writing a 1 to this bit clears the DMATXRIS bit in the UARTRIS register and the DMATXMIS bit in the UARTMIS register.
16	DMARXIC	W1C	0h	Receive DMA Interrupt Clear Writing a 1 to this bit clears the DMARXRIS bit in the UARTRIS register and the DMARXMIS bit in the UARTMIS register.
15-13	RESERVED	R	0h	
12	RESERVED	W1C	0h	
11	EOTIC	W1C	0h	End of Transmission Interrupt Clear Writing a 1 to this bit clears the EOTRIS bit in the UARTRIS register and the EOTMIS bit in the UARTMIS register.
10	OEIC	W1C	0h	Overrun Error Interrupt Clear Writing a 1 to this bit clears the OERIS bit in the UARTRIS register and the OEMIS bit in the UARTMIS register.
9	BEIC	W1C	0h	Break Error Interrupt Clear Writing a 1 to this bit clears the BERIS bit in the UARTRIS register and the BEMIS bit in the UARTMIS register.
8	PEIC	W1C	0h	Parity Error Interrupt Clear Writing a 1 to this bit clears the PERIS bit in the UARTRIS register and the PEMIS bit in the UARTMIS register.
7	FEIC	W1C	0h	Framing Error Interrupt Clear Writing a 1 to this bit clears the FERIS bit in the UARTRIS register and the FEMIS bit in the UARTMIS register.
6	RTIC	W1C	0h	Receive Time-Out Interrupt Clear Writing a 1 to this bit clears the RTRIS bit in the UARTRIS register and the RTMIS bit in the UARTMIS register.
5	TXIC	W1C	0h	Receive Time-Out Interrupt Clear Writing a 1 to this bit clears the RTRIS bit in the UARTRIS register and the RTMIS bit in the UARTMIS register.

Table 6-15. UARTICR Register Field Descriptions (continued)


Bit	Field	Type	Reset	Description
4	RXIC	W1C	0h	Receive Interrupt Clear Writing a 1 to this bit clears the RXRIS bit in the UARTRIS register and the RXMIS bit in the UARTMIS register.
3	DSRMIC	W1C	0h	Reserved
2	DCDMIC	W1C	0h	Reserved
1	CTSMIC	W1C	0h	UART Clear to Send Modem Interrupt Clear Writing a 1 to this bit clears the CTSRIS bit in the UARTRIS register and the CTSMIS bit in the UARTMIS register.
0	RIMIC	W1C	0h	Reserved

6.3.1.13 UARTDMACTL Register (offset = 48h) [reset = 0h]

UARTDMACTL is shown in [Figure 6-14](#) and described in [Table 6-16](#).

The UARTDMACTL register is the DMA control register.

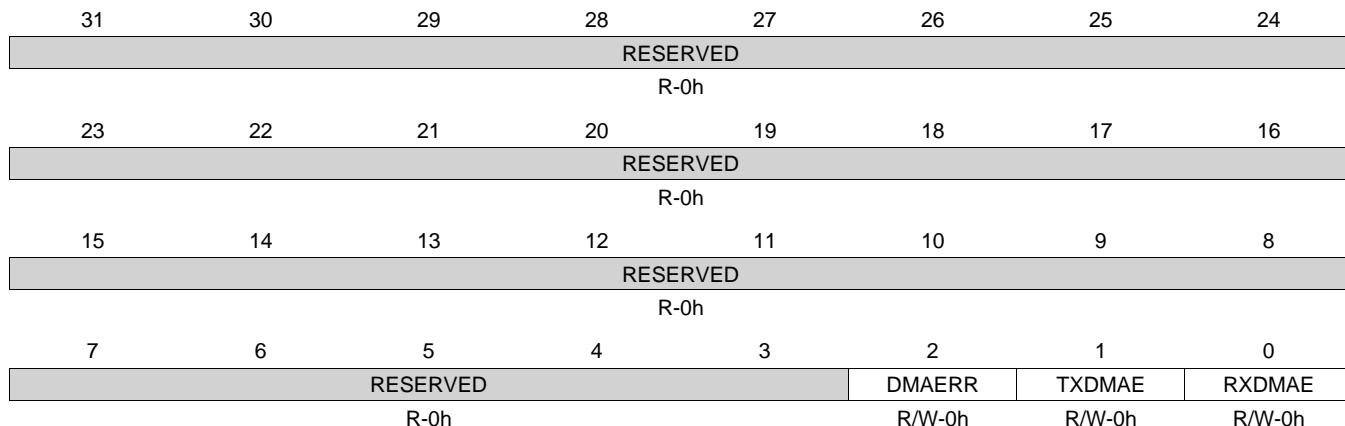Figure 6-14. UARTDMACTL Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 6-16. UARTDMACTL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-3	RESERVED	R	0h	
2	DMAERR	R/W	0h	DMA on Error 0h = DMA receive requests are unaffected when a receive error occurs. 1h = DMA receive requests are automatically disabled when a receive error occurs.
1	TXDMAE	R/W	0h	Transmit DMA Enable 0h = DMA for the receive FIFO is disabled. 1h = DMA for the receive FIFO is enabled.
0	RXDMAE	R/W	0h	Receive DMA Enable 0h = DMA for the receive FIFO is disabled. 1h = DMA for the receive FIFO is enabled.

Inter-Integrated Circuit (I2C) Interface

Topic	Page
7.1 Overview	162
7.2 Functional Description	164
7.3 Register Map	179

7.1 Overview


The Inter-Integrated Circuit (I2C) bus provides bi-directional data transfer through a two-wire design (a serial data line SDA and a serial clock line SCL), and interfaces to external I2C devices such as serial memory (EEPROM), sensors, LCDs and so on.

The 3200 chip includes one I2C module with the following features:

- Devices on the I2C bus can be designated as either a master or a slave:
 - Supports both transmitting and receiving data as either a master or a slave
 - Supports simultaneous master and slave operation
- Four I2C modes:
 - Master transmit
 - Master receive
 - Slave transmit
 - Slave receive
- Supported transmission speeds:
 - Standard (100 Kbps)
 - Fast-mode (400 Kbps)
- Master and slave interrupt generation:
 - Master generates interrupts when a transmit or receive operation completes (or aborts due to an error)
 - Slave generates interrupts when data has been transferred or requested by a master, or when a START or STOP condition is detected
- Master with arbitration and clock synchronization, multimaster support, and 7-bit addressing mode
- Efficient transfers using micro-direct memory access controller (μ DMA)
 - Separate channels for transmit and receive
 - Ability to execute single data transfers or burst data transfers using the RX and TX FIFOs in the I2C

7.1.1 Block Diagram

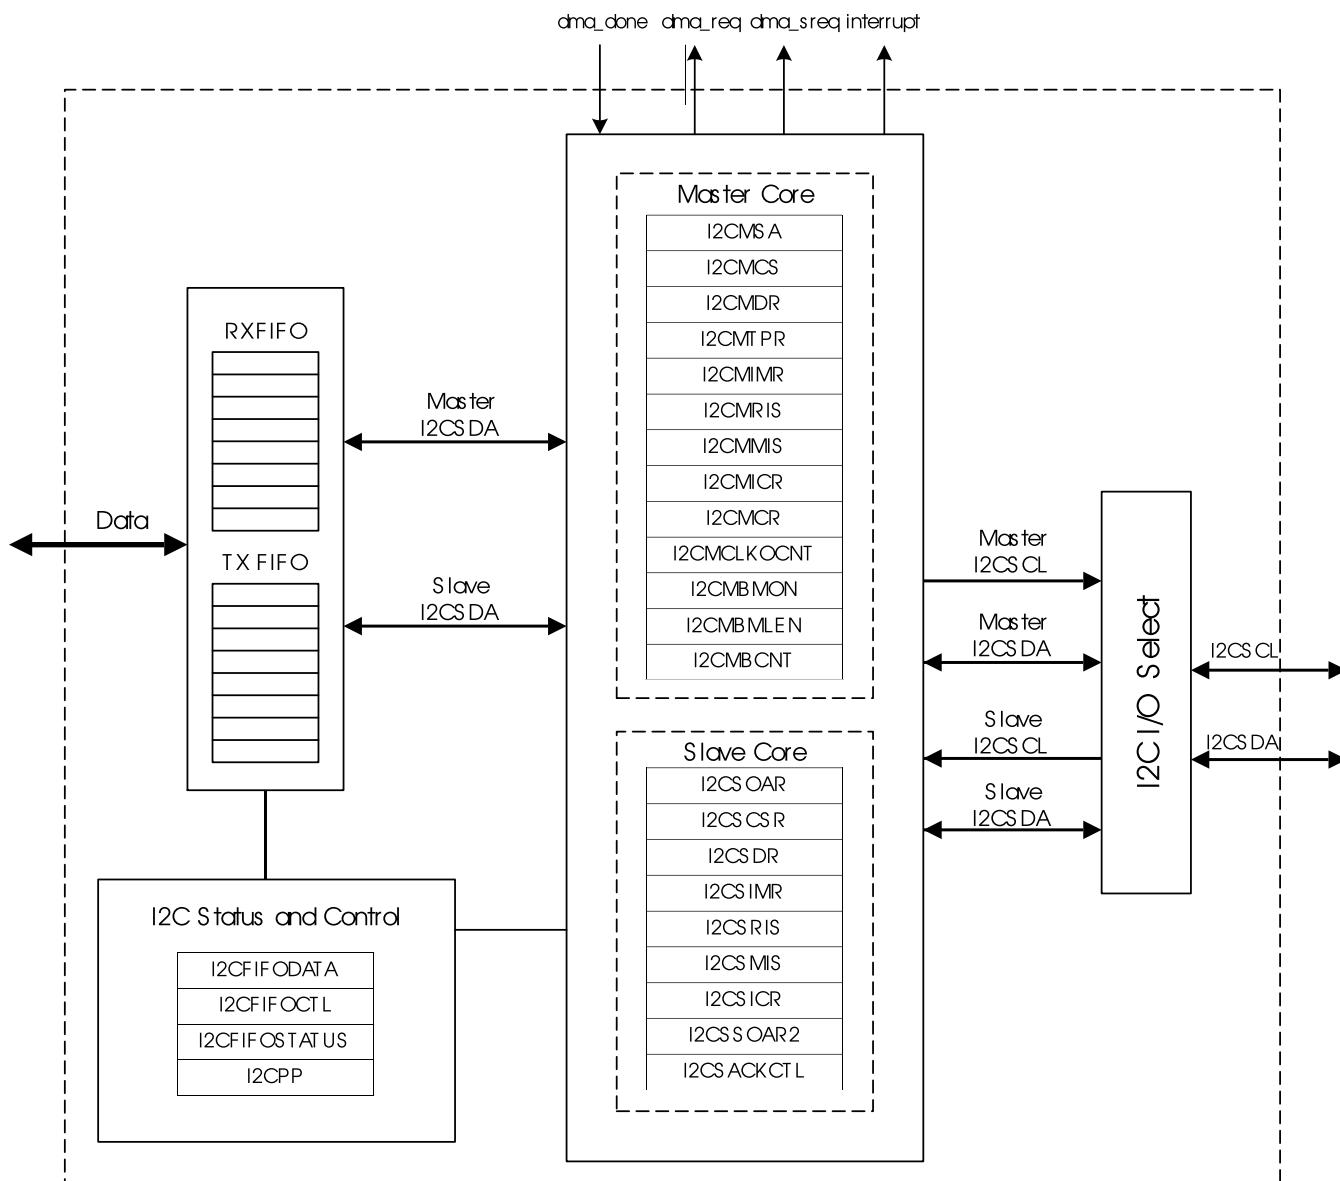Figure 7-1. I2C Block Diagram



This section describes the details of the architecture of the peripheral and how it is structured. The architecture and design details are common to all of the operation modes. Information that is mode-specific to one of the supported modes can be put in the corresponding supported-use case section. This section describes how the peripheral works.

7.1.2 Signal Description

The following table lists the external signals of the I2C interface and describes the function of each. The I2C interface signals are alternate functions for some GPIO signals and default to be GPIO signals at reset. The pin mux/pin assignment column in [Table 7-1](#) lists the possible GPIO pin placements for the I2C signals. The CONFMODE bits in the GPIO_PAD_CONFIG register should be set to choose the I2C function. Set the I2CSDA and I2CSCL pins to open-drain using the IODEN bits of the GPIO_PAD_CONFIG register.


Table 7-1. I²C Signals (64QFN)

Pin Name	Pin Number	Pin Mux / Pin Assignment	Pin Type	Buffer Type	Description
I ² C1SCL	Pin 30 Pin Y		I/O	OD	I ² C module 1 clock. This signal has an active pullup.
I ² C1SDA	Pin 29 Pin Q Pin R		I/O	OD	I ² C module 1 data

7.2 Functional Description

The CC3200 has one instance of an I²C module comprised of both master and slave functions, identified by a unique address. A master-initiated communication generates the clock signal, SCL. For proper operation, the SDA and SCL pin must be configured as an open-drain signal. Both SDA and SCL signals must be connected to a positive supply voltage using a pullup resistor. A typical I²C bus configuration is shown in [Figure 7-2](#). The typical pullups needed for proper operation is approximately 2KΩ.

See [Chapter 7](#) for I²C timing diagrams.

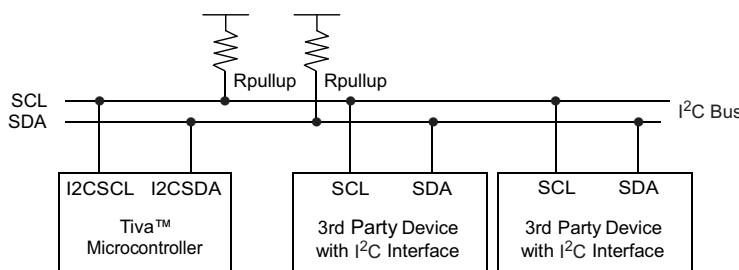Figure 7-2. I²C Bus Configuration

7.2.1 I²C Bus Functional Overview

The I²C bus uses only two signals: SDA and SCL, named I²CSDA and I²CSCL on CC3200 microcontrollers. SDA is the bi-directional serial data line and SCL is the bi-directional serial clock line. The bus is considered idle when both lines are High.

Every transaction on the I²C bus is nine bits long, consisting of eight data bits and a single acknowledge bit. The number of bytes per transfer (defined as the time between a valid START and STOP condition, described in [Section 7.2.1.1](#)) is unrestricted, but each data byte must be followed by an acknowledge bit, and data must be transferred to MSB first. When a receiver cannot receive another complete byte, the receiver holds the clock line SCL Low and forces the transmitter into a wait state. The data transfer continues when the receiver releases the clock SCL.

7.2.1.1 START and STOP Conditions

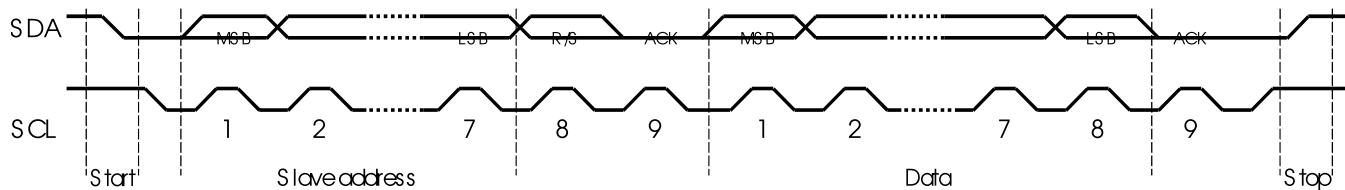
The protocol of the I²C bus defines two states to begin and end a transaction: START and STOP. A high-to-low transition on the SDA line while the SCL is High is defined as a START condition, and a low-to-high transition on the SDA line while SCL is High is defined as a STOP condition. The bus is considered busy after a START condition and free after a STOP condition (see [Figure 7-3](#)).

Figure 7-3. START and STOP Conditions



The STOP bit determines if the cycle stops at the end of the data cycle, or continues on to a repeated START condition. To generate a single transmit cycle, the I2C Master Slave Address (I2CMSCA) register is written with the desired address, the R/S bit is cleared, and the Control register is written with ACK=X (0 or 1), STOP=1, START=1, and RUN=1 to perform the operation and stop. When the operation is completed (or aborted due to an error), the interrupt pin becomes active and the data may be read from the I2C Master Data (I2CMDR) register. When the I2C module operates in master receiver mode, the ACK bit is normally set, causing the I2C bus controller to transmit an acknowledge automatically after each byte. This bit must be cleared when the I2C bus controller requires no further data to be transmitted from the slave transmitter.

7.2.1.2 Data Format with 7-Bit Address

Data transfers follow the format shown in [Figure 7-4](#). After the START condition, a slave address is transmitted. This address is 7-bits long followed by an eighth bit, which is a data direction bit (R/S bit in the I2CMSCA register). If the R/S bit is clear, the bit indicates a transmit operation (send), and if it is set, the bit indicates a request for data (receive). A data transfer is always terminated by a STOP condition generated by the master, however, a master can initiate communications with another device on the bus by generating a repeated START condition and addressing another slave without first generating a STOP condition. Various combinations of receive and transmit formats are then possible within a single transfer.

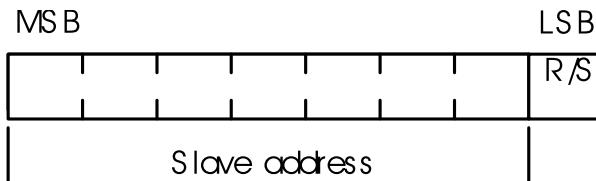Figure 7-4. Complete Data Transfer with a 7-Bit Address


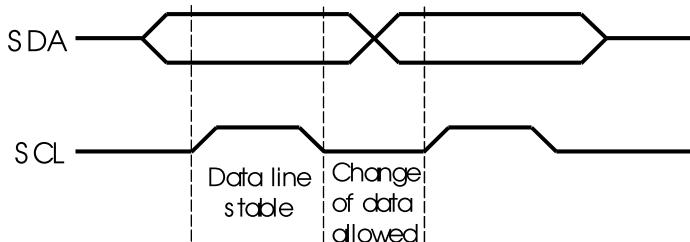
The first seven bits of the first byte make up the slave address (see [Figure 7-5](#)). The eighth bit determines the direction of the message. A zero in the R/S position of the first byte indicates that the master transmits (sends) data to the selected slave, and a one in this position indicates that the master receives data from the slave.

Figure 7-5. R/S Bit in First Byte


7.2.1.3 Data Validity

The data on the SDA line must be stable during the high period of the clock, and the data line can only change when SCL is Low (see [Figure 7-6](#)).

Figure 7-6. Data Validity During Bit Transfer on the I²C Bus



7.2.1.4 Acknowledge

All bus transactions have a required acknowledge clock cycle generated by the master. During the acknowledge cycle, the transmitter (which can be the master or slave) releases the SDA line. To acknowledge the transaction, the receiver must pull down SDA during the acknowledge clock cycle. The data transmitted out by the receiver during the acknowledge cycle must comply with the data validity requirements described in [Section 7.2.1.3](#).

When a slave receiver does not acknowledge the slave address, SDA must be left High by the slave so that the master can generate a STOP condition and abort the current transfer. If the master device is acting as a receiver during a transfer, it is responsible for acknowledging each transfer made by the slave. Because the master controls the number of bytes in the transfer, it signals the end of data to the slave transmitter by not generating an acknowledge on the last data byte. The slave transmitter must then release SDA to allow the master to generate the STOP or a repeated START condition.

If the slave is required to provide a manual ACK or NACK, the I²C Slave ACK Control (I2CSACKCTL) register allows the slave to NACK for invalid data or command or ACK for valid data or command. When this operation is enabled, the MCU slave module I²C clock is pulled low after the last data bit, until this register is written with the indicated response.

7.2.1.5 Repeated Start

The I²C master module has the capability of executing a repeated START (transmit or receive) after an initial transfer has occurred.

A repeated start sequence for a master transmit is as follows:

1. When the device is in the idle state, the master writes the slave address to the I2CMSC register and configures the R/S bit for the desired transfer type.
2. Data is written to the I2CMDR register.
3. When the BUSY bit in the I2CMCS register is 0, the master writes 0x3 to the I2CMCS register to initiate a transfer.
4. The master does not generate a STOP condition, but instead writes another slave address to the I2CMSC register, then writes 0x3 to initiate the repeated START.

A repeated start sequence for a master receive is similar:

1. When the device is in idle, the master writes the slave address to the I2CMSC register and configures the R/S bit for the desired transfer type.
2. The master reads data from the I2CMDR register.
3. When the BUSY bit in the I2CMCS register is 0, the master writes 0x3 to the I2CMCS register to initiate a transfer.
4. The master does not generate a STOP condition, but instead writes another slave address to the I2CMSC register, then writes 0x3 to initiate the repeated START.

7.2.1.6 Clock Low Timeout (CLTO)

The I²C slave can extend the transaction by periodically pulling the clock low to create a slow bit transfer rate. The I²C module has a 12-bit programmable counter that tracks how long the clock has been held low. The upper 8 bits of the count value are software-programmable through the I²C Master Clock Low Timeout Count (I2CMCLKOCNT) register. The lower four bits are not user-visible, and are 0x0. The CNTL value programmed in the I2CMCLKOCNT register must be greater than 0x01. The application can program the eight most significant bits of the counter to reflect the acceptable cumulative low period in transaction. The count is loaded at the START condition and counts down on each falling edge of the internal bus clock of the master. The internal bus clock generated for this counter runs at the programmed I²C speed, even if SCL is held low on the bus. Upon reaching terminal count, the master state machine forces ABORT on the bus by issuing a STOP condition at the instance of SCL and SDA release.

For example, if an I²C module operates at 100-kHz speed, programming the I2CMCLKOCNT register to 0xDA translates the value 0xDA0, because the lower four bits are set to 0x0. This translates to a decimal value of 3488 clocks, or a cumulative clock low period of 34.88 ms at 100 kHz.

The CLKRIS bit in the I²C Master Raw Interrupt Status (I2CMRIS) register is set when the clock timeout period is reached, allowing the master to start corrective action to resolve the remote slave state. In addition, the CLKTO bit in the I²C Master Control/Status (I2CMCS) register is set; this bit is cleared when a STOP condition is sent, or during the I²C master reset. The status of the raw SDA and SCL signals are readable by software through the SDA and SCL bits in the I²C Master Bus Monitor (I2CMBMON) register to help determine the state of the remote slave.

In the event of a CLTO condition, application software must choose how it intends to attempt bus recovery. Most applications may attempt to manually toggle the I²C pins to force the slave to let go of the clock signal (a common solution is to attempt to force a STOP on the bus). If a CLTO is detected before the end of a burst transfer, and the bus is successfully recovered by the master, the master hardware attempts to finish the pending burst operation. Depending on the state of the slave after bus recovery, the actual behavior on the bus varies. If the slave resumes in a state where it can acknowledge the master (essentially, where it was before the bus hang), it continues where it left off. However, if the slave resumes in a reset state (or if a forced STOP by the master causes the slave to enter the idle state), it may ignore the master's attempt to complete the burst operation, and NAK the first data byte that the master sends or requests.

Because the behavior of slaves cannot always be predicted, the application software should always write the STOP bit in the I²C Master Configuration (I2CMCR) register during the CLTO interrupt service routine. This limits the amount of data the master attempts to send or receive upon bus recovery to a single byte, and after the single byte is on the wire, the master issues a STOP. An alternative solution is to have the application software reset the I²C peripheral before attempting to manually recover the bus. This solution allows the I²C master hardware to return to a known good (and idle) state before attempting to recover a stuck bus, and prevents any unwanted data from appearing on the wire.

NOTE: The master clock low timeout counter counts for the entire time SCL is held Low continuously. If SCL is de-asserted at any point, the master clock low timeout counter is reloaded with the value in the I2CMCLKOCNT register, and begins counting down from this value.

7.2.1.7 Dual Address

The I²C interface supports dual-address capability for the slave. The additional programmable address is provided, and can be matched if enabled. In legacy mode with dual address disabled, the I²C slave provides an ACK on the bus if the address matches the OAR field in the I2CSOAR register. In dual address mode, the I²C slave provides an ACK on the bus if either the OAR field in the I2CSOAR register or the OAR2 field in the I2CSOAR2 register is matched. The enable for dual address is programmable through the OAR2EN bit in the I2CSOAR2 register, and there is no disable on the legacy address.

The OAR2SEL bit in the I2CSCSR register indicates if the ACKed address is the alternate address or not. When this bit is clear, it indicates either legacy operation or no address match.

7.2.1.8 Arbitration

A master may only start a transfer if the bus is idle. Two or more masters can generate a START condition within minimum hold time of the START condition. In these situations, an arbitration scheme takes place on the SDA line, while SCL is High. During arbitration, the first of the competing master devices to place a 1 (High) on SDA, while another master transmits a 0 (Low), switches off its data output stage and retires until the bus is idle again.

Arbitration can take place over several bits. The first stage is a comparison of address bits, and if both masters are trying to address the same device, arbitration continues on to the comparison of data bits.

If arbitration is lost when the I2C master is initiating a BURST with the TX FIFO enabled, the application should execute the following steps to correctly handle the arbitration loss:

1. Flush and disable the TX FIFO
2. Clear and mask the TXFE interrupt by clearing the TXFEIM bit in the I2CMIMR register.

Once the bus is IDLE, the TXFIFO can be filled and enabled, the TXFE bit can be unmasked and a new BURST transaction initiated.

7.2.2 Supported Speed Modes

The I2C bus in the CC3200 can run in standard mode (100 kbps) or fast mode (400 kbps). The selected mode should match the speed of the other I2C devices on the bus.

7.2.2.1 Standard and Fast Modes

Standard and fast modes are selected using a value in the I2C Master Timer Period (I2CMTPR) register that results in an SCL frequency of 100 kbps for standard mode and 400 kbps for fast mode.

The I2C clock rate is determined by the parameters CLK_PRD, TIMER_PRD, SCL_LP, and SCL_HP where:

- CLK_PRD is the system clock period
- SCL_LP is the low phase of SCL (fixed at 6)
- SCL_HP is the high phase of SCL (fixed at 4)

TIMER_PRD is the programmed value in the I2CMTPR register. This value is determined by replacing the known variables in the equation below and solving for TIMER_PRD.

The I2C clock period is calculated as follows:

$$\text{SCL_PERIOD} = 2 \times (1 + \text{TIMER_PRD}) \times (\text{SCL_LP} + \text{SCL_HP}) \times \text{CLK_PRD}$$

For example:

$$\text{CLK_PRD} = 12.5 \text{ ns}$$

$$\text{TIMER_PRD} = 39$$

$$\text{SCL_LP}=6$$

$$\text{SCL_HP}=4$$

yields a SCL frequency of:

$$1/\text{SCL_PERIOD} = 100 \text{ KHz}$$

[Table 7-2](#) gives examples of the timer periods to generate standard and fast mode SCL frequencies based on the fixed 80-MHz system clock frequency.

Table 7-2. Timer Periods

System clock	Timer Period	Standard Mode	Timer Period	Fast Mode	
80 MHz	0x27	100 Kbps	0x09	400 Kbps	

7.2.3 Interrupts

The I2C can generate interrupts when the following conditions are observed in the master module:

- Master transaction completed (RIS bit)
- Master arbitration lost (ARBLOSTRIS bit)
- Master address/data NACK (NACKRIS bit)
- Master bus timeout (CLKRIS bit)
- Next byte request (RIS bit)
- Stop condition on bus detected (STOPRIS bit)
- Start condition on bus detected (STARTRIS bit)
- RX DMA interrupt pending (DMARXRIS bit)
- TX DMA interrupt pending (DMATXRIS bit)
- Trigger value for FIFO has been reached and a TX FIFO request interrupt is pending (TXRIS bit)
- Trigger value for FIFO has been reached and a RX FIFO request interrupt is pending (RXRIS bit)
- Transmit FIFO is empty (TxFERIS bit)
- Receive FIFO is full (RXFFRIS bit) Interrupts are generated when the following conditions are observed in the Slave Module:
- Slave transaction received (DATARIS bit)
- Slave transaction requested (DATARIS bit)
- Slave next byte transfer request (DATARIS bit)
- Stop condition on bus detected (STOPRIS bit)
- Start condition on bus detected (STARTRIS bit)
- RX DMA interrupt pending (DMARXRIS bit)
- TX DMA interrupt pending (DMATXRIS bit)
- Programmable trigger value for FIFO has been reached and a TX FIFO request interrupt is pending (TXRIS bit)
- Programmable trigger value for FIFO has been reached and a RX FIFO request interrupt is pending (RXRIS bit)
- Transmit FIFO is empty (TxFERIS bit)
- Receive FIFO is full (RXFFRIS bit)

The I2C master and I2C slave modules have separate interrupt registers. Interrupts can be masked by clearing the appropriate bit in the I2CMIMR or I2CSIMR registers. The RIS bit in the Master Raw Interrupt Status (I2CMRIS) register and the DATARIS bit in the Slave Raw Interrupt Status (I2CSRIS) register have multiple interrupt causes, including a next byte transfer request interrupt. This interrupt is generated when both master and slave are requesting a receive or transmit transaction.

7.2.4 Loopback Operation

The I2C modules can be placed into an internal loopback mode for diagnostic or debug work by setting the LPBKbit in the I2C Master Configuration (I2CMCR) register. In loopback mode, the SDA and SCL signals from the master and are tied to the SDA and SCL signals of the slave module, to allow internal testing of the device without requiring I/O.

7.2.5 FIFO and μDMA Operation

Both the master and the slave module can access two 8-byte FIFOs used in conjunction with the μDMA for fast transfer of data. The transmit (TX) FIFO and receive (RX) FIFO can be independently assigned to either the I2C master or I2C slave. Thus, the following FIFO assignments are allowed:

- The transmit and receive FIFOs can be assigned to the master
- The transmit and receive FIFOs can be assigned to the slave
- The transmit FIFO can be assigned to the master, while the receive FIFO is assigned to the slave, and

vice versa.

In most cases, both FIFOs are assigned to either the master or the slave. The FIFO assignment is configured by programming the TXASGNMT and RXASGNMT bit in the I2C FIFO Control (I2CFIFOCTL) register.

Each FIFO has a programmable threshold point which indicates when the FIFO service interrupt should be generated. Additionally, a FIFO receive full and transmit empty interrupt can be enabled in the Interrupt Mask (I2CxIMR) registers of both the master and slave. If the TXFERIS interrupt is cleared (by setting the TXFEIC bit) when the TX FIFO is empty, the TXFERIS interrupt does not reassert, even though the TX FIFO remains empty in this situation.

When a FIFO is not assigned to a master or a slave module, the FIFO interrupt and status signals to the module are forced to a state that indicates the FIFO is empty. For example, if the TX FIFO is assigned to the master module, the status signals to the slave transmit interface indicates that the FIFO is empty.

NOTE: The FIFOs must be empty when reassigning the FIFOs for proper functionality.

7.2.5.1 Master Module Burst Mode

A BURST command is provided for the master module, which allows a sequence of data transfers using the μDMA (or software, if desired) to handle the data in the FIFO. The BURST command is enabled by setting the BURST bit in the Master Control/Status (I2CMCS) register. The number of bytes transferred by a BURST request is programmed in the I2C Master Burst Length (I2CMBLEN) register, and a copy of this value is automatically written to the I2C Master Burst Count (I2CMBCNT) register to be used as a down-counter during the BURST transfer. The bytes written to the I2C FIFO Data (I2CFIFODATA) register are transferred to the RX FIFO or TX FIFO, depending on whether a transmit or receive is being executed. If data is NACKed during a BURST and the STOP bit is set in the I2CMCS register, the transfer terminates. If the STOP bit is not set, the software application must issue a repeated STOP or START when a NACK interrupt is asserted. In the case of a NACK, the I2CMBCNT register can determine the amount of data that was transferred prior to the BURST termination. If the address is NACKed during a transfer, a STOP is issued.

7.2.5.1.1 Master Module μDMA Functionality

When the Master Control/Status (I2CMCS) register is set to enable BURST, and the master I2C μDMA channel is enabled in the DMA Channel Map Select n (DMACHMAPn) registers in the μDMA, the master control module asserts either the internal single μDMA request signal (dma_sreq) or multiple μDMA request signal (dma_req) to the μDMA. There are separate dma_req and dma_sreq signals for transmit and receive. A single μDMA request (dma_sreq) is asserted by the master module when the RX FIFO has at least one data byte present in the FIFO or when the TX FIFO has at least one space available to fill. The dma_req (or BURST) signal is asserted when RX FIFO fill level is higher than trigger level or the TX FIFO burst length remaining is less than 4 bytes and the FIFO fill level is less than trigger level. If a single transfer or BURST operation has completed, the μDMA sends a dma_done signal to the master module, represented by the DMATX/DMARX interrupts in the I2CMIMR, I2CMRIS, I2CMMIS, and I2CMICR registers.

If the μDMA I2C channel is disabled and software is handling the BURST command, software can read the FIFO Status (I2CFIFOSTAT) register and the Master Burst Count (I2CMBC) register to determine whether the FIFO needs servicing during the BURST transaction. A trigger value can be programmed in the I2CFIFOCTL register to allow for interrupts at various fill levels of the FIFOs.

The NACK and ARBLOST bits in the interrupt status registers can be enabled to indicate no acknowledgment of data transfer or an arbitration loss on the bus.

When the master module is transmitting FIFO data, software can fill the TX FIFO in advance of setting the BURST bit in the I2CMCS register. If the FIFO is empty when the μDMA is enabled for BURST mode, the dma_req and dma_sreq both assert (assuming the I2CMBLEN register is programmed to at least 4 bytes and the TX FIFO fill level is less than the trigger set). If the I2CMBLEN register value is less than 4 and the TX FIFO is not full but more than trigger level, only dma_sreq asserts. Single requests are generated

as required to keep the FIFO full, until the number of bytes specified in the I2CMBLEN register has been transferred to the FIFO (and the I2CMBCOUNT register reaches 0x0). At this point, no further requests are generated until the next BURST command is issued. If the μ DMA is disabled, FIFOs are serviced based on the interrupts active in the master interrupt status registers, the FIFO trigger values shown in the I2CFIFOSTATUS register and completion of a BURST transfer.

When the master module is receiving FIFO data, the RX FIFO is initially empty and no requests are asserted. If data is read from the slave and placed into the RX FIFO, the dma_sreq signal to the μ DMA is asserted to indicate there is data to be transferred. If the RX FIFO contains at least 4 bytes, the dma_req signal is also asserted. The μ DMA continues to transfer data out of the RX FIFO until it has reached the amount of bytes programmed in the I2CMBLEN register.

NOTE: The TXFEIM interrupt mask bit in the I2CMIMR register should be clear (masking the TXFE interrupt) when the master is performing an RX Burst from the RXFIFO, and unmasked before starting a TX FIFO transfers.

7.2.5.1.2 Slave Module

The slave module also has the capability to use the μ DMA in RX and TX FIFO data transfers. If the TX FIFO is assigned to the slave module and the TXFIFO bit is set in the I2CSCSR register, the slave module generates a single μ DMA request, dma_sreq, if the master module requests the next byte transfer. If the FIFO fill level is less than the trigger level, a μ DMA multiple transfer request, dma_req, is asserted to continue data transfers from the μ DMA.

If the RX FIFO is assigned to the slave module and the RXFIFO bit is set in the I2CSCSR register, then the slave module generates a signal μ DMA request, dma_sreq, if there is any data to be transferred. The dma_req signal is asserted when the RX FIFO has more data than the trigger level programmed by the RXTRIG bit in the I2CFIFOCTL register.

NOTE: TI recommends that an application should not switch between the I2CSDR register and TX FIFO or vice versa for successive transactions.

7.2.6 Command Sequence Flow Charts

This section details the steps required to perform the various I²C transfer types in both master and slave mode.

7.2.6.1 I²C Master Command Sequences

The figures that follow show the command sequences available for the I²C master.

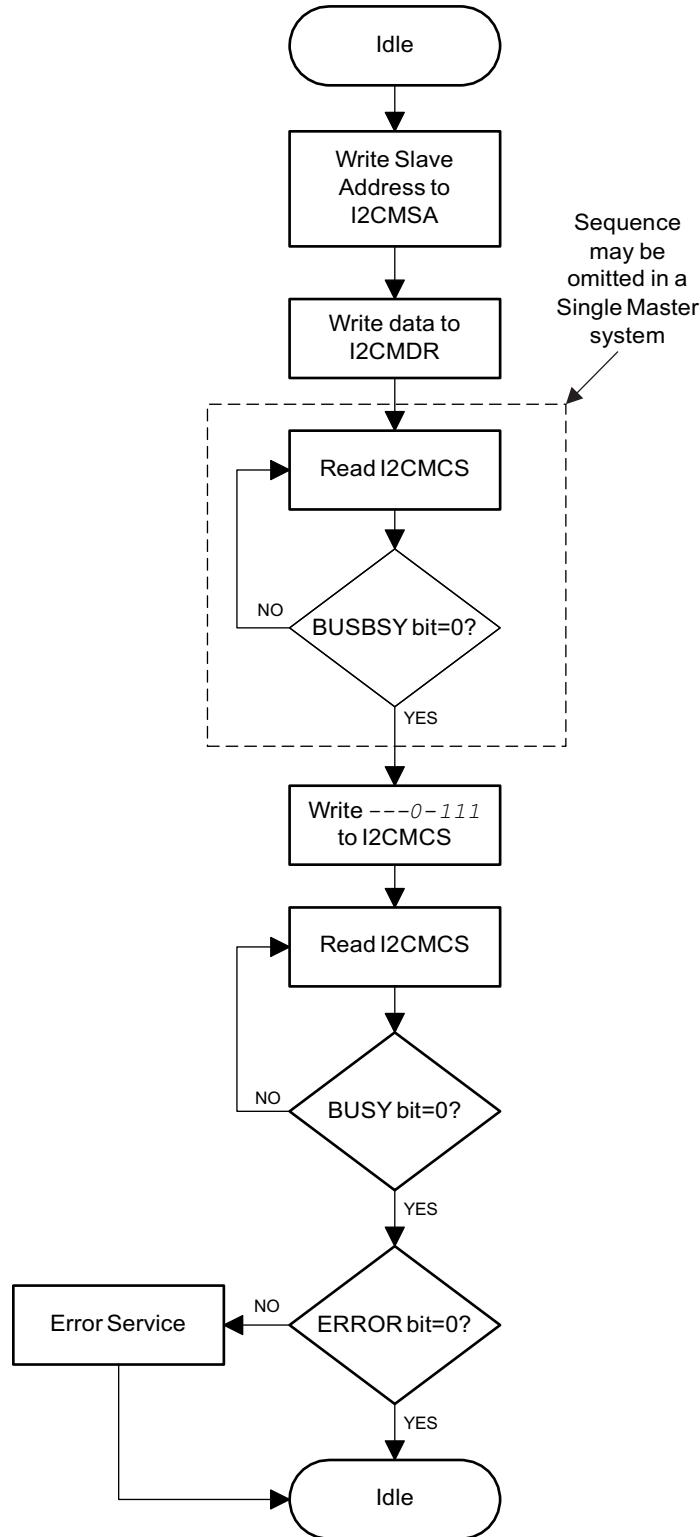
Figure 7-7. Master Single TRANSMIT


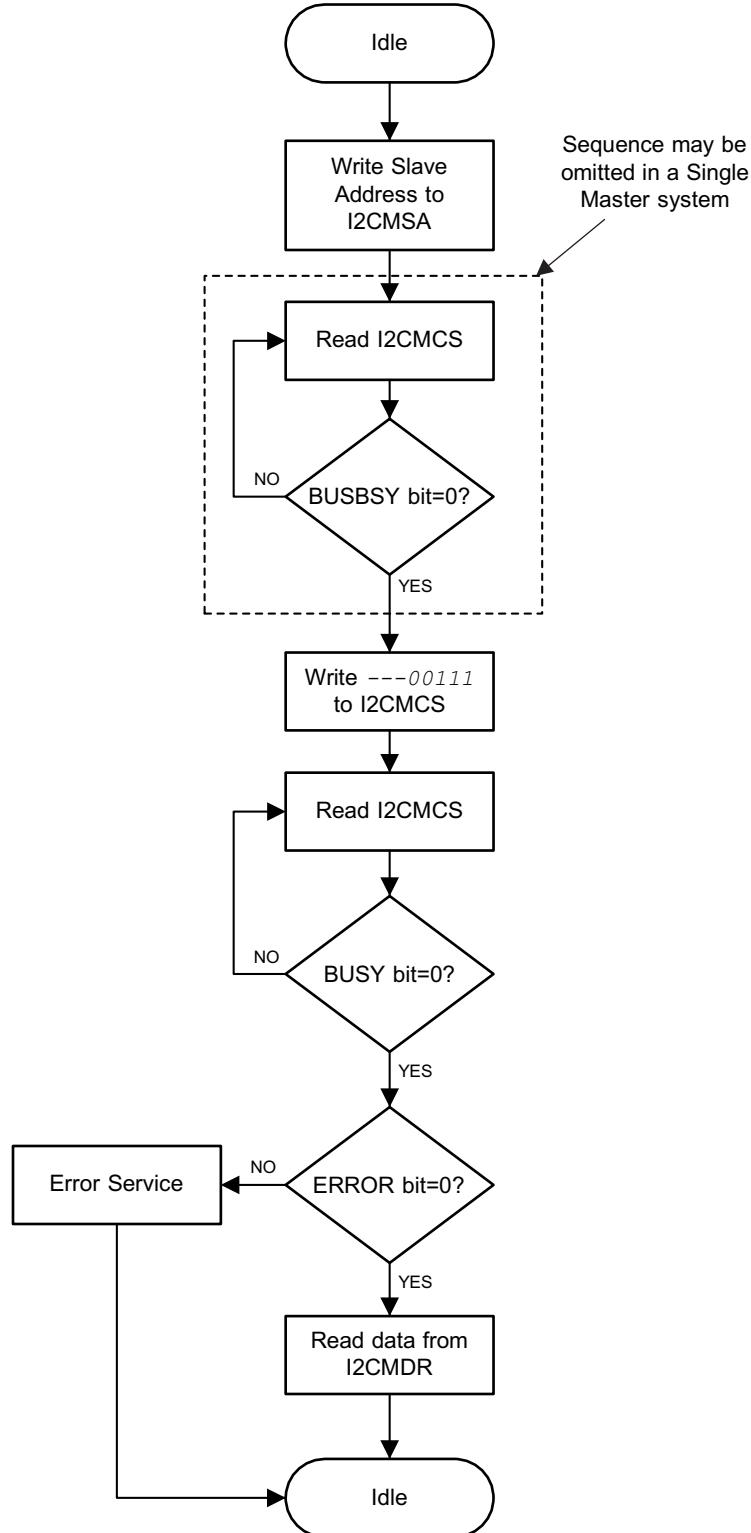
Figure 7-8. Master Single RECEIVE


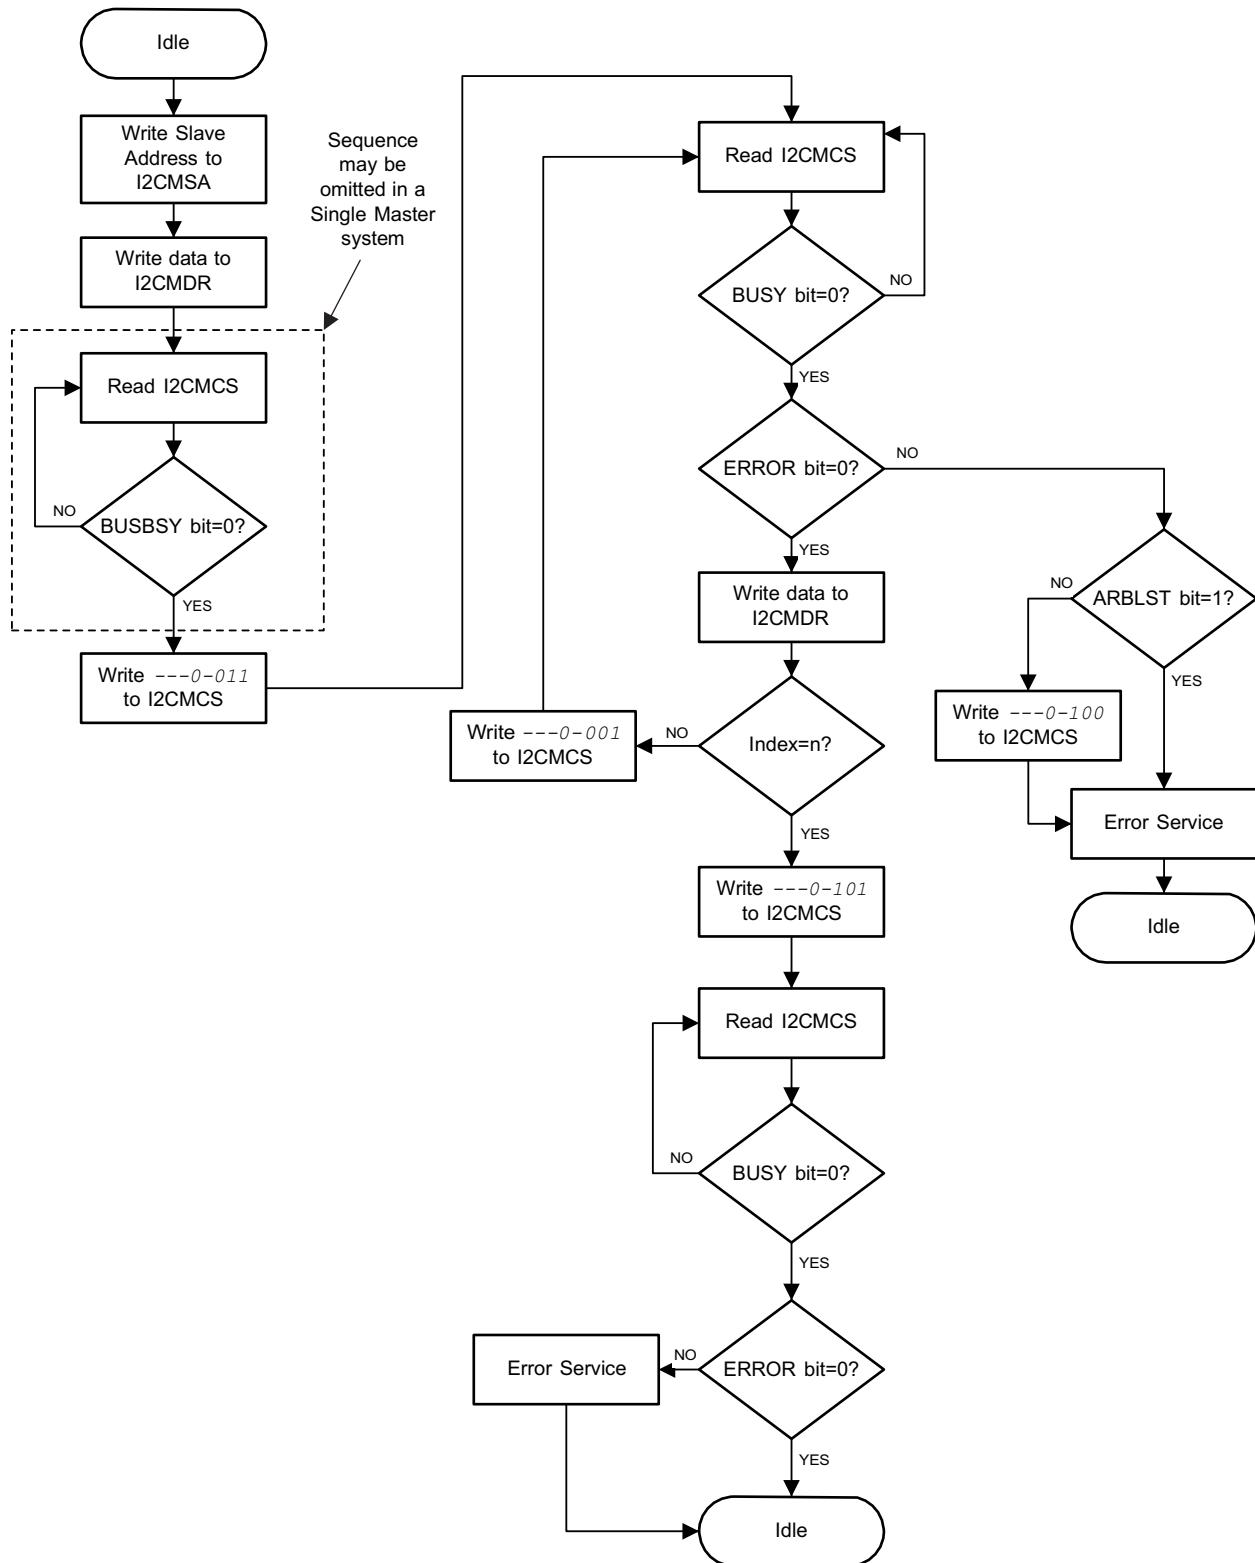
Figure 7-9. Master TRANSMIT of Multiple Data Bytes


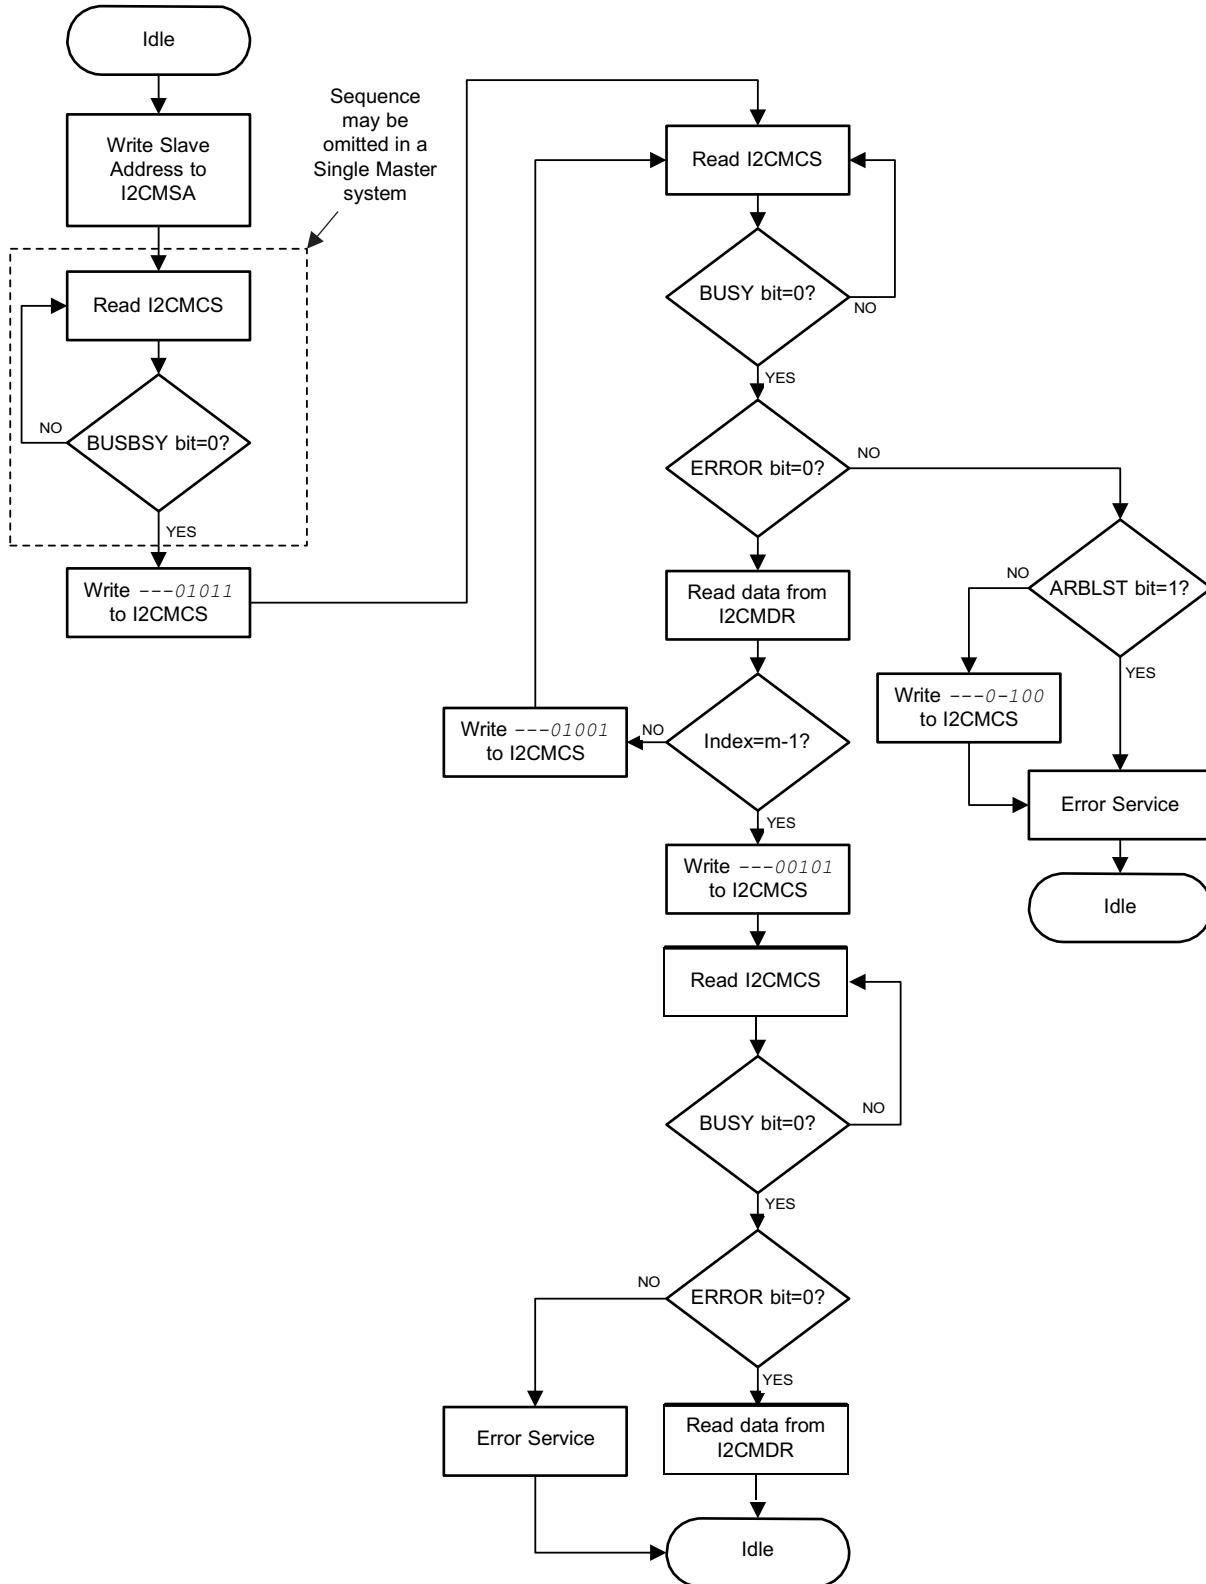
Figure 7-10. Master RECEIVE of Multiple Data Bytes


Figure 7-11. Master RECEIVE with Repeated START after Master TRANSMIT


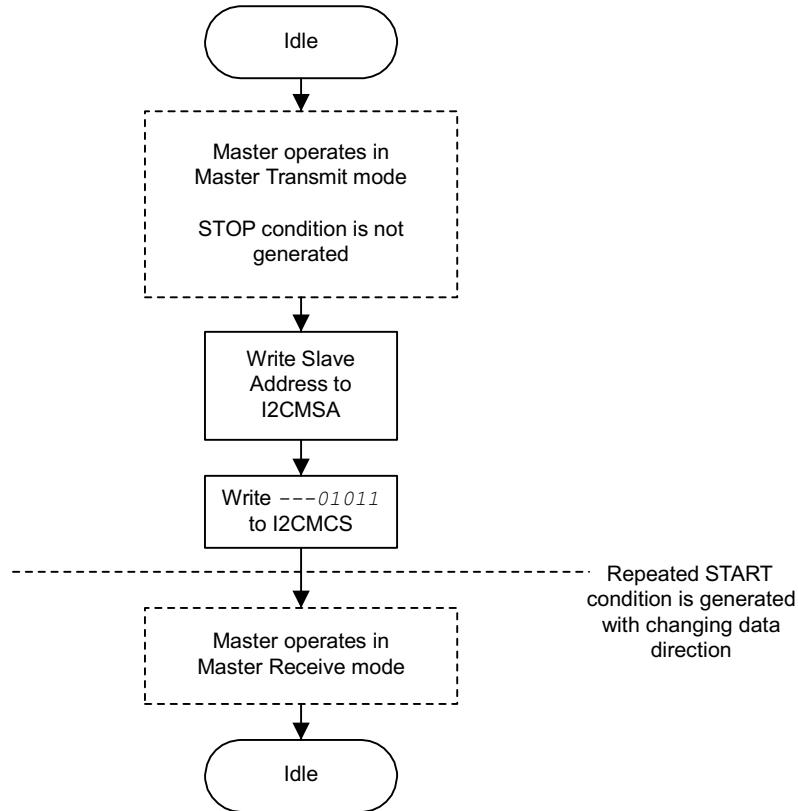
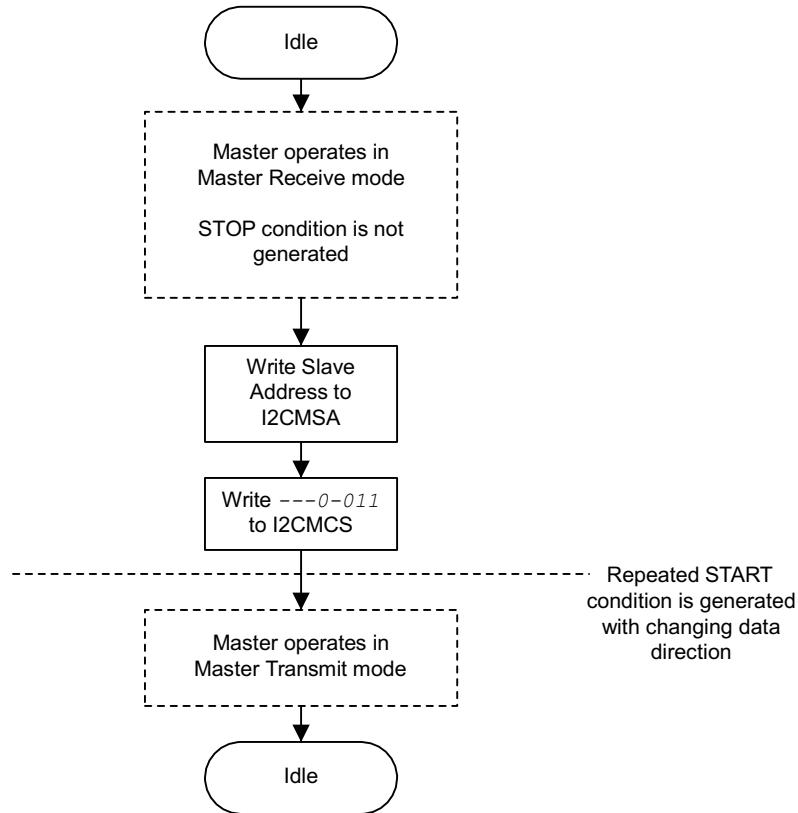


Figure 7-12. Master TRANSMIT with Repeated START after Master RECEIVE

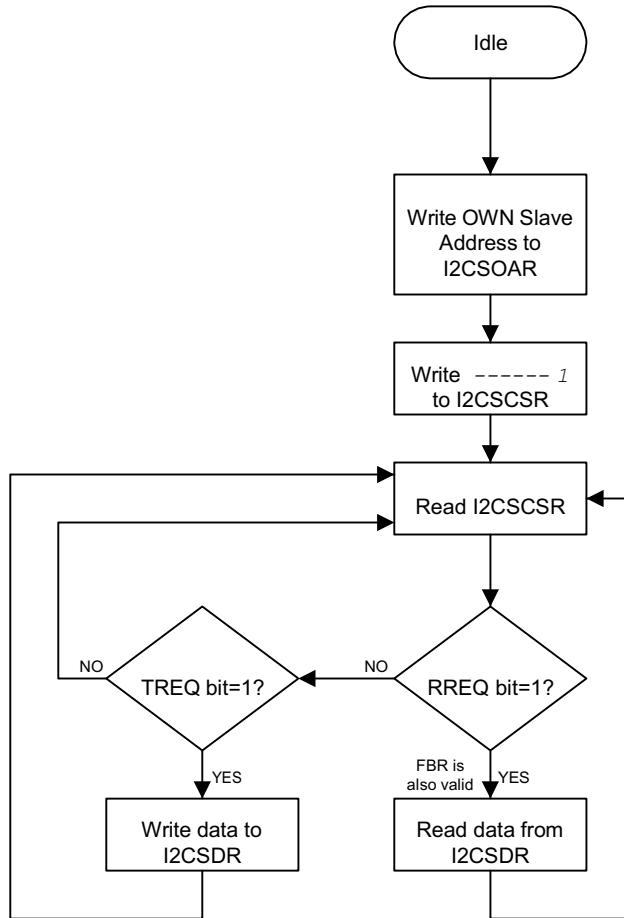

7.2.6.2 I2C Slave Command Sequences

Figure 7-13 presents the command sequence available for the I2C slave.

Figure 7-13. Slave Command Sequence


7.2.7 Initialization and Configuration

The following example shows how to configure the I2C module to transmit a single byte as a master. This assumes the system clock is 80 MHz.

1. Enable the I2C clock using the RCGCI2C register in the system control module.
2. The CONFMODE bits in the GPIO_PAD_CONFIG register should be set to choose the I2C function.
3. Enable the I2CSCL pin for open-drain operation using the IODEN bits of GPIO_PAD_CONFIG register.
4. Initialize the I2C master by writing the I2CMCR register with a value of 0x0000.0010.
5. Set the desired SCL clock speed of 100 Kbps by writing the I2CMTPR register with the correct value. The value written to the I2CMTPR register represents the number of system clock periods in one SCL clock period. The TPR value is determined by the following equation:

$$\text{TPR} = (\text{System Clock}/(2*(\text{SCL_LP} + \text{SCL_HP})*\text{SCL_CLK}))-1;$$

$$\text{TPR} = (80 \text{ MHz}/(2*(6+4)*100000))-1;$$

$$\text{TPR} = 39$$

Write the I2CMTPR register with the value of 0x0000.0039.
6. Specify the slave address of the master, and that the next operation is a transmit by writing the I2CMCS register with a value of 0x0000.0076. This sets the slave address to 0x3B.
7. Place data (byte) to be transmitted in the data register by writing the I2CMDR register with the desired data.
8. Initiate a single byte transmit of the data from master to slave by writing the I2CMCS register with a value of 0x0000.0007 (STOP, START, RUN).
9. Wait until the transmission completes by polling the BUSBSY bit of the I2CMCS register until the bit

has been cleared.

10. Check the ERROR bit in the I2CMCS register to confirm the transmit was acknowledged.

7.3 Register Map

7.3.1 I²C Registers

Table 7-3 lists the memory-mapped registers for the I²C. All register offset addresses not listed in **Table 7-3** should be considered as reserved locations and the register contents should not be modified.

All addresses given are relative to the I²C base address: 0x4002.0000.

Note that the I²C module clock must be enabled before the registers can be programmed. There must be a delay of 3 system clocks after the I²C module clock is enabled before any I²C module registers are accessed.

The hw_i2c.h file in the TivaWare Driver Library uses a base address of 0x800 for the I²C slave registers. Be aware when using registers with offsets between 0x800 and 0x818 that TivaWare for E Series uses an offset between 0x000 and 0x018 with the slave base address.

Table 7-3. I²C REGISTERS

Offset	Acronym	Register Name	Section
0h	I2CMSA	I ² C Master Slave Address	Section 7.3.1.1
4h	I2CMCS	I ² C Master Control/Status	Section 7.3.1.2
8h	I2CMDR	I ² C Master Data	Section 7.3.1.3
Ch	I2CMTPR	I ² C Master Timer Period	Section 7.3.1.4
10h	I2CMIMR	I ² C Master Interrupt Mask	Section 7.3.1.5
14h	I2CMRIS	I ² C Master Control/Status	Section 7.3.1.6
18h	I2CMMIS	I ² C Master Masked Interrupt Status	Section 7.3.1.7
1Ch	I2CMICR	I ² C Master Interrupt Clear	Section 7.3.1.8
20h	I2CMCR	I ² C Master Configuration	Section 7.3.1.9
24h	I2CMCLKOCNT	I ² C Master Clock Low Timeout Count	Section 7.3.1.10
2Ch	I2CMBMON	I ² C Master Bus Monitor	Section 7.3.1.11
30h	I2CMBLEN	I ² C Master Burst Length	Section 7.3.1.12
34h	I2CMBCNT	I ² C Master Burst Count	Section 7.3.1.13
800h	I2CSOAR	I ² C Slave Own Address	Section 7.3.1.14
804h	I2CSCCSR	I ² C Slave Control/Status	Section 7.3.1.15
808h	I2CSDR	I ² C Slave Data	Section 7.3.1.16
80Ch	I2CSIMR	I ² C Slave Interrupt Mask	Section 7.3.1.17
810h	I2CSRIS	I ² C Slave Raw Interrupt Status	Section 7.3.1.18
814h	I2CSMIS	I ² C Slave Masked Interrupt Status	Section 7.3.1.19
818h	I2CSICR	I ² C Slave Interrupt Clear	Section 7.3.1.20
81Ch	I2CSOAR2	I ² C Slave Own Address 2	Section 7.3.1.21
820h	I2CSACKCTL	I ² C Slave ACK Control	Section 7.3.1.22
F00h	I2CFIFODATA	I ² C FIFO Data	Section 7.3.1.23
F04h	I2CFIFOCTL	I ² C FIFO Control	Section 7.3.1.24
F08h	I2CFIFOSTATUS	I ² C FIFO Status	Section 7.3.1.25
FC0h	I2CPP	I ² C Peripheral Properties	Section 7.3.1.26
FC4h	I2CPC	I ² C Peripheral Configuration	Section 7.3.1.27

7.3.1.1 I2CMSA Register (offset = 0h) [reset = 0h]

I2CMSA is shown in [Figure 7-14](#) and described in [Table 7-4](#).

This register consists of eight bits: seven address bits (A6-A0), and a Receive/Send bit, which determines if the next operation is a Receive (High), or Transmit (Low).

Figure 7-14. I2CMSA Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED								SA							
R-0h								R/W-0h							
R/W-0h								R/W-0h							

LEGEND: R/W = Read/Write; R = Read only; W1toCI = Write 1 to clear bit; -n = value after reset

Table 7-4. I2CMSA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-1	SA	R/W	0h	I ² C Slave Address This field specifies bits A6 through A0 of the slave address.
0	R_S	R/W	0h	Receive/Send 0h = Transmit 1h = Receive The R/S bit specifies if the next master operation is a Receive (High) or Transmit (Low).

7.3.1.2 I2CMCS Register (offset = 4h) [reset = 20h]

I2CMCS is shown in [Figure 7-15](#) and described in [Table 7-5](#).

Figure 7-15. I2CMCS Register

31	30	29	28	27	26	25	24
ACTDMARX	ACTDMATX			RESERVED			
R/W-0h	R-0h			R-0h			
23	22	21	20	19	18	17	16
				RESERVED			
				R-0h			
15	14	13	12	11	10	9	8
				RESERVED			
				R-0h			
7	6	5	4	3	2	1	0
CLKTO	BUSBSY_OR_BURST	IDLE_OR_QCMD	ARBLST_OR_HS	DATAACK_OR_ACK	ADRACK_OR_STOP	ERROR_OR_START	BUSY_OR_RUN
R/W-0h	R/W-0h	R/W-1h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-5. I2CMCS Register Field Descriptions

Bit	Field	Type	Reset	Description
31	ACTDMARX	R/W	0h	DMA RX Active Status 0h (R) = DMA RX is not active 1h (R) = DMA RX is active
30	ACTDMATX	R	0h	DMA TX Active Status 0h (R) = DMA TX is not active 1h (R) = DMA TX is active.
29-8	RESERVED	R	0h	
7	CLKTO	R/W	0h	Clock Timeout Error This bit is cleared when the master sends a STOP condition or if the I2C master is reset. 0h (R) = No clock timeout error. 1h (R) = The clock timeout error has occurred.
6	BUSBSY_OR_BURST	R/W	0h	Bus Busy (R) or Burst Enable (W) The bit changes based on the START and STOP conditions. 0h (W) = Burst operation is disabled. 0h (R) = The I2C bus is idle. 1h (W) = The master is enabled to burst using the receive and transmit FIFOs. 1h (R) = The I2C bus is busy. Note that the BURST and RUN bits are mutually exclusive.
5	IDLE_OR_QCMD	R/W	1h	I2C Idle (R) or Quick Command (W) To execute a quick command, the START, STOP and RUN bits must also be set. After the quick command is issued, the master generates a STOP. 0h (W) = Bus transaction is not a quick command. 0h (R) = The I2C controller is not idle. 1h (W) = The bus transaction is a quick command. 1h (R) = The I2C controller is idle.

Table 7-5. I2CMCS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
4	ARBLST_OR_HS	R/W	0h	<p>Arbitration Lost (R) or Reserved (High-Speed Enable Not Supported) (W)</p> <p>0h (W) = The master operates in Standard or Fast mode as selected by using a value in the I2CMTPR register that results in an SCL frequency of 100 kbps for Standard mode or 400 kbps for Fast mode.</p> <p>0h (R) = The I2C controller won arbitration.</p> <p>1h (R) = The I2C controller lost arbitration.</p>
3	DATAACK_OR_ACK	R/W	0h	<p>Acknowledge Data (R) or Data Acknowledge Enable (W)</p> <p>0h (W) = The received data byte is not acknowledged automatically by the master.</p> <p>0h (R) = The transmitted data was acknowledged</p> <p>1h (W) = The received data byte is acknowledged automatically by the master.</p> <p>1h (R) = The transmitted data was not acknowledged.</p>
2	ADRACK_OR_STOP	R/W	0h	<p>Acknowledge Address (R) or Generate STOP (W)</p> <p>0h (W) = The controller does not generate the STOP condition.</p> <p>0h (R) = The transmitted address was acknowledged</p> <p>1h (W) = The controller generates the STOP condition.</p> <p>1h (R) = The transmitted address was not acknowledged.</p>
1	ERROR_OR_START	R/W	0h	<p>Error (R) or Generate START (W)</p> <p>The error can be when the slave address is not acknowledged, or when the transmit data is not acknowledged.</p> <p>0h (W) = The controller does not generate the START condition.</p> <p>0h (R) = No error was detected on the last operation.</p> <p>1h (W) = The controller generates the START or repeated START condition.</p> <p>1h (R) = An error occurred on the last operation.</p>
0	BUSY_OR_RUN	R/W	0h	<p>I2C Busy (R) or I2C Master Enable (W)</p> <p>When the BUSY bit is set, the other status bits are not valid.</p> <p>Note that the BURST and RUN bits are mutually exclusive.</p> <p>0h (W) = In standard mode, this encoding means the master is unable to transmit or receive data. In Burst mode, this bit is not used and must be set to 0.</p> <p>0h (R) = The controller is idle.</p> <p>1h (W) = The master is able to transmit or receive data. Note that this bit cannot be set in Burst mode.</p> <p>1h (R) = The controller is busy.</p>


7.3.1.3 I2CMDR Register (offset = 8h) [reset = 0h]

I2CMDR is shown in [Figure 7-16](#) and described in [Table 7-6](#).

NOTE: This register is read-sensitive. See the register description for details.

This register contains the data to be transmitted when in the Master Transmit state and the data received when in the Master Receive state. If the BURST bit is enabled in the **I2CMCS** register, then the I2CFIFODATA register is used for the current data transmit or receive value and this register is ignored.

Figure 7-16. I2CMDR Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-6. I2CMDR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	DATA	R/W	0h	This byte contains the data transferred during a transaction.

7.3.1.4 I2CMTPR Register (offset = Ch) [reset = 1h]

I2CMTPR is shown in [Figure 7-17](#) and described in [Table 7-7](#).

This register is programmed to set the timer period for the SCL clock and assign the SCL clock to standard.

Figure 7-17. I2CMTPR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED														PULSEL	
R-0h														R/W-0h	
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED														TPR	
R-0h														R/W-1h	

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-7. I2CMTPR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-19	RESERVED	R	0h	
18-16	PULSEL	R/W	0h	<p>Glitch Suppression Pulse Width This field controls the pulse width select for glitch suppression on the SCL and SDA lines. The following values are the glitch suppression values in terms of system clocks.</p> <p>0h = Bypass 1h = 1 clock 2h = 2 clocks 3h = 3 clocks 4h = 4 clocks 5h = 8 clocks 6h = 16 clocks 7h = 31 clocks</p>
15-8	RESERVED	R	0h	
7	RESERVED	R	0h	
6-0	TPR	R/W	1h	<p>Timer Period This field is used in the equation to configure SCL_PERIOD: $SCL_PERIOD = 2 \cdot (1 + TPR) \cdot (SCL_LP + SCL_HP) \cdot CLK_PRD$ where: SCL_PRD is the SCL line period (I2C clock). TPR is the Timer Period register value (range of 1 to 127). SCL_LP is the SCL Low period (fixed at 6). SCL_HP is the SCL High period (fixed at 4). CLK_PRD is the system clock period in ns.</p>

7.3.1.5 I2CMIMR Register (offset = 10h) [reset = 0h]

I2CMIMR is shown in [Figure 7-18](#) and described in [Table 7-8](#).

This register controls whether a raw interrupt is promoted to a controller interrupt.

Figure 7-18. I2CMIMR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED				RXFFIM	TXFEIM	RXIM	TXIM
R-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
ARBLOSTIM	STOPIM	STARTIM	NACKIM	DMATXIM	DAMRXIM	CLKIM	IM
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-8. I2CMIMR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-12	RESERVED	R	0h	
11	RXFFIM	R/W	0h	Receive FIFO Full Interrupt Mask 0h = The RXFFRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The Receive FIFO Full interrupt is sent to the interrupt controller when the RXFFRIS bit in the I2CMRIS register is set.
10	TXFEIM	R/W	0h	Transmit FIFO Empty Interrupt Mask Note: The TXFEIM interrupt mask bit in the I2CMIMR register should be clear (masking the TXFE interrupt) when the master is performing an RX Burst from the RXFIFO and should be unmasked before starting a TX FIFO transfers. 0h = The TXFERIS interrupt is suppressed and not sent to the interrupt controller. 1h = The Transmit FIFO Empty interrupt is sent to the interrupt controller when the TXFERIS bit in the I2CMRIS register is set.
9	RXIM	R/W	0h	Receive FIFO Request Interrupt Mask 0h = The RXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The RX FIFO Request interrupt is sent to the interrupt controller when the RXRIS bit in the I2CMRIS register is set.
8	TXIM	R/W	0h	Transmit FIFO Request Interrupt Mask 0h = The TXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The TX FIFO Request interrupt is sent to the interrupt controller when the TXRIS bit in the I2CMRIS register is set.
7	ARBLOSTIM	R/W	0h	Transmit FIFO Request Interrupt Mask 0h = The TXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The TX FIFO Request interrupt is sent to the interrupt controller when the TXRIS bit in the I2CMRIS register is set.

Table 7-8. I2CMIMR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
6	STOPIM	R/W	0h	STOP Detection Interrupt Mask 0h = The STOPRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The STOP detection interrupt is sent to the interrupt controller when the STOPRIS bit in the I2CMRIS register is set.
5	STARTIM	R/W	0h	START Detection Interrupt Mask 0h = The STARTRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The START detection interrupt is sent to the interrupt controller when the STARTRIS bit in the I2CMRIS register is set.
4	NACKIM	R/W	0h	Address/Data NACK Interrupt Mask 0h = The NACKRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The address/data NACK interrupt is sent to the interrupt controller when the NACKRIS bit in the I2CMRIS register is set.
3	DMATXIM	R/W	0h	Transmit DMA Interrupt Mask 0h = The DMATXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The transmit DMA complete interrupt is sent to the interrupt controller when the DMATXRIS bit in the I2CMRIS register is set.
2	DAMRXIM	R/W	0h	Receive DMA Interrupt Mask 0h = The DMARXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The receive DMA complete interrupt is sent to the interrupt controller when the DMARXRIS bit in the I2CMRIS register is set.
1	CLKIM	R/W	0h	Clock Timeout Interrupt Mask 0h = The CLKRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The clock timeout interrupt is sent to the interrupt controller when the CLKRIS bit in the I2CMRIS register is set.
0	IM	R/W	0h	Master Interrupt Mask 0h = The RIS interrupt is suppressed and not sent to the interrupt controller. 1h = The master interrupt is sent to the interrupt controller when the RIS bit in the I2CMRIS register is set.

7.3.1.6 I2CMRIS Register (offset = 14h) [reset = 0h]

I2CMRIS is shown in [Figure 7-19](#) and described in [Table 7-9](#).

This register specifies whether an interrupt is pending.

Figure 7-19. I2CMRIS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED				RXFFRIS	TXFERIS	RXRIS	TXRIS
R-0h				R-0h	R-0h	R-0h	R-0h
7	6	5	4	3	2	1	0
ARBLOSTRIS	STOPRIS	STARTRIS	NACKRIS	DMATXRIS	DMARXRIS	CLKRIS	RIS
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-9. I2CMRIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-12	RESERVED	R	0h	
11	RXFFRIS	R	0h	Receive FIFO Full Raw Interrupt Status This bit is cleared by writing a 1 to the RXFFIC bit in the I2CMICR register. 0h = No interrupt 1h = The Receive FIFO Full interrupt is pending.
10	TXFERIS	R	0h	Transmit FIFO Empty Raw Interrupt Status 0h = No interrupt 1h = The Transmit FIFO Empty interrupt is pending. This bit is cleared by writing a 1 to the TXFEIC bit in the I2CMICR register. Note that if we clear the TXFERIS interrupt (by setting the TXFEIC bit) when the TX FIFO is empty, the TXFERIS interrupt does not reassert even though the TX FIFO remains empty in this situation.
9	RXRIS	R	0h	Receive FIFO Request Raw Interrupt Status This bit is cleared by writing a 1 to the RXIC bit in the I2CMICR register. 0h = No interrupt 1h = The trigger level for the RX FIFO has been reached or there is data in the FIFO and the burst count is zero. Thus, a RX FIFO request interrupt is pending.
8	TXRIS	R	0h	Transmit Request Raw Interrupt Status This bit is cleared by writing a 1 to the TXIC bit in the I2CMICR register. 0h = No interrupt 1h = The trigger level for the TX FIFO has been reached and more data is needed to complete the burst. Thus, a TX FIFO request interrupt is pending.
7	ARBLOSTRIS	R	0h	Arbitration Lost Raw Interrupt Status This bit is cleared by writing a 1 to the ARBLOSTIC bit in the I2CMICR register. 0h = No interrupt 1h = The Arbitration Lost interrupt is pending.

Table 7-9. I2CMRIS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
6	STOPRIS	R	0h	STOP Detection Raw Interrupt Status This bit is cleared by writing a 1 to the STOPIC bit in the I2CMICR register. 0h = No interrupt 1h = The STOP Detection interrupt is pending.
5	STARTRIS	R	0h	START Detection Raw Interrupt Status This bit is cleared by writing a 1 to the STARTIC bit in the I2CMICR register. 0h = No interrupt 1h = The START Detection interrupt is pending.
4	NACKRIS	R	0h	Address/Data NACK Raw Interrupt Status This bit is cleared by writing a 1 to the NACKIC bit in the I2CMICR register. 0h = No interrupt 1h = The address/data NACK interrupt is pending.
3	DMATXRIS	R	0h	Transmit DMA Raw Interrupt Status This bit is cleared by writing a 1 to the DMATXIC bit in the I2CMICR register. 0h = No interrupt. 1h = The transmit DMA complete interrupt is pending.
2	DMARXRIS	R	0h	Receive DMA Raw Interrupt Status This bit is cleared by writing a 1 to the DMARXIC bit in the I2CMICR register. 0h = No interrupt. 1h = The receive DMA complete interrupt is pending.
1	CLKRIS	R	0h	Clock Timeout Raw Interrupt Status This bit is cleared by writing a 1 to the CLKIC bit in the I2CMICR register. 0h = No interrupt. 1h = The clock timeout interrupt is pending.
0	RIS	R	0h	Master Raw Interrupt Status This interrupt includes: Master transaction completed Next byte transfer request Value Description This bit is cleared by writing a 1 to the IC bit in the I2CMICR register. 0h = No interrupt. 1h = A master interrupt is pending.

7.3.1.7 I2CMMIS Register (offset = 18h) [reset = 0h]

I2CMMIS is shown in [Figure 7-20](#) and described in [Table 7-10](#).

This register specifies whether an interrupt was signaled.

Figure 7-20. I2CMMIS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED				RXFFMIS	TXFEMIS	RXMIS	TXMIS
R-0h				R-0h	R-0h	R-0h	R-0h
7	6	5	4	3	2	1	0
ARBLOSTMIS	STOPMIS	STARTMIS	NACKMIS	DMATXMISS	DMARXMISS	CLKMIS	MIS
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-10. I2CMMIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-12	RESERVED	R	0h	
11	RXFFMIS	R	0h	<p>Receive FIFO Full Interrupt Mask This bit is cleared by writing a 1 to the RXFFIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked Receive FIFO Full interrupt was signaled and is pending.</p>
10	TXFEMIS	R	0h	<p>Transmit FIFO Empty Interrupt Mask This bit is cleared by writing a 1 to the TXFEIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked Transmit FIFO Empty interrupt was signaled and is pending.</p>
9	RXMIS	R	0h	<p>Receive FIFO Request Interrupt Mask This bit is cleared by writing a 1 to the RXIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked Receive FIFO Request interrupt was signaled and is pending.</p>
8	TXMIS	R	0h	<p>Transmit Request Interrupt Mask This bit is cleared by writing a 1 to the TXIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked Transmit FIFO Request interrupt was signaled and is pending.</p>
7	ARBLOSTMIS	R	0h	<p>Arbitration Lost Interrupt Mask This bit is cleared by writing a 1 to the ARBLOSTIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked Arbitration Lost interrupt was signaled and is pending.</p>

Table 7-10. I2CMMIS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
6	STOPMIS	R	0h	STOP Detection Interrupt Mask This bit is cleared by writing a 1 to the STOPIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked STOP Detection interrupt was signaled and is pending.
5	STARTMIS	R	0h	START Detection Interrupt Mask This bit is cleared by writing a 1 to the STARTIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked START Detection interrupt was signaled and is pending.
4	NACKMIS	R	0h	Address/Data NACK Interrupt Mask This bit is cleared by writing a 1 to the NACKIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked Address/Data NACK interrupt was signaled and is pending.
3	DMATXMISS	R	0h	Transmit DMA Interrupt Status This bit is cleared by writing a 1 to the DMATXIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked transmit DMA complete interrupt was signaled and is pending.
2	DMARXMIS	R	0h	Receive DMA Interrupt Status This bit is cleared by writing a 1 to the DMARXIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked receive DMA complete interrupt was signaled and is pending.
1	CLKMIS	R	0h	Clock Timeout Masked Interrupt Status This bit is cleared by writing a 1 to the CLKIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked clock timeout interrupt was signaled and is pending.
0	MIS	R	0h	Clock Timeout Masked Interrupt Status This bit is cleared by writing a 1 to the CLKIC bit in the I2CMICR register. 0h = No interrupt. 1h = An unmasked clock timeout interrupt was signaled and is pending.

7.3.1.8 I2CMICR Register (offset = 1Ch) [reset = 0h]

I2CMICR is shown in [Figure 7-21](#) and described in [Table 7-11](#).

This register clears the raw and masked interrupts.

Figure 7-21. I2CMICR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED				RXFFIC	TXFEIC	RXIC	TXIC
R-0h				W-0h	W-0h	W-0h	W-0h
7	6	5	4	3	2	1	0
ARBLOSTIC	STOPIC	STARTIC	NACKIC	DMATXIC	DMARXIC	CLKCIC	IC
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCI = Write 1 to clear bit; -n = value after reset

Table 7-11. I2CMICR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-12	RESERVED	R	0h	
11	RXFFIC	W	0h	Receive FIFO Full Interrupt Clear Writing a 1 to this bit clears the RXFFIS bit in the I2CMRIS register and the RXFFMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
10	TXFEIC	W	0h	Transmit FIFO Empty Interrupt Clear Writing a 1 to this bit clears the TXFERIS bit in the I2CMRIS register and the TXFEMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
9	RXIC	W	0h	Receive FIFO Request Interrupt Clear Writing a 1 to this bit clears the RXRIS bit in the I2CMRIS register and the RXMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
8	TXIC	W	0h	Transmit FIFO Request Interrupt Clear Writing a 1 to this bit clears the TXRIS bit in the I2CMRIS register and the TXMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
7	ARBLOSTIC	W	0h	Arbitration Lost Interrupt Clear Writing a 1 to this bit clears the ARBLOSTRIS bit in the I2CMRIS register and the ARBLOSTMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
6	STOPIC	W	0h	STOP Detection Interrupt Clear Writing a 1 to this bit clears the STOPRIS bit in the I2CMRIS register and the STOPMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
5	STARTIC	W	0h	START Detection Interrupt Clear Writing a 1 to this bit clears the STARTRIS bit in the I2CMRIS register and the STARTMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.

Table 7-11. I2CMICR Register Field Descriptions (continued)


Bit	Field	Type	Reset	Description
4	NACKIC	W	0h	Address/Data NACK Interrupt Clear Writing a 1 to this bit clears the NACKRIS bit in the I2CMRIS register and the NACKMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
3	DMATXIC	W	0h	Transmit DMA Interrupt Clear Writing a 1 to this bit clears the DMATXRIS bit in the I2CMRIS register and the DMATXMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
2	DMARXIC	W	0h	Receive DMA Interrupt Clear Writing a 1 to this bit clears the DMARXRIS bit in the I2CMRIS register and the DMARXMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
1	CLKCIC	W	0h	Clock Timeout Interrupt Clear Writing a 1 to this bit clears the CLKRIS bit in the I2CMRIS register and the CLKMIS bit in the I2CMMIS register. A read of this register returns no meaningful data.
0	IC	W	0h	Master Interrupt Clear Writing a 1 to this bit clears the RIS bit in the I2CMRIS register and the MIS bit in the I2CMMIS register. A read of this register returns no meaningful data.

7.3.1.9 I2CMCR Register (offset = 20h) [reset = 0h]

I2CMCR is shown in [Figure 7-22](#) and described in [Table 7-12](#).

This register configures the mode (Master or Slave), and sets the interface for test mode loopback.

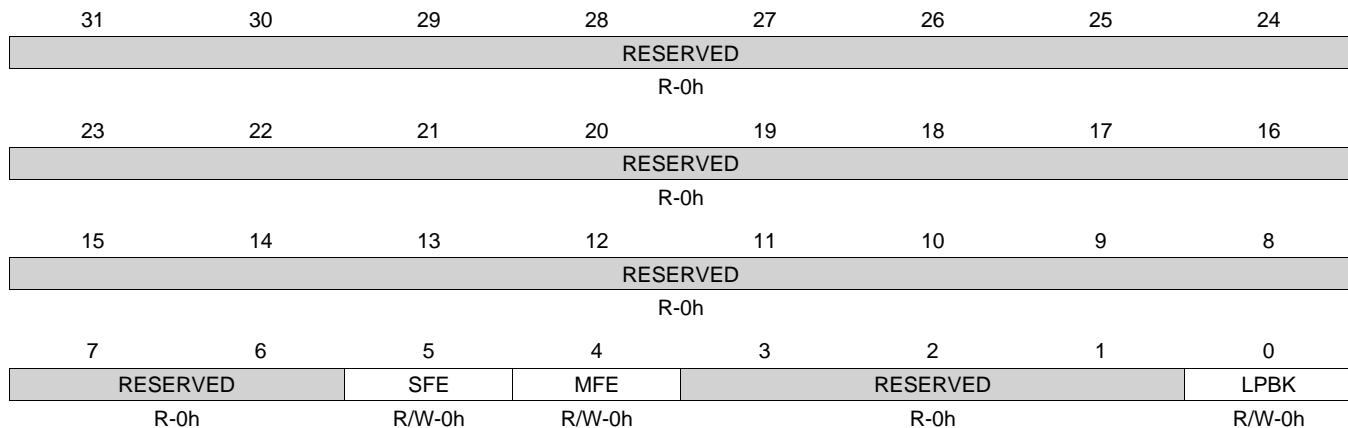Figure 7-22. I2CMCR Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-12. I2CMCR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-6	RESERVED	R	0h	
5	SFE	R/W	0h	I2C Slave Function Enable 0h = Slave mode is disabled. 1h = Slave mode is enabled.
4	MFE	R/W	0h	I2C Master Function Enable 0h = Master mode is disabled. 1h = Master mode is enabled.
3-1	RESERVED	R	0h	
0	LPBK	R/W	0h	I2C Loopback 0h = Normal operation. 1h = The controller in a test mode loopback configuration.

7.3.1.10 I2CMCLKOCNT Register (offset = 24h) [reset = 0h]

I2CMCLKOCNT is shown in [Figure 7-23](#) and described in [Table 7-13](#).

This register contains the upper 8 bits of a 12-bit counter that can be used to keep the timeout limit for clock stretching by a remote slave. The lower four bits of the counter are not user visible and are always 0x0.

NOTE: The Master Clock Low Timeout counter counts for the entire time SCL is held Low continuously. If SCL is de-asserted at any point, the Master Clock Low Timeout Counter is reloaded with the value in the I2CMCLKOCNT register and begins counting down from this value.

Figure 7-23. I2CMCLKOCNT Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																								CNTL							
R-0h																								R/W-0h							

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-13. I2CMCLKOCNT Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	CNTL	R/W	0h	I2C Master Count This field contains the upper 8 bits of a 12-bit counter for the clock low timeout count. Note: The value of CNTL must be greater than 0x1.

7.3.1.11 I2CMBMON Register (offset = 2Ch) [reset = 3h]

I2CMBMON is shown in [Figure 7-24](#) and described in [Table 7-14](#).

This register is used to determine the SCL and SDA signal status.

Figure 7-24. I2CMBMON Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED															
R-0h															R-1h R-1h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-14. I2CMBMON Register Field Descriptions

Bit	Field	Type	Reset	Description
31-2	RESERVED	R	0h	
1	SDA	R	1h	I2C SDA Status 0h = The I2CSDA signal is low. 1h = The I2CSDA signal is high.
0	SCL	R	1h	I2C SCL Status 0h = The I2CSCL signal is low. 1h = The I2CSCL signal is high.

7.3.1.12 I2CMBLEN Register (offset = 30h) [reset = 0h]

I2CMBLEN is shown in [Figure 7-25](#) and described in [Table 7-15](#).

This register contains the programmed length of bytes that are transferred during a Burst request.

Figure 7-25. I2CMBLEN Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																										CNTL					

R-0h

R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-15. I2CMBLEN Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	CNTL	R/W	0h	I2C Burst Length This field contains the programmed length of bytes of the Burst Transaction. If BURST is enabled this register must be set to a non-zero value otherwise an error will occur.

7.3.1.13 I2CMBCNT Register (offset = 34h) [reset = 0h]

I2CMBCNT is shown in [Figure 7-26](#) and described in [Table 7-16](#).

When BURST is active, the value in the I2CMBLEN register is copied into this register and decremented during the BURST transaction. This register can be used to determine the number of transfers that occurred when a BURST terminates early (as a result of a data NACK). When a BURST completes successfully, this register will contain 0.

Figure 7-26. I2CMBCNT Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																									CNTL						
R-0h																									Ro-0h						

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-16. I2CMBCNT Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	CNTL	Ro	0h	I2C Master Burst Count This field contains the current count-down value of the BURST transaction.

7.3.1.14 I2CSOAR Register (offset = 800h) [reset = 0h]

I2CSOAR is shown in [Figure 7-27](#) and described in [Table 7-17](#).

This register consists of seven address bits that identify the TM4E111BE6ZRB I2C device on the I2C bus.

Figure 7-27. I2CSOAR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																									OAR						
R-0h																									R/W-0h						

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-17. I2CSOAR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-7	RESERVED	R	0h	
6-0	OAR	R/W	0h	I2C Slave Own Address This field specifies bits A6 through A0 of the slave address.

7.3.1.15 I2CSCCSR Register (offset = 804h) [reset = 0h]

I2CSCCSR is shown in [Figure 7-28](#) and described in [Table 7-18](#).

This register functions as a control register when written, and a status register when read.

Figure 7-28. I2CSCCSR Register

31	30	29	28	27	26	25	24
ACTDMARX	ACTDMATX			RESERVED			
R-0h	R-0h			R-0h			
23	22	21	20	19	18	17	16
			RESERVED				
			R-0h				
15	14	13	12	11	10	9	8
			RESERVED				
			R-0h				
7	6	5	4	3	2	1	0
RESERVED	QCMDRW	QCMDST	OAR2SEL	FBR_OR_RXFI FO	TREQ_OR_TX FIFO	RREQ_OR_DA	
R-0h	RC-0h	RC-0h	RO-0h	R/W-0h	R/W-0h	R/W-0h	

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-18. I2CSCCSR Register Field Descriptions

Bit	Field	Type	Reset	Description
31	ACTDMARX	R	0h	DMA RX Active Status 0h (R) = DMA RX is not active 1h (R) = DMA RX is active.
30	ACTDMATX	R	0h	DMA RX Active Status 0h (R) = DMA RX is not active 1h (R) = DMA RX is active.
29-6	RESERVED	R	0h	
5	QCMDRW	RC	0h	Quick Command Read / Write This bit only has meaning when the QCMDST bit is set. 0h (R) = Quick command was a write 1h (R) = Quick command was a read
4	QCMDST	RC	0h	Quick Command Status 0h (R) = The last transaction was a normal transaction or a transaction has not occurred. 1h (R) = The last transaction was a Quick Command transaction.
3	OAR2SEL	RO	0h	OAR2 Address Matched This bit gets reevaluated after every address comparison. 0h (R) = Either the address is not matched or the match is in legacy mode. 1h (R) = OAR2 address matched and ACKed by the slave.
2	FBR_OR_RXFIFO	R/W	0h	First Byte Received (R) or RX FIFO Enable This bit is only valid when the RREQ bit is set and is automatically cleared when data has been read from the I2CSDR register. Note: This bit is not used for slave transmit operations. 0h (W) = Disables RX FIFO 0h (R) = The first byte has not been received. 1h (W) = Enables RX FIFO 1h (R) = The first byte following the slave's own address has been received.

Table 7-18. I2CSCSR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
1	TREQ_OR_TXFIFO	R/W	0h	<p>Transmit Request (R) or TX FIFO Enable (W) 0h (W) = Disables TX FIFO 0h (R) = No outstanding transmit request. 1h (W) = Enables TX FIFO 1h (R) = The I2C controller has been addressed as a slave transmitter and is using clock stretching to delay the master until data has been written to the I2CSDR register.</p>
0	RREQ_OR_DA	R/W	0h	<p>Receive Request (R) or Device Active (W) Once this bit has been set, it should not be set again unless it has been cleared by writing a 0 or by a reset, otherwise transfer failures may occur. 0h (W) = Disables the I2C slave operation. 0h (R) = No outstanding receive data. 1h (W) = Enables the I2C slave operation. 1h (R) = The I2C controller has outstanding receive data from the I2C master and is using clock stretching to delay the master until the data has been read from the I2CSDR register.</p>

7.3.1.16 I2CSDR Register (offset = 808h) [reset = 0h]

I2CSDR is shown in [Figure 7-29](#) and described in [Table 7-19](#).

NOTE: This register is read-sensitive. See the register description for details.

This register contains the data to be transmitted when in the Slave Transmit state, and the data received when in the Slave Receive state. If the RXFIFO bit or TXFIFO bit are enabled in the I2CSCSR register, then this register is ignored and the data value being transferred from the FIFO is contained in the I2CFIFODATA register.

NOTE: Best practice recommends that an application should not switch between the I2CSDR register and TX FIFO or vice versa for successive transactions.

Figure 7-29. I2CSDR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																										DATA					
R-0h																										R/W-0h					

LEGEND: R/W = Read/Write; R = Read only; W1toCI = Write 1 to clear bit; -n = value after reset

Table 7-19. I2CSDR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	DATA	R/W	0h	Data for Transfer This field contains the data for transfer during a slave receive or transmit operation.

7.3.1.17 I2CSIMR Register (offset = 80Ch) [reset = 0h]

I2CSIMR is shown in [Figure 7-30](#) and described in [Table 7-20](#).

This register controls whether a raw interrupt is promoted to a controller interrupt.

Figure 7-30. I2CSIMR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
TXFEIM	RXIM	TXIM	DMATXIM	DMARXIM	STOPIM	STARTIM	DATAIM
R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-20. I2CSIMR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-9	RESERVED	R	0h	
8	RXFFIM	R/W	0h	Receive FIFO Full Interrupt Mask 0h = The RXFFRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The Receive FIFO Full interrupt is sent to the interrupt controller when the RXFFRIS bit in the I2CSRIS register is set.
7	TXFEIM	R/W	0h	Transmit FIFO Empty Interrupt Mask 0h = The TXFERIS interrupt is suppressed and not sent to the interrupt controller. 1h = The Transmit FIFO Empty interrupt is sent to the interrupt controller when the TXFERIS bit in the I2CSRIS register is set.
6	RXIM	R/W	0h	Receive FIFO Request Interrupt Mask 0h = The RXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The RX FIFO Request interrupt is sent to the interrupt controller when the RXRIS bit in the I2CSRIS register is set.
5	TXIM	R/W	0h	Transmit FIFO Request Interrupt 0h = The TXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The TX FIFO Request interrupt is sent to the interrupt controller when the TXRIS bit in the I2CSRIS register is set.
4	DMATXIM	R/W	0h	Transmit DMA Interrupt Mask 0h = The DMATXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The transmit DMA complete interrupt is sent to the interrupt controller when the DMATXRIS bit in the I2CSRIS register is set.
3	DMARXIM	R/W	0h	Receive DMA Interrupt Mask 0h = The DMARXRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The receive DMA complete interrupt is sent to the interrupt controller when the DMARXRIS bit in the I2CSRIS register is set.

Table 7-20. I2CSIMR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
2	STOPIM	R/W	0h	Stop Condition Interrupt Mask 0h = The STOPRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The STOP condition interrupt is sent to the interrupt controller when the STOPRIS bit in the I2CSRIS register is set.
1	STARTIM	R/W	0h	Start Condition Interrupt Mask 0h = The STARTRIS interrupt is suppressed and not sent to the interrupt controller. 1h = The START condition interrupt is sent to the interrupt controller when the STARTRIS bit in the I2CSRIS register is set.
0	DATAIM	R/W	0h	Data Interrupt Mask 0h = The DATARIS interrupt is suppressed and not sent to the interrupt controller. 1h = Data interrupt sent to interrupt controller when DATARIS bit in the I2CSRIS register is set.

7.3.1.18 I2CSRIS Register (offset = 810h) [reset = 0h]

I2CSRIS is shown in [Figure 7-31](#) and described in [Table 7-21](#).

This register specifies whether an interrupt is pending.

Figure 7-31. I2CSRIS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
TXFERIS	RXRIS	TXRIS	DMATXRIS	DMARXRIS	STOPRIS	STARTRIS	DATARIS
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-21. I2CSRIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-9	RESERVED	R	0h	
8	RXFFRIS	R	0h	Receive FIFO Full Raw Interrupt Status This bit is cleared by writing a 1 to the RXFFIC bit in the I2CSICR register. 0h = No interrupt 1h = The Receive FIFO Full interrupt is pending.
7	TXFERIS	R	0h	Transmit FIFO Empty Raw Interrupt Status This bit is cleared by writing a 1 to the TXFEIC bit in the I2CSICR register. Note that if the TXFERIS interrupt is cleared (by setting the TXFEIC bit) when the TX FIFO is empty, the TXFERIS interrupt does not reassert even though the TX FIFO remains empty in this situation. 0h = No interrupt 1h = The Transmit FIFO Empty interrupt is pending.
6	RXRIS	R	0h	Receive FIFO Request Raw Interrupt Status This bit is cleared by writing a 1 to the RXIC bit in the I2CSICR register. 0h = No interrupt 1h = The trigger value for the FIFO has been reached and a RX FIFO Request interrupt is pending.
5	TXRIS	R	0h	Receive FIFO Request Raw Interrupt Status This bit is cleared by writing a 1 to the RXIC bit in the I2CSICR register. 0h = No interrupt 1h = The trigger value for the FIFO has been reached and a RX FIFO Request interrupt is pending.
4	DMATXRIS	R	0h	Transmit DMA Raw Interrupt Status This bit is cleared by writing a 1 to the DMATXIC bit in the I2CSICR register. 0h = No interrupt 1h = A transmit DMA complete interrupt is pending.

Table 7-21. I2CSRIS Register Field Descriptions (continued)


Bit	Field	Type	Reset	Description
3	DMARXRIS	R	0h	Receive DMA Raw Interrupt Status This bit is cleared by writing a 1 to the DMARIC bit in the I2CSICR register. 0h = No interrupt 1h = A receive DMA complete interrupt is pending.
2	STOPRIS	R	0h	Stop Condition Raw Interrupt Status This bit is cleared by writing a 1 to the STOPIC bit in the I2CSICR register. 0h = No interrupt 1h = A STOP condition interrupt is pending.
1	STARTRIS	R	0h	Start Condition Raw Interrupt Status This bit is cleared by writing a 1 to the STARTIC bit in the I2CSICR register. 0h = No interrupt. 1h = A START condition interrupt is pending.
0	DATARIS	R	0h	Data Raw Interrupt Status This interrupt encompasses the following: Slave transaction received Slave transaction requested Next byte transfer request This bit is cleared by writing a 1 to the DATAIC bit in the I2CSICR register. 0h = No interrupt. 1h = Slave Interrupt is pending.

7.3.1.19 I2CSMIS Register (offset = 814h) [reset = 0h]

I2CSMIS is shown in [Figure 7-32](#) and described in [Table 7-22](#).

This register specifies whether an interrupt was signaled.

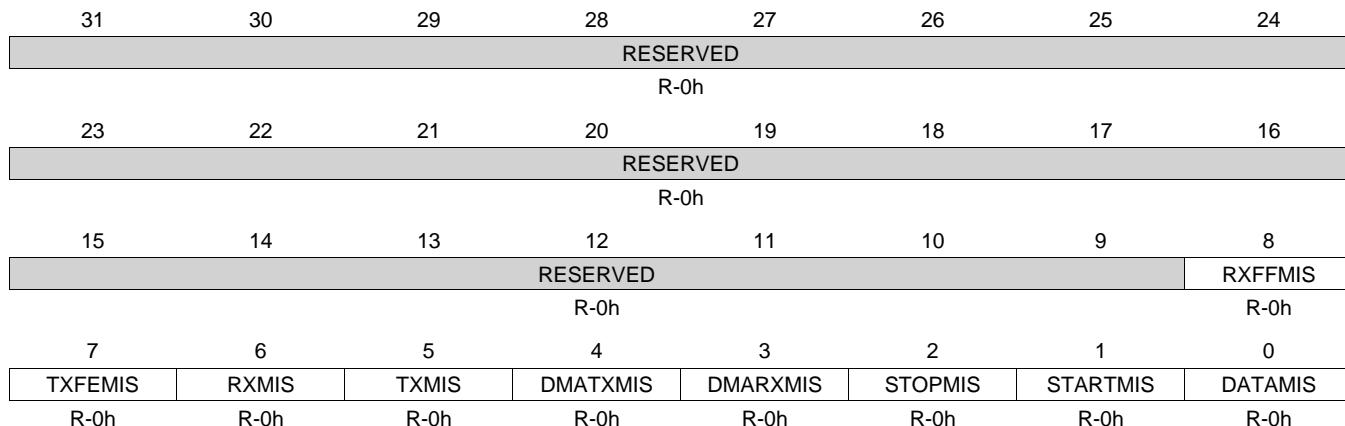Figure 7-32. I2CSMIS Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-22. I2CSMIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-9	RESERVED	R	0h	
8	RXFFMIS	R	0h	Receive FIFO Full Interrupt Mask This bit is cleared by writing a 1 to the RXFFIC bit in the I2CSICR register. 0h = No interrupt. 1h = An unmasked Receive FIFO Full interrupt was signaled and is pending.
7	TXFEMIS	R	0h	Transmit FIFO Empty Interrupt Mask This bit is cleared by writing a 1 to the TXFEIC bit in the I2CSICR register. 0h = No interrupt. 1h = An unmasked Transmit FIFO Empty interrupt was signaled and is pending.
6	RXMIS	R	0h	Receive FIFO Request Interrupt Mask This bit is cleared by writing a 1 to the RXIC bit in the I2CSICR register. 0h = No interrupt. 1h = An unmasked Receive FIFO Request interrupt was signaled and is pending.
5	TXMIS	R	0h	Transmit FIFO Request Interrupt Mask This bit is cleared by writing a 1 to the TXIC bit in the I2CSICR register. 0h = No interrupt. 1h = An unmasked Transmit FIFO Request interrupt was signaled and is pending.
4	DMATXMISS	R	0h	Transmit DMA Masked Interrupt Status This bit is cleared by writing a 1 to the DMATXIC bit in the I2CSICR register. 0h = An interrupt has not occurred or is masked. 1h = An unmasked transmit DMA complete interrupt was signaled and is pending.

Table 7-22. I2CSMIS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
3	DMARXMIS	R	0h	<p>Receive DMA Masked Interrupt Status</p> <p>This bit is cleared by writing a 1 to the DMARXIC bit in the I2CSICR register.</p> <p>0h = An interrupt has not occurred or is masked.</p> <p>1h = An unmasked receive DMA complete interrupt was signaled is pending.</p>
2	STOPMIS	R	0h	<p>Stop Condition Masked Interrupt Status</p> <p>This bit is cleared by writing a 1 to the STOPIC bit in the I2CSICR register.</p> <p>0h = An interrupt has not occurred or is masked.</p> <p>1h = An unmasked STOP condition interrupt was signaled is pending.</p>
1	STARTMIS	R	0h	<p>Start Condition Masked Interrupt Status</p> <p>This bit is cleared by writing a 1 to the STARTIC bit in the I2CSICR register.</p> <p>0h = An interrupt has not occurred or is masked.</p> <p>1h = An unmasked START condition interrupt was signaled is pending.</p>
0	DATAMIS	R	0h	<p>Data Masked Interrupt Status</p> <p>This bit is cleared by writing a 1 to the DATAIC bit in the I2CSICR register.</p> <p>0h = An interrupt has not occurred or is masked.</p> <p>1h = An unmasked slave data interrupt was signaled is pending.</p>

7.3.1.20 I2CSICR Register (offset = 818h) [reset = 0h]

I2CSICR is shown in [Figure 7-33](#) and described in [Table 7-23](#).

This register clears the raw interrupt. A read of this register returns no meaningful data.

Figure 7-33. I2CSICR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
TXFEIC	RXIC	TXIC	DMATXIC	DMARXIC	STOPIC	STARTIC	DATAIC
W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h	W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-23. I2CSICR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-9	RESERVED	R	0h	
8	RXFFIC	W	0h	Receive FIFO Full Interrupt Mask Writing a 1 to this bit clears the RXFFIS bit in the I2CSRIS register and the RXFFMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.
7	TXFEIC	W	0h	Transmit FIFO Empty Interrupt Mask Writing a 1 to this bit clears the TXFERIS bit in the I2CSRIS register and the TXFEMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.
6	RXIC	W	0h	Receive Request Interrupt Mask Writing a 1 to this bit clears the RXRIS bit in the I2CSRIS register and the RXMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.
5	TXIC	W	0h	Transmit Request Interrupt Mask Writing a 1 to this bit clears the TXRIS bit in the I2CSRIS register and the TXMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.
4	DMATXIC	W	0h	Transmit DMA Interrupt Clear Writing a 1 to this bit clears the DMATXRIS bit in the I2CSRIS register and the DMATXMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.
3	DMARXIC	W	0h	Receive DMA Interrupt Clear Writing a 1 to this bit clears the DMARXRIS bit in the I2CSRIS register and the DMARXMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.
2	STOPIC	W	0h	Receive DMA Interrupt Clear Writing a 1 to this bit clears the DMARXRIS bit in the I2CSRIS register and the DMARXMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.

Table 7-23. I2CSICR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
1	STARTIC	W	0h	Start Condition Interrupt Clear Writing a 1 to this bit clears the STARTRIS bit in the I2CSRIS register and the STARTMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.
0	DATAIC	W	0h	Start Condition Interrupt Clear Writing a 1 to this bit clears the STARTRIS bit in the I2CSRIS register and the STARTMIS bit in the I2CSMIS register. A read of this register returns no meaningful data.

7.3.1.21 I2CSOAR2 Register (offset = 81Ch) [reset = 0h]

I2CSOAR2 is shown in [Figure 7-34](#) and described in [Table 7-24](#).

This register consists of seven address bits that identify the alternate address for the I2C device on the I2C bus.

Figure 7-34. I2CSOAR2 Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
OAR2EN				OAR2			
R/W-0h				R/W-0h			

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-24. I2CSOAR2 Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7	OAR2EN	R/W	0h	I2C Slave Own Address 2 Enable 0h = The alternate address is disabled. 1h = Enables the use of the alternate address in the OAR2 field.
6-0	OAR2	R/W	0h	I2C Slave Own Address 2 This field specifies the alternate OAR2 address.

7.3.1.22 I2CSACKCTL Register (offset = 820h) [reset = 0h]

I2CSACKCTL is shown in [Figure 7-35](#) and described in [Table 7-25](#).

This register enables the I2C slave to NACK for invalid data or command or ACK for valid data or command. The I2C clock is pulled low after the last data bit until this register is written.

Figure 7-35. I2CSACKCTL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED						ACKOVAL	ACKOEN
R-0h						R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-25. I2CSACKCTL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-2	RESERVED	R	0h	
1	ACKOVAL	R/W	0h	I2C Slave ACK Override Value 0h = An ACK is sent indicating valid data or command. 1h = A NACK is sent indicating invalid data or command.
0	ACKOEN	R/W	0h	I2C Slave ACK Override Enable 0h = A response is not provided. 1h = An ACK or NACK is sent according to the value written to the ACKOVAL bit.

7.3.1.23 I2CFIFODATA Register (offset = F00h) [reset = 0h]

I2CFIFODATA is shown in [Figure 7-36](#) and described in [Table 7-26](#).

The I2C FIFO Data (I2CFIFODATA) register contains the current value of the top of the RX or TX FIFO stack being used in the a transfer.

Figure 7-36. I2CFIFODATA Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																										DATA					
R-0h																										R/W-0h					

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-26. I2CFIFODATA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	DATA	R/W	0h	<p>I2C RX FIFO Data Byte This field contains the current byte being read in the RX FIFO stack. This field contains the current byte written to the TX FIFO. For back to back transmit operations, the application should not switch between writing to the I2CSDR register and the I2CFIFODATA.</p>

7.3.1.24 I2CFIFOCTL Register (offset = F04h) [reset = 40004h]

I2CFIFOCTL is shown in [Figure 7-37](#) and described in [Table 7-27](#).

The FIFO Control Register can be programmed to control various aspects of the FIFO transaction, such as RX and TX FIFO assignment, byte count value for FIFO triggers and flushing of the FIFOs.

Figure 7-37. I2CFIFOCTL Register

31	30	29	28	27	26	25	24
RXASGNMT	RXFLUSH	DMARXENA		RESERVED			
R/W-0h	R/W-0h	R/W-0h		R-0h			
23	22	21	20	19	18	17	16
		RESERVED				RXTRIG	
			R-0h			R/W-4h	
15	14	13	12	11	10	9	8
TXASGNMT	TXFLUSH	DMATXENA		RESERVED			
R/W-0h	R/W-0h	R/W-0h		R-0h			
7	6	5	4	3	2	1	0
		RESERVED				TXTTRIG	
			R-0h			R/W-4h	

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-27. I2CFIFOCTL Register Field Descriptions

Bit	Field	Type	Reset	Description
31	RXASGNMT	R/W	0h	RX Control Assignment 0h = RX FIFO is assigned to Master 1h = RX FIFO is assigned to Slave
30	RXFLUSH	R/W	0h	RX FIFO Flush Setting this bit will Flush the RX FIFO. This bit will self-clear when the flush has completed.
29	DMARXENA	R/W	0h	DMA RX Channel Enable 0h = DMA RX channel disabled 1h = DMA RX channel enabled
28-19	RESERVED	R	0h	
18-16	RXTRIG	R/W	4h	RX FIFO Trigger Indicates at what fill level the RX FIFO will generate a trigger. Note: Programming RXTRIG to 0x0 has no effect since no data is present to transfer out of RX FIFO. 0h = Trigger when RX FIFO contains no bytes 1h = Trigger when Rx FIFO contains 1 or more bytes 2h = Trigger when Rx FIFO contains 2 or more bytes 3h = Trigger when Rx FIFO contains 3 or more bytes 4h = Trigger when Rx FIFO contains 4 or more bytes 5h = Trigger when Rx FIFO contains 5 or more bytes 6h = Trigger when Rx FIFO contains 6 or more bytes 7h = Trigger when Rx FIFO contains 7 or more bytes.
15	TXASGNMT	R/W	0h	TX Control Assignment 0h = TX FIFO is assigned to Master 1h = TX FIFO is assigned to Slave
14	TXFLUSH	R/W	0h	TX FIFO Flush Setting this bit will Flush the TX FIFO. This bit will self-clear when the flush has completed.

Table 7-27. I2CFIFOCTL Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
13	DMATXENA	R/W	0h	DMA TX Channel Enable 0h = DMA TX channel disabled 1h = DMA TX channel enabled
12-3	RESERVED	R	0h	
2-0	TXTRIG	R/W	4h	TX FIFO Trigger Indicates at what fill level in the TX FIFO a trigger will be generated. 0h = Trigger when the TX FIFO is empty. 1h = Trigger when TX FIFO contains 1 byte 2h = Trigger when TX FIFO contains 2 bytes 3h = Trigger when TX FIFO 3 bytes 4h = Trigger when TX FIFO 4 bytes 5h = Trigger when TX FIFO 5 bytes 6h = Trigger when TX FIFO 6 bytes 7h = Trigger when TX FIFO 7 bytes

7.3.1.25 I2CFIFOSTATUS Register (offset = F08h) [reset = 100005h]

I2CFIFOSTATUS is shown in [Figure 7-38](#) and described in [Table 7-28](#).

This register contains the real-time status of the RX and TX FIFOs.

Figure 7-38. I2CFIFOSTATUS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED					RXABVTRIG	RXFF	RXFE
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED					TXBLWTRIG	TXFF	TXFE
R-0h							
R-1h							
R-0h							
R-1h							

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-28. I2CFIFOSTATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-19	RESERVED	R	0h	
18	RXABVTRIG	R	0h	RX FIFO Above Trigger Level 0h = The number of bytes in RX FIFO is below the trigger level programmed by the RXTRIG bit in the I2CFIFOCTL register 1h = The number of bytes in the RX FIFO is above the trigger level programmed by the RXTRIG bit in the I2CFIFOCTL register
17	RXFF	R	0h	RX FIFO Full 0h = The RX FIFO is not full. 1h = The RX FIFO is full.
16	RXFE	R	1h	RX FIFO Empty 0h = The RX FIFO is not empty. 1h = The RX FIFO is empty.
15-3	RESERVED	R	0h	
2	TXBLWTRIG	R	1h	TX FIFO Below Trigger Level 0h = The number of bytes in TX FIFO is above the trigger level programmed by the TXTRIG bit in the I2CFIFOCTL register 1h = The number of bytes in the TX FIFO is below the trigger level programmed by the TXTRIG bit in the I2CFIFOCTL register
1	TXFF	R	0h	TX FIFO Full 0h = The TX FIFO is not full. 1h = The TX FIFO is full.
0	TXFE	R	1h	TX FIFO Empty 0h = The TX FIFO is not empty. 1h = The TX FIFO is empty.

7.3.1.26 I2CPP Register (offset = FC0h) [reset = 1h]

I2CPP is shown in [Figure 7-39](#) and described in [Table 7-29](#).

The I2CPP register provides information regarding the properties of the I2C module.

Figure 7-39. I2CPP Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED															
R-0h															HS
R-1h															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-29. I2CPP Register Field Descriptions

Bit	Field	Type	Reset	Description
31-1	RESERVED	R	0h	
0	HS	R	1h	High-Speed Capable 0h = The interface is capable of Standard or Fast mode operation. 1h = Reserved.

7.3.1.27 I2CPC Register (offset = FC4h) [reset = 1h]

I2CPC is shown in Figure 7-40 and described in Table 7-30.

The I2CPC register allows software to enable features present in the I2C module.

Figure 7-40. I2CPC Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED															
R-0h															
HS															
R-1h															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 7-30. I2CPC Register Field Descriptions

Bit	Field	Type	Reset	Description
31-1	RESERVED	R	0h	
0	HS	R	1h	High-Speed Capable 0h = The interface is capable of Standard or Fast mode operation. 1h = Reserved. Must be set to 0

SPI (*Serial Peripheral Interface*)

Topic	Page
8.1 Overview	220
8.2 Functional Description	221
8.3 Initialization and Configuration	236
8.4 Access to Data Registers	237
8.5 Module Initialization	238
8.6 SPI Registers	244

8.1 Overview

This chapter is intended to provide programmers with a functional presentation of the master and slave serial peripheral interface module, and provides a module configuration example. The serial peripheral interface (SPI) is a four-wire bidirectional communications interface that converts data between parallel and serial.

The CC3200 device has two SPI interfaces:


- One SPI (master) interface is reserved for interfacing an external serial flash to the CC3200. The serial flash holds the application image and networking credentials, policies, and software patches. This is referred to as the FLASH_SSPI; it has a fixed mapping to package pins.
- The second SPI interface can be used by the application in either master or slave mode. Refer to [Section 8.6](#) on pin-mux for the supported pin mapping options for this interface and the state of the pins in various sleep and reset states. CLKSPIREF is the clock input to the SPI module, and has a gating in PRCM module (refer to on clock-reset-power management). The subdivision of this clock is inside the SPI module. The CC3200 does not support waking up of the chip on SPI interface activity.

This chapter focuses on the second SPI interface.

The SPI module performs serial-to-parallel conversion on data received from a peripheral device, and parallel-to-serial conversion on data transmitted to a peripheral device. The SPI module can be configured as either a master or slave device. As a slave device, the SPI module can also be configured to disable its output, which allows a master device to be coupled with multiple slave devices. The TX and RX paths are buffered with separate internal FIFOs. The SPI module also includes a programmable bit rate clock divider to generate the output serial clock derived from the input clock of the SPI module. Bit rates are generated based on the input clock, and the maximum bit rate is determined by the connected peripheral.

The SPI allows full duplex between a local host and SPI-compliant external devices (slaves and masters). [Figure 8-1](#) shows a high-level overview of the SPI system.

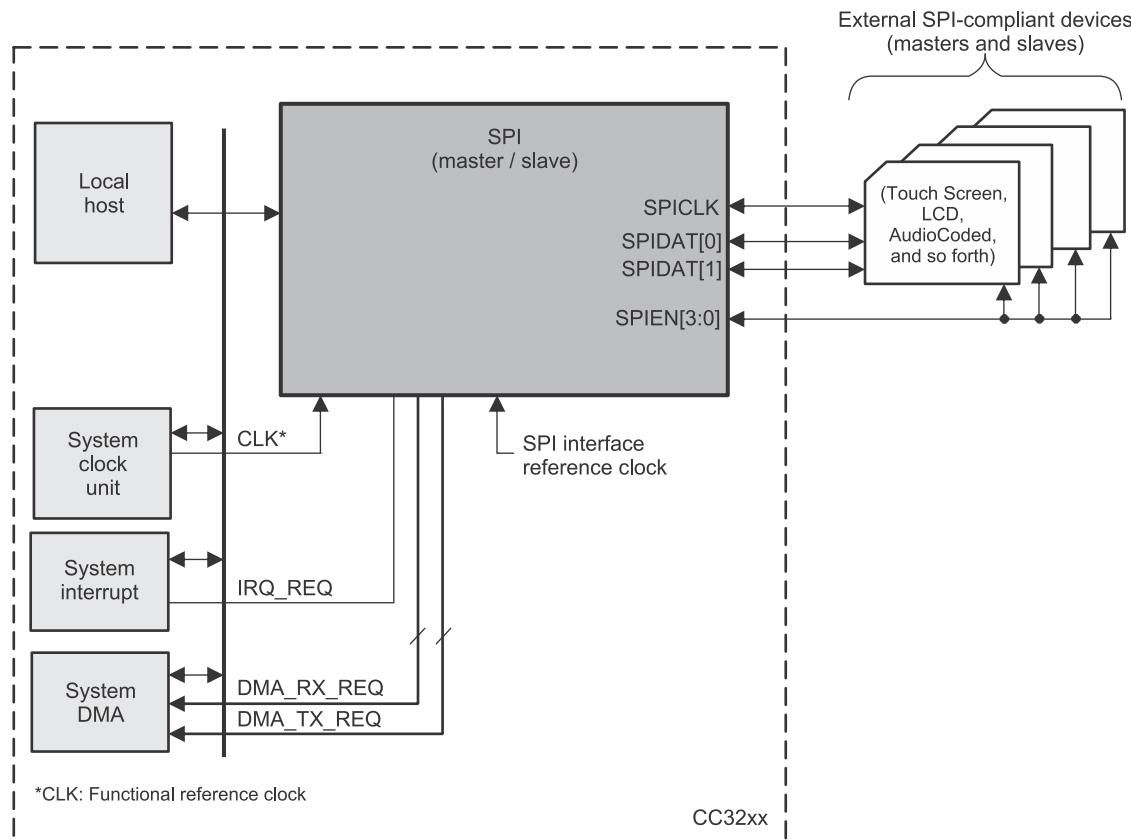Figure 8-1. SPI Block Diagram



8.1.1 Features

- Serial clock with programmable frequency, polarity, and phase
- SPI enable
 - Generation programmable
 - Programmable polarity
- Selection of SPI word lengths at 8, 16, and 32 bits
- Support of both master and slave modes
- Independent DMA requests for read and write
- No dead cycle between two successive words in slave mode
- Multiple SPI word access with a channel using an enabled FIFO

The SPI allows a duplex serial communication between a local host and SPI-compliant external devices (slaves and masters).

8.2 Functional Description

8.2.1 SPI interface

Table 8-1 lists the name and description of the SPI interface used for connection to external SPI compliant devices.

Table 8-1. SPI Interface

Name	Type	Reset Value	Description
MISO/MOSI [1:0]	In-Out	Z	Serial data lines for transmitting and receiving data.
SPICLK	In-Out	Z	Transmits the serial clock when configured as a master. Receives the serial clock when configured as a slave.
SPIEN	In-Out	Z	Indicates the beginning and the end of serialized data word. Selects the external slave SPI devices when configured as master. Receives the slave select signal from external SPI masters when configured as a slave

8.2.2 SPI Transmission

This section describes the transmissions supported by SPI.

The SPI protocol is a synchronous protocol that allows a master device to initiate serial communication with a slave device. Data is exchanged between these devices. A slave select line (SPIEN) can be used to allow selection of slave SPI device. The flexibility of SPI allows exchanging data with several formats through programmable parameters.

8.2.2.1 Two Data Pins Interface Mode


The two data pins interface mode allows a full duplex SPI transmission where data is transmitted (shifted out serially) and received (shifted in serially) simultaneously on separate data lines, MISO and MOSI.

- Data leaving the master exits on transmit serial data line also known as MOSI: MasterOutSlaveIn.
- Data leaving the slave exits on the receive data line also known as MISO: MasterInSlaveOut.

The serial clock (SPICLK) synchronizes shifting and sampling of the information on the two serial data lines. Each time a bit is transferred out from the master; one bit is transferred in from the slave.

Figure 8-2 shows an example of a full duplex system with a master device on the left and a slave device on the right. After 8 cycles of the serial clock SPICLK, the WordA has been transferred from the master to the slave. At the same time, the WordB has been transferred from the slave to the master.

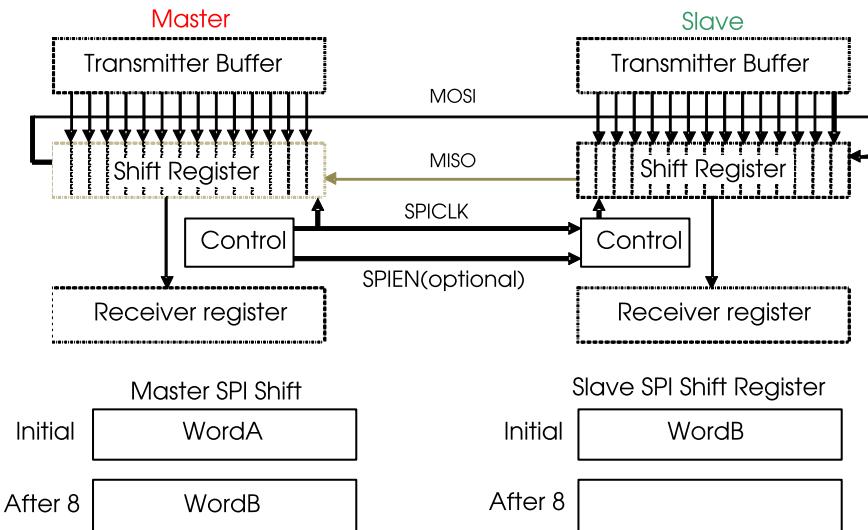Figure 8-2. SPI Full Duplex Transmission (Example)



When referring to the master device, the control block transmits the clock SPICLK and the enable signal SPIEN.

8.2.2.2 Transfer formats

This section describes the transfer formats supported by SPI. The flexibility of SPI allows setting the parameters of the SPI transfer:

- SPI word length
- SPI enable generation programmable
- SPI enable assertion
- SPI enable polarity
- SPI clock frequency
- SPI clock phase
- SPI clock polarity

The software is responsible for the consistency between SPI word length, clock phase, and clock polarity of the master SPI device and the communicating slave device.

8.2.2.2.1 Programmable Word Length

SPI supports word of 8, 16, and 32 bits long.

8.2.2.2.2 Programmable SPI Enable (SPIEN)

The polarity of the SPIEN signals is programmable. SPIEN signals can be active high or low. The assertion of the SPIEN signals is programmable: SPIEN signals can be manually asserted or automatically asserted.

8.2.2.2.3 Programmable SPI Clock (SPICLK)

The phase and the polarity of the SPI serial clock are programmable when SPI is a master device or a slave device. The baud rate of the SPI serial clock is programmable when SPI is a master. When SPI is operating as a slave, the serial clock SPICLK is an input from the external master.


8.2.2.2.4 Bit Rate

In master mode, an internal reference clock CLKSPIREF is used as an input of a programmable divider to generate the bit rate of the serial clock SPICLK.

8.2.2.2.5 Polarity and Phase

SPI supports 4 sub-modes of the SPI format transfer that depend on the polarity (POL) and the phase (PHA) of the SPI serial clock (SPICLK). The details of each sub-mode are described in the following chapters. [Table 8-2](#) shows a summary of the 4 sub-modes. Software selects one of four combinations of serial clock phase and polarity.

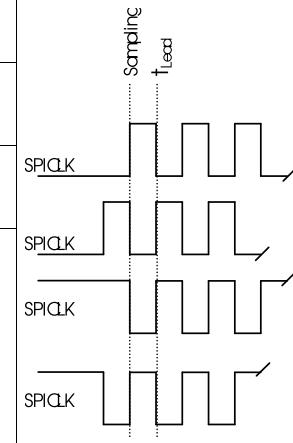Table 8-2. Phase and Polarity Combinations

Polarity (POL)	Phase (PHA)	SPI Mode	Comments	
0	0	mode0	SPICLK active high and sampling occurs on the rising edge	
0	1	mode1	SPICLK active high and sampling occurs on the falling edge	
1	0	mode2	SPICLK active low and sampling occurs on the falling edge	
1	1	mode3	SPICLK active low and sampling occurs on the rising edge	

8.2.2.2.5.1 Transfer Format with PHA = 0

This section describes the concept of an SPI transmission with the SPI mode0 and SPI mode2. In the transfer format with PHA = 0, SPIEN is activated a half-cycle of SPICLK ahead of the first SPICLK edge.


In both master and slave modes, SPI drives the data lines at the time of SPIEN is asserted. Each data frame is transmitted starting with the MSB. At the extremity of both SPI data lines, the first bit of the SPI word is valid a half-cycle of SPICLK after the SPIEN assertion.

Thus, the first edge of the SPICLK line is used by the master to sample the first data bit sent by the slave. On the same edge, the first data bit sent by the master is sampled by the slave. On the next SPICLK edge, the received data bit is shifted into the shift register, and a new data bit is transmitted on the serial data line.

This process continues for a total number of pulses on the SPICLK line defined by the SPI word length programmed in the master device, with data being latched on odd-numbered edges and shifted on even-numbered edges.

[Figure 8-3](#) is a timing diagram of a SPI transfer for the SPI mode0 and SPI mode2, when SPI is master or slave, with the frequency of SPICLK equals the frequency of CLKSPIREF.

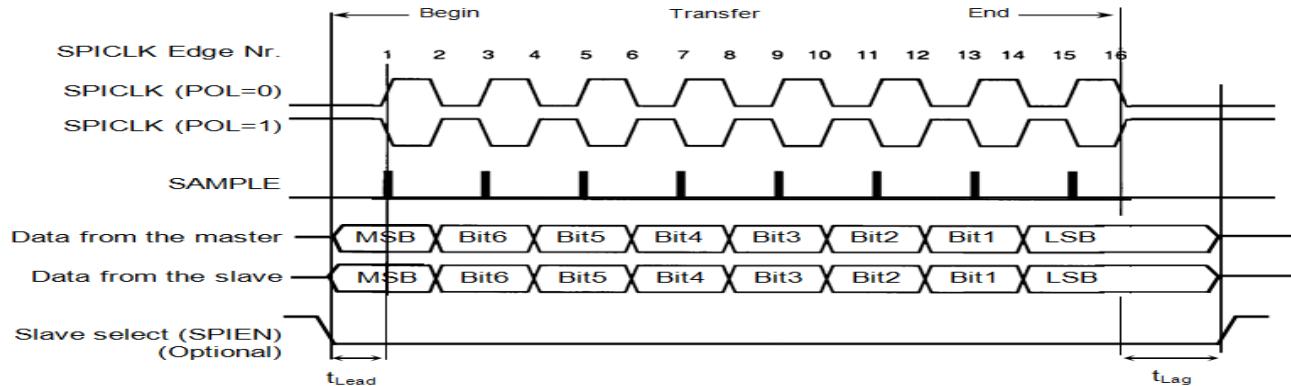Figure 8-3. Full Duplex Single Transfer Format with PHA = 0



t_{Lead} — Minimum leading time required for slave mode (guaranteed in master mode) before the first SPICLK edge.

t_{Lag} — Minimum trailing time required for slave mode (guaranteed in master mode) after the last SPICLK edge.

In 3-pin mode without using the SPIEN signal, the controller provides the same waveform, with SPIEN forced to low state. In 3-pin slave mode, SPIEN is useless.


8.2.2.2.5.2 Transfer Format with PHA = 1

This section describes SPI full duplex transmission with the SPI mode1 and SPI mode3. In the transfer format with PHA = 1, SPIEN is activated a delay (t_{Lead}) ahead of the first SPICLK edge. In both master and slave modes, SPI drives the data lines on the first SPICLK edge.

Each data frame is transmitted starting with the MSB. At the extremity of both SPI data lines, the first bit of the SPI word is valid on the next SPICLK edge, a half-cycle of SPICLK later, and is the sampling edge for both the master and slave. When the third edge occurs, the received data bit is shifted into the shift register. The next data bit of the master is provided to the serial input pin of the slave. This process continues for a total number of pulses on the SPICLK line defined by the word length programmed in the master device, with data being latched on even-numbered edges and shifted on odd-numbered edges.

Figure 8-4 is a timing diagram of an SPI transfer for the SPI mode1 and SPI mode3, when SPI is master or slave, with the frequency of SPICLK equals the frequency of CLKSPIREF.

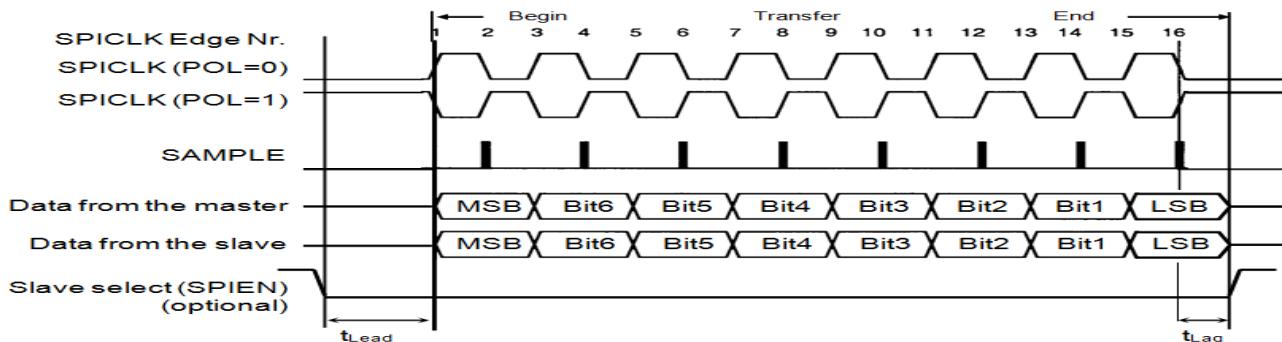Figure 8-4. Full Duplex Single Transfer Format with PHA = 1



t_{Lead} — Minimum leading time required for slave mode (guaranteed in master mode) before the first SPICLK edge.

t_{Lag} — Minimum trailing time required for slave mode (guaranteed in master mode) after the last SPICLK edge.

In 3-pin mode without using the SPIEN signal, the controller provides the same waveform, with SPIEN forced to low state. In 3-pin slave mode, SPIEN is useless.

8.2.3 Master Mode

SPI is in master mode when the MS bit of the SPI_MODULCTRL register is cleared.

8.2.3.1 Interrupt Events in Master Mode

In master mode, the interrupt events related to the transmitter register state are TX_empty and TX_underflow. The interrupt event related to the receiver register state is RX_full.

8.2.3.1.1 TX_empty

The event TX_empty is activated when a channel is enabled and its transmitter register becomes empty (transient event). Enabling the channel automatically raises this event. When the FIFO buffer is enabled (MCSPI_CHCONF[FFEW] set to 1), the TX_empty is asserted once there is enough space in buffer to write the number of bytes defined by MCSPI_XFERLEVEL[AEL].

The transmitter register must be loaded to remove the source of the interrupt, and the TX_empty interrupt status bit must be cleared for interrupt line de-assertion (if the event is enabled as an interrupt source).

When FIFO is enabled, no new TX_empty event is asserted when the local host has not performed the number of writes into the transmitter register, defined by MCSPI_XFERLEVEL[AEL]. The local host must perform the correct number of writes.

8.2.3.1.2 TX_underflow

The event TX_underflow is activated when the channel is enabled and the transmitter register or FIFO is empty (not updated with new data) at the time of a shift register assignment. TX_underflow acts as a warning in master mode.

To avoid having TX_underflow event at the beginning of a transmission, TX_underflow is not activated when no data has been loaded into the transmitter register, because the channel has been enabled. To avoid TX_underflow, the transmitter register must rarely be loaded. The TX_underflow interrupt status bit must be cleared for interrupt line de-assertion (if the event is enabled as an interrupt source).

8.2.3.1.3 RX_full

The event RX_full is activated when the channel is enabled and the receiver register is filled. When the FIFO buffer is enabled (MCSPI_CHCONF[FFER] set to 1), the RX_full is asserted once there are a certain number of bytes held in the buffer to read, as defined by MCSPI_XFERLEVEL[AFL].

The receiver register must be read to remove the source of interrupt, and the RX_full interrupt status bit must be cleared for interrupt line de-assertion (if the event is enabled as an interrupt source). When FIFO is enabled, no new RX_full event is asserted until the local host has not performed the number of reads into the receive register, as defined by MCSPI_XFERLEVEL[AFL]. It is the responsibility of the local host to perform the correct number of reads.

8.2.3.1.4 End of Word Count

The event EOW (end-of-word count) is activated when the channel is enabled and configured to use the built-in FIFO. This interrupt is raised when the controller has performed the number of transfers defined in the MCSPI_XFERLEVEL[WCNT] register. If the value was programmed to 0x0000, the counter is not enabled, and this interrupt is not generated.

The end of word count interrupt also indicates that the SPI transfer is halted on the channel (using the FIFO buffer) until MCSPI_XFERLEVEL[WCNT] is not reloaded and the channel is re-enabled. The end of word interrupt status bit must be cleared for interrupt line de-assertion (if the event is enabled as an interrupt source).

8.2.3.2 Master Transmit and Receive Mode

This mode is programmable by the TRM bit of the SPI_CHCONF register. The channel access to the shift registers is based on its transmitter and receiver register state.

1. The channel can be scheduled for transmission or reception only when enabled (EN bit of the SPI_CHCTRL register).
2. An enabled channel can be scheduled if its transmitter register is not empty (TXS bit of the SPI_CHSTAT register) or its FIFO is not empty, or if the buffer is used (FFE bit of the MCSPI_CHSTAT register) and updated with new data at the time of shift register assignment. If the transmitter register or FIFO is empty at the time of shift register assignment, the event TX_underflow is activated.
3. An enabled channel can be scheduled if its receive register is not full (RXS bit of the SPI_CHSTAT register), or its FIFO is not full if the buffer is used (FFF bit of the MCSPI_CHSTAT register) at the time of shift register assignment. Thus, the receiver register of FIFO cannot be overwritten. The RX_overflow bit in the SPI_IRQSTATUS register is never set in this mode.

The built-in FIFO is available in this mode, and can be configured in one or both data directions for transmit or receive. The FIFO is seen as a 64-byte buffer if configured for one data direction. If configured in both data directions (transmit and receive), the FIFO is split into two separate 32-byte buffers with their own address space management. In this case, the definition of AEL and AFL levels is based on 32 bytes, and is under local host responsibility.

8.2.3.3 SPI Enable Control in Master Mode

When SPI is configured as a master device, the assertion of the SPIEN is optional, depending on the device connected to the controller. The following is a description of each configuration:

- In 3-pin mode: the MCSPI_MODULCTRL[1] PIN34 and MCSPI_MODULCTRL[0] SINGLE bits are set to 1, and the controller transmits the SPI word once the transmit register or FIFO is not empty.
- In 4-pin mode: the MCSPI_MODULCTRL[1] PIN34 bit is set to 0 and MCSPI_MODULCTRL[0] SINGLE bit is set to 1, and the SPIEN assertion and deassertion is controlled by software.

8.2.3.3.1 Keep SPIEN Active Mode (Force SPIEN)

Continuous transfers are manually allowed, by keeping the SPIEN signal active for successive SPI words. Several sequences (configuration – enable – disable of the channel) can be run without deactivating the SPIEN line.

The ‘keep SPIEN active’ mode is authorized when:

- The parameters of the transfer are loaded in the configuration register (MCSPI_CHCONF)
- The state of the SPIEN signal is programmable:
 - Writing 1 into the FORCE bit of the MCSPI_CHCONF register drives the SPIEN line high when MCSPI_CHCONF[EPOL] is set to zero, and drives it low when MCSPI_CHCONF[EPOL] is set.
 - Writing 0 into the FORCE bit of the MCSPI_CHCONF register drives the SPIEN line low when MCSPI_CHCONF[EPOL] is set to zero, and drives it high when MCSPI_CHCONF[EPOL] is set.

Once the channel is enabled, the SPIEN signal is activated with the programmed polarity. The start of the transfer depends on the status of the transmitter register and the status of the receiver register.

The status of the serialization completion of each SPI word is given by the EOT bit of the SPI_CHSTAT register, set when received data is loaded from the shift register to the receiver register.

A change in the configuration parameters is directly propagated on the SPI interface. If the SPIEN signal is activated, the user must ensure that the configuration is changed only between SPI words, to avoid corrupting the current transfer. SPIEN polarity, the SPICLK phase, and SPICLK polarity must not be modified when the SPIEN signal is activated. The channel can be disabled and enabled while the SPIEN signal is activated.

At the end of the last SPI word, the channel must be deactivated (MCSPI_CHCTRL[En] set to 0) and the SPIEN can be forced to its inactive state (MCSPI_CHCONF[Force]).

Figure 8-5. Contiguous Transfers with SPIEN Kept Active (2 Data Pins Interface Mode)

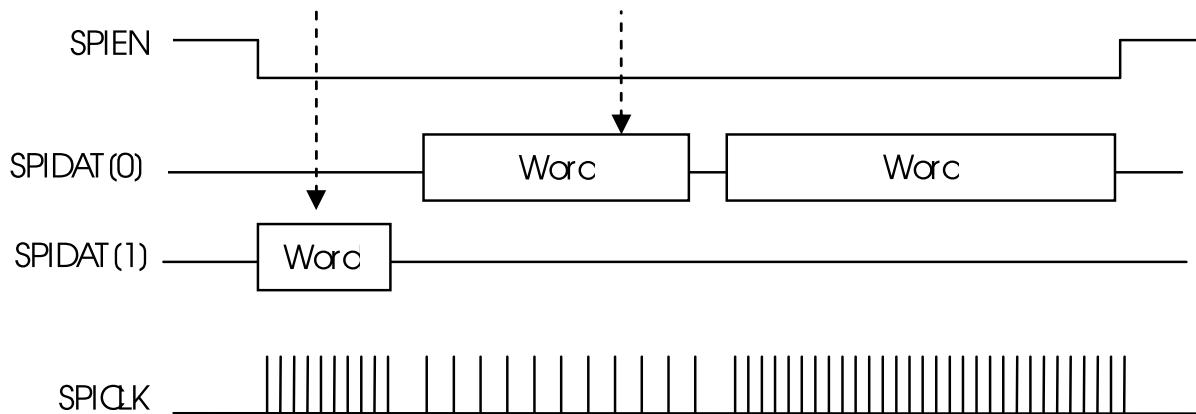


Figure 8-5 shows successive transfers with SPIEN kept active low, with a different configuration for each SPI word in single data pin interface mode and two data pins interface mode. The arrows indicate when the channel is disabled before a change in the configuration parameters, and enabled again.

8.2.3.4 Clock Ratio Granularity

The clock division ratio is defined by the MCSPI_CHCONF[CLKD] register, with power of two granularity leading to a clock division in range 1 to 32768; in this case the duty cycle is always 50%.

Table 8-3. Clock Ratio Granularity

Clock Ratio F_{ratio}	CLKSPIO High Time	CLKSPIO Low Time
1	T_{high_ref}	T_{low_ref}
Even ≥ 2	$T_{ref} \times (F_{ratio}/2)$	$T_{ref} \times (F_{ratio}/2)$

Granularity examples with a clock source frequency of 48 Mhz:

Table 8-4. Granularity Examples

MCSPI_CHC_ONF [CLKD]	F_{ratio}	MCSPI_CHC_ONF [PHA]	MCSPI_CHCONF [POL]	T_{high} (ns)	T_{low} (ns)	T_{period} (ns)	Duty Cycle	F_{out} (Mhz)
0	1	X	X	10.4	10.4	20.8	50-50	48
1	2	X	X	20.8	20.8	41.6	50-50	24
2	4	X	X	41.6	41.6	83.2	50-50	12
3	8	X	X	83.2	83.2	166.4	50-50	6

8.2.3.4.1 FIFO Buffer Management

The SPI controller has a built-in 64-byte buffer to unload the DMA or interrupt handler and improve data throughput. This buffer can be used by setting MCSPI_CHCONF[FFER] or MCSPI_CHCONF[FFEW] to 1. The buffer can be used in the modes defined below:

- Master or slave mode
- Every word length MCSPI_CHCONF[WL] are supported.

Two levels, AFL and AFL, located in the MCSPI_XFERLEVEL register, rule the buffer management. The driver must set these values as a multiple of SPI word length defined in MCSPI_CHCONF[WL]. The number of bytes written in the FIFO depends on word length (see [Table 8-5](#)). The FIFO buffer pointers are reset when the channel is enabled, or when the FIFO configuration changes.


Table 8-5. SPI Word Length WL

	SPI Word Length	
	8	16 and 32
Number of bytes written in the FIFO	2 Bytes	4 Bytes

8.2.3.4.1.1 Split FIFO

The FIFO can be split into two parts when the module is configured in transmit/receive mode, MCSPI_CHCONF[TRM] set to 0, and MCSPI_CHCONF[FFER] and MCSPI_CHCONF[FFEW] asserted. Then system can access a 32-byte depth FIFO per direction.

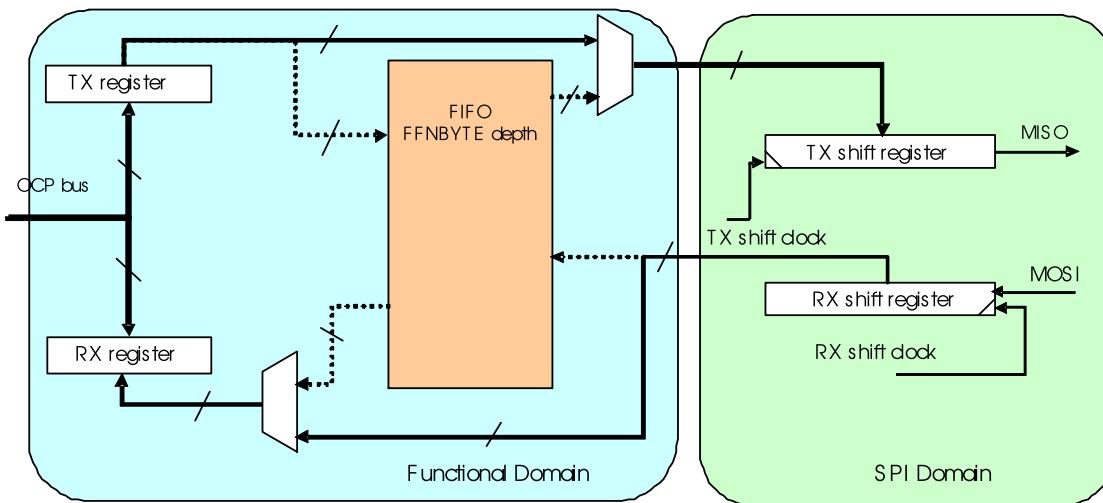Figure 8-6. Transmit/Receive Mode With no FIFO Used




Configuration:

MCS PI_CHCONF (TRM)=0x0 Transmit/receive mode enabled

MCS PI_CHCONF (FFRE)=0x0 FIFO disabled on receive path

MCS PI_CHCONF (FFWE)=0x0 FIFO disabled on transmit path

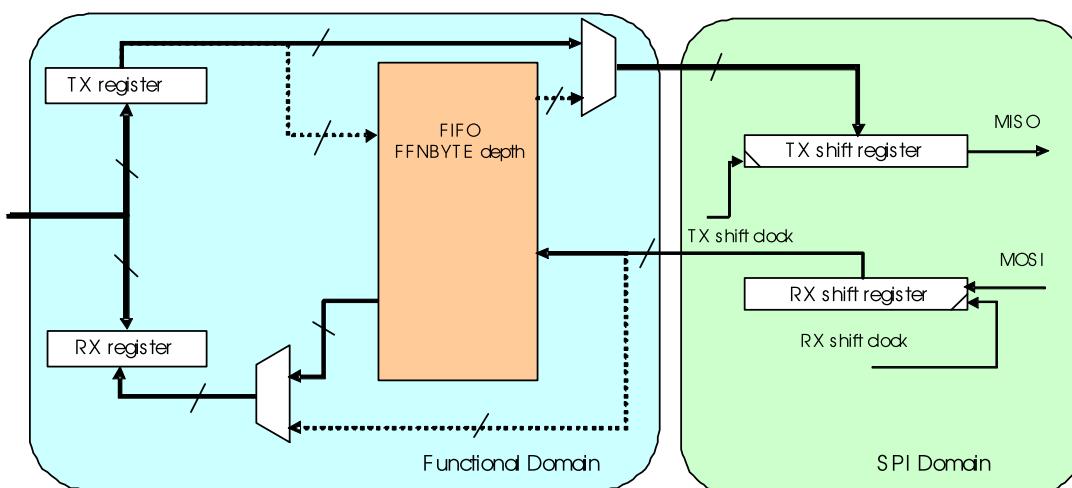Figure 8-7. Transmit/Receive Mode With Only Receive FIFO Enabled





Configuration:

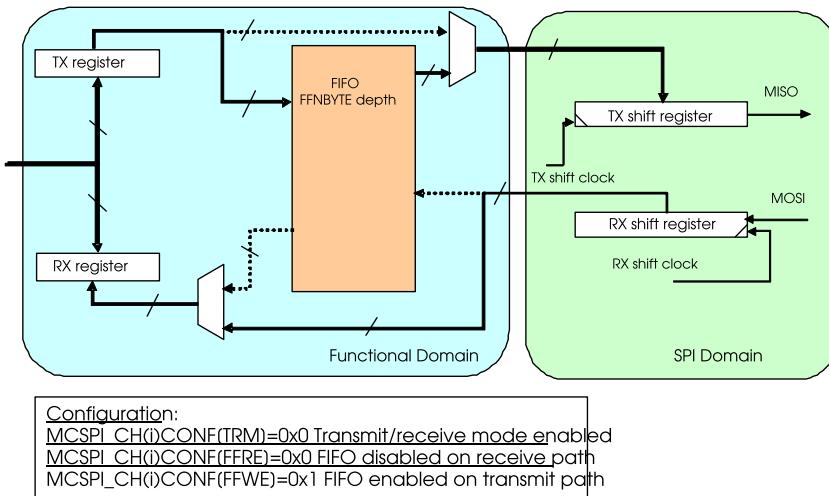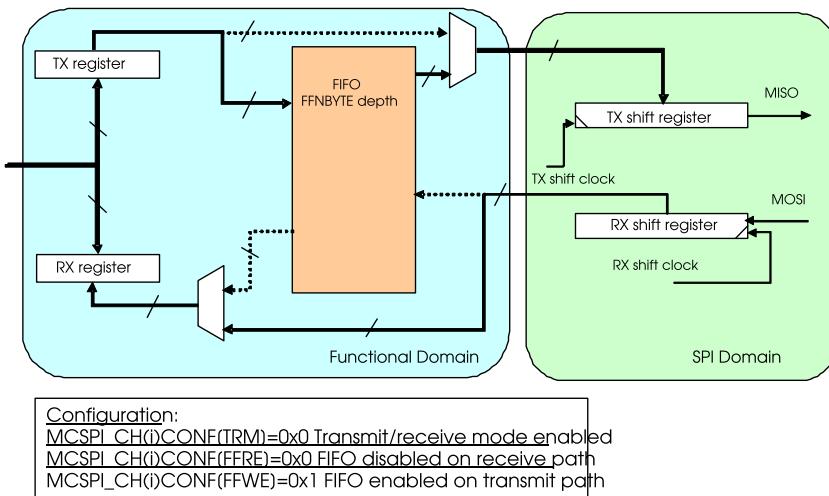MCS PI_CH(i)CONF (TRM)=0x0 Transmit/receive mode enabled

MCS PI_CH(i)CONF (FFRE)=0x1 FIFO enabled on receive path

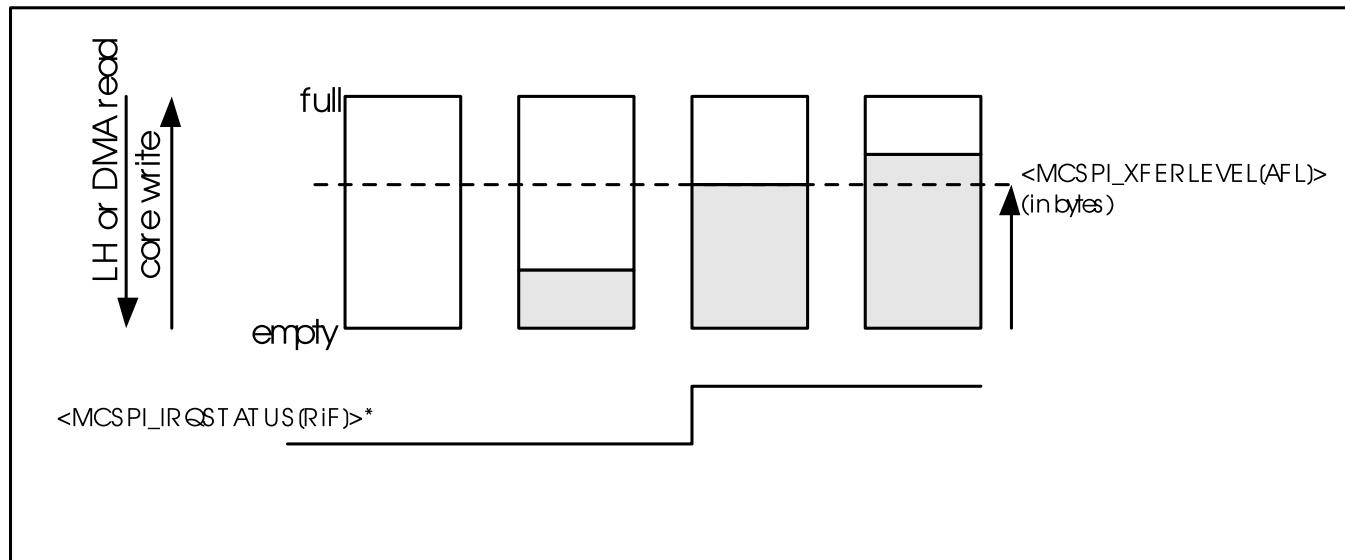
MCS PI_CH(i)CONF (FFWE)=0x0 FIFO disabled on transmit path

Figure 8-8. Transmit/Receive Mode With Only Transmit FIFO Used

Figure 8-9. Transmit/Receive Mode With Both FIFO Directions Used


8.2.3.4.1.2 Buffer Almost Full

The bit-field MCSPI_XFERLEVEL[AFL] is required when the buffer is used to receive an SPI word from a slave (MCSPI_CHCONF[FFER] must be set to 1), and defines the Almost Full buffer status.

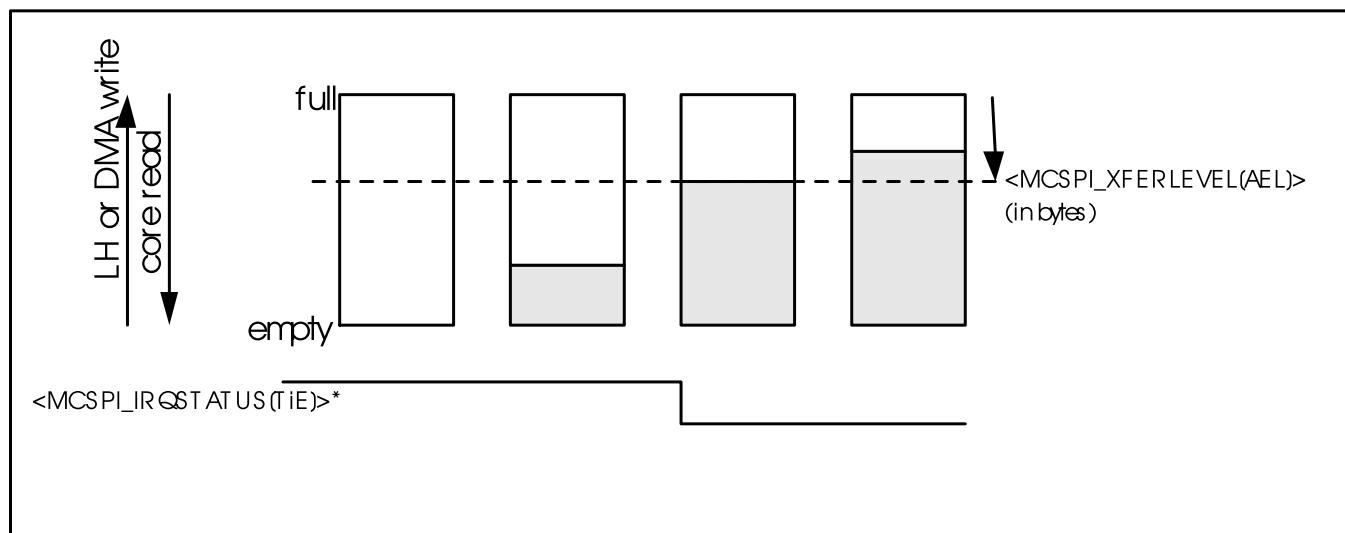
When the FIFO pointer reaches this level, an interrupt or a DMA request is sent to the local host to enable the system to read AFL+1 bytes from the receive register. AFL+1 must correspond to a multiple value of MCSPI_CHCONF[WL]. When DMA is used, the request is de-asserted after the first receive register read. No new request is asserted until it has performed the correct number of read accesses.

Figure 8-10. Buffer Almost Full Level (AFL)


8.2.3.4.1.3 Buffer Almost Empty

The bit-field MCSPI_XFERLEVEL[AEL] is required when the buffer is used to transmit an SPI word to a slave (MCSPI_CHCONF[FFEW] must be set to 1), and defines the Almost Empty buffer status.

When the FIFO pointer has reached this level, an interrupt or a DMA request is sent to the local host to enable the system to write AEL+1 bytes to the transmit register. AEL+1 must correspond to a multiple value of MCSPI_CHCONF[WL]. When DMA is used, the request is de-asserted after the first transmit register write. No new request is asserted again until the system has performed the right number of write accesses.

Figure 8-11. Buffer Almost Empty Level (AEL)


8.2.3.4.1.4 End of Transfer Management

When the FIFO buffer is enabled for a channel, the user configures the MCSPI_XFERLEVEL register, the AEL and AFL levels, and the WCNT bit field to define the number of SPI word to be transferred using the FIFO before enabling the channel.

This counter allows the controller to stop the transfer after a defined number of SPI word transfers. If WCNT is set to 0x0000, the counter is not used and the user must stop the transfer manually by disabling the channel, if the user does not know how many SPI transfers have been done. For a receive transfer, the software polls the corresponding FFE bit field and reads the receive register to empty the FIFO buffer. When the end of word count interrupt is generated, the user can disable the channel and poll on the MCSPI_CHSTAT[FFE] register to see if there is an SPI word in the FIFO buffer, and read the last words.


8.2.3.4.1.5 3- or 4-Pin Mode.

The external SPI bus interface can be configured to use a restricted set of pins, using the bit field MCSPI_MODULECTRL[1] PIN34 and depending on the targeted application:

- If MCSPI_MODULECTRL[1] is set to 0 (default value), the controller is in 4-pin mode, using the SPI pins CLKSPI, SOMI, SIMO, and chip-enable CS.
- If MCSPI_MODULECTRL[1] is set to 1, the controller is in 3-pin mode, using the SPI pins CLKSPI, SOMI, and SIMO.

In this mode, only one SPI device can be on the bus.

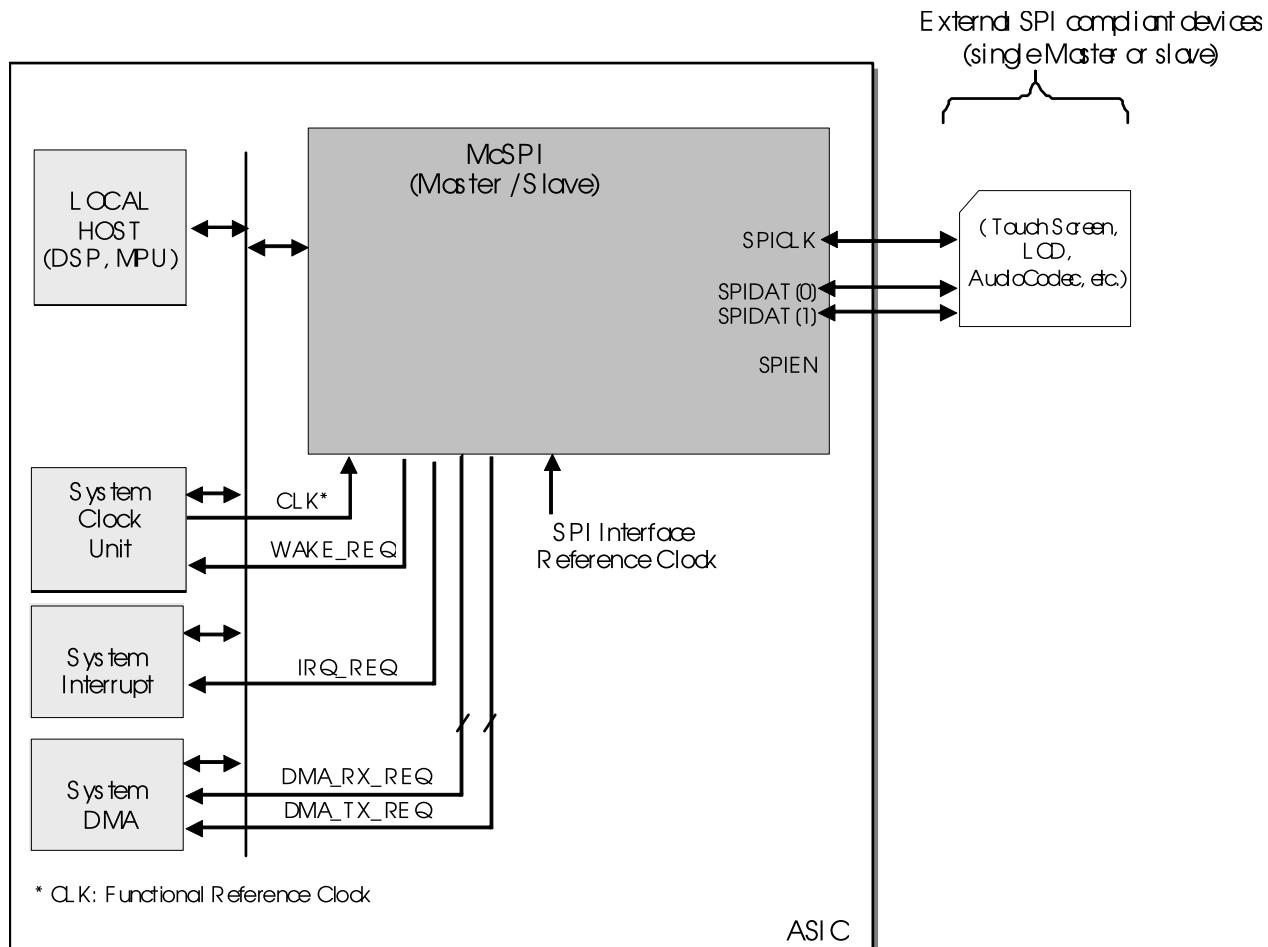Figure 8-12. 3-Pin Mode System Overview



In 3-pin mode, not all options related to chip select management are used:

- MCSPI_CHxCONF[EPOL]
- MCSPI_CHxCONF[TCS0]
- MCSPI_CHxCONF[FORCE]

The chip select pin SPIEN is forced to 0 in this mode.

8.2.4 Slave Mode

SPI is in slave mode when the MS bit of the SPI_MODULCTRL register is set. In slave mode, SPI should be connected to only one external master device.

In slave mode, SPI initiates data transfer on the data lines (MISO/MOSI) when it receives an SPI clock (SPICLK) from the external SPI master device. The controller is able to work with or without a chip-select SPIEN, depending on the MCSPI_MODULCTRL[1] PIN34 bit setting. It also support transfers without a dead cycle between two successive words.

The following configurations are available for the slave channel:

- A channel enable, programmable with the EN bit of the SPI_CHCTRL register. This channel should be enabled before transmission and reception. Disabling the channel, outside data word transmission, is the user's responsibility.
- A transmitter register, SPI_TX, on top of the common shift register. If the transmitter register is empty, the TXS status bit of the SPI_CHSTAT register is set. When SPI is selected by an external master (active signal on the SPIEN port), the transmitter register content of the channel is always loaded in the shift register, whether it has been updated or not. The transmitter register should be loaded before SPI is selected by a master.
- A receiver register, SPI_RX, on top of the common shift register. If the receiver register is full, the RXS status bit of the SPI_CHSTAT register is set.
- A communication configuration with the following parameters in the MCSPI_CHCONF register:
 - Transmit and receive modes, programmable with the TRM bit.
 - SPI word length, programmable with the WL bits.
 - SPIEN polarity, programmable with the EPOL bit.
 - SPICLK polarity, programmable with the POL bit.
 - SPICLK phase, programmable with the PHA bit.
 - Use a FIFO buffer or not, programmable with FFER and FFEW, depending on transfer mode TRM.
 - The SPICLK frequency of a transfer is controlled by the external SPI master.
 - Two DMA requests events, read and write, to synchronize read/write accesses of the DMA controller with the activity of SPI. The DMA requests are enabled with the DMAR and DMAW bits of the MCSPI_CHCONF register.

8.2.4.1 Interrupts Events in Slave Mode

The interrupt events related to the transmitter register state are TX_empty and TX_underflow. The interrupt events related to the receiver register state are RX_full and RX_overflow.

8.2.4.1.1 TX_empty

The TX_empty event activates when the channel is enabled and its transmitter register becomes empty. Enabling the channel automatically raises this event. When the FIFO buffer is enabled (MCSPI_CHCONF[FFEW] set to 1), the TX_empty is asserted once there is enough space in buffer to write a number of bytes defined by MCSPI_XFERLEVEL[AEL].

The transmitter register must be loaded to remove the source of the interrupt, and the TX_empty interrupt status bit must be cleared for the interrupt line de-assertion (if the event is enabled as the interrupt source).

When FIFO is enabled, no new TX_empty event is asserted if the local host has not performed the number of writes into the transmitter register defined by MCSPI_XFERLEVEL[AEL]. The local host must perform the correct number of writes.

8.2.4.1.2 TX_underflow

The TX_underflow event activates when the channel is enabled and the transmitter register or FIFO (if buffer is enabled) is empty (not updated with new data), and when an external master device starts a data transfer with SPI (transmit and receive).

When FIFO is enabled, the data emitted while the underflow event is raised is not the last data written in the FIFO. The TX_underflow indicates an error (data loss) in slave mode.

To avoid having a TX_underflow event at the beginning of a transmission, the event TX_underflow is not activated when no data has been loaded into the transmitter register, because the channel has been enabled. The TX_underflow interrupt status bit must be cleared for an interrupt line de-assertion (if event is enabled as the interrupt source).

8.2.4.1.3 RX_full

The RX_full event activates when the channel is enabled and the receiver is filled (transient event). When the FIFO buffer is enabled (MCSPI_CHCONF[FFER] set to 1), the RX_full is asserted once there is a number of bytes held in the buffer to read defined by MCSPI_XFERLEVEL[AFL].

The receiver register must be read to remove the source of the interrupt, and the RX_full interrupt status bit must be cleared for an interrupt line de-assertion (if the event is enabled as an interrupt source).

When FIFO is enabled, no new RX_full event is asserted if the local host has not performed the number of reads into the receive register defined by MCSPI_XFERLEVEL[AFL]. The local host must perform the correct number of reads.

8.2.4.1.4 RX_overflow

The RX_overflow event activates when the channel is enabled and the receiver register or FIFO (if the buffer is enabled) is full at the time of a new SPI word reception. The receiver register is always overwritten with the new SPI word. If FIFO is enabled and the data within the FIFO is overwritten, it must be corrupted.

The RX_overflow event should not appear in slave mode using the FIFO. The RX_overflow indicates an error (data loss) in slave mode. The RX_overflow interrupt status bit must be cleared for an interrupt line de-assertion (if the event is enabled as an interrupt source).

8.2.4.1.5 End-of-Word Count

The EOW (end-of-word count) event activates when the channel is enabled and configured to use the built-in FIFO. This interrupt is raised when the controller performs the number of transfers defined in the MCSPI_XFERLEVEL[WCNT] register. If the value is programmed to 0x0000, the counter is not enabled and this interrupt is not generated.

The end-of-word count interrupt also indicates that the SPI transfer is stopped on the channel using the FIFO buffer, once MCSPI_XFERLEVEL[WCNT] is not reloaded and the channel re-enabled. The end-of-word interrupt status bit must be cleared for the interrupt line de-assertion (if the event is enabled as an interrupt source).

8.2.4.2 Slave Transmit and Receive Mode

The slave transmit and receive mode is programmable (TRM bits set to 00 in the register SPI_CHCONF). After the channel is enabled, transmission and reception proceed with interrupt and DMA request events.

In slave transmit and receive mode, the transmitter register should be loaded before SPI is selected by an external SPI master device. The transmitter register or FIFO (if the use of a buffer is enabled) content is always loaded in the shift register, whether updated or not. The TX_underflow event activates, and does not prevent transmission.

Upon completion of SPI word transfer (EOT bit of the SPI_CHSTAT register is set), the received data is transferred to the channel receive register. This bit is meaningless when using the buffer for this channel.

The built-in FIFO is available in this mode and can be configured in one data direction, either transmit or receive, to ensure that the FIFO is seen as a unique 64-byte buffer. The FIFO can also be configured in both data transmit and receive directions, to ensure the FIFO is split into two separate 32-byte buffers with individual address space management. In this last case, the definition of the AEL and AFL levels is based on 64 bytes, and is the responsibility of the local host.

8.2.5 Interrupts

According to the transmitter register state and the receiver register state, the channel can issue interrupt events if enabled. Each interrupt event has a status bit in the SPI_IRQSTATUS register that indicates service is required, and an interrupt enable bit in the SPI_IRQENABLE register that enables the status to generate hardware interrupt requests. When an interrupt occurs and a mask is then applied on it (IRQENABLE), the interrupt line is not asserted again, even if the interrupt source has not been serviced.

SPI supports interrupt-driven operation and polling.

8.2.5.1 Interrupt-Driven Operation

Alternatively, an interrupt enable bit in the SPI_IRQENABLE register can be set to enable each of the events to generate interrupt requests when the corresponding event occurs. Status bits are automatically set by hardware logic conditions.

When an event occurs (the single interrupt line is asserted), the local host must:

- Read the SPI_IRQSTATUS register to identify which event occurred.
- Interrupt handling:
 - Read the receiver register that corresponds to the event, to remove the source of an RX_full event, or
 - Write into the transmitter register that corresponds to the event, to remove the source of a TX_empty event.
 - No action is needed to remove the source of the events TX_underflow and RX_overflow.
- Write a 1 into the corresponding bit of the SPI_IRQSTATUS register to clear the interrupt status and release the interrupt line.

The interrupt status bit should always be reset after channel enabling and before events are enabled as an interrupt source.

8.2.5.2 Polling

When the interrupt capability of an event is disabled in the SPI_IRQENABLE register, the interrupt line is not asserted and:

- The status bits in the SPI_IRQSTATUS register is polled by software to detect when the corresponding event occurs.
- Once the expected event occurs, the local host must read the receiver register that corresponds to the event to remove the source of an RX_full event, or write into the transmitter register that corresponds to the event to remove the source of a TX_empty event. No action is needed to remove the source of the events TX_underflow and RX_overflow.
- Writing a 1 into the corresponding bit of the SPI_IRQSTATUS register clears the interrupt status and does not affect the interrupt line state.

8.2.6 DMA Requests

SPI can be interfaced with a DMA controller. At the system level, the advantage is to discharge the local host of the data transfers. According to FIFO level (if using a buffer for the channel), the channel can issue DMA requests if enabled. The DMA requests must be disabled to get TX and RX interrupts. There are two DMA request lines for the channel.

8.2.6.1 FIFO Buffer Enabled

The DMA read request line asserts when the channel is enabled and a number of bytes defined in SPI_XFERLEVEL[AFL] bit field is held in the FIFO buffer for the receive register of the channel. A DMA read request can be individually masked with the DMAR bit of the SPI_CHCONF register. The DMA read request line is de-asserted on the first SPI word read completion of the receive register of the channel. No new DMA request is asserted if the user has not performed the correct number of read accesses, as defined by SPI_XFERLEVEL[AFL].

The DMA write request line asserts when the channel is enabled and the number of bytes held in the FIFO buffer is below the level defined by the SPI_XFERLEVEL[AEL] bit field. A DMA write request can be individually masked with the DMAW bit of the SPI_CHCONF register. The DMA write request line asserts when the channel is enabled and the number of bytes held in the FIFO buffer is below the level defined by the SPI_XFERLEVEL[AEL] bit field.

8.2.7 Reset

The module can be reset by software through the SoftReset bit of the SPI_SYS CONFIG register. The SPI_SYS CONFIG register is not sensitive to software reset. The SoftReset control bit is active high. The bit is automatically reset to 0 by the hardware.

A global ResetDone status bit is provided in the SPI_SYS CONFIG status register. The global ResetDone status bit can be monitored by the software to check if the module is ready to use following a reset.

8.3 Initialization and Configuration

This section describes a GSPI module initialization and configuration example for each of the two basic modes supported to transmit and receive at 100000 KHz.

8.3.1 Basic Initialization

(a) Enable the SPI module clock by invoking the following API:

```
PRCMPeripheralClkEnable(PRCM_GSPI, PRCM_RUN_MODE_CLK)
```

(b) Set the pinmux to bring out the SPI signals to the chip boundary at desired location:

```
PinTypeSPI(<pin_no>, <mode>).
```

(c) Soft reset the module:

```
SPIReset(GSPI_BASE)
```

8.3.2 Master Mode Operation Without Interrupt (Polling)

(a) Configure the SPI with following parameters:

- **Mode:** 4-pin/master
- **Sub mode:** 0
- **Bit Rate:** 100000 Hz
- **Chip Select:** Software-controlled/active high
- **Word Length:** 8 bits

```
SPIConfigSetExpClk(GSPI_BASE, PRCMPeripheralClockGet(PRCM_GSPI),  
100000, SPI_MODE_MASTER,  
SPI_SUB_MODE_0, (SPI_SW_CTRL_CS | SPI_4PIN_MODE | SPI_TURBO_OFF |  
SPI_CS_ACTIVEHIGH |  
SPI_WL_8))
```

(b) Enable SPI channel for communication:

```
SPIEnable(GSPI_BASE)
```

(c) Enable chip select:

```
SPICSEnable(GSPI_BASE)
```

(d) Write new data into TX FIFO to transmit over the interface:

```
SPIDataPut(GSPI_BASE, <UserData>);
```

(e) Read received data from the RX FIFO:

```
SPIDataGet(GSPI_BASE, & <ulDummy>)
```

(f) Disable chip select:

```
SPICSDisable(GSPI_BASE)
```

8.3.3 Slave Mode Operation With Interrupt

(a) Set the interrupt vector table base and enable master interrupt for NVIC:

```
IntVTableBaseSet( <address_of_vector_table> )IntMasterEnable()
```

(b) Configure the SPI with following parameters:

- **Mode:** 4-pin/slave
- **Word Length:** 8 bits

```
SPIConfigSetExpClk(GSPI_BASE,PRCMPeripheralClockGet(PRCM_GSPI),
SPI_IF_BIT_RATE, SPI_MODE_SLAVE, SPI_SUB_MODE_0,
(SPI_HW_CTRL_CS |
SPI_4PIN_MODE |
SPI_TURBO_OFF |
SPI_CS_ACTIVEHIGH |
SPI_WL_8))
```

(c) Register the interrupt handler:

```
SPIIntRegister(GSPI_BASE, <SlaveIntHandler> )
```

(d) Enable the transmit empty and receive full interrupts:

```
SPIIntEnable(GSPI_BASE,SPI_INT_RX_FULL|SPI_INT_TX_EMPTY)
```

(e) Enable SPI channel for communication:

```
SPIEnable(GSPI_BASE)
```

8.3.4 Generic Interrupt Handler Implementation

```
void SlaveIntHandler()
{
    unsigned long ulDummy;
    unsigned long ulStatus;

    // Read the interrupt status
    ulStatus = SPIIntStatus(GSPI_BASE,true);

    // Acknowledge the interrupts
    SPIIntClear(GSPI_BASE,SPI_INT_RX_FULL|SPI_INT_TX_EMPTY);

    // If TX empty, write a new data into SPI register
    if(ulStatus & SPI_INT_TX_EMPTY)
    {
        SPIDataPut(GSPI_BASE,
<user_data>)
    }
    // if RX is full, readout the data from SPI
    if(ulStatus & SPI_INT_RX_FULL)
    {
        SPIDataGetNonBlocking(GSPI_BASE,
&ulDummy);
    }
}
```


8.4 Access to Data Registers

This section describes the supported data accesses (read or write) to and from the data receiver registers SPI_RX and data transmitter registers SPI_TX.

SPI supports only one SPI word per register (receiver or transmitter) and does not support successive 8-bit or 16-bit accesses for a single SPI word. The SPI word received is always right-justified on the LSbit of the 32-bit SPI_RX register, and the SPI word to transmit is always right-justified on the LSbit of the 32-bit SPI_TX register. The bits above SPI word length are ignored, and the content of the data registers is not reset between the SPI data transfers. The coherence between the number of bits of the SPI word, the number of bits of the access, and the enabled byte is the responsibility of the user. Only aligned accesses are supported. In master mode, data should not be written in the transmit register when the channel is disabled.

8.5 Module Initialization

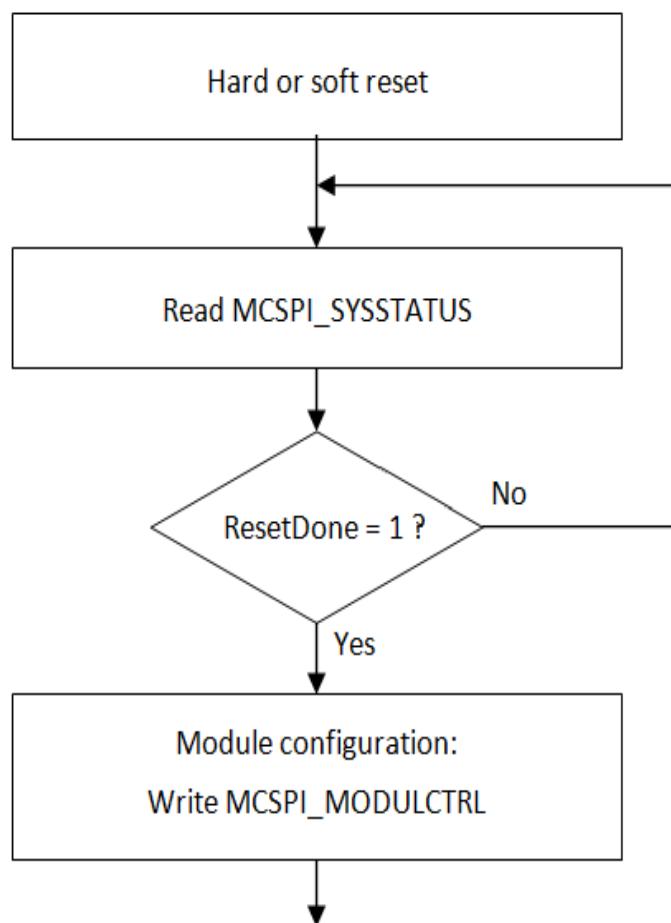Figure 8-13. Flow Chart - Module Initialization



Before the ResetDone bit is set, the clocks CLK and CLKSPIREF must be provided to the module. To avoid hazardous behavior, reset the module before changing from master mode to slave mode or from slave mode to master mode.

8.5.1 Common Transfer Sequence


SPI module allows the transfer of one or several words, according to different modes:

- Master normal, master turbo, slave
- Transmit – receive
- Write and read requests: interrupts, DMA
- SPIEN lines assertion/deassertion: automatic, manual

For all these flows, the host process contains the main process and the interrupt routines. The interrupt routines are called on the interrupt signals, or by an internal call if the module is used in polling mode.

[Figure 8-14](#) represents the main sequence common to all transfers.

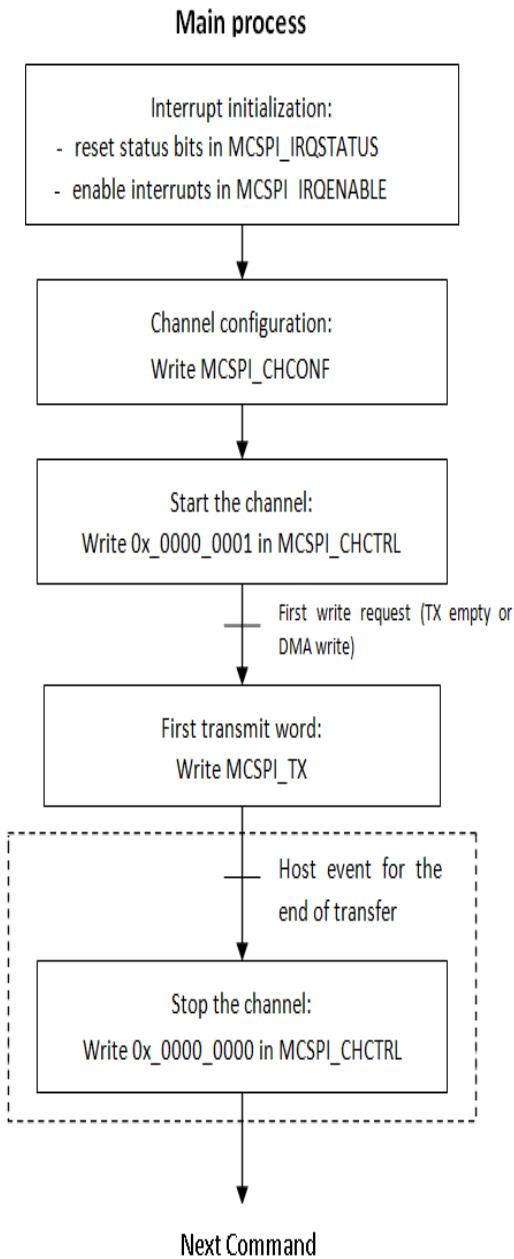Figure 8-14. Flow Chart - Common Transfer Sequence



8.5.2 End of Transfer Sequences

In these sequences, some soft variables are used:

- write_count = 0
- read_count = 0
- channel_enable = FALSE
- last_transfer = FALSE


- last_request = FALSE

These variables are initialized before starting the channel.

The executed transfer has size of N. If the requests are configured in DMA, write_count and read_count are assigned with N.

Figure 8-15 highlights the interrupt routine executed for N times until write_count and read_count reached value N, after which the transfer is over and the main process disables the channel.

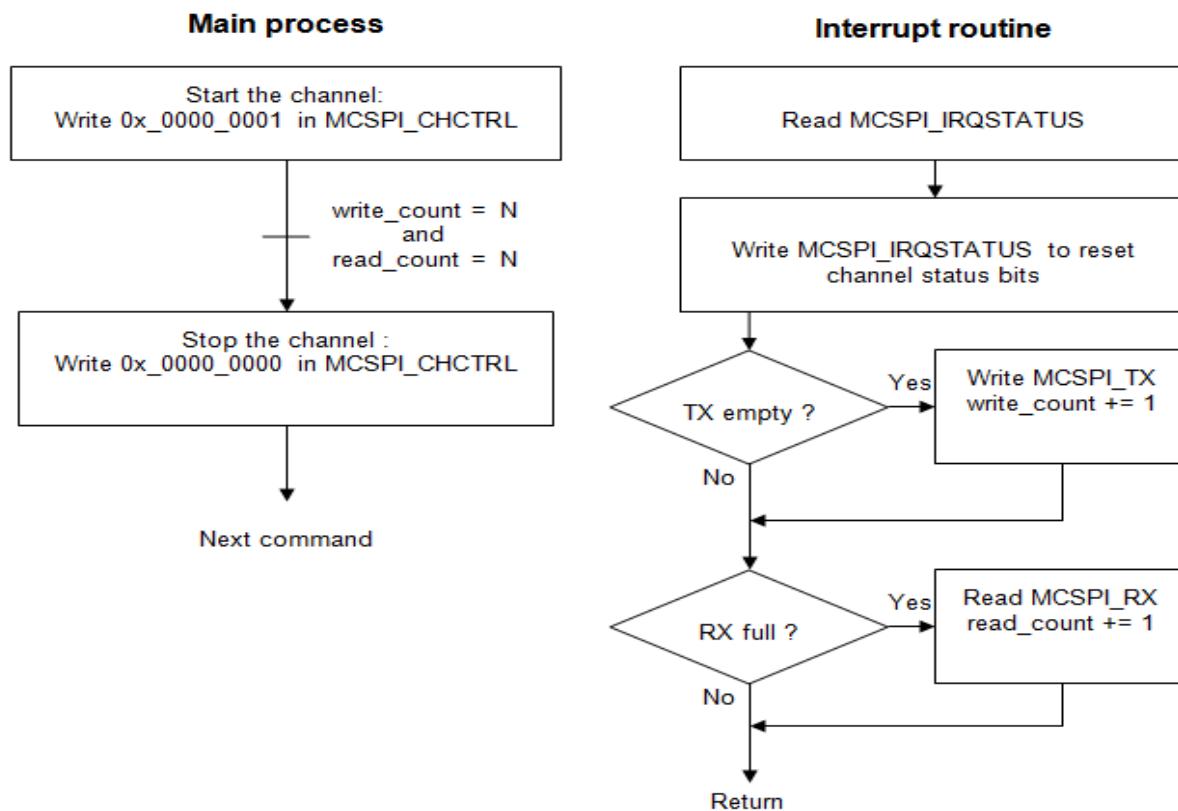Figure 8-15. Flow Chart - Transmit and Receive (Master and Slave)



8.5.3 FIFO Mode

These flows describe the transfer with FIFO.

The SPI module allows the transfer of one or several words, according to different modes:

- Master normal, master turbo, slave
- Transmit – receive
- Write and read requests: IRQ, DMA

For each flow, the host process contains the main process and the interrupt routine. This routine is called on the IRQ signals, or by an internal call if the module is used in polling mode.

8.5.3.1 Common Transfer Sequence

In transmit and receive mode, the FIFO can be enabled for write or read request only. The SPI module starts the transfer only when the first write request is released, by writing the SPI_TX register. See [Figure 8-16](#).

This first write request is managed by the IRQ routine or DMA handler.

The sequence varies according to whether word count is used or not (SPI_XFERLEVEL : WCNT ≠ 0 or not). The AEL or AFL values can be different, but they must be a multiple of the word size in the FIFO: 1, 2, or 4 bytes, according to word length.


In these sequences, the transfer to execute has a size of N words. In these sequences, the numbers of word written or read for each write or read FIFO request are:

- write_request_size
- read_request_size

If they are not submultiples of N, the last request sizes are:

- last_write_request_size (< write_request_size)
- last_read_request_size. (< read_request_size)

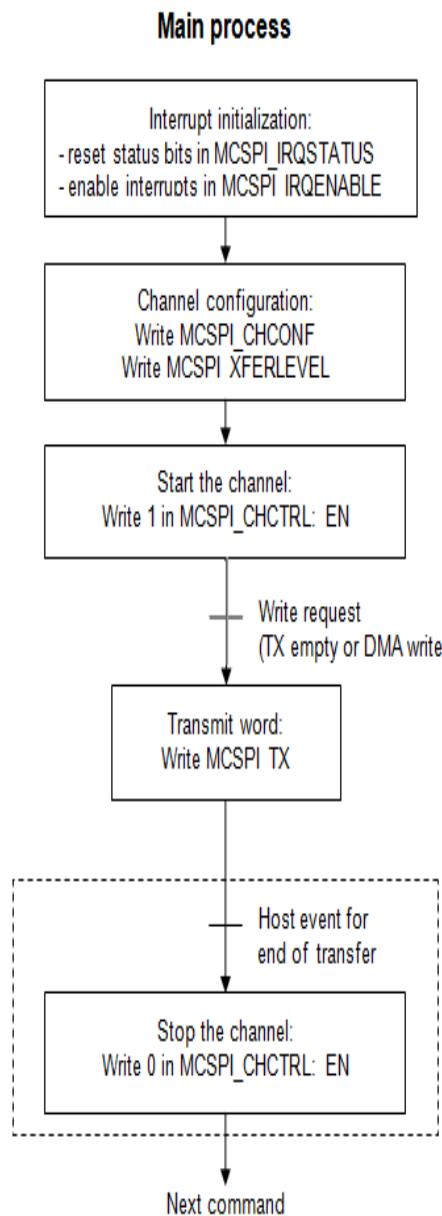Figure 8-16. Flow Chart - FIFO Mode Common Sequence (Master)



In these sequences, some soft variables are used:


- `write_count = N`
- `read_count = N`
- `last_request = FALSE`

These variables are initialized before starting the channel.

8.5.3.2 Transmit Receive with Word Count

Flow of a transfer in transmit – receive mode, with word count.

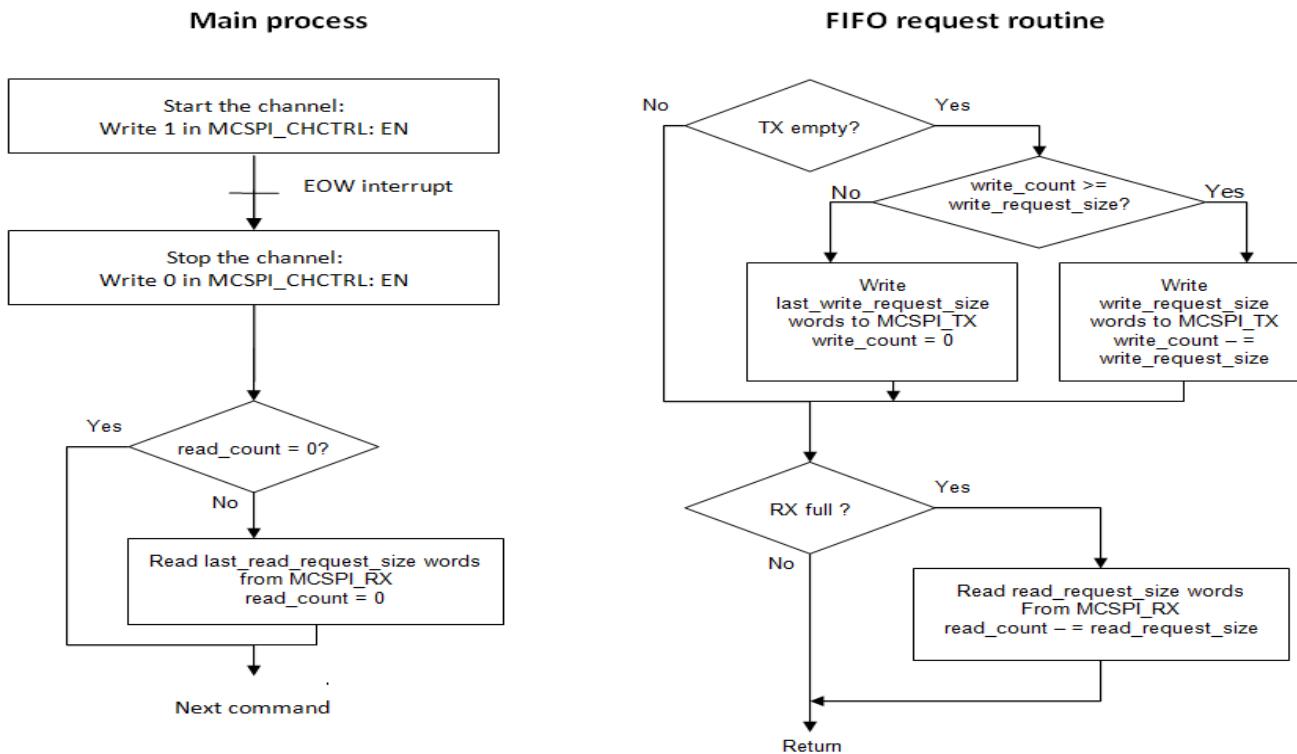
Figure 8-17. Flow Chart - FIFO Mode Transmit and Receive with Word Count (Master)



8.5.3.3 Transmit Receive without Word Count

Flow of a transfer in transmit – receive mode, without word count.

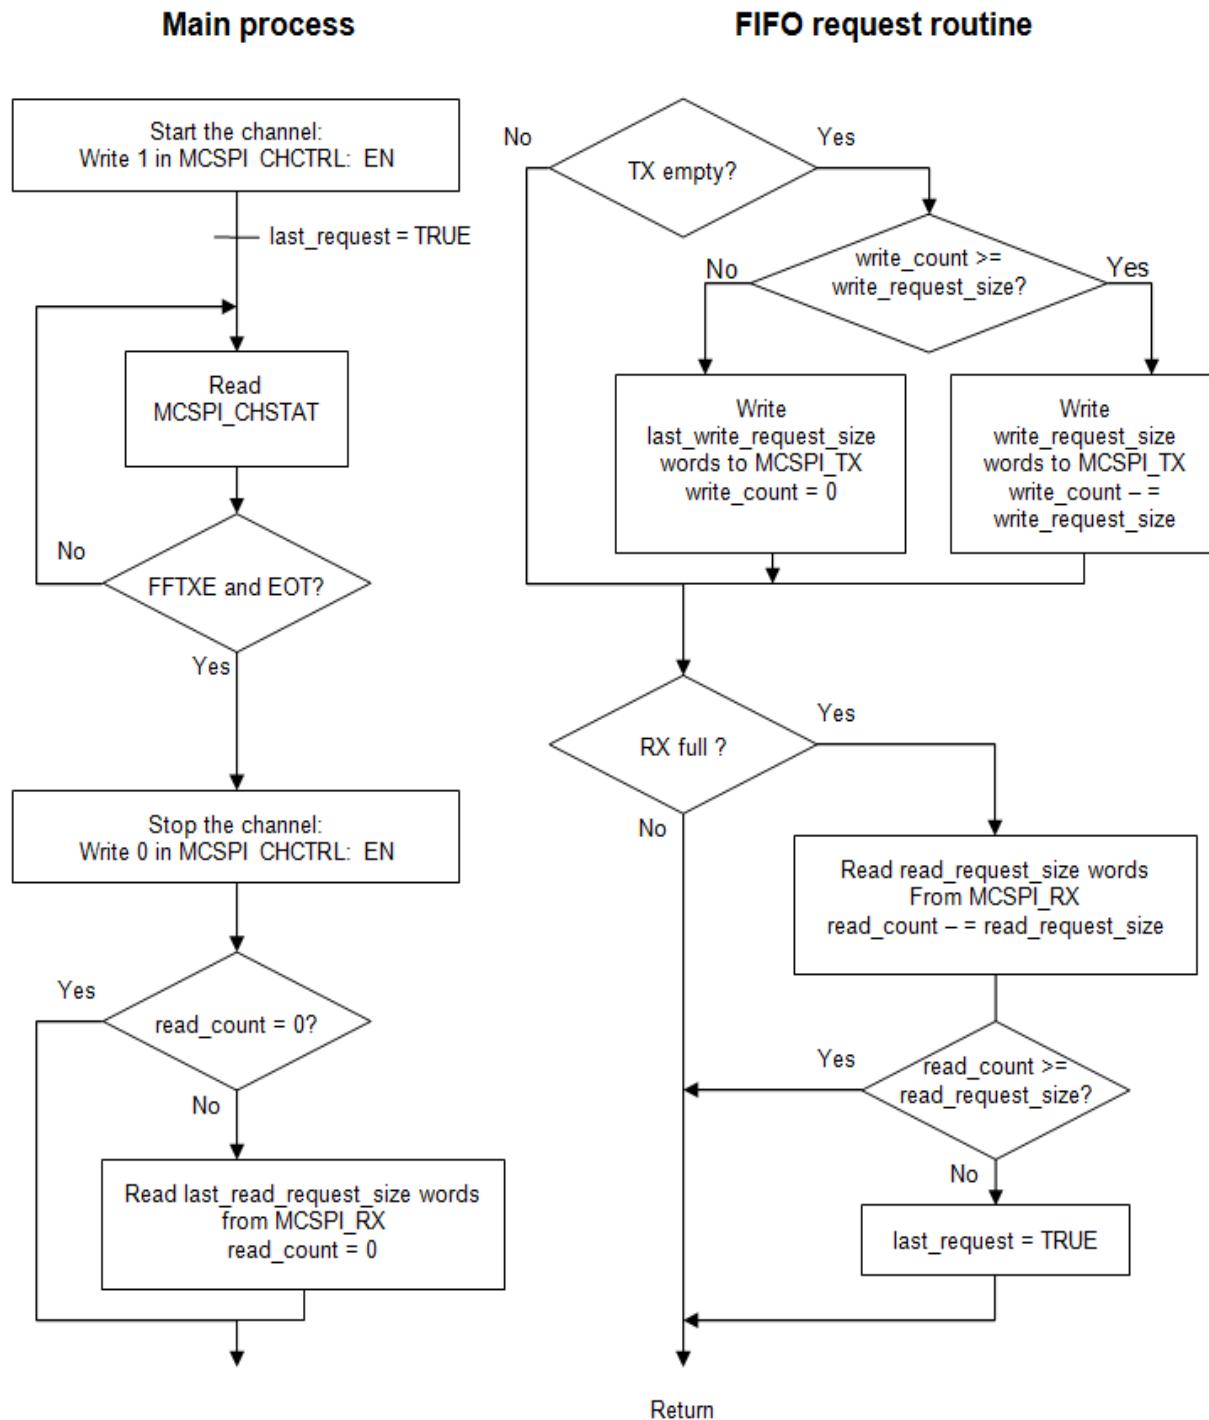Figure 8-18. Flow Chart - FIFO Mode Transmit and Receive without Word Count (Master)



8.6 SPI Registers

Table 8-6 lists the memory-mapped registers for the SPI. All register offset addresses not listed in Table 8-6 should be considered as reserved locations, and the register contents should not be modified.

Table 8-6. SPI Registers

Offset	Acronym	Register Name	Section
10h	SPI_SYSCONFIG	System Configuration	Section 8.6.1.1
114h	SPI_SYSSTATUS	System Status Register	Section 8.6.1.2
118h	SPI_IRQSTATUS	Interrupt Status Register	Section 8.6.1.3
11Ch	SPI_IRQENABLE	Interrupt Enable Register	Section 8.6.1.4
128h	SPI_MODULCTRL	Module Control Register	Section 8.6.1.5
12Ch	SPI_CHCONF	Channel Configuration Register	Section 8.6.1.6
130h	SPI_CHSTAT	Channel Status Register	Section 8.6.1.7
134h	SPI_CHCTRL	Channel Control Register	Section 8.6.1.8
138h	SPI_TX	Channel Transmitter Register	Section 8.6.1.9
13Ch	SPI_RX	Channel Receiver Register	Section 8.6.1.10
17Ch	SPI_XFERLEVEL	Transfer Levels Register	Section 8.6.1.11

8.6.1 SPI Register Description

The remainder of this section lists and describes the SPI registers.

8.6.1.1 SPI_SYSConfig Register (offset = 10h) [reset = 0h]

SPI_SYSConfig is shown in [Figure 8-19](#) and described in [Table 8-7](#).

Clock management configuration.

Figure 8-19. SPI_SYSConfig Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED							
SOFTRESET							R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-7. SPI_SYSConfig Register Field Descriptions

Bit	Field	Type	Reset	Description
31-1	RESERVED	R	0h	
0	SOFTRESET	R/W	0h	Software reset. (Optional) 0h (W) = No action 0h (R) = Reset done, no pending action 1h (W) = Initiate software reset 1h (R) = Reset (software or other) ongoing

8.6.1.2 SPI_SYSSTATUS Register (offset = 114h) [reset = 0h]

SPI_SYSSTATUS is shown in [Figure 8-20](#) and described in [Table 8-8](#).

This register provides status information about the module excluding the interrupt status information.

Figure 8-20. SPI_SYSSTATUS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED							RESETDONE
							R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-8. SPI_SYSSTATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-1	RESERVED	R	0h	
0	RESETDONE	R	0h	Internal Reset Monitoring 0h (R) = Internal module reset is on-going 1h (R) = Reset completed

8.6.1.3 SPI_IRQSTATUS Register (offset = 118h) [reset = 0h]

SPI_IRQSTATUS is shown in [Figure 8-21](#) and described in [Table 8-9](#).

The interrupt status regroups all the status of the module internal events that can generate an interrupt.

Figure 8-21. SPI_IRQSTATUS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED						EOW	WKS
R-0h						R/W-0h	R/W-0h
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED				RX_OVERFLOW W	RX_FULL	TX_UNDERFL OW	TX_EMPTY
R-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-9. SPI_IRQSTATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-18	RESERVED	R	0h	
17	EOW	R/W	0h	End of word count event when a channel is enabled using the FIFO buffer and the channel had sent the number of SPI word defined by SPI_XFERLEVEL[WCNT]. 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is pending
16	WKS	R/W	0h	Wake Up event in slave mode when an active control signal is detected on the SPIEN line programmed in the field SPI_CHCONF[SPIENSLV]. 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is pending
15-4	RESERVED	R	0h	
3	RX_OVERFLOW	R/W	0h	Receiver register overflow (slave mode only). 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is pending
2	RX_FULL	R/W	0h	Receiver register full or almost full. This bit indicate FIFO almost full status when built-in FIFO is use for receive register (SPI_CHCONF[FIFER] is set). 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is pending

Table 8-9. SPI_IRQSTATUS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
1	TX_UNDERFLOW	R/W	0h	Transmitter register underflow. 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is pending
0	TX_EMPTY	R/W	0h	Transmitter register empty or almost empty. This bit indicate FIFO almost full status when built-in FIFO is use for transmit register (SPI_CHCONF[FFEW] is set). 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is pending

8.6.1.4 SPI_IRQENABLE Register (offset = 11Ch) [reset = 0h]

SPI_IRQENABLE is shown in [Figure 8-22](#) and described in [Table 8-10](#).

This register allows the user to enable and disable the module internal sources of interrupt, on an event-by-event basis.

Figure 8-22. SPI_IRQENABLE Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED						EOWE	WKE
R-0h						R/W-0h	R/W-0h
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED				RX_OVERFLOW_ENABLE	RX_FULL_ENABLE	TX_UNDERFLOW_ENABLE	TX_EMPTY_ENABLE
R-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-10. SPI_IRQENABLE Register Field Descriptions

Bit	Field	Type	Reset	Description
31-18	RESERVED	R	0h	
17	EOWE	R/W	0h	End of word count Interrupt Enable. 0h = Interrupt disabled 1h = Interrupt enabled
16	WKE	R/W	0h	Wake-up event interrupt enable in slave mode when an active control signal is detected on the SPIEN line programmed in the field SPI_CHCONF[SPIENSLV] 0h = Interrupt disabled 1h = Interrupt enabled
15-4	RESERVED	R	0h	
3	RX_OVERFLOW_ENABLE	R/W	0h	Receiver register overflow interrupt enable. 0h = Interrupt disabled 1h = Interrupt enabled
2	RX_FULL_ENABLE	R/W	0h	Receiver register full or almost full interrupt enable. 0h = Interrupt disabled 1h = Interrupt enabled
1	TX_UNDERFLOW_ENABLE	R/W	0h	Transmitter register underflow interrupt enable. 0h = Interrupt disabled 1h = Interrupt enabled
0	TX_EMPTY_ENABLE	R/W	0h	Transmitter register empty or almost empty interrupt enable. 0h = Interrupt disabled 1h = Interrupt enabled

8.6.1.5 SPI_MODULCTRL Register (offset = 128h) [reset = 4h]

SPI_MODULCTRL is shown in [Figure 8-23](#) and described in [Table 8-11](#).

This register is dedicated to the configuration of the serial port interface.

Figure 8-23. SPI_MODULCTRL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED	RESERVED			MS	PIN34	SINGLE	
R-0h	R-0h			R/W-1h	R/W-0h	R/W-0h	

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-11. SPI_MODULCTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-3	RESERVED	R	0h	
2	MS	R/W	1h	Master/ Slave 0h = Master - The module generates the SPICLK and SPIEN 1h = Slave - The module receives the SPICLK and SPIEN
1	PIN34	R/W	0h	Pin mode selection: 3 wire vs 4 wire. This register is used to configure the SPI pin mode, in master or slave mode. If asserted the controller only use SIMO,SOMI and SPICLK clock pin for spi transfers. 0h = SPIEN is used as a chip select. 1h = SPIEN is not used. In this mode all related option to chip select have no meaning.
0	SINGLE	R/W	0h	Channel enable (master mode only) 1h = Channel will be used in master mode. This bit must be set in Force SPIEN mode.

8.6.1.6 SPI_CHCONF Register (offset = 12Ch) [reset = 60000h]

SPI_CHCONF is shown in [Figure 8-24](#) and described in [Table 8-12](#).

This register is dedicated to the configuration of the channel. The table below lists the allowed data line configurations per channel. The user must program which data line to use and in which direction (receive or transmit), according to the single data pin or two-pin interface mode shared with the external slave or master device.

IS	DPE1	DPE0	TRM (Transmit and Receive)
0	0	0	supported
0	0	1	supported
0	1	0	supported
0	1	1	NOT supported (unpredictable result)
1	0	0	supported
1	0	1	supported
1	1	0	supported
1	1	1	NOT supported (unpredictable result)

Figure 8-24. SPI_CHCONF Register

31	30	29	28	27	26	25	24
RESERVED		CLKG	FFER	FFEW	RESERVED		
R-0h			R/W-0h	R/W-0h	R-0h		
23	22	21	20	19	18	17	16
RESERVED			FORCE	TURBO	IS	DPE1	DPE0
R-0h			R/W-0h	R/W-0h	R/W-1h	R/W-1h	R/W-0h
15	14	13	12	11	10	9	8
DMAR	DMARW	TRM		WL			
R/W-0h	R/W-0h	R/W-0h		R/W-0h			
7	6	5	4	3	2	1	0
WL	EPOL	CLKD			POL	PHA	
R/W-0h	R/W-0h	R/W-0h			R/W-0h	R/W-0h	

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-12. SPI_CHCONF Register Field Descriptions

Bit	Field	Type	Reset	Description
31-30	RESERVED	R	0h	
29	CLKG	R/W	0h	Clock divider granularity. This register defines the granularity of channel clock divider: power of two or one clock cycle granularity. When this bit is set the register SPI_CHCTRL[EXTCLK] must be configured to reach a maximum of 4096 clock divider ratio. Then the clock divider ratio is a concatenation of SPI_CHCONF[CLKD] and SPI_CHCTRL[EXTCLK] values 0h = Clock granularity of power of two 1h = One clock cycle granularity
28	FFER	R/W	0h	FIFO enabled for receive: Only one channel can have this bit field set. 0h = The buffer is not used to receive data. 1h = The buffer is used to receive data.
27	FFEW	R/W	0h	FIFO enabled for transmit: Only one channel can have this bit field set. 0h = The buffer is not used to transmit data. 1h = The buffer is used to transmit data.
26-21	RESERVED	R	0h	

Table 8-12. SPI_CHCONF Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
20	FORCE	R/W	0h	Manual SPIEN assertion to keep SPIEN active between SPI words (single channel master mode only) 0h = Writing 0 into this bit drives low the SPIEN line when SPI_CHCONF[EPOL] = 0, and drives it high when SPI_CHCONF[EPOL] = 1. 1h = Writing 1 into this bit drives high the SPIEN line when SPI_CHCONF[EPOL] = 0, and drives it low when SPI_CHCONF[EPOL] = 1
19	TURBO	R/W	0h	Turbo mode 0h = Turbo is deactivated (recommended for single SPI word transfer) 1h = Turbo is activated to maximize the throughput for multi SPI words transfer.
18	IS	R/W	1h	Input select 0h = Data Line0 (SPIDAT[0]) selected for reception. 1h = Data Line1 (SPIDAT[1]) selected for reception
17	DPE1	R/W	1h	Transmission enable for data line 1 0h = Data Line1 (SPIDAT[1]) selected for transmission 1h = No transmission on data line 1 (SPIDAT[1])
16	DPE0	R/W	0h	Transmission enable for data line 0 0h = Data line 0 (SPIDAT[0]) selected for transmission 1h = No transmission on data line 0 (SPIDAT[0])
15	DMAR	R/W	0h	DMA read request. The DMA read request line is asserted when the channel is enabled and a new data is available in the receive register of the channel. The DMA read request line is deasserted on read completion of the receive register of the channel. 0h = DMA read request disabled 1h = DMA read request enabled
14	DMARW	R/W	0h	DMA write request. The DMA write request line is asserted when The channel is enabled and the transmitter register of the channel is empty. The DMA write request line is deasserted on load completion of the transmitter register of the channel. 0h = DMA write request disabled 1h = DMA write request enabled
13-12	TRM	R/W	0h	Transmit receive modes 0h = Transmit and receive mode
11-7	WL	R/W	0h	SPI word length 7h = The SPI word is 8-bits long Fh = The SPI word is 16-bits long 1Fh = The SPI word is 32-bits long
6	EPOL	R/W	0h	SPIEN polarity 0h = SPIEN is held high during the active state. 1h = SPIEN is held low during the active state.

Table 8-12. SPI_CHCONF Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
5-2	CLKD	R/W	0h	<p>Frequency divider for SPICLK. (Only when the module is a master SPI device). A programmable clock divider divides the SPI reference clock (CLKSPIREF) with a 4-bit value, and results in a new clock SPICLK available to shift-in and shiftout data.</p> <p>0h = 1 1h = 2 2h = 4 3h = 8 4h = 16 5h = 32 6h = 64 7h = 128 8h = 256 9h = 512 Ah = 1024 Bh = 2048 Ch = 4096 Dh = 8192 Eh = 16384 Fh = 32768</p>
1	POL	R/W	0h	<p>SPICLK polarity 0h = SPICLK is held high during the active state 1h = SPICLK is held low during the active state</p>
0	PHA	R/W	0h	<p>SPICLK phase 0h = Data are latched on odd numbered edges of SPICLK. 1h = Data are latched on even numbered edges of SPICLK.</p>

8.6.1.7 SPI_CHSTAT Register (offset = 130h) [reset = 0h]

SPI_CHSTAT is shown in [Figure 8-25](#) and described in [Table 8-13](#).

This register provides status information about the transmitter and receiver registers of the channel.

Figure 8-25. SPI_CHSTAT Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED	RXFFF	RFFE	TXFFF	TXFE	EOT	TXS	RXS
R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h	R-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-13. SPI_CHSTAT Register Field Descriptions

Bit	Field	Type	Reset	Description
31-7	RESERVED	R	0h	
6	RXFFF	R	0h	Channel FIFO receive buffer full status 0h (R) = FIFO receive buffer is not full 1h (R) = FIFO receive buffer is full
5	RFFE	R	0h	Channel FIFO receive buffer empty status 0h (R) = FIFO receive buffer is not empty 1h (R) = FIFO receive buffer is empty
4	TXFFF	R	0h	Channel FIFO transmit buffer full status 0h (R) = FIFO transmit buffer is not full 1h (R) = FIFO transmit buffer is full
3	TXFE	R	0h	Channel FIFO transmit buffer empty status 0h (R) = FIFO transmit buffer is not empty 1h (R) = FIFO transmit buffer is empty
2	EOT	R	0h	Channel end of transfer status. The definitions of beginning and end of transfer vary with master versus slave and the transfer format (turbo mode). See dedicated chapters for details. 0h (R) = This flag is automatically cleared when the shift register is loaded with the data from the transmitter register (beginning of transfer). 1h (R) = This flag is automatically set to one at the end of an SPI transfer.
1	TXS	R	0h	Channel transmitter register status 0h (R) = Register is full 1h (R) = Register is empty
0	RXS	R	0h	Channel receiver register status 0h (R) = Register is empty 1h (R) = Register is full

8.6.1.8 SPI_CHCTRL Register (offset = 134h) [reset = 0h]

SPI_CHCTRL is shown in [Figure 8-26](#) and described in [Table 8-14](#).

This register enables the channel and defines the extended clock ratio with one clock cycle granularity.

Figure 8-26. SPI_CHCTRL Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
EXTCLK								RESERVED							
R/W-0h								R-0h							
R/W-0h															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-14. SPI_CHCTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-16	RESERVED	R	0h	
15-8	EXTCLK	R/W	0h	<p>Clock ratio extension This register is used to concatenate with the SPI_CHCONF[CLKD] register for the clock ratio only when the granularity is one clock cycle (SPI_CHCONF[CLKG] set to 1). Then, the max value reached is 4096 clock divider ratio. 0h = Clock ratio is CLKD + 1 1h = Clock ratio is CLKD + 1 + 16 FFh = Clock ratio is CLKD + 1 + 4080</p>
7-1	RESERVED	R	0h	
0	EN	R/W	0h	<p>Channel enable 0h = Channel is not active 1h = Channel is active</p>

8.6.1.9 SPI_TX Register (offset = 138h) [reset = 0h]

SPI_TX is shown in [Figure 8-27](#) and described in [Table 8-15](#).

This register contains a single SPI word to transmit on the serial link, depending on SPI word length. See Chapter Access to data registers for the list of supported accesses; the little endian host accesses the SPI 8-bit word on 0x00, while the big endian host accesses it on 0x03.

Figure 8-27. SPI_TX Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TDATA																															
R/W-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-15. SPI_TX Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TDATA	R/W	0h	Channel data to transmit

8.6.1.10 SPI_RX Register (offset = 13Ch) [reset = 0h]

SPI_RX is shown in [Figure 8-28](#) and described in [Table 8-16](#).

This register contains a single SPI word received through the serial link, depending on SPI word length. See Chapter Access to data registers for the list of supported accesses; the little endian host accesses the SPI 8-bit word on 0x00, while the big endian host accesses it on 0x03.

Figure 8-28. SPI_RX Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RDATA																															
R-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-16. SPI_RX Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	RDATA	R	0h	Channel received data

8.6.1.11 SPI_XFERLEVEL Register (offset = 17Ch) [reset = 0h]

SPI_XFERLEVEL is shown in [Figure 8-29](#) and described in [Table 8-17](#).

This register provides the transfer levels required to use the FIFO buffer during transfer.

Figure 8-29. SPI_XFERLEVEL Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
WCNT																AFL				AEL											
R/W-0h																R/W-0h				R/W-0h											

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 8-17. SPI_XFERLEVEL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-16	WCNT	R/W	0h	<p>SPI word counter. This register holds the programmable value of the number of SPI words to be transferred on the channel using the FIFO buffer. When the transfer starts, a read back in this register returns the current SPI word transfer index.</p> <p>0h = Counter not used 1h = One SPI word FFFEh = 65534 SPI word FFFFh = 65535 SPI word</p>
15-8	AFL	R/W	0h	<p>Buffer almost full. This register holds the programmable almost-full level value used to determine almost-full buffer condition. If the user wants an interrupt or a DMA read request to be issued during a receive operation when the data buffer holds at least n bytes, then the buffer SPI_XFERLEVEL[AFL] must be set with n-1.</p> <p>0h = One byte 1h = 2 bytes Fh = 16 bytes</p>
7-0	AEL	R/W	0h	<p>Buffer almost empty. This register holds the programmable almost-empty level value used to determine almost-empty buffer condition. If the user wants an interrupt or a DMA write request to be issued during a transmit operation when the data buffer is able to receive n bytes, then the buffer SPI_XFERLEVEL[AEL] must be set with n-1.</p> <p>0h = One byte 1h = 2 bytes Fh = 16 bytes</p>

General-Purpose Timers

Topic	Page
9.1 Overview	261
9.2 Block Diagram.....	261
9.3 Functional Description	262
9.4 Initialization and Configuration	269
9.5 TIMER Registers.....	272

9.1 Overview

Programmable timers can be used to count or time external events that drive the timer input pins. The CC3200 general-purpose timer module (GPTM) contains 16- or 32-bit GPTM blocks. Each 16- or 32-bit GPTM block provides two 16-bit timers/counters (referred to as Timer A and Timer B) that can be configured to operate independently as timers or event counters, or concatenated to operate as one 32-bit timer. Timers can also be used to trigger µDMA transfers.

The GPTM contains four 16- or 32-bit GPTM blocks with the following functional options:

- Operating modes:
 - 16- or 32-bit programmable one-shot timer
 - 16- or 32-bit programmable periodic timer
 - 16-bit general-purpose timer with an 8-bit prescaler
 - 16-bit input-edge count- or time-capture modes with an 8-bit prescaler
 - 16-bit PWM mode with an 8-bit prescaler and software-programmable output inversion of the PWM signal
- Count up or down
- Sixteen 16- or 32-bit capture compare PWM pins (CCP)
- User-enabled stalling when the microcontroller asserts CPU Halt flag during debug
- Ability to determine the elapsed time between the assertion of the timer interrupt and entry into the interrupt service routine
- Efficient transfers using micro direct memory access controller (µDMA):
 - Dedicated channel for each timer
 - Burst request generated on timer interrupt
- Runs from system clock (80 MHz)

9.2 Block Diagram

Figure 9-1. GPTM Module Block Diagram

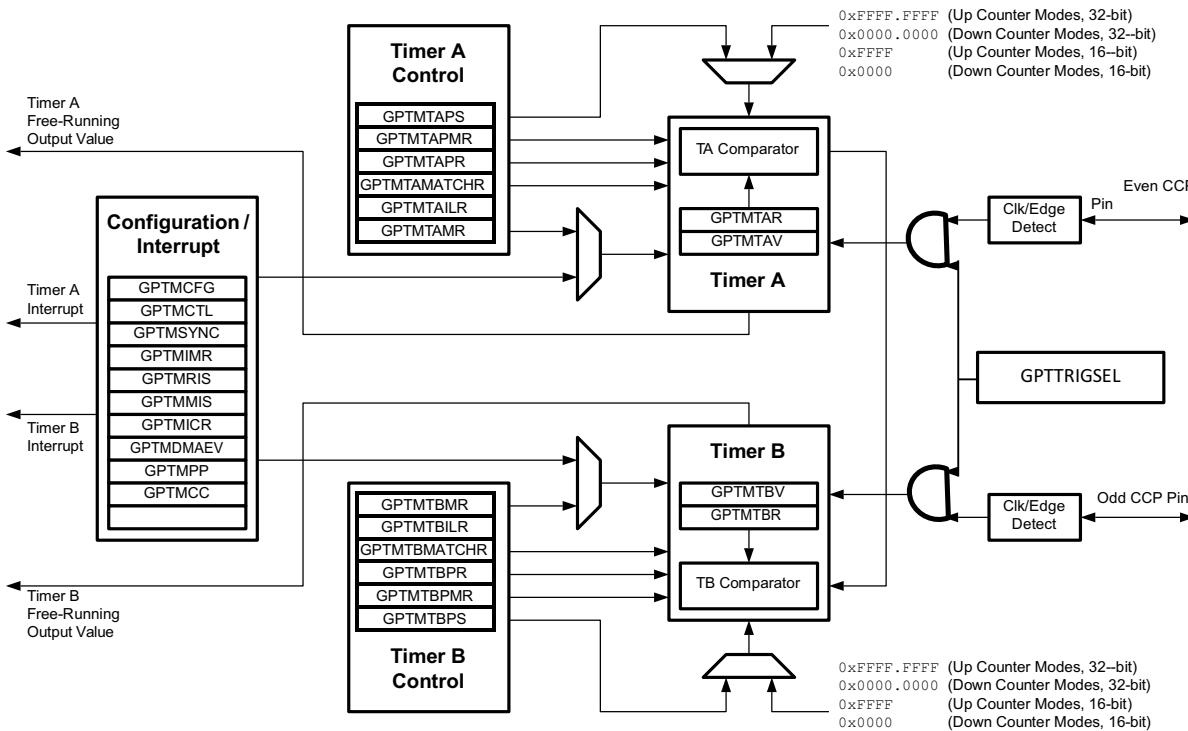


Table 9-1. Available CCP Pins and PWM Outputs/Signals Pins

Timer	Up/Down Counter	Even CCP Pin	Odd CCP Pin	PWM Outputs/Signals
16/32-Bit Timer 0	Timer A	GT_CCP00	-	PWM_OUT0
	Timer B	-	GT_CCP01	PWM_OUT1
16/32-Bit Timer 1	Timer A	GT_CCP02	-	PWM_OUT2
	Timer B	-	GT_CCP03	PWM_OUT3
16/32-Bit Timer 2	Timer A	GT_CCP04	-	
	Timer B	-	GT_CCP05	PWM_OUT5
16/32-Bit Timer 3	Timer A	GT_CCP06	-	PWM_OUT6
	Timer B	-	GT_CCP07	PWM_OUT7

The GP timer signals pin-muxed and CONFMODE bits in the GPIO PAD CONFIG register should be set to choose the GP timer function.

9.3 Functional Description

The main components of each GPTM block are two free-running up/down counters (referred to as Timer A and Timer B), two prescaler registers, two match registers, two prescaler match registers, two shadow registers, and two load/initialization registers and their associated control functions. The exact functionality of each GPTM is controlled by software and configured through the register interface. Timer A and Timer B can be used individually, in which case they have a 16-bit counting range for the 16/32-bit GPTM blocks. In addition, Timer A and Timer B can be concatenated to provide a 32-bit counting range for the 16/32-bit GPTM blocks.

NOTE: The prescaler can only be used when the timers are used individually.

The available modes for each GPTM block are shown in [Table 9-2](#). Note that when counting down in one-shot or periodic modes, the prescaler acts as a true prescaler and contains the least-significant bits of the count. When counting up in one-shot or periodic modes, the prescaler acts as a timer extension, and holds the most-significant bits of the count. In input edge count, input edge time, and PWM mode, the prescaler always acts as a timer extension, regardless of the count direction.

Table 9-2. General-Purpose Timer Capabilities

Mode	Timer Use	Count Direction	Counter Size	Prescaler Size ⁽¹⁾
One-shot	Individual	Up or down	16-bit	8-bit
	Concatenated	Up or down	32-bit	-
Periodic	Individual	Up or down	16-bit	8-bit
	Concatenated	Up or down	32-bit	-
Edge Count	Individual	Up or down	16-bit	8-bit
Edge Time	Individual	Up or down	16-bit	8-bit
PWM	Individual	Down	16-bit	8-bit

⁽¹⁾ The prescaler is only available when the timers are used individually

Software configures the GPTM using the GPTM Configuration (GPTMCFG) register, the GPTM Timer A Mode (GPTMTAMR) register, and the GPTM Timer B Mode (GPTMTBMR) register. When in one of the concatenated modes, Timer A and Timer B can only operate in one mode. However, when configured in an individual mode, Timer A and Timer B can be independently configured in any combination of the individual modes.

9.3.1 GPTM Reset Conditions

After reset has been applied to the GPTM module, the module is in an inactive state, and all control registers are cleared and in their default states. Counters Timer A and Timer B are initialized to all 1s, along with their corresponding registers:

- Load registers:
 - GPTM Timer A Interval Load (GPTMTAILR) register
 - GPTM Timer B Interval Load (GPTMTBILR) register
- Shadow registers:
 - GPTM Timer A Value (GPTMTAV) register
 - GPTM Timer B Value (GPTMTBV) register

The following prescale counters are initialized to all 0s:

- GPTM Timer A Prescale (GPTMTAPR) register
- GPTM Timer B Prescale (GPTMTBPR) register
- GPTM Timer A Prescale Snapshot (GPTMTAPS) register
- GPTM Timer B Prescale Snapshot (GPTMTBPS) register

9.3.2 Timer Modes

This section describes the operation of the various timer modes. When using Timer A and Timer B in concatenated mode, only the Timer A control and status bits must be used; there is no need to use Timer B control and status bits. The GPTM is placed into individual/split mode by writing a value of 0x4 to the GPTM Configuration (GPTMCFG) register. In the following sections, the variable n is used in bit field and register names to imply either a Timer A function or a Timer B function. Throughout this section, the timeout event in down-count mode is 0x0, and in up-count mode is the value in the GPTM Timer n Interval Load (GPTMTnILR) and the optional GPTM Timer n Prescale (GPTMTnPR) registers.

9.3.2.1 One-Shot or Periodic Timer Mode

The selection of one-shot or periodic mode is determined by the value written to the TnMR field of the GPTM Timer n Mode (GPTMTnMR) register. The timer is configured to count up or down using the TnCDIR bit in the GPTMTnMR register.

When software sets the TnEN bit in the GPTM Control (GPTMCTL) register, the timer begins counting up from 0x0 or down from its preloaded value. [Table 9-3](#) shows the values loaded into the timer registers when the timer is enabled.

Table 9-3. Counter Values When the Timer is Enabled in Periodic or One-Shot Modes

Register	Count Down Mode	Count Up Mode
GPTMTnR	GPTMTnILR	0x0
GPTMTnV	GPTMTnILR in concatenated mode; GPTMTnPR in combination with GPTMTnILR in individual mode.	0x0
GPTMTnPS	GPTMTnPR in individual mode; not available in concatenated mode.	0x0 in individual mode; not available in concatenated mode.

When the timer is counting down and it reaches the timeout event (0x0), the timer reloads its start value from the GPTMTnILR and the GPTMTnPR registers on the next cycle. When the timer is counting up and it reaches the timeout event (the value in the GPTMTnILR and the optional GPTMTnPR registers), the timer reloads with 0x0. If configured as a one-shot timer, the timer stops counting and clears the TnEN bit in the GPTMCTL register. If configured as a periodic timer, the timer starts counting again on the next cycle.

In periodic, snap-shot mode, the TnMR field is 0x2 and the TnSNAPS bit is set in the GPTMTnMR register, the value of the timer at the time-out event is loaded into the GPTMTnR register, and the value of the prescaler is loaded into the GPTMTnPS register. The free-running counter value is shown in the GPTMTnV register. In this manner, software can determine the time elapsed from the interrupt assertion to the ISR entry by examining the snapshot values and the current value of the free-running timer. Snapshot mode is not available when the timer is configured in one-shot mode.

In addition to reloading the count value, the GPTM can generate interrupts, CCP outputs, and triggers when it reaches the time-out event. The GPTM sets the TnTORIS bit in the GPTM Raw Interrupt Status (GPTMRIS) register, and holds it until it is cleared by writing the GPTM Interrupt Clear (GPTMICR) register. If the time-out interrupt is enabled in the GPTM Interrupt Mask (GPTMIMR) register, the GPTM also sets the TnTOMIS bit in the GPTM Masked Interrupt Status (GPTMMIS) register. The time-out interrupt can be disabled entirely by setting the TACINTD bit in the GPTM Timer n Mode (GPTMTnMR) register. In this case, the TnTORIS bit does not even set in the GPTMRIS register.

By setting the TnMIE bit in the GPTMTnMR register, an interrupt condition can also be generated when the timer value equals the value loaded into the GPTM Timer n Match (GPTMTnMATCHR) and GPTM Timer n Prescale Match (GPTMTnPMPR) registers. This interrupt has the same status, masking, and clearing functions as the time-out interrupt, but uses the match interrupt bits instead (for example, the raw interrupt status is monitored using the TnMRIS bit in the GPTM Raw Interrupt Status (GPTMRIS) register). The interrupt status bits are not updated by the hardware unless the TnMIE bit in the GPTMTnMR register is set, which is different than the behavior for the time-out interrupt. The µDMA trigger is enabled by configuring and enabling the appropriate µDMA channel, as well as the type of trigger enable in the GPTM DMA Event (GPTMDMAEV) register.

If software updates the GPTMTnILR or the GPTMTnPR register while the counter is counting down, the counter loads the new value on the next clock cycle and continues counting from the new value if the TnILD bit in the GPTMTnMR register is clear. If the TnILD bit is set, the counter loads the new value after the next timeout. If software updates the GPTMTnILR or the GPTMTnPR register while the counter is counting up, the timeout event is changed on the next cycle to the new value. If software updates the GPTM Timer n Value (GPTMTnV) register while the counter is counting up or down, the counter loads the new value on the next clock cycle and continues counting from the new value. If software updates the GPTMTnMATCHR or the GPTMTnPMPR registers, the new values are reflected on the next clock cycle if the TnMRSU bit in the GPTMTnMR register is clear. If the TnMRSU bit is set, the new value does not take effect until the next timeout.

If the TnSTALL bit in the GPTMCTL register is set, the timer freezes counting while the processor is halted by the debugger. The timer resumes counting when the processor resumes execution.

Table 9-4 shows a variety of configurations for a 16-bit free-running timer while using the prescaler. All values assume a 80-MHz clock with $T_c=12.5$ ns (clock period). The prescaler can only be used when a 16/32-bit timer is configured in 16-bit mode.

Table 9-4. 16-Bit Timer With Prescaler Configurations

Prescale (8-bit value)	Number of Timer Clocks (T_c) ⁽¹⁾	Max Time	Units
00000000	1	0.8192	ms
00000001	2	1.6384	ms
00000010	3	2.4576	ms
-----	--	--	--
11111101	254	208.0768	ms
11111110	255	208.896	ms
11111111	256	209.7152	ms

⁽¹⁾ T_c is the clock period.

9.3.2.2 Input Edge-Count Mode

NOTE: For rising-edge detection, the input signal must be High for at least two clock periods following the rising edge. Similarly, for falling-edge detection, the input signal must be Low for at least two clock periods following the falling edge. Based on this criteria, the maximum input frequency for edge detection is 1/4 of the frequency.

In edge-count mode, the timer is configured as a 24-bit up- or down-counter, including the optional prescaler with the upper count value stored in the GPTM Timer n Prescale (GPTMTnPR) register and the lower bits in the GPTMTnR register. In this mode, the timer is capable of capturing three types of events: rising edge, falling edge, or both. To place the timer in edge-count mode, the TnCMR bit of the GPTMTnMR register must be cleared. The type of edge that the timer counts is determined by the TnEVENT fields of the GPTMCTL register. During initialization in down-count mode, the GPTMTnMATCHR and GPTMTnPmR registers are configured so that the difference between the value in the GPTMTnILR and GPTMTnPR registers and the GPTMTnMATCHR and GPTMTnPmR registers equals the number of edge events that must be counted. In up-count mode, the timer counts from 0x0 to the value in the GPTMTnMATCHR and GPTMTnPmR registers. Note that when executing an up-count, the value of GPTMTnPR and GPTMTnILR must be greater than the value of GPTMTnPmR and GPTMTnMATCHR. [Table 9-5](#) shows the values loaded into the timer registers when the timer is enabled.

Table 9-5. Counter Values When the Timer is Enabled in Input Edge-Count Mode

Register	Count Down Mode	Count Up Mode
GPTMTnR	GPTMTnPR in combination with GPTMTnILR	0x0
GPTMTnV	GPTMTnPR in combination with GPTMTnILR	0x0


When software writes the TnEN bit in the GPTM Control (GPTMCTL) register, the timer is enabled for event capture. Each input event on the CCP pin decrements or increments the counter by 1 until the event count matches GPTMTnMATCHR and GPTMTnPmR. When the counts match, the GPTM asserts the CnMRIS bit in the GPTM Raw Interrupt Status (GPTMRIS) register, and holds it until it is cleared by writing the GPTM Interrupt Clear (GPTMICR) register. If the capture mode match interrupt is enabled in the GPTM Interrupt Mask (GPTMIMR) register, the GPTM also sets the CnMMIS bit in the GPTM Masked Interrupt Status (GPTMMIS) register. In up-count mode, the current count of the input events is held in both the GPTMTnR and GPTMTnV registers. In down-count mode, the current count of the input events can be obtained by subtracting the GPTMTnR or GPTMTnV from the value made up of the GPTMTnPR and GPTMTnILR register combination.

The μDMA trigger is enabled by configuring and enabling the appropriate μDMA channel, as well as the type of trigger enable in the GPTM DMA Event (GPTMDMAEV) register.

After the match value is reached in down-count mode, the counter is then reloaded using the value in the GPTMTnILR and GPTMTnPR registers, and stopped because the GPTM automatically clears the TnEN bit in the GPTMCTL register. Once the event count has been reached, all further events are ignored until TnEN is re-enabled by software. In up-count mode, the timer is reloaded with 0x0 and continues counting.

[Figure 9-2](#) shows how input edge-count mode works. In this case, the timer start value is set to GPTMTnILR =0x000A, and the match value is set to GPTMTnMATCHR =0x0006 so that four edge events are counted. The counter is configured to detect both edges of the input signal.

The last two edges are not counted, because the timer automatically clears the TnEN bit after the current count matches the value in the GPTMTnMATCHR register.

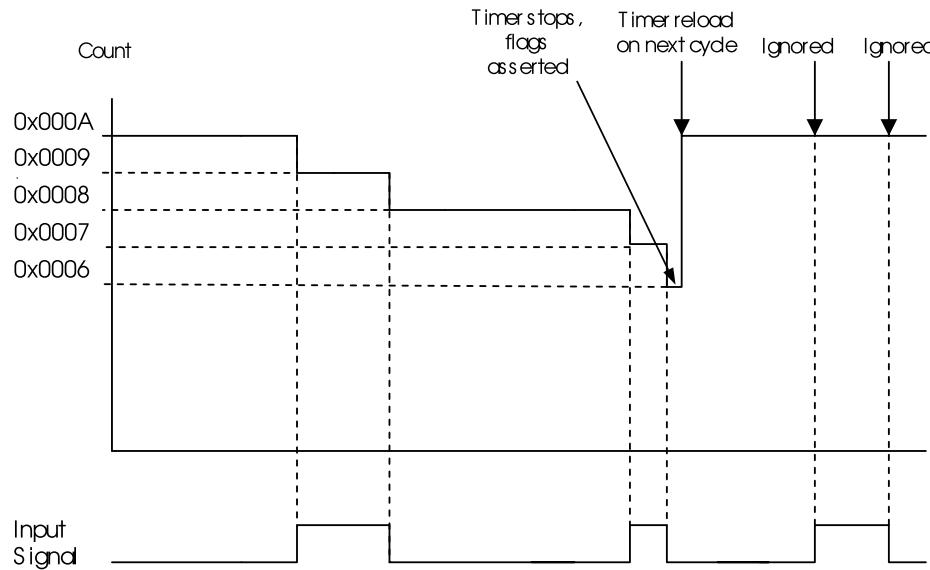Figure 9-2. Input Edge-Count Mode Example, Counting Down

9.3.2.3 Input Edge-Time Mode

NOTE: For rising-edge detection, the input signal must be High for at least two system clock periods following the rising edge. Similarly, for falling edge detection, the input signal must be Low for at least two system clock periods following the falling edge. Based on this criteria, the maximum input frequency for edge detection is 1/4 of the system frequency.

In edge-time mode, the timer is configured as a 24-bit up- or down-counter, including the optional prescaler with the upper timer value stored in the GPTMTnPR register and the lower bits in the GPTMTnILR register. In this mode, the timer is initialized to the value loaded in the GPTMTnILR and GPTMTnPR registers when counting down, and 0x0 when counting up. The timer is capable of capturing three types of events: rising edge, falling edge, or both. The timer is placed into edge-time mode by setting the TnCMR bit in the GPTMTnMR register, and the type of event that the timer captures is determined by the TnEVENT fields of the GPTMCTL register. [Table 9-6](#) shows the values loaded into the timer registers when the timer is enabled.

Set the TRIGSEL bits of the register GPTTRIGSEL to detect GPIO triggers.

Table 9-6. Counter Values When the Timer is Enabled in Input Event-Count Mode

Register	Count Down Mode	Count Up Mode
TnR	GPTMTnILR	0x0
TnV	GPTMTnILR	0x0

When software writes the TnEN bit in the GPTMCTL register, the timer is enabled for event capture. When the selected input event is detected, the current timer counter value is captured in the GPTMTnR and GPTMTnPS registers, and is available to be read by the microcontroller. The GPTM then asserts the CnERIS bit in the GPTM Raw Interrupt Status (GPTMRIS) register, and holds it until it is cleared by writing the GPTM Interrupt Clear (GPTMICR) register. If the capture mode event interrupt is enabled in the GPTM Interrupt Mask (GPTMIMR) register, the GPTM also sets the CnEMIS bit in the GPTM Masked Interrupt Status (GPTMMIS) register. In this mode, the GPTMTnR and GPTMTnPS registers hold the time at which the selected input event occurred, while the GPTMTnV register holds the free-running timer value. These registers can be read to determine the time that elapsed between the interrupt assertion and the entry into the ISR.


In addition to generating interrupts, a μDMA trigger can be generated. The μDMA trigger is enabled by configuring the appropriate μDMA channel, as well as the type of trigger selected in the GPTM DMA Event (GPTMDMAEV) register.

After an event has been captured, the timer does not stop counting. It continues to count until the TnEN bit is cleared. When the timer reaches the timeout value, it is reloaded with 0x0 in up-count mode, and the value from the GPTMTnILR and GPTMTnPR registers in down-count mode.

[Figure 9-3](#) shows how input edge-timing mode works. In the diagram, the start value of the timer is the default value of 0xFFFF, and the timer is configured to capture rising-edge events.

Each time a rising edge event is detected, the current count value is loaded into the GPTMTnR and GPTMTnPS registers, and is held there until another rising-edge is detected (at which point the new count value is loaded into the GPTMTnR and GPTMTnPS registers).

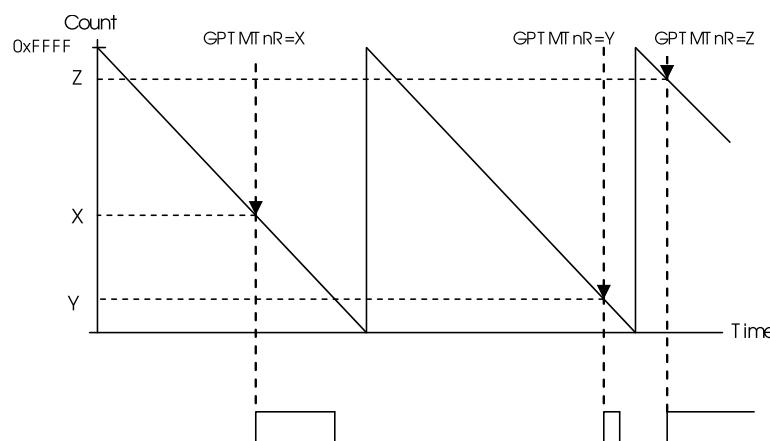Figure 9-3. 16-Bit Input Edge-Time Mode Example



When operating in edge-time mode, the counter uses a modulo 2^{24} count if prescaler is enabled, or 216 if not. If there is a possibility the edge could take longer than the count, then another timer configured in periodic-timer mode can be implemented to ensure detection of the missed edge. The periodic timer should be configured in such a way that:

- The periodic timer cycles at the same rate as the edge-time timer.
- The periodic timer interrupt has a higher interrupt priority than the edge-time timeout interrupt.
- If the periodic timer interrupt service routine is entered, software must check if an edge-time interrupt is pending and if it is, the value of the counter must be subtracted by 1 before being used to calculate the snapshot time of the event.

9.3.2.4 PWM Mode

The GPTM supports a simple PWM generation mode. In PWM mode, the timer is configured as a 24-bit down-counter with a start value (and thus period) defined by the GPTMTnILR and GPTMTnPR registers. In this mode, the PWM frequency and period are synchronous events, and therefore guaranteed to be glitch-free. PWM mode is enabled in the GPTMTnMR register by setting the TnAMS bit to 0x1, the TnCMR bit to 0x0, and the TnMR field to 0x2. [Table 9-7](#) shows the values loaded into the timer registers when the timer is enabled.

Table 9-7. Counter Values When the Timer is Enabled in PWM Mode

Register	Count Down Mode	Count Up Mode
GPTMTnR	GPTMTnILR	Not available
GPTMTnV	GPTMTnILR	Not available

When software writes the TnEN bit in the GPTMCTL register, the counter begins counting down until it reaches the 0x0 state. On the next counter cycle in periodic mode, the counter reloads its start value from the GPTMTnILR and GPTMTnPR registers, and continues counting until disabled by software clearing the TnEN bit in the GPTMCTL register. The timer is capable of generating interrupts based on three types of events: rising edge, falling edge, or both. The event is configured by the TnEVENT field of the GPTMCTL register, and the interrupt is enabled by setting the TnPWMIE bit in the GPTMTnMR register. When the event occurs, the CnERIS bit is set in the GPTM Raw Interrupt Status (GPTMRIS) register, and holds it until it is cleared by writing the GPTM Interrupt Clear (GPTMICR) register. If the capture mode event interrupt is enabled in the GPTM Interrupt Mask (GPTMIMR) register, the GPTM also sets the CnEMIS bit in the GPTM Masked Interrupt Status (GPTMMIS) register. Note that the interrupt status bits are not updated unless the TnPWMIE bit is set.

In addition, when the TnPWMIE bit is set and a capture event occurs, the timer automatically generates triggers to the DMA if the trigger capability is enabled, by setting the TnOTE bit in the GPTMCTL register and the CnEDMAEN bit in the GPTMDMAEV register, respectively.


In this mode, the GPTMTnR and GPTMTnV registers always have the same value.

The output PWM signal asserts when the counter is at the value of the GPTMTnILR and GPTMTnPR registers (its start state), and is deasserted when the counter value equals the value in the GPTMTnMATCHR and GPTMTnPMR registers. Software can invert the output PWM signal by setting the TnPWML bit in the GPTMCTL register.

NOTE: If PWM output inversion is enabled, edge-detection interrupt behavior is reversed. Thus, if a positive-edge interrupt trigger has been set and the PWM inversion generates a positive edge, no event-trigger interrupt asserts. Instead, the interrupt is generated on the negative edge of the PWM signal.

Figure 9-4 shows how to generate an output PWM with a 1-ms period and a 66% duty cycle assuming a 50-MHz input clock and TnPWML =0 (duty cycle would be 33% for the TnPWML =1 configuration). For this example, the start value is GPTMTnILR=0xC350, and the match value is GPTMTnMATCHR=0x411A.

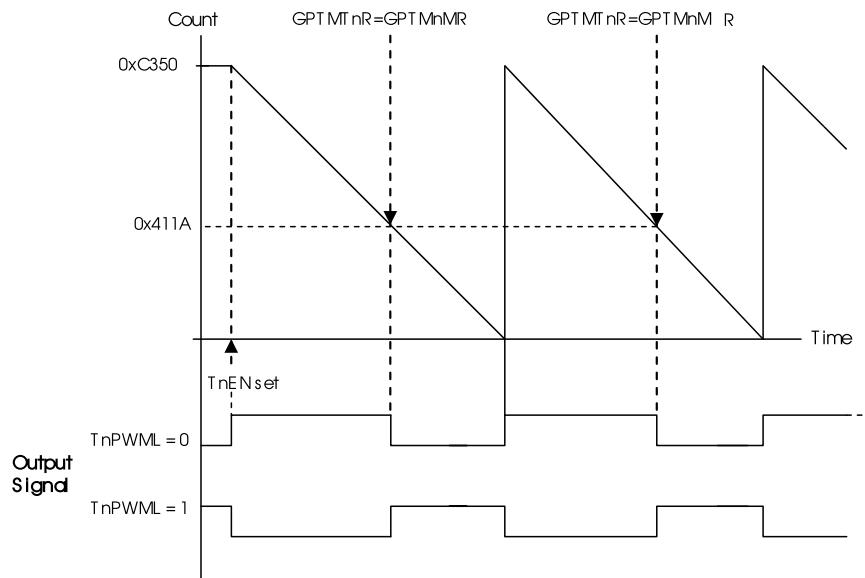Figure 9-4. 16-Bit PWM Mode Example



9.3.3 DMA Operation

The timers each have a dedicated µDMA channel and can provide a request signal to the µDMA controller. Pulse requests are generated by a timer using its own `dma_req` signal. A `dma_done` signal is provided from the µDMA to each timer, to indicate transfer completion and trigger a µDMA done interrupt (DMAAnRIS) in the GPTM Raw Interrupt Status Register (GPTMRIS) register. The request is a burst type, and occurs whenever a timer raw interrupt condition occurs. The arbitration size of the µDMA transfer should be set to the amount of data that should be transferred whenever a timer event occurs.

For example, to transfer 256 items, or 8 items at a time every 10 ms, configure a timer to generate a periodic timeout at 10 ms. Configure the µDMA transfer for a total of 256 items, with a burst size of 8 items. Each time the timer times out, the µDMA controller transfers 8 items, until all 256 items have been transferred.

The GPTM DMA Event (GPTMDMAEV) register enables the types of events that can cause a `dma_req` signal assertion by the timer module. Application software can enable a `dma_req` trigger for a match, capture, or time-out event for each timer using the GPTMDMAEV register. For an individual timer, all active timer trigger events that have been enabled through the GPTMDMAEV register are ORed together to create a single `dma_req` pulse that is sent to the µDMA. When the µDMA transfer has completed, a `dma_done` signal is sent to the timer, resulting in a DMAAnRIS bit set in the GPTMRIS register.

9.3.4 Accessing Concatenated 16/32-Bit GPTM Register Values

The GPTM is placed into concatenated mode by writing a 0x0 to the GPTMCFG bit field in the GPTM Configuration (GPTMCFG) register. In this configuration, certain 16/32-bit GPTM registers are concatenated to form pseudo-32-bit registers. These registers include:

- GPTM Timer A Interval Load (GPTMTAILR) register [15:0]
- GPTM Timer B Interval Load (GPTMTBILR) register [15:0]
- GPTM Timer A (GPTMTAR) register [15:0]
- GPTM Timer B (GPTMTBR) register [15:0]
- GPTM Timer A Value (GPTMTAV) register [15:0]
- GPTM Timer B Value (GPTMTBV) register [15:0]
- GPTM Timer A Match (GPTMTAMATCHR) register [15:0]
- GPTM Timer B Match (GPTMTBMATCHR) register [15:0]

In the 32-bit modes, the GPTM translates a 32-bit write access to GPTMTAILR into a write access to both GPTMTAILR and GPTMTBILR. The resulting word ordering for such a write operation is:

`GPTMTBILR[15:0]:GPTMTAILR[15:0]`

Likewise, a 32-bit read access to GPTMTAR returns the value:

`GPTMTBR[15:0]:GPTMTAR[15:0]`

A 32-bit read access to GPTMTAV returns the value:

`GPTMTBV[15:0]:GPTMTAV[15:0]`

9.4 Initialization and Configuration

To use a GPTM, the appropriate CLKEN bit must be set in the GPTnCLKCFG or GPTnCLKEN register. Configure the CONFMODE fields in the GPIO_PAD_CONFIG register to assign the CCP signals to the appropriate pins. The user should set GPTTRIGSEL bits appropriately before using CCP mode.

The user can also reset GPTM blocks using register GPTnSWRST.

This section shows module initialization and configuration examples for each of the supported timer modes.

9.4.1 One-Shot and Periodic Timer Mode

The GPTM is configured for one-shot and periodic modes by the following sequence:

1. Ensure the timer is disabled (the TnEN bit in the GPTMCTL register is cleared) before making any changes.
2. Write the GPTM Configuration Register (GPTMCFG) with a value of 0x0000.0000.
3. Configure the TnMR field in the GPTM Timer n Mode Register (GPTMTnMR):
 - (a) Write a value of 0x1 for one-shot mode.
 - (b) Write a value of 0x2 for periodic mode.
4. Optionally configure the TnSNAPS, TnWOT, TnMTE, and TnCDIR bits in the GPTMTnMR register to select whether to capture the value of the free-running timer at time-out, use an external trigger to start counting, configure an additional trigger or interrupt, and count up or down.
5. Load the start value into the GPTM Timer n Interval Load (GPTMTnILR) register.
6. If interrupts are required, set the appropriate bits in the GPTM Interrupt Mask (GPTMIMR) register.
7. Set the TnEN bit in the GPTMCTL register to enable the timer and start counting.
8. Poll the GPTMRIS register or wait for the interrupt to be generated (if enabled). In both cases, the status flags are cleared by writing a 1 to the appropriate bit of the GPTM Interrupt Clear (GPTMICR) register.

If the TnMIE bit in the GPTMTnMR register is set, the RTCRIS bit in the GPTMRIS register is set, and the timer continues counting. In one-shot mode, the timer stops counting after the time-out event. To re-enable the timer, repeat the sequence. A timer configured in periodic mode reloads the timer and continues counting after the time-out event.

9.4.2 Input Edge-Count Mode

Configure the timer to input edge-count mode with the following sequence:

1. Ensure the timer is disabled (the TnEN bit is cleared) before making any changes.
2. Write the GPTM Configuration (GPTMCFG) register with a value of 0x0000.0004.
3. In the GPTM Timer Mode (GPTMTnMR) register, write the TnCMR field to 0x0 and the TnMR field to 0x3.
4. Configure the type of events that the timer captures by writing the TnEVENT field of the GPTM Control (GPTMCTL) register.
5. Program registers according to count direction:
 - In down-count mode, the GPTMTnMATCHR and GPTMTnPmR registers are configured so that the difference between the value in the GPTMTnILR and GPTMTnPR registers and the GPTMTnMATCHR and GPTMTnPmR registers equals the number of edge events that must be counted.
 - In up-count mode, the timer counts from 0x0 to the value in the GPTMTnMATCHR and GPTMTnPmR registers. Note that when executing an up-count, the value of GPTMTnPR and GPTMTnILR must be greater than the value of GPTMTnPmR and GPTMTnMATCHR.
6. If interrupts are required, set the CnMIM bit in the GPTM Interrupt Mask (GPTMIMR) register.
7. Set the TnEN bit in the GPTMCTL register to enable the timer and begin waiting for edge events.
8. Poll the CnMRIS bit in the GPTMRIS register or wait for the interrupt to be generated (if enabled). In both cases, the status flags are cleared by writing a 1 to the CnMCINT bit of the GPTM Interrupt Clear (GPTMICR) register.

When counting down in input edge-count mode, the timer stops after the programmed number of edge events has been detected. To re-enable the timer, ensure that the TnEN bit is cleared, and repeat steps #4 through #8.

9.4.3 Input Edge-Time Mode

Configure the timer to input edge-time mode with the following sequence:

1. Ensure the timer is disabled (the TnEN bit is cleared) before making any changes.
2. Write the GPTM Configuration (GPTMCFG) register with a value of 0x0000.0004.

3. In the GPTM Timer Mode (GPTMTnMR) register, write the TnCMR field to 0x1 and the TnMR field to 0x3, and select a count direction by programming the TnCDIR bit.
4. Configure the type of event that the timer captures by writing the TnEVENT field of the GPTM Control (GPTMCTL) register.
5. If using a prescaler, write the prescale value to the GPTM Timer n Prescale (GPTMTnPR) register.
6. Load the timer start value into the GPTM Timer n Interval Load (GPTMTnILR) register.
7. If interrupts are required, set the CnEIM bit in the GPTM Interrupt Mask (GPTMIMR) register.
8. Set the TnEN bit in the GPTM Control (GPTMCTL) register to enable the timer and start counting.
9. Poll the CnERIS bit in the GPTMRIS register, or wait for the interrupt to be generated (if enabled). In both cases, the status flags are cleared by writing a 1 to the CnECINT bit of the GPTM Interrupt Clear (GPTMICR) register. The time at which the event happened can be obtained by reading the GPTM Timer n (GPTMTnR) register.

In input edge timing mode, the timer continues running after an edge event has been detected, but the timer interval can be changed at any time by writing the GPTMTnILR register and clearing the TnILD bit in the GPTMTnMR register. The change takes effect at the next cycle after the write.

9.4.4 PWM Mode

Configure the timer to PWM mode with the following sequence:

1. Ensure the timer is disabled (the TnEN bit is cleared) before making any changes.
2. Write the GPTM Configuration (GPTMCFG) register with a value of 0x0000.0004.
3. In the GPTM Timer Mode (GPTMTnMR) register, set the TnAMS bit to 0x1, the TnCMR bit to 0x0, and the TnMR field to 0x2.
4. Configure the output state of the PWM signal (whether or not it is inverted) in the TnPWML field of the GPTM Control (GPTMCTL) register.
5. If using a prescaler, write the prescale value to the GPTM Timer n Prescale (GPTMTnPR) register.
6. If using PWM interrupts, configure the interrupt condition in the TnEVENT field in the GPTMCTL register, and enable the interrupts by setting the TnPWMIE bit in the GPTMTnMR register. Edge-detect interrupt behavior is reversed when the PWM output is inverted.
7. Load the timer start value into the GPTM Timer n Interval Load (GPTMTnILR) register.
8. Load the GPTM Timer n Match (GPTMTnMATCHR) register with the match value.
9. Set the TnEN bit in the GPTM Control (GPTMCTL) register to enable the timer and begin generation of the output PWM signal.

9.5 TIMER Registers

Table 9-8 lists the memory-mapped registers for the TIMER. All register offset addresses not listed in Table 9-8 should be considered as reserved locations, and the register contents should not be modified.

Table 9-8. TIMER Registers

Offset	Acronym	Register Name	Section
0h	GPTMCFG	GPTM Configuration	Section 9.5.1.1
4h	GPTMTAMR	GPTM Timer A Mode	Section 9.5.1.2
8h	GPTMTBMR	GPTM Timer B Mode	Section 9.5.1.3
Ch	GPTMCTL	GPTM Control	Section 9.5.1.4
18h	GPTMIMR	GPTM Interrupt Mask	Section 9.5.1.5
1Ch	GPTMRIS	GPTM Raw Interrupt Status	Section 9.5.1.6
20h	GPTMMIS	GPTM Masked Interrupt Status	Section 9.5.1.7
24h	GPTMICR	GPTM Interrupt Clear	Section 9.5.1.8
28h	GPTMTAILR	GPTM Timer A Interval Load	Section 9.5.1.9
2Ch	GPTMTBILR	GPTM Timer B Interval Load	Section 9.5.1.10
30h	GPTMTAMATCHR	GPTM Timer A Match	Section 9.5.1.11
34h	GPTMTBMATCHR	GPTM Timer B Match	Section 9.5.1.12
38h	GPTMTAPR	GPTM Timer A Prescale	Section 9.5.1.13
3Ch	GPTMTBPR	GPTM Timer B Prescale	Section 9.5.1.14
40h	GPTMTAPMR	GPTM TimerA Prescale Match	Section 9.5.1.15
44h	GPTMTBPMR	GPTM TimerB Prescale Match	Section 9.5.1.16
48h	GPTMTAR	GPTM Timer A	Section 9.5.1.17
4Ch	GPTMTBR	GPTM Timer B	Section 9.5.1.18
50h	GPTMTAV	GPTM Timer A Value	Section 9.5.1.19
54h	GPTMTBV	GPTM Timer B Value	Section 9.5.1.20
6Ch	GPTMDMAEV	GPTM DMA Event	Section 9.5.1.21

9.5.1 GPT Register Description

This section lists and describes the GPT registers, in numerical order and by address offset.

9.5.1.1 GPTMCFG Register (offset = 0h) [reset = 0h]

GPTMCFG is shown in [Figure 9-5](#) and described in [Table 9-9](#).

This register configures the global operation of the GPTM module. The value written to this register determines whether the GPTM is in 32- or 16-bit mode.

NOTE: Bits in this register should only be changed when the TAEN and TBEN bits in the GPTMCTL register are cleared.

Figure 9-5. GPTMCFG Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16				
RESERVED																			
R-0h																			
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
RESERVED												GPTMCFG							
R-0h																			
R/W-0h																			

Table 9-9. GPTMCFG Register Field Descriptions

Bit	Field	Type	Reset	Description
31-3	RESERVED	R	0h	
2-0	GPTMCFG	R/W	0h	GPTM Configuration The GPTMCFG values are defined as follows: 0h = For a 16/32-bit timer, this value selects the 32-bit timer configuration. 1h-3h = Reserved 4h = For a 16/32-bit timer, this value selects the 16-bit timer configuration. The function is controlled by bits 1:0 of GPTMTAMR and GPTMTBMR. 5h - 7h = Reserved

9.5.1.2 GPTMTAMR Register (offset = 4h) [reset = 0h]

GPTMTAMR is shown in [Figure 9-6](#) and described in [Table 9-10](#).

This register configures the GPTM, based on the configuration selected in the GPTMCFG register. When in PWM mode, set the TAAMS bit, clear the TACMR bit, and configure the TAMR field to 0x1 or 0x2.

Figure 9-6. GPTMTAMR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED				TAPLO	TAMRSU	TAPWMIE	TAILD
R-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
RESERVED	TAMIE	TACDIR	TAAMS	TACMIR	TAMR		
R-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h		

Table 9-10. GPTMTAMR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-12	RESERVED	R	0h	
11	TAPLO	R/W	0h	GPTM Timer A PWM Legacy Operation 0h = Legacy operation with CCP pin driven Low when the GPTMTAILR is reloaded after the timer reaches 0. 1h = CCP is driven High when the GPTMTAILR is reloaded after the timer reaches 0.
10	TAMRSU	R/W	0h	GPTM Timer A Match Register Update. If the timer is disabled (TAEN is clear) when this bit is set, GPTMTAMATCHR and GPTMTAPR are updated when the timer is enabled. If the timer is stalled (TASTALL is set), GPTMTAMATCHR and GPTMTAPR are updated according to the configuration of this bit. 0h = Update the GPTMTAMATCHR register and the GPTMTAPR register, if used, on the next cycle. 1h = Update the GPTMTAMATCHR register and the GPTMTAPR register, if used, on the next timeout.
9	TAPWMIE	R/W	0h	GPTM Timer A PWM Interrupt Enable. This bit enables interrupts in PWM mode on rising, falling, or both edges of the CCP output, as defined by the TAEVENT field in the GPTMCTL register. In addition, when this bit is set and a capture event occurs, Timer A automatically generates triggers to the DMA if the trigger capability is enabled, by setting the TAOTE bit in the GPTMCTL register and the CAEDMAEN bit in the GPTMDMAEV register, respectively. This bit is only valid in PWM mode. 0h = Capture event interrupt is disabled. 1h = Capture event interrupt is enabled.

Table 9-10. GPTMTAMR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
8	TAILD	R/W	0h	<p>GPTM Timer A Interval Load Write. Note the state of this bit has no effect when counting up. The bit descriptions above apply if the timer is enabled and running. If the timer is disabled (TAEN is clear) when this bit is set, GPTMTAR, GPTMTAV, and GPTMTAPs are updated when the timer is enabled. If the timer is stalled (TASTALL is set), GPTMTAR and GPTMTAPS are updated according to the configuration of this bit.</p> <p>0h = Updates the GPTMTAR and GPTMTAV registers with the value in the GPTMTAILR register on the next cycle. Also updates the GPTMTAPS register with the value in the GPTMTAPR register on the next cycle.</p> <p>1h = Updates the GPTMTAR and GPTMTAV registers with the value in the GPTMTAILR register on the next timeout. Also updates the GPTMTAPS register with the value in the GPTMTAPR register on the next timeout.</p>
7-6	RESERVED	R	0h	
5	TAMIE	R/W	0h	<p>GPTM Timer A Match Interrupt Enable</p> <p>0h = The match interrupt is disabled for match events. Additionally, triggers to the DMA on match events are prevented.</p> <p>1h = An interrupt is generated when the match value in the GPTMTAMATCHR register is reached in the one-shot and periodic modes.</p>
4	TACDIR	R/W	0h	<p>GPTM Timer A Count Direction. When in PWM mode, the status of this bit is ignored. PWM mode always counts down.</p> <p>0h = The timer counts down.</p> <p>1h = The timer counts up. When counting up, the timer starts from a value of 0x0.</p>
3	TAAMS	R/W	0h	<p>GPTM Timer A Alternate Mode Select. The TAAMS values are defined as follows. Note: To enable PWM mode, clear the TACMR bit and configure the TAMR field to 0x1 or 0x2.</p> <p>0h = Capture or compare mode is enabled.</p> <p>1h = PWM mode is enabled.</p>
2	TACMIR	R/W	0h	<p>GPTM Timer A Capture Mode. The TACMR values are defined as follows:</p> <p>0h = Edge-count mode</p> <p>1h = Edge-time mode</p>
1-0	TAMR	R/W	0h	<p>GPTM Timer A Mode. The TAMR values are defined as follows: The timer mode is based on the timer configuration defined by bits 2:0 in the GPTMCFG register.</p> <p>0h = Reserved</p> <p>1h = One-shot timer mode</p> <p>2h = Periodic timer mode</p> <p>3h = Capture mode</p>

9.5.1.3 GPTMTBMR Register (offset = 8h) [reset = 0h]

GPTMTBMR is shown in [Figure 9-7](#) and described in [Table 9-11](#).

This register controls the modes for Timer B when it is used individually. When Timer A and Timer B are concatenated, this register is ignored and GPTMTAMR controls the modes for both Timer A and Timer B.

Except for the TCACT bit field, all other bits in this register should only be changed when the TBEN bit in the GPTMCTL register is cleared.

Figure 9-7. GPTMTBMR Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED				TBPLO	TBMRSU	TBPWMIE	TBILD
R-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
RESERVED		TBMIE	TBCDIR	TBAMS	TBCMR	TBMR	
R-0h		R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	

Table 9-11. GPTMTBMR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-12	RESERVED	R	0h	
11	TBPLO	R/W	0h	Timer B PWM Legacy Operation. This bit is only valid in PWM mode. 0h = Legacy operation with CCP pin driven Low when the GPTMTAILR is reloaded after the timer reaches 0. 1h = CCP is driven High when the GPTMTAILR is reloaded after the timer reaches 0.
10	TBMRSU	R/W	0h	GPTM Timer B Match Register Update. If the timer is disabled (TBEN is clear) when this bit is set, GPTMTBMATCHR and GPTMTBPR are updated when the timer is enabled. If the timer is stalled (TBSTALL is set), GPTMTBMATCHR and GPTMTBPR are updated according to the configuration of this bit. 0h = Update the GPTMTBMATCHR register and the GPTMTBPR register, if used, on the next cycle. 1h = Update the GPTMTBMATCHR register and the GPTMTBPR register, if used, on the next timeout.
9	TBPWMIE	R/W	0h	GPTM Timer B PWM Interrupt Enable. This bit enables interrupts in PWM mode on rising, falling, or both edges of the CCP output as defined by the TBEVENT field in the GPTMCTL register. In addition, when this bit is set and a capture event occurs, Timer B automatically generates triggers to the ADC and DMA if the trigger capability is enabled, by setting the TBOTE bit in the GPTMCTL register and the CBEDMAEN bit in the GPTMDMAEV register, respectively. This bit is only valid in PWM mode. 0h = Capture event interrupt is disabled. 1h = Capture event is enabled.

Table 9-11. GPTMTBMR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
8	TBILD	R/W	0h	GPTM Timer B Interval Load Write. The state of this bit has no effect when counting up. The bit descriptions above apply if the timer is enabled and running. If the timer is disabled (TBEN is clear) when this bit is set, GPTMTBR, GPTMTBV, and GPTMTBPS are updated when the timer is enabled. If the timer is stalled (TBSTALL is set), GPTMTBR and GPTMTBPS are updated according to the configuration of this bit. 0h = Update the GPTMTBR and GPTMTBV registers with the value in the GPTMTBILR register on the next cycle. Also update the GPTMTBPS register with the value in the GPTMTBPR register on the next cycle. 1h = Update the GPTMTBR and GPTMTBV registers with the value in the GPTMTBILR register on the next timeout. Also update the GPTMTBPS register with the value in the GPTMTBPR register on the next timeout.
7-6	RESERVED	R	0h	
5	TBMIE	R/W	0h	GPTM Timer B Match Interrupt Enable 0h = The match interrupt is disabled for match events. Additionally, triggers to the DMA on match events are prevented. 1h = An interrupt is generated when the match value in the GPTMTBMATCHR register is reached in the one-shot and periodic modes.
4	TBCDIR	R/W	0h	GPTM Timer B Count Direction 0h = The timer counts down. 1h = The timer counts up. When counting up, the timer starts from a value of 0x0. When in PWM mode, the status of this bit is ignored. PWM mode always counts down.
3	TBAMS	R/W	0h	GPTM Timer B Alternate Mode Select. The TBAMS values are defined as follows. To enable PWM mode, clear the TBCMR bit and configure the TBMR field to 0x1 or 0x2. 0h = Capture or compare mode is enabled. 1h = PWM mode is enabled.
2	TBCMR	R/W	0h	GPTM Timer B Capture Mode. The TBCMR values are defined as follows: 0h = Edge-count mode 1h = Edge-time mode
1-0	TBMR	R/W	0h	GPTM Timer B Mode. The TBMR values are defined as follows. The timer mode is based on the timer configuration defined by bits 2:0 in the GPTMCFG register. 0h = Reserved 1h = One-shot timer mode 2h = Periodic timer mode 3h = Capture mode

9.5.1.4 GPTMCTL Register (offset = Ch) [reset = 0h]

GPTMCTL is shown in [Figure 9-8](#) and described in [Table 9-12](#).

Figure 9-8. GPTMCTL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED	TBPWML	RESERVED		TBEVENT	TBSTALL	TBEN	
R-0h	R/W-0h	R-0h		R/W-0h	R/W-0h	R/W-0h	
7	6	5	4	3	2	1	0
RESERVED	TAPWML	RESERVED		TAEVENT	TASTALL	TAEN	
R-0h	R/W-0h	R-0h		R/W-0h	R/W-0h	R/W-0h	

Table 9-12. GPTMCTL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-15	RESERVED	R	0h	
14	TBPWML	R/W	0h	GPTM Timer B PWM Output Level. The TBPWML values are defined as follows: 0h = Output is unaffected. 1h = Output is inverted.
13-12	RESERVED	R	0h	
11-10	TBEVENT	R/W	0h	GPTM Timer B Event Mode. The TBEVENT values are defined as follows. Note: If PWM output inversion is enabled, edge-detection interrupt behavior is reversed. Thus, if a positive-edge interrupt trigger has been set and the PWM inversion generates a positive edge, no event-trigger interrupt asserts. Instead, the interrupt is generated on the negative edge of the PWM signal. 0h = Positive edge 1h = Negative edge 2h = Reserved 3h = Both edges
9	TBSTALL	R/W	0h	GPTM Timer B Stall Enable. The TBSTALL values are defined as follows. If the processor is executing normally, the TBSTALL bit is ignored. 0h = Timer B continues counting while the processor is halted by the debugger. 1h = Timer B freezes counting while the processor is halted by the debugger.
8	TBEN	R/W	0h	GPTM Timer B Enable. The TBEN values are defined as follows: 0h = Timer B is disabled. 1h = Timer B is enabled and begins counting or the capture logic is enabled based on the GPTMCFG register.
7	RESERVED	R	0h	
6	TAPWML	R/W	0h	GPTM Timer A PWM Output Level. The TAPWML values are defined as follows: 0h = Output is unaffected. 1h = Output is inverted.
5-4	RESERVED	R	0h	

Table 9-12. GPTMCTL Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
3-2	TAEVENT	R/W	0h	GPTM Timer A Event Mode. The TAEVENT values are defined as follows. If PWM output inversion is enabled, edge-detection interrupt behavior is reversed. Thus, if a positive-edge interrupt trigger has been set and the PWM inversion generates a positive edge, no event-trigger interrupt asserts. Instead, the interrupt is generated on the negative edge of the PWM signal. 0h = Positive edge 1h = Negative edge 2h = Reserved 3h = Both edges
1	TASTALL	R/W	0h	GPTM Timer A Stall Enable. The TASTALL values are defined as follows. If the processor is executing normally, the TASTALL bit is ignored. 0h = Timer A continues counting while the processor is halted by the debugger. 1h = Timer A freezes counting while the processor is halted by the debugger.
0	TAEN	R/W	0h	GPTM Timer A Enable. The TAEN values are defined as follows: 0h = Timer A is disabled. 1h = Timer A is enabled and begins counting or the capture logic is enabled based on the GPTMCFG register.

9.5.1.5 GPTMIMR Register (offset = 18h) [reset = 0h]

Register mask: 0h

GPTMIMR is shown in [Figure 9-9](#) and described in [Table 9-13](#).

This register allows software to enable or disable GPTM controller-level interrupts. Setting a bit enables the corresponding interrupt, while clearing a bit disables it.

Figure 9-9. GPTMIMR Register

31	30	29	28	27	26	25	24
RESERVED							
R-X							
23	22	21	20	19	18	17	16
RESERVED							
R-X							
15	14	13	12	11	10	9	8
RESERVED		DMABIM	RESERVED	TBMIM	CBEIM	CBMIM	TBTOIM
R-X		R/W-X	R-X	R/W-X	R/W-X	R/W-X	R/W-X
7	6	5	4	3	2	1	0
RESERVED		DMAAIM	TAMIM	RESERVED	CAEIM	CAMIM	TATOIM
R-X		R/W-X	R/W-X	R-X	R/W-X	R/W-X	R/W-X

Table 9-13. GPTMIMR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-14	RESERVED	R	X	
13	DMABIM	R/W	X	GPTM Timer B DMA Done Interrupt Mask. The DMABIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.
12	RESERVED	R	X	
11	TBMIM	R/W	X	GPTM Timer B Match Interrupt Mask. The TBMIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.
10	CBEIM	R/W	X	GPTM Timer B Capture Mode Event Interrupt Mask. The CBEIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.
9	CBMIM	R/W	X	GPTM Timer B Capture Mode Match Interrupt Mask. The CBMIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.
8	TBTOIM	R/W	X	GPTM Timer B Time-Out Interrupt Mask. The TBTOIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.
7-6	RESERVED	R	X	
5	DMAAIM	R/W	X	GPTM Timer A DMA Done Interrupt Mask. The DMAAIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.

Table 9-13. GPTMIMR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
4	TAMIM	R/W	X	GPTM Timer A Match Interrupt Mask. The TAMIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.
3	RESERVED	R	X	
2	CAEIM	R/W	X	GPTM Timer A Capture Mode Event Interrupt Mask. The CAEIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.
1	CAMIM	R/W	X	GPTM Timer A Capture Mode Match Interrupt Mask. The CAMIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.
0	TATOIM	R/W	X	GPTM Timer A Time-Out Interrupt Mask. The TATOIM values are defined as follows: 0h = Interrupt is disabled. 1h = Interrupt is enabled.

9.5.1.6 GPTMRIS Register (offset = 1Ch) [reset = 0h]

Register mask: 0h

GPTMRIS is shown in [Figure 9-10](#) and described in [Table 9-14](#).

Figure 9-10. GPTMRIS Register

31	30	29	28	27	26	25	24
RESERVED							
R-X							
23	22	21	20	19	18	17	16
RESERVED							
R-X							
15	14	13	12	11	10	9	8
RESERVED	DMABRIS	RESERVED	TBMRIS	CBERIS	CBMRIS	TBTORIS	
R-X	R-X	R-X	R-X	R-X	R-X	R-X	R-X
7	6	5	4	3	2	1	0
RESERVED	DMAARIS	TAMRIS	RESERVED	CAERIS	CAMRIS	TATORIS	
R-X	R-X	R-X	R-X	R-X	R-X	R-X	R-X

Table 9-14. GPTMRIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-14	RESERVED	R	X	
13	DMABRIS	R	X	GPTM Timer B DMA Done Raw Interrupt Status 0h = The Timer B DMA transfer has not completed. 1h = The Timer B DMA transfer has completed.
12	RESERVED	R	X	
11	TBMRIS	R	X	GPTM Timer B Match Raw Interrupt. This bit is cleared by writing a 1 to the TBMCINT bit in the GPTMICR register. 0h = The match value has not been reached. 1h = The TBMIE bit is set in the GPTMTBMR register, and the match values in the GPTMTBMATCHR and (optionally) GPTMTBPMR registers have been reached when configured in one-shot or periodic mode.
10	CBERIS	R	X	GPTM Timer B Capture Mode Event Raw Interrupt. This bit is cleared by writing a 1 to the CBECINT bit in the GPTMICR register. 0h = The capture mode event for Timer B has not occurred. 1h = A capture mode event has occurred for Timer B. This interrupt asserts when the subtimer is configured in input edge-time mode.
9	CBMRIS	R	X	GPTM Timer B Capture Mode Match Raw Interrupt. This bit is cleared by writing a 1 to the CBMCINT bit in the GPTMICR register. 0h = The capture mode match for Timer B has not occurred. 1h = The capture mode match has occurred for Timer B. This interrupt asserts when the values in the GPTMTBMR and GPTMTBPR match the values in the GPTMTBMATCHR and GPTMTBPMR when configured in input edge-time mode.
8	TBTORIS	R	X	GPTM Timer B Time-Out Raw Interrupt. This bit is cleared by writing a 1 to the TBTOCINT bit in the GPTMICR register. 0h = Timer B has not timed out. 1h = Timer B has timed out. This interrupt is asserted when a one-shot or periodic mode timer reaches the count limit (0 or the value loaded into GPTMTBILR, depending on the count direction).
7-6	RESERVED	R	X	
5	DMAARIS	R	X	GPTM Timer A DMA Done Raw Interrupt Status 0h = The Timer A DMA transfer has not completed. 1h = The Timer A DMA transfer has completed.

Table 9-14. GPTMRIS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
4	TAMRIS	R	X	GPTM Timer A Match Raw Interrupt. This bit is cleared by writing a 1 to the TAMCINT bit in the GPTMICR register. 0h = The match value has not been reached. 1h = The TAMIE bit is set in the GPTMTAMR register, and the match value in the GPTMTAMATCHR and (optionally) GPTMTAPMR registers have been reached when configured in one-shot or periodic mode.
3	RESERVED	R	X	
2	CAERIS	R	X	GPTM Timer A Capture Mode Event Raw Interrupt. This bit is cleared by writing a 1 to the CAECINT bit in the GPTMICR register. 0h = The capture mode event for Timer A has not occurred. 1h = A capture mode event has occurred for Timer A. This interrupt asserts when the subtimer is configured in input edge-time mode.
1	CAMRIS	R	X	GPTM Timer A Capture Mode Match Raw Interrupt. This bit is cleared by writing a 1 to the CAMCINT bit in the GPTMICR register. 0h = The capture mode match for Timer A has not occurred. 1h = A capture mode match has occurred for Timer A. This interrupt asserts when the values in the GPTMTAR and GPTMTAPR match the values in the GPTMTAMATCHR and GPTMTAPMR when configured in input edge-time mode.
0	TATORIS	R	X	GPTM Timer A Time-Out Raw Interrupt. This bit is cleared by writing a 1 to the TATOCINT bit in the GPTMICR register. 0h = Timer A has not timed out. 1h = Timer A has timed out. This interrupt is asserted when a one-shot or periodic mode timer reaches its count limit (0 or the value loaded into GPTMTAILR, depending on the count direction).

9.5.1.7 GPTMMIS Register (offset = 20h) [reset = 0h]

Register mask: 0h

GPTMMIS is shown in [Figure 9-11](#) and described in [Table 9-15](#).

Figure 9-11. GPTMMIS Register

31	30	29	28	27	26	25	24
RESERVED							
R-X							
23	22	21	20	19	18	17	16
RESERVED							
R-X							
15	14	13	12	11	10	9	8
RESERVED	DMABMIS	RESERVED	TBMMIS	CBEMIS	CBMMIS	TBTOMIS	
R-X	R-X	R-X	R-X	R-X	R-X	R-X	R-X
7	6	5	4	3	2	1	0
RESERVED	DMAAMIS	TAMMIS	RESERVED	CAEMIS	CAMMIS	TATOMIS	
R-X	R-X	R-X	R-X	R-X	R-X	R-X	R-X

Table 9-15. GPTMMIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-14	RESERVED	R	X	
13	DMABMIS	R	X	GPTM Timer B DMA Done Masked Interrupt. This bit is cleared by writing a 1 to the DMABINT bit in the GPTMICR register. 0h = A Timer B DMA done interrupt has not occurred or is masked. 1h = An unmasked Timer B DMA done interrupt has occurred.
12	RESERVED	R	X	
11	TBMMIS	R	X	GPTM Timer B Match Masked Interrupt. This bit is cleared by writing a 1 to the TBMCINT bit in the GPTMICR register. 0h = A Timer B mode match interrupt has not occurred or is masked. 1h = An unmasked Timer B mode match interrupt has occurred.
10	CBEMIS	R	X	GPTM Timer B Capture Mode Event Masked Interrupt. This bit is cleared by writing a 1 to the CBEINT bit in the GPTMICR register. 0h = A Capture B event interrupt has not occurred or is masked. 1h = An unmasked Capture B event interrupt has occurred.
9	CBMMIS	R	X	GPTM Timer B Capture Mode Match Masked Interrupt. This bit is cleared by writing a 1 to the CBMCINT bit in the GPTMICR register. 0h = A Capture B mode match interrupt has not occurred or is masked. 1h = An unmasked Capture B match interrupt has occurred.
8	TBTOMIS	R	X	GPTM Timer B Time-Out Masked Interrupt. This bit is cleared by writing a 1 to the TBOCINT bit in the GPTMICR register. 0h = A Timer B time-out interrupt has not occurred or is masked. 1h = An unmasked Timer B time-out interrupt has occurred.
7-6	RESERVED	R	X	
5	DMAAMIS	R	X	GPTM Timer A DMA Done Masked Interrupt. This bit is cleared by writing a 1 to the DMAINT bit in the GPTMICR register. 0h = A Timer A DMA done interrupt has not occurred or is masked. 1h = An unmasked Timer A DMA done interrupt has occurred.
4	TAMMIS	R	X	GPTM Timer A Match Masked Interrupt. This bit is cleared by writing a 1 to the TAMCINT bit in the GPTMICR register. 0h = A Timer A mode match interrupt has not occurred or is masked. 1h = An unmasked Timer A mode match interrupt has occurred.
3	RESERVED	R	X	

Table 9-15. GPTMMIS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
2	CAEMIS	R	X	GPTM Timer A Capture Mode Event Masked Interrupt. This bit is cleared by writing a 1 to the CAECINT bit in the GPTMICR register. 0h = A Capture A event interrupt has not occurred or is masked. 1h = An unmasked Capture A event interrupt has occurred.
1	CAMMIS	R	X	GPTM Timer A Capture Mode Match Masked Interrupt. This bit is cleared by writing a 1 to the CAMCINT bit in the GPTMICR register. 0h = A Capture A mode match interrupt has not occurred or is masked. 1h = An unmasked Capture A match interrupt has occurred.
0	TATOMIS	R	X	GPTM Timer A Time-Out Masked Interrupt. This bit is cleared by writing a 1 to the TATOCINT bit in the GPTMICR register. 0h = A Timer A time-out interrupt has not occurred or is masked. 1h = An unmasked Timer A time-out interrupt has occurred.

9.5.1.8 GPTMICR Register (offset = 24h) [reset = 0h]

Register mask: 0h

GPTMICR is shown in [Figure 9-12](#) and described in [Table 9-16](#).

This register clears the status bits in the GPTMRIS and GPTMMIS registers. Writing a 1 to a bit clears the corresponding bit in the GPTMRIS and GPTMMIS registers.

Figure 9-12. GPTMICR Register

31	30	29	28	27	26	25	24
RESERVED							
R-X							
23	22	21	20	19	18	17	16
RESERVED							
R-X							
15	14	13	12	11	10	9	8
RESERVED	DMABINT	RESERVED	TBMCINT	CBECINT	CBMCINT	TBTOMINT	
R-X	W1C-X	R-X	W1C-X	W1C-X	W1C-X	W1C-X	
7	6	5	4	3	2	1	0
RESERVED	DMAAINT	TAMCINT	RESERVED	CAECINT	CAMCINT	TATOCINT	
R-X	W1C-X	W1C-X	R-X	W1C-X	W1C-X	W1C-X	

Table 9-16. GPTMICR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-14	RESERVED	R	X	
13	DMABINT	W1C	X	GPTM Timer B DMA Done Interrupt Clear. Writing a 1 to this bit clears the DMABRIS bit in the GPTMRIS register and the DMABMIS bit in the GPTMMIS register.
12	RESERVED	R	X	
11	TBMCINT	W1C	X	GPTM Timer B Match Interrupt Clear. Writing a 1 to this bit clears the TBMRIS bit in the GPTMRIS register and the TBMMIS bit in the GPTMMIS register.
10	CBECINT	W1C	X	GPTM Timer B Capture Mode Event Interrupt Clear. Writing a 1 to this bit clears the CBERIS bit in the GPTMRIS register and the CBEMIS bit in the GPTMMIS register.
9	CBMCINT	W1C	X	GPTM Timer B Capture Mode Match Interrupt Clear. Writing a 1 to this bit clears the CBMRIS bit in the GPTMRIS register and the CBMMIS bit in the GPTMMIS register.
8	TBTOMINT	W1C	X	GPTM Timer B Time-Out Interrupt Clear. Writing a 1 to this bit clears the TBTORIS bit in the GPTMRIS register and the TBTOMIS bit in the GPTMMIS register.
7-6	RESERVED	R	X	
5	DMAAINT	W1C	X	GPTM Timer A DMA Done Interrupt Clear. Writing a 1 to this bit clears the DMAARIS bit in the GPTMRIS register and the DMAAMIS bit in the GPTMMIS register.
4	TAMCINT	W1C	X	GPTM Timer A Match Interrupt Clear. Writing a 1 to this bit clears the TAMRIS bit in the GPTMRIS register and the TAMMIS bit in the GPTMMIS register.
3	RESERVED	R	X	
2	CAECINT	W1C	X	GPTM Timer A Capture Mode Event Interrupt Clear. Writing a 1 to this bit clears the CAERIS bit in the GPTMRIS register and the CAEMIS bit in the GPTMMIS register.
1	CAMCINT	W1C	X	GPTM Timer A Capture Mode Match Interrupt Clear. Writing a 1 to this bit clears the CAMRIS bit in the GPTMRIS register and the CAMMIS bit in the GPTMMIS register.

Table 9-16. GPTMICR Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
0	TATOCINT	W1C	X	GPTM Timer A Time-Out Raw Interrupt. Writing a 1 to this bit clears the TATORIS bit in the GPTMRIS register and the TATOMIS bit in the GPTMMIS register.

9.5.1.9 GPTMTAILR Register (offset = 28h) [reset = FFFFFFFFh]

GPTMTAILR is shown in [Figure 9-13](#) and described in [Table 9-17](#).

When a GPTM is configured to one of the 32-bit modes, GPTMTAILR appears as a 32-bit register (the upper 16-bits correspond to the contents of the GPTM Timer B Interval Load (GPTMTBILR) register). In a 16-bit mode, the upper 16 bits of this register read as 0s and have no effect on the state of GPTMTBILR.

Figure 9-13. GPTMTAILR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TAILR																															
R/W-FFFFFFFFFFh																															

Table 9-17. GPTMTAILR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TAILR	R/W	FFFFFFFFFFh	GPTM Timer A Interval Load Register. Writing this field loads the counter for Timer A. A read returns the current value of GPTMTAILR.

9.5.1.10 GPTMTBILR Register (offset = 2Ch) [reset = FFFFh]

GPTMTBILR is shown in [Figure 9-14](#) and described in [Table 9-18](#).

When a GPTM is configured to one of the 32-bit modes, the contents of bits 15:0 in this register are loaded into the upper 16 bits of the GPTMTAILR register. Reads from this register return the current value of Timer B, and writes are ignored. In a 16-bit mode, bits 15:0 are used for the load value. Bits 31:16 are reserved in both cases.

Figure 9-14. GPTMTBILR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TBILR																															
R/W-FFFFh																															

Table 9-18. GPTMTBILR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TBILR	R/W	FFFFh	GPTM Timer B Interval Load Register. Writing this field loads the counter for Timer B. A read returns the current value of GPTMTBILR. When a 16/32-bit GPTM is in 32-bit mode, writes are ignored, and reads return the current value of GPTMTBILR.

9.5.1.11 GPTMTAMATCHR Register (offset = 30h) [reset = FFFFFFFFh]

GPTMTAMATCHR is shown in [Figure 9-15](#) and described in [Table 9-19](#).

When a 16/32-bit GPTM is configured to one of the 32-bit modes, GPTMTAMATCHR appears as a 32-bit register (the upper 16-bits correspond to the contents of the GPTM Timer B Match (GPTMTBMATCHR) register). In a 16-bit mode, the upper 16 bits of this register read as 0s and have no effect on the state of GPTMTBMATCHR.

Figure 9-15. GPTMTAMATCHR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TAMR																															
R/W-FFFFFFFh																															

Table 9-19. GPTMTAMATCHR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TAMR	R/W	FFFFFFFh	GPTM Timer A Match Register. This value is compared to the GPTMTAR register to determine match events.

9.5.1.12 GPTMTBMATCHR Register (offset = 34h) [reset = FFFFh]

GPTMTBMATCHR is shown in [Figure 9-16](#) and described in [Table 9-20](#).

When a GPTM is configured to one of the 32-bit modes, the contents of bits 15:0 in this register are loaded into the upper 16 bits of the GPTMTAMATCHR register. Reads from this register return the current match value of Timer B, and writes are ignored. In a 16-bit mode, bits 15:0 are used for the match value. Bits 31:16 are reserved in both cases.

Figure 9-16. GPTMTBMATCHR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TBMR																															
R/W-FFFFh																															

Table 9-20. GPTMTBMATCHR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TBMR	R/W	FFFFh	GPTM Timer B Match Register. This value is compared to the GPTMTBR register to determine match events.

9.5.1.13 GPTMTAPR Register (offset = 38h) [reset = 0h]

GPTMTAPR is shown in [Figure 9-17](#) and described in [Table 9-21](#).

This register allows software to extend the range of the timers when they are used individually. When in one-shot or periodic down count modes, this register acts as a true prescaler for the timer counter. When acting as a true prescaler, the prescaler counts down to 0 before the value in the GPTMTAR and GPTMTAV registers are incremented. In all other individual or split modes, this register is a linear extension of the upper range of the timer counter, holding bits 23:16 in the 16-bit modes of the 16/32-bit GPTM.

Figure 9-17. GPTMTAPR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																										TAPSR					
R-X																										R/W-0h					

Table 9-21. GPTMTAPR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	X	
7-0	TAPSR	R/W	0h	GPTM Timer A Prescale. The register loads this value on a write. A read returns the current value of the register. For the 16/32-bit GPTM, this field contains the entire 8-bit prescaler.

9.5.1.14 GPTMTBPR Register (offset = 3Ch) [reset = 0h]

GPTMTBPR is shown in [Figure 9-18](#) and described in [Table 9-22](#).

This register allows software to extend the range of the timers when they are used individually. When in one-shot or periodic down count modes, this register acts as a true prescaler for the timer counter. When acting as a true prescaler, the prescaler counts down to 0 before the value in the GPTMTBR and b registers are incremented. In all other individual or split modes, this register is a linear extension of the upper range of the timer counter, holding bits 23:16 in the 16-bit modes of the 16/32-bit GPTM.

Figure 9-18. GPTMTBPR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																									TBPSR						
R-X																									R/W-0h						

Table 9-22. GPTMTBPR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	X	
7-0	TBPSR	R/W	0h	GPTM Timer B Prescale. The register loads this value on a write. A read returns the current value of this register. For the 16/32-bit GPTM, this field contains the entire 8-bit prescaler.

9.5.1.15 GPTMTAPMR Register (offset = 40h) [reset = 0h]

GPTMTAPMR is shown in [Figure 9-19](#) and described in [Table 9-23](#).

This register allows software to extend the range of the GPTMTAMATCHR when the timers are used individually. This register holds bits 23:16 in the 16-bit modes of the 16/32-bit GPTM.

Figure 9-19. GPTMTAPMR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																								TAPSMR							
R-X																								R/W-0h							

Table 9-23. GPTMTAPMR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	X	
7-0	TAPSMR	R/W	0h	GPTM TimerA Prescale Match. This value is used alongside GPTMTAMATCHR to detect timer match events while using a prescaler. For the 16/32-bit GPTM, this field contains the entire 8-bit prescaler match value.

9.5.1.16 GPTMTBPMR Register (offset = 44h) [reset = 0h]

GPTMTBPMR is shown in [Figure 9-20](#) and described in [Table 9-24](#).

This register allows software to extend the range of the GPTMTBMATCHR when the timers are used individually. This register holds bits 23:16 in the 16-bit modes of the 16/32-bit GPTM.

Figure 9-20. GPTMTBPMR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																								TBPSMR							
R-X																								R/W-0h							

Table 9-24. GPTMTBPMR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	X	
7-0	TBPSMR	R/W	0h	GPTM TimerB Prescale Match. This value is used alongside GPTMTBMATCHR to detect timer match events while using a prescaler.

9.5.1.17 GPTMTAR Register (offset = 48h) [reset = FFFFFFFFh]

GPTMTAR is shown in [Figure 9-21](#) and described in [Table 9-25](#).

When a GPTM is configured to one of the 32-bit modes, GPTMTAR appears as a 32-bit register (the upper 16-bits correspond to the contents of the GPTM Timer B (GPTMTBR) register). In the 16-bit input edge-count, input edge-time, and PWM modes, bits 15:0 contain the value of the counter and bits 23:16 contain the value of the prescaler, which is the upper 8 bits of the count. Bits 31:24 always read as 0. To read the value of the prescaler in 16-bit one-shot and periodic modes, read bits [23:16] in the GPTMTAV register. To read the value of the prescalar in periodic snapshot mode, read the Timer A Prescale Snapshot (GPTMTAPS) register.

Figure 9-21. GPTMTAR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TAR																															
R-FFFFFFFFFFh																															

Table 9-25. GPTMTAR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TAR	R	FFFFFFFh	GPTM Timer A Register. A read returns the current value of the GPTM Timer A Count register, in all cases except for input edge-count and time modes. In the input edge-count mode, this register contains the number of edges that have occurred. In the input edge-time mode, this register contains the time at which the last edge event took place.

9.5.1.18 GPTMTBR Register (offset = 4Ch) [reset = FFFFh]

GPTMTBR is shown in [Figure 9-22](#) and described in [Table 9-26](#).

When a GPTM is configured to one of the 32-bit modes, the contents of bits 15:0 in this register are loaded into the upper 16 bits of the GPTMTAR register. Reads from this register return the current value of Timer B. In a 16-bit mode, bits 15:0 contain the value of the counter and bits 23:16 contain the value of the prescaler in input edge-count, input edge-time, and PWM modes, which is the upper 8 bits of the count. Bits 31:24 always read as 0. To read the value of the prescaler in 16-bit one-shot and periodic modes, read bits [23:16] in the GPTMTBV register. To read the value of the prescaler in periodic snapshot mode, read the Timer B Prescale Snapshot (GPTMTBPS) register.

Figure 9-22. GPTMTBR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TBR																															
R-FFFFh																															

Table 9-26. GPTMTBR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TBR	R	FFFFh	GPTM Timer B Register. A read returns the current value of the GPTM Timer B Count register, in all cases except for input edge-count and time modes. In the input edge-count mode, this register contains the number of edges that have occurred. In the input edge-time mode, this register contains the time at which the last edge event took place.

9.5.1.19 GPTMTAV Register (offset = 50h) [reset = FFFFFFFFh]

GPTMTAV is shown in [Figure 9-23](#) and described in [Table 9-27](#).

When a 16/32-bit GPTM is configured to one of the 32-bit modes, GPTMTAV appears as a 32-bit register (the upper 16-bits correspond to the contents of the GPTM Timer B Value (GPTMTBV) register). In a 16-bit mode, bits 15:0 contain the value of the counter and bits 23:16 contain the current, free-running value of the prescaler, which is the upper 8 bits of the count in input edge-count, input edge-time, PWM, and one-shot or periodic up count modes. In one-shot or periodic down count modes, the prescaler stored in 23:16 is a true prescaler, meaning bits 23:16 count down before decrementing the value in bits 15:0. The prescaler in bits 31:24 always reads as 0.

Figure 9-23. GPTMTAV Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TAV																															
R/W-FFFFFFFFFFh																															

Table 9-27. GPTMTAV Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TAV	R/W	FFFFFFFh	GPTM Timer A Value. A read returns the current, free-running value of Timer A in all modes. When written, the value written into this register is loaded into the GPTMTAR register on the next clock cycle. Note: In 16-bit mode, only the lower 16-bits of the GPTMTAV register can be written with a new value. Writes to the prescaler bits have no effect.

9.5.1.20 GPTMTBV Register (offset = 54h) [reset = FFFFh]

GPTMTBV is shown in [Figure 9-24](#) and described in [Table 9-28](#).

When a 16/32-bit GPTM is configured to one of the 32-bit modes, the contents of bits 15:0 in this register are loaded into the upper 16 bits of the GPTMTAV register. Reads from this register return the current free-running value of Timer B. In a 16-bit mode, bits 15:0 contain the value of the counter and bits 23:16 contain the current, free-running value of the prescaler, which is the upper 8 bits of the count in input edge-count, input edge-time, PWM, and one-shot or periodic up count modes. In one-shot or periodic down count modes, the prescaler stored in 23:16 is a true prescaler, meaning bits 23:16 count down before decrementing the value in bits 15:0. The prescaler in bits 31:24 always reads as 0.

Figure 9-24. GPTMTBV Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
TBV																															
R/W-FFFFh																															

Table 9-28. GPTMTBV Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	TBV	R/W	FFFFh	GPTM Timer B Value. A read returns the current, free-running value of Timer A in all modes. When written, the value written into this register is loaded into the GPTMTAR register on the next clock cycle. In 16-bit mode, only the lower 16-bits of the GPTMTBV register can be written with a new value. Writes to the prescaler bits have no effect.

9.5.1.21 GPTMDMAEV Register (offset = 6Ch) [reset = 0h]

GPTMDMAEV is shown in [Figure 9-25](#) and described in [Table 9-29](#).

This register allows software to enable and disable GPTM DMA trigger events. Setting a bit enables the corresponding DMA trigger, while clearing a bit disables it.

Figure 9-25. GPTMDMAEV Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED				TBMDMAEN	CBEDMAEN	CBMDMAEN	TBTODMAEN
R-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
RESERVED			TAMDMAEN	RTCDMAEN	CAEDMAEN	CAMDMAEN	TATODMAEN
R-0h			R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

Table 9-29. GPTMDMAEV Register Field Descriptions

Bit	Field	Type	Reset	Description
31-12	RESERVED	R	0h	
11	TBMDMAEN	R/W	0h	GPTM B Mode Match Event DMA Trigger Enable. When this bit is enabled, a Timer B dma_req signal is sent to the DMA when a mode match has occurred. 0h = Timer B mode match DMA trigger is disabled. 1h = Timer B DMA mode match trigger is enabled
10	CBEDMAEN	R/W	0h	GPTM B Capture Event DMA Trigger Enable. When this bit is enabled, a Timer B dma_req signal is sent to the DMA when a capture event has occurred. 0h = Timer B capture event DMA trigger is disabled. 1h = Timer B capture event DMA trigger is enabled.
9	CBMDMAEN	R/W	0h	GPTM B Capture Match Event DMA Trigger Enable. When this bit is enabled, a Timer B dma_req signal is sent to the DMA when a capture match event has occurred. 0h = Timer B capture match DMA trigger is disabled. 1h = Timer B capture match DMA trigger is enabled
8	TBTODMAEN	R/W	0h	GPTM B Time-Out Event DMA Trigger Enable. When this bit is enabled, a Timer B dma_req signal is sent to the DMA on a time-out event. 0h = Timer B time-out DMA trigger is disabled. 1h = Timer B time-out DMA trigger is enabled.
7-5	RESERVED	R	0h	
4	TAMDMAEN	R/W	0h	GPTM A Mode Match Event DMA Trigger Enable. When this bit is enabled, a Timer A dma_req signal is sent to the DMA when a mode match has occurred. 0h = Timer A mode match DMA trigger is disabled. 1h = Timer A DMA mode match trigger is enabled.
3	RTCDMAEN	R/W	0h	GPTM A RTC Match Event DMA Trigger Enable. When this bit is enabled, a Timer A dma_req signal is sent to the DMA when a RTC match has occurred. 0h = Timer A RTC match DMA trigger is disabled. 1h = Timer A RTC match DMA trigger is enabled.

Table 9-29. GPTMDMAEV Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
2	CAEDMAEN	R/W	0h	GPTM A Capture Event DMA Trigger Enable. When this bit is enabled, a Timer A dma_req signal is sent to the DMA when a capture event has occurred. 0h = Timer A capture event DMA trigger is disabled. 1h = Timer A capture event DMA trigger is enabled.
1	CAMDMAEN	R/W	0h	GPTM A Capture Match Event DMA Trigger Enable. When this bit is enabled, a Timer A dma_req signal is sent to the DMA when a capture match event has occurred. 0h = Timer A capture match DMA trigger is disabled. 1h = Timer A capture match DMA trigger is enabled.
0	TATODMAEN	R/W	0h	GPTM A Time-Out Event DMA Trigger Enable. When this bit is enabled, a Timer A dma_req signal is sent to the DMA on a time-out event. 0h = Timer A time-out DMA trigger is disabled. 1h = Timer A time-out DMA trigger is enabled.

Watchdog Timer

Topic	Page
10.1 Overview	303
10.2 Functional Description	304
10.3 Register Map.....	304
10.4 MCU Watch Dog Controller Usage Caveats.....	313

10.1 Overview

The watchdog timer in CC3200 generates a regular interrupt or a reset when a time-out value is reached. The watchdog timer regains control when a system has failed due to a software error or due to the failure of an external device to respond in the expected way. The CC3200 has one watchdog timer module, clocked by the system clock.

The watchdog timer module supports the following features:

- 32-bit down-counter with a programmable load register
- Lock register protection from runaway software
- Reset generation cannot be disabled
- User-enabled stalling when the microcontroller asserts the CPU Halt flag during debug

The watchdog timer can be configured to generate an interrupt to the controller on its first time-out, and to generate a reset signal on its second time-out. Once the watchdog timer has been configured, the lock register can be written to prevent the timer configuration from being inadvertently altered.


The watchdog timer module supports the following clock sources:

- System clock (80 MHz in RUN mode)

The clock used for WDT is selected by the configuration register APRCM:WDTCLKEN.

10.1.1 Block Diagram

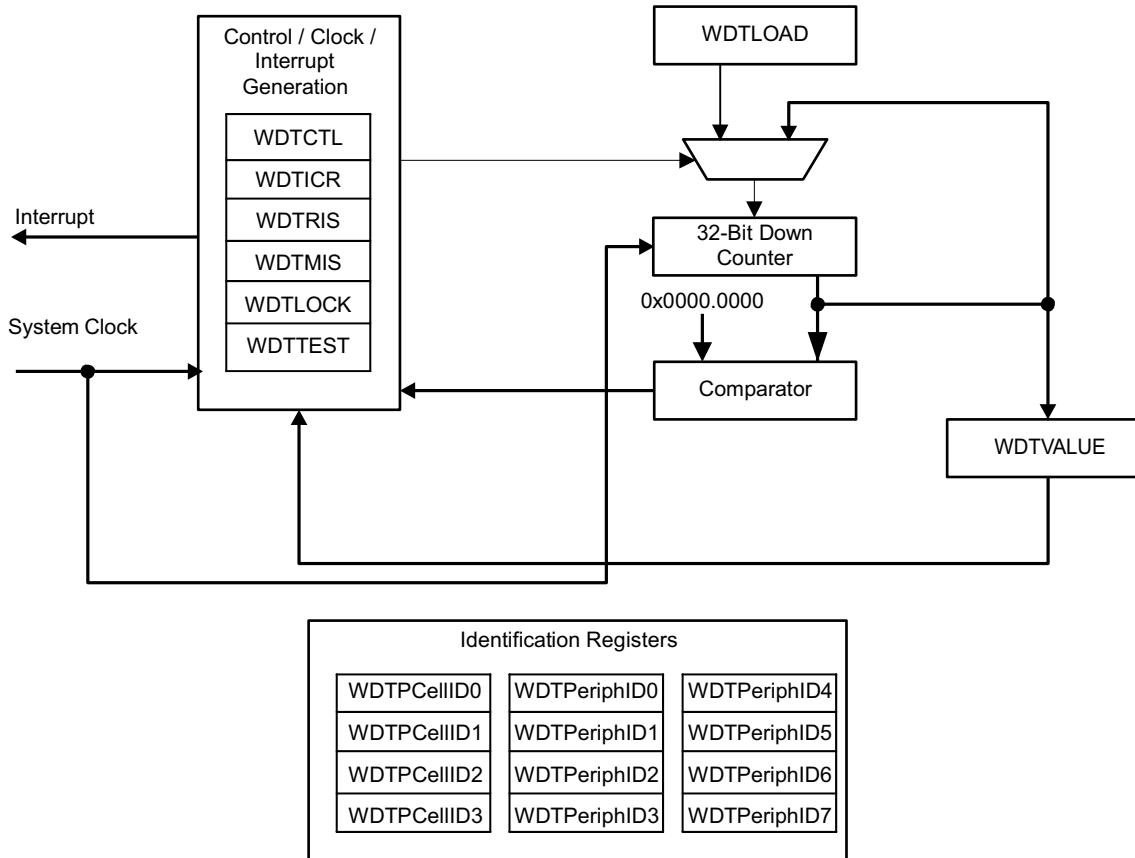Figure 10-1. WDT Module Block Diagram



10.2 Functional Description

The watchdog timer module generates the first time-out signal (interrupt) when the 32-bit counter reaches the zero state after being enabled; enabling the counter also enables the watchdog timer interrupt. The WDT can be configured to reset on the second overflow. The WDT interrupt is maskable.

After the first time-out event, the 32-bit counter is re-loaded with the value of the Watchdog Timer Load (WDTLOAD) register, and the timer resumes counting down from that value. Once the watchdog timer has been configured, the Watchdog Timer Lock (WDTLOCK) register is written, which prevents the timer configuration from being inadvertently altered by software.

If the timer counts down to its zero state again before the first time-out interrupt is cleared, the watchdog timer asserts its reset signal to the system. If the interrupt is cleared before the 32-bit counter reaches its second time-out, the 32-bit counter is loaded with the value in the WDTLOAD register, and counting resumes from that value.

If WDTLOAD is written with a new value while the watchdog timer counter is counting, then the counter is loaded with the new value, and continues counting.

Writing to WDTLOAD does not clear an active interrupt. An interrupt must be specifically cleared by writing to the Watchdog Interrupt Clear (WDTICR) register.

The watchdog timer is disabled by default out of reset. To achieve maximum watchdog protection of the device, the watchdog timer can be enabled at the start of the reset vector.

NOTE: In the CC3200 R1 device, TI recommends that the application software, when rebooting after a WDT reset, requests the PRCM for hibernation (see [Section 15.3.10](#)) for 10 ms, and resumes its full functionality only after returning from this hibernation. This is effective for full recovery from any complex stuck-at scenario that involves the Wi-Fi subsystem.

The application can determine if the reset cause is WDT by reading the GPRCM:APPS_RESET_CAUSE[7:0] register (physical address 0x4402 D00C). On wakeup following a WDT reset, this would read the value 0101.

Refer to for more details.

10.2.1 Initialization and Configuration

The watchdog timer is configured using the following sequence:

1. Enable the peripheral clock by setting the RUNCLKEN bit in Watchdog Timer Clock Enable (WDTCLKEN) register.
2. Reset the watchdog module using the Watch Dog Timer Software Reset (WDTWRST) register.
3. Load the WDTLOAD register with the desired timer load value.
4. Set the INTEN bit in the WDTCTL register to enable the watchdog, enable interrupts, and lock the control register.

If the software requires that all of the watchdog registers are locked, the watchdog timer module can be fully locked by writing any value to the WDTLOCK register. To unlock the watchdog timer, write a value of 0x1ACC.E551.

To service the watchdog, periodically reload the count value into the WDTLOAD register to restart the count. The interrupt can be enabled using the INTEN bit in the WDTCTL register to allow the processor to attempt corrective action if the watchdog is not serviced often enough. The RESEN bit in WDTCTL can be set so that the system resets if the failure is not recoverable using the ISR.

10.3 Register Map

[Table 10-1](#) lists the watchdog registers. The offset listed is a hexadecimal increment to the register address, relative to the watchdog timer base address: 0x4000.0000.

Note that the watchdog timer module clock must be enabled before the registers can be programmed.

Table 10-1. Watchdog Timers Register Map

Offset	Name	Type	Reset	Description
0x000	WDTLOAD	R/W	0xFFFF.FFFF	Watchdog Load
0x004	WDTVALUE	RO	0xFFFF.FFFF	Watchdog Value
0x008	WDTCTL	R/W	0x0000.0000 (WDT0) 0x8000.0000 (WDT1)	Watchdog Control
0x00C	WDTICR	WO	-	Watchdog Interrupt Clear
0x010	WDTRIS	RO	0x0000.0000	Watchdog Raw Interrupt Status
0x418	WDTTEST	R/W	0x0000.0000	Watchdog Test
0xC00	WDTLOCK	R/W	0x0000.0000	Watchdog Lock

10.3.1 Register Description

This section lists and describes the WDT registers, in numerical order by address offset.

10.3.1.1 WATCHDOG Registers

[Table 10-2](#) lists the memory-mapped registers for the WATCHDOG. All register offset addresses not listed in [Table 10-2](#) should be considered as reserved locations and the register contents should not be modified.

lists the Watchdog registers. The offset listed is a hexadecimal increment to the register's address, relative to the Watchdog Timer base address: 0x4000.0000. Note that the Watchdog Timer module clock must be enabled before the registers can be programmed.

Table 10-2. WATCHDOG Registers

Offset	Acronym	Register Name	Section
0h	WDTLOAD	Watchdog Load	Section 10.3.1.1.1
4h	WDTVVALUE	Watchdog Value	Section 10.3.1.1.2
8h	WDTCTL	Watchdog Control	Section 10.3.1.1.3
Ch	WDTICR	Watchdog Interrupt Clear	Section 10.3.1.1.4
10h	WDTRIS	Watchdog Raw Interrupt Status	Section 10.3.1.1.5
418h	WDTTEST	Watchdog Test	Section 10.3.1.1.6
C00h	WDTLOCK	Watchdog Lock	Section 10.3.1.1.7

10.3.1.1.1 WDTLOAD Register (offset = 0h) [reset = FFFFFFFFh]

WDTLOAD is shown in [Figure 10-2](#) and described in [Table 10-3](#).

This register is the 32-bit interval value used by the 32-bit counter. When this register is written, the value is immediately loaded and the counter restarts counting down from the new value. If the WDTLOAD register is loaded with 0x0000.0000, an interrupt is immediately generated.

Figure 10-2. WDTLOAD Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
WDTLOAD																															
R/W-FFFFFFFFFFh																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 10-3. WDTLOAD Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	WDTLOAD	R/W	FFFFFFFh	Watchdog Load Value

10.3.1.1.2 WDTVALUE Register (offset = 4h) [reset = FFFFFFFFh]

WDTVALUE is shown in [Figure 10-3](#) and described in [Table 10-4](#).

This register contains the current count value of the timer.

Figure 10-3. WDTVALUE Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
WDTVALUE																															
R-FFFFFFFh																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 10-4. WDTVALUE Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	WDTVALUE	R	FFFFFFFh	Watchdog Value Current value of the 32-bit down counter.

10.3.1.1.3 WDTCTL Register (offset = 8h) [reset = 80000000h]

WDTCTL is shown in [Figure 10-4](#) and described in [Table 10-5](#).

This register is the watchdog control register. The watchdog timer can be used to generate a reset signal (on second time-out) or an interrupt on time-out.

Figure 10-4. WDTCTL Register

31	30	29	28	27	26	25	24
WRC				RESERVED			
R-1h				R-0h			
23	22	21	20	19	18	17	16
				RESERVED			
				R-0h			
15	14	13	12	11	10	9	8
				RESERVED			
				R-0h			
7	6	5	4	3	2	1	0
		RESERVED			INTTYPE	RESERVED	INTEN
		R-0h		R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 10-5. WDTCTL Register Field Descriptions

Bit	Field	Type	Reset	Description
31	WRC	R	1h	Write Complete The WRC values are defined as follows: Note: This bit is reserved for WDT0 and has a reset value of 0. 0h = A write access to one of the WDT1 registers is in progress. 1h = A write access is not in progress, and WDT1 registers can be read or written.
30-3	RESERVED	R	0h	
2	INTTYPE	R/W	0h	Watchdog Interrupt Type The INTTYPE values are defined as follows: 0h = Watchdog interrupt is a standard interrupt. 1h = Not Valid Value
1	RESERVED	R/W	0h	
0	INTEN	R/W	0h	Watchdog Interrupt Enable The INTEN values are defined as follows: 0h = Interrupt event disabled (once this bit is set, it can only be cleared by a hardware reset). 1h = Interrupt event enabled. Once enabled, all writes are ignored. Setting this bit enables the Watchdog Timer.

10.3.1.1.4 WDTICR Register (offset = Ch) [reset = 0h]

Register mask: 0h

WDTICR is shown in [Figure 10-5](#) and described in [Table 10-6](#).

This register is the interrupt clear register. A write of any value to this register clears the Watchdog interrupt and reloads the 32-bit counter from the WDTLOAD register. Write to this register when a watchdog time-out interrupt has occurred to properly service the Watchdog. Value for a read or reset is indeterminate.

Figure 10-5. WDTICR Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
WDTINTCLR																															
W-X																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 10-6. WDTICR Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	WDTINTCLR	W	X	Watchdog Interrupt Clear

10.3.1.1.5 WDTRIS Register (offset = 10h) [reset = 0h]

WDTRIS is shown in [Figure 10-6](#) and described in [Table 10-7](#).

This register is the raw interrupt status register. Watchdog interrupt events can be monitored via this register if the controller interrupt is masked.

Figure 10-6. WDTRIS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED						WDTRIS	
						R-0h	

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 10-7. WDTRIS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-1	RESERVED	R	0h	
0	WDTRIS	R	0h	Watchdog Raw Interrupt Status 0h = The watchdog has not timed out. 1h = A watchdog time-out event has occurred.

10.3.1.1.6 WDTTEST Register (offset = 418h) [reset = 0h]

WDTTEST is shown in [Figure 10-7](#) and described in [Table 10-8](#).

This register provides user-enabled stalling when the microcontroller asserts the CPU halt flag during debug.

Figure 10-7. WDTTEST Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED							
R-0h							

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 10-8. WDTTEST Register Field Descriptions

Bit	Field	Type	Reset	Description
31-9	RESERVED	R	0h	
8	STALL	R/W	0h	Watchdog Stall Enable 0h = The watchdog timer continues counting if the microcontroller is stopped with a debugger. 1h = If the microcontroller is stopped with a debugger, the watchdog timer stops counting. Once the microcontroller is restarted, the watchdog timer resumes counting.
7-0	RESERVED	R	0h	

10.3.1.1.7 WDTLOCK Register (offset = C00h) [reset = 0h]

WDTLOCK is shown in [Figure 10-8](#) and described in [Table 10-9](#).

Writing 0x1ACC.E551 to the WDTLOCK register enables write access to all other registers. Writing any other value to the WDTLOCK register re-enables the locked state for register writes to all the other registers, except for the Watchdog Test (WDTTEST) register. The locked state will be enabled after 2 clock cycles. Reading the WDTLOCK register returns the lock status rather than the 32-bit value written. Therefore, when write accesses are disabled, reading the WDTLOCK register returns 0x0000.0001 (when locked; otherwise, the returned value is 0x0000.0000 (unlocked)).

Figure 10-8. WDTLOCK Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
WDTLOCK																															
R/W-0h																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 10-9. WDTLOCK Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	WDTLOCK	R/W	0h	<p>Watchdog Lock</p> <p>A write of the value 0x1ACC.E551 unlocks the watchdog registers for write access.</p> <p>A write of any other value re-applies the lock, preventing any register updates, except for the WDTTEST register.</p> <p>Avoid writes to the WDTTEST register when the watchdog registers are locked.</p> <p>A read of this register returns the following values:</p> <p>0h = Unlocked</p> <p>1h = Locked</p>

10.4 MCU Watch Dog Controller Usage Caveats

10.4.1 System WatchDog

Behavior:


- The system WDOG timer expiry forces the MCU and network processor through a reset cycle, but the WLAN domain (MAC and Baseband) is not reset.
- Subsequent recovery takes MCU and NWP out of reset at the same time.

Issue:

- The above behavior does not allow a WLAN domain clean reset.
- The recovery flow order is not congruent to the software flow (NWP start-up is always initiated by the MCU once the MCU boot loading is completed).

Resolution: The MCU application must detect a recovery from the WDOG trigger and force the device into complete hibernation with a wake-up associated with an internal RTC timer. This ensures a complete system cleanup.

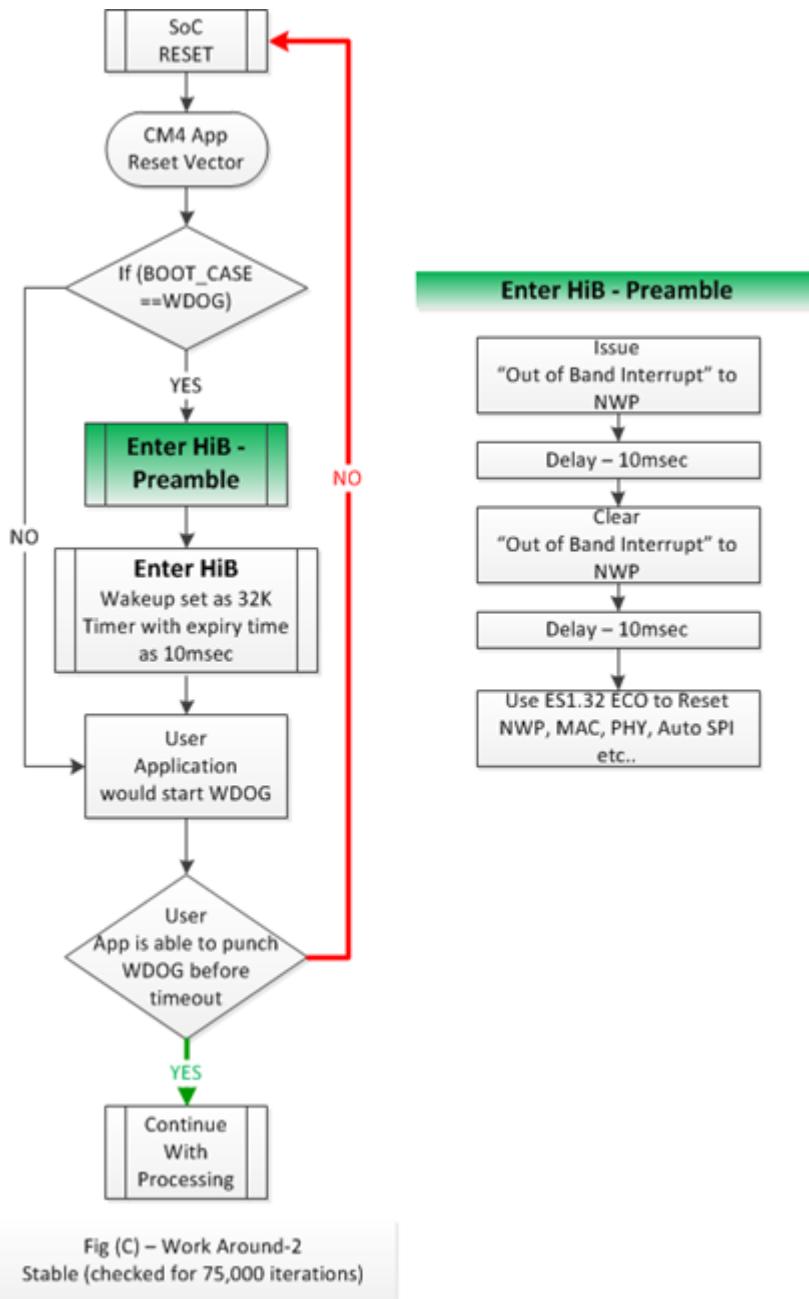Figure 10-9. WatchDog Flow Chart



10.4.2 System WatchDog Recovery Sequence

The following sequence should be integrated in the user application for a reliable recovery from the WDOG trigger:

Figure 10-10. System WatchDog Recovery Sequence

```
// Get the reset cause
ulResetCause = PRCMSysResetCauseGet();

// If the Reset Cause is recovery from WDOG trigger
if(ulResetCause == PRCM_WDT_RESET)
{
    // MCU interrupts NWP (this is Out of Band Interrupt)
    // This forces NWP to IDLE State
    HWREG(0x400F70B8) = 0x1;
    UtilsDelay(800000/5);

    // Clear the interrupt
    HWREG(0x400F70B0) = 0x1;
    UtilsDelay(800000/5);

    // Reset NWP, WLAN domains
    HWREG(0x4402E16C) |= 0x2;
    UtilsDelay(800);

    // Ensure ANA DCDC is moved to PFM mode before
    // invoking Hibernate
    HWREG(0x4402F024) &= 0xF7FFFFFF;

    // Choose the wake source as internal timer
    PRCMHibernateWakeupSourceEnable(PRCM_HIB_SLOW_CLK_CTR);

    //Setup the Hibernate period and enter Hibernate
    PRCMHibernateIntervalSet(330*3);
    PRCMHibernateEnter();
}
```

SD Host Controller Interface

Topic	Page
11.1 Overview	317
11.2 SD Host Features	317
11.3 1-Bit SD Interface	318
11.4 Initialization and Configuration Using Peripheral APIs	318
11.5 Performance and Testing	323
11.6 Peripheral Library APIs	324

11.1 Overview

The Secure Digital Host (SD Host) controller on the CC3200 provides an interface between a local host (LH) such as a microprocessor controller (MCU) and an SD memory card, and handles SD transactions with minimal LH intervention.

The SD host provides SD card access in 1-bit mode, and deals with SD protocol at transmission level, data packing, adding cyclic redundancy checks (CRC), start/end bit, and checking for syntactical correctness. The application interface can send every SD command and either poll for the status of the adapter or wait for an interrupt request, which is sent back in case of exceptions or to warn of end of operation. The controller can be configured to generate DMA requests and work with minimum CPU intervention. Given the nature of integration of this peripheral on the CC3200 platform, TI recommends that developers use peripheral library APIs to control and operate the block.


This section emphasizes understanding the SD host APIs provided in the CC3200 Software Development Kit [Peripheral Library].

11.2 SD Host Features

- Full compliance with SD command and response sets, as defined in the SD memory card. Specifications, v2.0. Including high-capacity (size >2 GB) cards HC SD.
- Flexible architecture, allowing support for new command structure.
- 1-bit transfer mode specifications for SD cards
- Built-in 1024-byte buffer for read or write
 - 512-byte buffer for both transmit and receive
 - Each buffer is 32-bits wide by 128 words deep
- 32-bit-wide access bus to maximize bus throughput
- Single interrupt line for multiple interrupt source events
- Two slave DMA channels (1 for TX, 1 for RX)
- Programmable clock generation
- Integrates an internal transceiver that allows a direct connection to the SD card without external transceiver.
- Supports configurable busy and response timeout.
- Support for a wide range of card clock frequency with odd and even clock ratio. Maximum frequency supported is 24 MHz.

11.3 1-Bit SD Interface

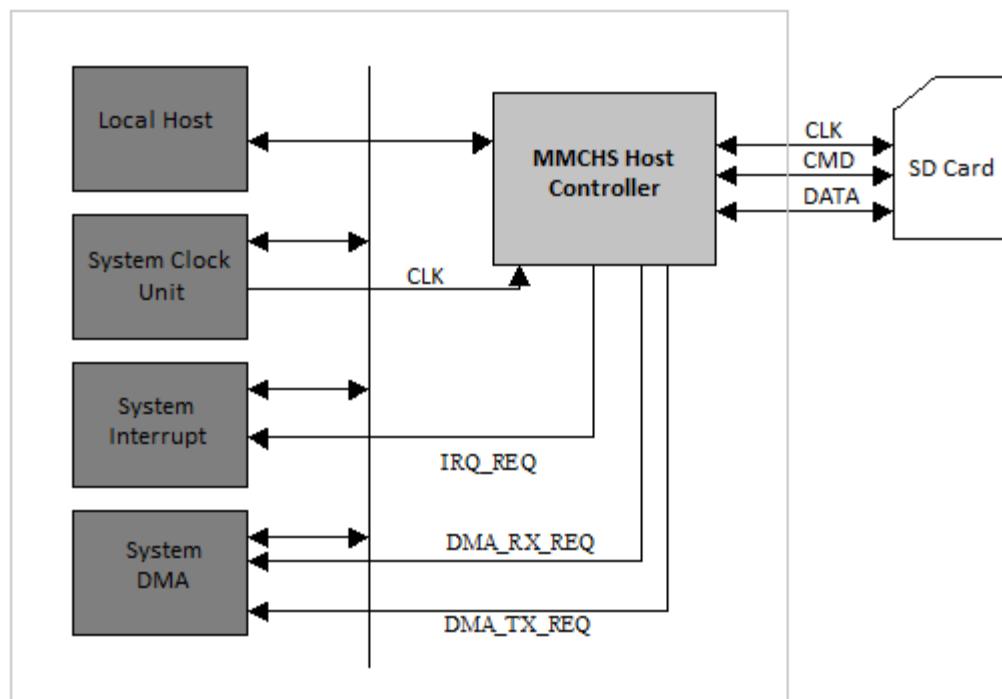Figure 11-1. SDHost Controller Interface Block Diagram



The interface uses three signal lines to communicate with the SD card:

1. CLK: Generated internally by SD host controller and provided to the external SD card.
2. CMD: Bidirectional; used to send commands and receive responses.
3. DATA: Bidirectional; used to send and receive data to and from the attached SD card.

The bus protocol between the SD host controller and the card is message-based. Each message is represented by one of the following parts:

- **Command:** A command starts an operation. The command is transferred serially from the SD host controller to the card on the CMD line.
- **Response:** A response is an answer to a command. The response is sent from the card to the SD host controller, and is transferred serially on the CMD line.
- **Data:** Data is transferred from the SD host controller to the card, or from a card to the SD host controller, using the DATA line.
- **Busy:** The data signal is maintained low by the card, as it programs the data received.

11.3.1 Clock and Reset Management

The Power, Reset and Clock Module (PRCM) manages the clock and reset functions. The on-chip SD host controller is sourced by a 120-MHz fixed clock that can be divided down to the required card clock frequency using the internal 10-bit divider of the module.

The user can reset the module to bring all the internal registers to their default state by calling the PRCM reset API with the appropriate parameters.

11.4 Initialization and Configuration Using Peripheral APIs

This section discusses the host initialization and configuration example, followed by showing how the peripheral APIs can implement the standard SD card detection and initialization sequence.

11.4.1 Basic Initialization and Configuration

1. Enable SD host clock using PRCMPeripheralClkEnable(PRCM_SDHOST, PRCM_RUN_MODE_CLK).
2. In the pin-mux module, enable the appropriate pins for SD host functionality.
3. For a pin configured as CLK, configure the pin as an output by calling:

```
PinDirModeSet(<PIN_NO>, PIN_DIR_MODE_OUT)
```

4. Soft reset and initialize the host controller:

```
PRCMPeripheralReset(PRCM_SDHOST)
```

```
SDHostInit(SDHOST_BASE)
```

5. Soft reset and initialize the host controller for 15-MHz card clocks:

```
SDHostSetExpClk(SDHOST_BASE, PRCMPeripheralClockGet(PRCM_SDHOST), 15000000)
```

11.4.2 Sending Command

The following code shows how to send a command to an attached SD card using peripheral APIs.

```
SendCmd(unsigned long ulCmd, unsigned long ulArg)
{
    unsigned long ulStatus;

    //
    // Clear interrupt status
    //
    SDHostIntClear(SDHOST_BASE, 0xFFFFFFFF);

    //
    // Send command
    //
    SDHostCmdSend(SDHOST_BASE,ulCmd,ulArg);

    //
    // Wait for command complete or error
    //
    do
    {
        ulStatus = SDHostIntStatus(SDHOST_BASE);
        ulStatus = (ulStatus
&amp; (SDHOST_INT_CC|SDHOST_INT_ERRI));
    }
    while( !ulStatus );

    //
    // Check error status
    //
    if(ulStatus
&amp; SDHOST_INT_ERRI)
    {
        //
        // Reset the command line
        //
        SDHostCmdReset(SDHOST_BASE);
        return 1;
    }
    else
    {
        return 0;
    }
}
```

The *ulCmd* parameter is logical OR of the SD command, expected response length, or flags, indicating if the command is followed by a block read or write, a multi-block read or write, and whether the host controller will generate a DMA request for data to and from the internal FIFO.

For example, the SD card command 0 (or GO_IDLE command) has neither a response associated with it nor any block read or write that follows it. The command does not take any argument. For this the *SendCmd()* is invoked as:

```
#define CMD_GO_IDLE_STATE      SDHOST_CMD_0
SendCmd(CMD_GO_IDLE_STATE, 0)
```

Another command example is the SD card command 18, used to read multiple blocks from the SD Card. The command takes the block number or linear address of the first byte to be read based on the version and capacity of the attached card:

```
#define CMD_READ_MULTI_BLK      SDHOST_CMD_18 | SDHOST_RD_CMD| SDHOST_RESP_LEN_48 | SDHOST_MULTI_BLK
SendCmd(CMD_READ_MULTI_BLK,
<ulBlockNo>)
```

11.4.3 Card Detection and Initialization

The following code shows a card detection and initialization using peripheral APIs:

```
CardInit(CardAttrib_t *CardAttrib)
{
    unsigned long ulRet;
    unsigned long ulResp[4];

    //
    // Initialize the attributes.
    //
    CardAttrib->ulCardType = CARD_TYPE_UNKNOWN;
    CardAttrib->ulCapClass = CARD_CAP_CLASS_SDSC;
    CardAttrib->ulRCA      = 0;
    CardAttrib->ulVersion  = CARD_VERSION_1;

    //
    // Send std GO IDLE command
    //
    if( SendCmd(CMD_GO_IDLE_STATE, 0) == 0 )
    {

        ulRet = SendCmd(CMD_SEND_IF_COND,0x00000100);

        //
        // It's a SD ver 2.0 or higher card
        //
        if(ulRet == 0)
        {
            CardAttrib->ulVersion = CARD_VERSION_2;
            CardAttrib->ulCardType = CARD_TYPE_SDCARD;

            //
            // Wait for card to become ready.
            //
            do
            {
                //
                // Send ACMD41
                //
                SendCmd(CMD_APP_CMD,0);
                ulRet = SendCmd(CMD_SD_SEND_OP_COND,0x40E00000);

                //
                // Response contains 32-bit OCR register
                //
            } while(ulRet != 0);
        }
    }
}
```

```

SDHostRespGet(SDHOST_BASE,ulResp);

}while(((ulResp[0] >> 31) == 0));

if(ulResp[0] && (1UL<<30))      {
    CardAttrib->ulCapClass = CARD_CAP_CLASS_SDHC;
}
}

else //It's a MMC or SD 1.x card
{

    //
    // Wait for card to become ready.
    //
    do
    {
        if( (ulRet = SendCmd(CMD_APP_CMD,0)) == 0 )
        {
            ulRet = SendCmd(CMD_SD_SEND_OP_COND,0x00E00000);

            //
            // Response contains 32-bit OCR register
            //
            SDHostRespGet(SDHOST_BASE,ulResp);
        }
    }while((ulRet == 0)
&&((ulResp[0] >>31) == 0));

    //
    // Check the response
    //
    if(ulRet == 0)
    {
        CardAttrib->ulCardType = CARD_TYPE_SDCARD;
    }
    else // CMD 55 is not recognised by SDHost cards.
    {
        //
        // Confirm if its a SDHost card
        //
        ulRet = SendCmd(CMD_SEND_OP_COND,0);
        if( ulRet == 0)
        {
            CardAttrib->ulCardType = CARD_TYPE_MMC;
        }
    }
}

// Get the RCA of the attached card
//
if(ulRet == 0)
{
    ulRet = SendCmd(CMD_ALL_SEND_CID,0);
    if( ulRet == 0)
    {
        SendCmd(CMD_SEND_REL_ADDR,0);
        SDHostRespGet(SDHOST_BASE,ulResp);

        //
        // Fill in the RCA
        //
        CardAttrib->ulRCA = (ulResp[0]
>> 16);
    }
}
}

```

```

    //
    // Get tha card capacity
    //
    CardAttrib->ullCapacity = CardCapacityGet(CardAttrib->ulRCA);
}
}

//
// return status.
//
return ulRet;
}

```

The structure used in the API has following format:

```

typedef struct
{
    unsigned long    ulCardType;
    unsigned long    long ullCapacity;
    unsigned long    ulVersion;
    unsigned long    ulCapClass;
    unsigned short   ulRCA;
}CardAttrib_t;

```

11.4.4 Block Read

The following code shows a block read using peripheral APIs:

```

unsigned long CardReadBlock(CardAttrib_t *Card, unsigned char *pBuffer,
                           unsigned long ulBlockNo, unsigned long ulBlockCount)
{
    unsigned long ulSize;
    unsigned long ulBlkIndx;

    ulBlockCount = ulBlockCount + ulBlockNo;
    for(ulBlkIndx = ulBlockNo; ulBlkIndx
<ulBlockCount; ulBlkIndx++)
    {
        ulSize = 128; // 512/4

        // Compute linear address from block no. for SDSC cards.
        if(Card->ulCapClass == CARD_CAP_CLASS_SDSC)
        {
            ulBlockNo = ulBlkIndx * 512;
        }

        if( SendCmd(CMD_READ_SINGLE_BLK, ulBlockNo) == 0 )
        {
            // Read out the data.
            while(ulSize--)
            {
                MAP_SDHostDataRead(SDHOST_BASE, ((unsigned long *)pBuffer));
                pBuffer+=4;
            }
        }
        else
        {
            // Retutn error
            return 1;
        }
    }
}

```

```

        }

    // Return success
    return 0;
}

```

11.4.5 Block Write

The following code shows a block write using peripheral APIs:

```

Unsigned long CardWriteBlock(CardAttrib_t *Card, unsigned char *pBuffer,
                            unsigned long ulBlockNo, unsigned long ulBlockCount)
{
    unsigned long ulSize;
    unsigned long ulBlkIndx;

    ulBlockCount = ulBlockCount + ulBlockNo;
    for(ulBlkIndx = ulBlockNo; ulBlkIndx
<ulBlockCount; ulBlkIndx++)
    {
        ulSize = 128;
        if(Card->ulCapClass == CARD_CAP_CLASS_SDSC)
        {
            ulBlockNo = ulBlkIndx * 512;
        }

        if( SendCmd(CMD_WRITE_SINGLE_BLK, ulBlockNo) == 0 )
        {

            // Write the data
            while(ulSize--)
            {
                SDHostDataWrite(SDHOST_BASE,*((unsigned long *)pBuffer));
                pBuffer+=4;
            }

            // Wait for transfer completion.
            while( !(SDHostIntStatus(SDHOST_BASE)
&SDHOST_INT_TC) );
        }
        else
        {
            return 1;
        }
    }

    // Return error
    return 0;
}

```

11.5 Performance and Testing

The APIs discussed above were tested with following cards types:

Table 11-1. Card Types

Vendor	Size	Capacity Class	Block Read/Write	Comments
Transcend	2 GB	SDSC	Passed	
Transcend	16 GB	SDHC	Passed	
Strontium	2 GB	SDSC	Passed	
SanDisk	2 GB	SDSC	Passed	This card requires some additional delay after the card select command is sent to the card, and before sending a read or write command, or the command will never complete.
SanDisk	64 GB	SDXC	Passed	This card requires some additional delay after the card select command is sent to the card, and before sending a read or write command, or the command will never complete.
Kingston	16 GB	SDHC	Failed. Did not respond to block read/write commands	This card requires a special SW sequence to work properly. The initialization sequence is different from other cards.

Table 11-2 shows examples of throughput data using the CPU. These values were measured with 1-MB and 10-MB block read or write on a Class-4 Transcend 16-GB SDHC card:

Table 11-2. Throughput Data

Vendor and Type	Operation	Card Freq	80-MHz Cycles	Data (bytes)	Baud (bytes/sec)	Throughput (Mbps)
Class 4 Transcend	Read	24	67959516	1048576	1234354	9.4
	Read	24	680884716	10485760	1232016	9.4
	Write	12	236784547	1048576	354272	2.70
	Write	12	2442413554	10485760	343456	2.62
	Write	24	2151815366	10485760	389839	2.97
	Write	24	2152352658	10485760	389741	2.97

11.6 Peripheral Library APIs

This section lists the APIs, hosted in the CC3200 SDK (peripheral library) necessary for I2S configuration.

void SDHostInit(unsigned long ulBase)

- Description:** This function configures the SD host module, enabling internal sub-modules.
- Parameters:** *ulBase* – Base address of the SD host module
- Return:** None

void SDHostCmdReset(unsigned long ulBase)

- Description:** This function resets the SD host command line.
- Parameters:** *ulBase* – Base address of the SD host module
- Return:** None

long SDHostCmdSend(unsigned long ulBase,unsigned long ulCmd, unsigned ulArg)

- Description:** This function sends a command to the attached card over the SD host interface.

- **Parameters:**

- *ulBase* – Base address of the SD host module
- *ulCmd* – Command to be send to the card
- *ulArg* – Argument for the command

The *ulCmd* parameter can be one of SDHOST_CMD_0 to SDHOST_CMD_63. It can be logically ORed with one or more of the following:

- SDHOST_MULTI_BLK: For multi-block transfer
- SDHOST_WR_CMD: If the command is followed by write data
- SDHOST_RD_CMD: If the command is followed by read data
- SDHOST_DMA_EN: If data transfer must generate a DMA request

- **Return:** Returns 0 on success, -1 otherwise

`void SDHostIntRegister(unsigned long ulBase, void (*pfnHandler)(void))`

- **Description:** This function registers the interrupt handler and enables the global interrupt in the interrupt controller; specific interrupts must be enabled using SDHostIntEnable(). It is the responsibility of the interrupt handler to clear the interrupt source.

- **Parameters:**

- *ulBase* – Base address of the SD host module
- *pfnHandler* – Pointer to the SD host interrupt handler function

- **Return:** None

`void SDHostIntUnregister(unsigned long ulBase)`

- **Description:** This function unregisters the interrupt handler and clears the handler to be called when a SD host interrupt occurs. This also masks off the interrupt in the interrupt controller, so that the interrupt handler is no longer called.

- **Parameters:** *ulBase* – Base address of the SD host module

- **Return:** None

`void SDHostIntEnable(unsigned long ulBase,unsigned long ullIntFlags)`

- **Description:** This function enables the indicated SD host interrupt sources. Only enabled sources can be reflected to the processor interrupt; disabled sources have no effect on the processor.

- **Parameters:**

- *ulBase* – Base address of the SD host module
- *ullIntFlags* – Bit mask of the interrupt sources to be enabled

The *ullIntFlags* parameter is the logical OR of any of the following:

- SDHOST_INT_CC: Command Complete interrupt
- SDHOST_INT_TC: Transfer Complete interrupt
- SDHOST_INT_BWR: Buffer Write Ready interrupt
- SDHOST_INT_BWR: Buffer Read Ready interrupt
- SDHOST_INT_ERRI: Error interrupt
 - Note that SDHOST_INT_ERRI can only be used with SDHostIntStatus(), and is internally logical OR of all error status bits. Setting this bit alone as *ullIntFlags* does not generate any interrupt.
- SDHOST_INT_CTO: Command Timeout error interrupt
- SDHOST_INT_CEB: Command End Bit error interrupt
- SDHOST_INT_DTO: Data Timeout error interrupt
- SDHOST_INT_DCRC: Data CRC error interrupt
- SDHOST_INT_DEB: Data End Bit error
- SDHOST_INT_CERR: Cart Status Error interrupt
- SDHOST_INT_BADA: Bad Data error interrupt
- SDHOST_INT_DMARD: Read DMA done interrupt

- SDHOST_INT_DMAWR: Write DMA done interrupt
- **Return:** None

void SDHostIntDisable(unsigned long ulBase,unsigned long ullIntFlags)

- **Description:** This function disables the indicated SD host interrupt sources. Only enabled sources can be reflected to the processor interrupt.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ullIntFlags* – Bit mask of the interrupt sources to be disabled

The *ullIntFlags* parameter has the same definition as the *ullIntFlags* parameter to SDHostIntEnable().
- **Return:** None

unsigned long SDHostIntStatus(unsigned long ulBase)

- **Description:** This function returns the interrupt status for the specified SD host.
- **Parameters:** *ulBase* – Base address of the SD host module.
- **Return:** Returns the current interrupt status, enumerated as a bit field of values described in SDHostIntEnable().

void SDHostIntClear(unsigned long ulBase,unsigned long ullIntFlags)

- **Description:** The specified SD host interrupt sources are cleared, so that they no longer assert. This function must be called in the interrupt handler to keep the interrupt from being recognized again immediately upon exit.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ullIntFlags* – Bit mask of the interrupt sources to be cleared

The *ullIntFlags* parameter has the same definition as the *ullIntFlags* parameter to SDHostIntEnable().
- **Return:** None

Void SDHostCardErrorMaskSet(unsigned long ulBase, unsigned long ulErrMask)

- **Description:** This function sets the card status error mask for response type R1, R1b, R5, R5b, and R6. The parameter *ulErrMask* is the bit mask of card status errors to be enabled; if the corresponding bits in the card status field of a response are set, then the host controller indicates a card error interrupt status. Only bits referenced as type E (error) in the status field in the response can set a card status error.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ulErrMask* – Bit mask of card status errors to be enabled
- **Return:** None

unsigned long SDHostCardErrorMaskGet(unsigned long ulBase)

- **Description:** This function gets the card status error mask for response type R1, R1b, R5, R5b, and R6.
- **Parameters:** *ulBase* – Base address of the SD host module
- **Return:** Returns the current card status error.

void SDHostSetExpClk(unsigned long ulBase, unsigned long ulSDHostClk, unsigned long ulCardClk)

- **Description:** This function configures the SD host interface to supply the specified clock to the connected card.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ulSDHostClk* – The rate of clock supplied to SD host module
 - *ulCardClk* – Required SD interface clock
- **Return:** None

void SDHostRespGet(unsigned long ulBase, unsigned long ulResponse[4])

- **Description:** This function gets the response from the SD card for the last command send.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ulResponse* – 128-bit response
- **Return:** None

void SDHostBlockSizeSet(unsigned long ulBase, unsigned short ulBlkSize)

- **Description:** This function sets the block size of the data transfer.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ulBlkSize* – Transfer block size in bytes
- The parameter *ulBlkSize* is size of each data block in bytes. This should be in range 0 -2^10.
- **Return:** None

void SDHostBlockCountSet(unsigned long ulBase, unsigned short ulBlkCount)

- **Description:** This function sets block count for the data transfer. This must be set for each block transfer.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ulBlkCount* – Number of blocks
- **Return:** None

tBoolean SDHostDataNonBlockingWrite(unsigned long ulBase, unsigned long ulData)

- **Description:** This function writes a single data word into the SD host write buffer. The function returns true if there was a space available in the buffer; else returns false.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ulData* – Data word to be transferred
- **Return:** Return true on success, false otherwise

tBoolean SDHostDataNonBlockingRead(unsigned long ulBase, unsigned long *pulData)

- **Description:** This function reads a data word from the SD host read buffer. The function returns true if there was data available in the buffer; else returns false.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *pulData* – Pointer to data word to be transferred
- **Return:** Return true on success, false otherwise

void SDHostDataWrite(unsigned long ulBase, unsigned long ulData)

- **Description:** This function writes \e *ulData* into the SD host write buffer. If there is no space in the write buffer, this function waits until there is a space available before returning.
- **Parameters:**
 - *ulBase* – Base address of the SD host module
 - *ulData* – Data word to be transferred
- **Return:** None

void SDHostDataRead(unsigned long ulBase, unsigned long *ulData)

- **Description:** This function reads a single data word from the SD host read buffer. If there is no data available in the buffer, the function waits until a data word is received before returning.
- **Parameters:**
 - *ulBase* – Base address of the SD host module

- *pulData* – Pointer to data word to be transferred
- **Return:** None

Inter-Integrated Sound (I2S) Multi-Channel Audio Serial Port

Topic	Page
12.1 Overview	330
12.2 Functional Description	331
12.3 Programming Model.....	331
12.4 Peripheral Library APIs for I2S Configuration	334

12.1 Overview

The CC3200 hosts a multi-channel audio serial port (MCASP). In this version of the device, only the Inter-Integrated Sound (I2S) bit stream format is supported. Given the nature of integration of this peripheral on the CC3200 platform, developers should use peripheral library APIs to control and operate the I2S block. These APIs are tested to ensure I2S operation in master mode (CC3200 sources the I2S bit clock and frame synchronization signals), while interfacing with external audio codecs.

This section describes the I2S APIs provided in the CC3200 Software Development Kit [Peripheral Library]. This document uses a reference audio application to illustrate the usage of the I2S APIs.


12.1.1 I2S Format

The I2S format is used in audio interfaces. I2S format is realized by configuring the internal TDM transfer mode to 2 slots per frame.


I2S format is designed to transfer a stereo channel (left and right) over a single data pin. Slots are also commonly referred to as channels. The frame width duration in the I2S format is the same as the slot size. The frame signal is also referred to as 'word select' in the I2S format.

[Figure 12-1](#) shows the I2S protocol.

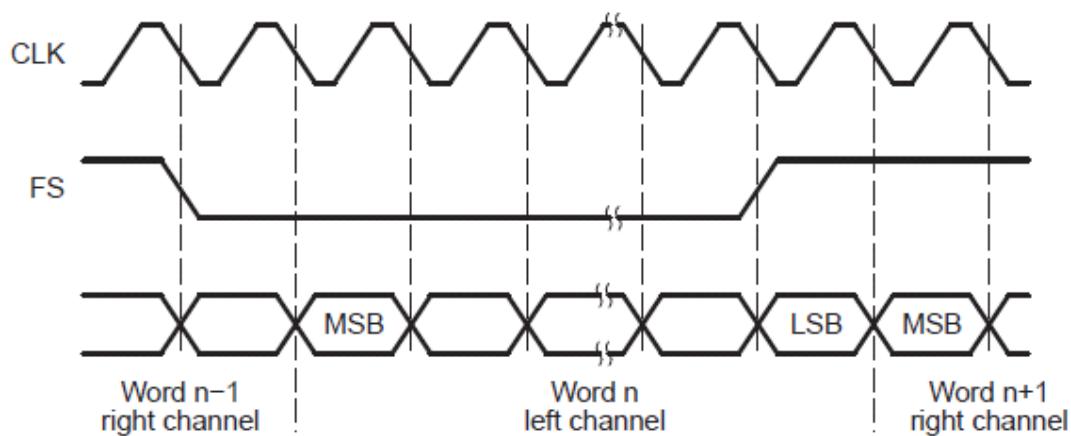Figure 12-1. I2S Protocol
Inter-Integrated Sound (I2S) Format



[Figure 12-2](#) is a functional diagram of the MCASP module.

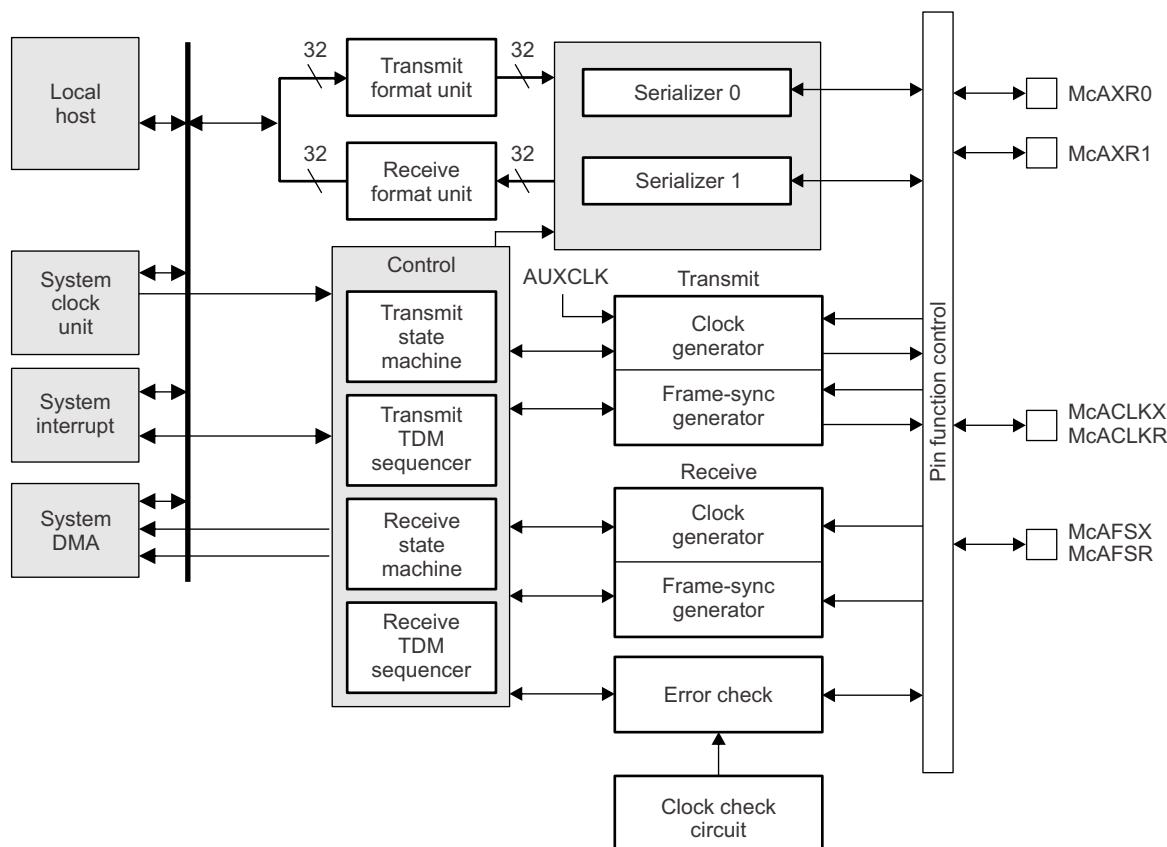Figure 12-2. MCASP Module


SWAS032-013

12.2 Functional Description

The following lists the configuration options:

- Interface
 - Bit clock configuration (generated internally in the device) – speed, polarity, and so forth
 - Frame sync configuration – speed, polarity, width, and so forth.
- Data Format
 - Alignment (left or right)
 - Order (MSB first or LSB first)
 - Pad
 - Slot size
- Data transfer (CPU or DMA)

For details on the APIs used for I2S configuration, see [Section 12.4](#).

12.3 Programming Model


12.3.1 Clock and Reset Management

The Power, Reset and Clock Module (PRCM) manages the clock and reset. The I2S master module is sourced by a 240-MHz clock through a fractional clock divider. By default, this divider is set to output 24-MHz clock to the I2S module. The minimum frequency obtained by configuring this divider is $(240000 \text{ KHz}/1023.99) = 234.377 \text{ KHz}$.

This divider can be configured using the PRCM_I2SClockFreqSet(unsigned long ulI2CClkFreq) API from the PRCM module driver.

The module also has two internal dividers supporting a wide range of bit clock frequency. The following block diagram shows the logical clock path.

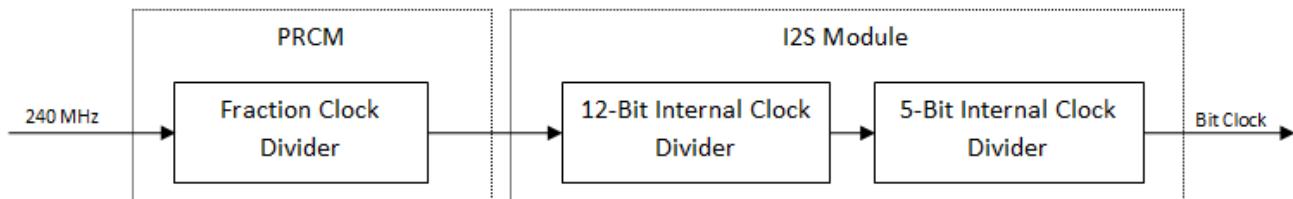Figure 12-3. Logical Clock Path



The user resets the module to return the internal registers to their default state by calling the PRCM reset API with the appropriate parameters.

12.3.2 I2S Data Port Interface

The I2S module has two data interfaces: CPU port and DMA port. Either can be used to feed transmit data into the I2S transmit buffer, or read received data from the receive buffer.

CPU Port: This port exposes the I2S buffers as 32-bit registers with one register per serializer (or data line), and can be written or read using the following APIs:

- I2SDDataPutNonBlocking(unsigned long ulBase, unsigned long ulDataLine, long ulData)
- I2SDDataPut(unsigned long ulBase, unsigned long ulDataLine, long ulData)
- I2SDDataGetNonBlocking(unsigned long ulBase, unsigned long ulDataLine, long &ulData)
- I2SDDataGet(unsigned long ulBase, unsigned long ulDataLine, long &ulData)

DMA Port: This port exposes the I2S buffers as two 32 bit registers, one each for transmit and receive. The transmit port services each serializer configured as transmit in a cyclic order, if multiple serializers are configured as a transmitter.

Similarly, the receive port services each serializer configured as receiver in a cyclic order if multiple serializers are configured as a transmitter.

The ports can be assessed using following macros:

- I2S_TX_DMA_PORT 0x4401E200
- I2S_RX_DMA_PORT 0x4401E280

12.3.3 Initialization and Configuration

I2S on the CC3200 acts as master providing frame sync and bit clock to slave and can operate in two modes: transmit-only mode and synchronous transmit – receive mode.

In transmit-only mode, the device is only configured to transmit data. In synchronous transmit – receive mode, the device is configured to transmit and receive in a synchronous manner. In both cases the data transmitted and received is in sync with the frame sync and bit clock signals generated internally by the I2S module.

This section shows a module initialization and configuration example for each mode supported to transmit and receive 16-bit, 44.1-KHz audio.

1. Computing bit clock from sampling frequency and bits/sample:

```

BitClock = (Sampling_Frequency * 2 * bits/sample)
BitClock = (44100 * 2 * 16) = 1411200 Hz
  
```

2. Basic initialization

- (a) Enable the I2S module clock by invoking

```
PRCMPeripheralClkEnable(PRCM_I2S, PRCM_RUN_MODE_CLK).
```

(b) Reset the module using PRCMPeripheralReset(PRCM_I2S).

(c) Set fractional clock divider to generate module input clock of BitRate * 10:

```
PRCMI2SClockFreqSet(14112000)
```

(d) Configure the internal divider of the module to generate the required bit clock frequency:

```
I2SConfigSetExpClk(I2S_BASE, 14112000, 1411200, I2S_SLOT_SIZE_16|I2S_PORT_CPU).
```

The second parameter “I2S_SLOT_SIZE_16|I2S_PORT_CPU” sets the slot size and chooses the port interface on which the I2C module should expect the data.

(e) Register the interrupt handler and enable the transmit data interrupt:

```
I2SIntRegister(I2S_BASE, I2SIntHandler)
```

```
I2SIntEnable(I2S_BASE, I2S_INT_XDATA)
```

3. Transmit-only mode with interrupts

(a) Configure the serializer 0 for transmit:

```
I2SSerializerConfig(I2S_BASE, I2S_DATA_LINE_0, I2S_SER_MODE_TX, I2S_INACT_LOW_LEVEL)
```

(b) Enable I2S module in transmit-only mode:

```
I2SEnable(I2S_BASE, I2S_MODE_TX_ONLY)
```

4. Synchronous transmit – receive with interrupts

(a) Enable receive data Interrupt:

```
I2SIntEnable(I2S_BASE, I2S_INT_XDATA)
```

(b) Configure the serializer 0 for transmit and serializer 1 for receive:

```
I2SSerializerConfig(I2S_BASE, I2S_DATA_LINE_0, I2S_SER_MODE_TX, I2S_INACT_LOW_LEVEL)
```

```
I2SSerializerConfig(I2S_BASE, I2S_DATA_LINE_1, I2S_SER_MODE_RX, I2S_INACT_LOW_LEVEL)
```

(c) Enable I2S module in synchronous transmit – receive mode:

```
I2SEnable(I2S_BASE, I2S_MODE_TX_RX_SYNC)
```

5. Generic I2S interrupt handler

```
void I2SIntHandler()
{
    unsigned long ulStatus;
    unsigned long ulDummy;

    // Get the interrupt status
    ulStatus = I2SIntStatus(I2S_BASE);

    // Check if there was a Transmit interrupt; if so write next data into the tx buffer and
    // acknowledge
    // the interrupt
    if(ulStatus
        &I2S_STS_XDATA)
    {
        I2SDataPutNonBlocking(I2S_BASE, I2S_DATA_LINE_0, 0xA5)
        I2SIntClear(I2S_BASE, I2S_STS_XDATA);
    }

    // Check if there was a receive interrupt; if so read the data from the rx buffer and
    // acknowledge
    // the interrupt
    if(ulStatus
        &I2S_STS_RDATA)
    {
        I2SDataGetNonBlocking( I2S_BASE, I2S_DATA_LINE_1,
        &ulDummy);
        I2SIntClear(I2S_BASE, I2S_STS_RDATA);
    }
}
```

12.4 Peripheral Library APIs for I2S Configuration

This section describes the APIs hosted in the CC3200 SDK (Peripheral Library) necessary for I2S configuration.

12.4.1 Basic APIs for Enabling and Configuring the Interface

void I2SDisable (unsigned long ulBase)

Disables transmit and/or receive.

Parameters:

ulBase — the base address of the I2S module.

This function disables transmit, receive, or both from the I2S module.

Returns:

None.

void I2SEnable (unsigned long ulBase, unsigned long ulMode)

Enables transmit and/or receive.

Parameters:

ulBase — is the base address of the I2S module.

ulMode — is one of the valid modes.

This function enables the I2S module in specified mode.

The parameter **ulMode** should be one of the following:

-I2S_MODE_TX_ONLY -I2S_MODE_TX_RX_SYNC

Returns:

None.

Reference:

```
ulModeparameter
#define I2S_MODE_TX_ONLY 0x00000001 #define
I2S_MODE_TX_RX_SYNC 0x00000003
```

void I2SSerializerConfig (unsigned long ulBase, unsigned long ulDataLine, unsigned long ulSerMode, unsigned long ullnActState)

Configure the serializer in a specified mode.

Parameters:

ulBase — is the base address of the I2S module.

ulDataLine — is the data line (serializer) to be configured.

ulSerMode — is the required serializer mode.

ullnActstate — sets the inactive state of the data line.

This function configures and enables the serializer associated with the given data line in specified mode.

The parameter **ulDataLine** selects the data line to be configured, and can be one of the following:

-I2S_DATA_LINE_0 -I2S_DATA_LINE_1

The parameter ulSerMode can be one of the following:

-I2S_SER_MODE_TX -I2S_SER_MODE_RX
-I2S_SER_MODE_DISABLE

The parameter ullnActState can be one of the following:

-I2S_INACT_TRI_STATE -I2S_INACT_LOW_LEVEL
-I2S_INACT_LOW_HIGH

Returns:

Returns receive FIFO status.

References:

ulDataLine parameter

```
#define I2S_DATA_LINE_0 0x00000001 #define
I2S_DATA_LINE_1 0x00000002
```

ulSerMode parameter

```
#define I2S_SER_MODE_TX 0x00000001 #define
I2S_SER_MODE_RX 0x00000002 #define I2S_SER_MODE_DISABLE
0x00000000
```

ullnActState parameter

```
#define I2S_INACT_TRI_STATE 0x00000000 #define
I2S_INACT_LOW_LEVEL 0x00000008 #define I2S_INACT_HIGH_LEVEL
0x0000000C
```

void I2SConfigSetExpClk (unsigned long ulBase, unsigned long ullI2SClk, unsigned long ulBitClk, unsigned long ulConfig)

Sets the configuration of the I2S module.

Parameters:

ulBase — is the base address of the I2S module.

ullI2SClk — is the rate of the clock supplied to the I2S module.

ulBitClk — is the desired bit rate.

ulConfig — is the data format.

This function configures the I2S for operation in the specified data format. The bit rate is provided in the **ulBitClk** parameter and the data format in the **ulConfig** parameter.

The **ulConfig** parameter is the logical OR of two values: the slot size and the data read/write port select.

The following parameters select the slot size:

-I2S_SLOT_SIZE_24 -I2S_SLOT_SIZE_16

The following parameters select the data read/write port:

-I2S_PORT_DMA -I2S_PORT_CPU

Returns:

None.

Reference:

```
#define I2S_SLOT_SIZE_24 0x00B200B4 #define  
I2S_SLOT_SIZE_16 0x00700074 #define I2S_PORT_CPU 0x00000008 #define  
I2S_PORT_DMA 0x00000000
```

12.4.2 APIs for Data Access if DMA is Not Used

void I2SDataGet (unsigned long ulBase, unsigned long ulDataLine, unsigned long * pulData)

Waits for data from the specified data line.

Parameters:

ulBase — is the base address of the I2S module.

ulDataLine — is one of the valid data lines.

pulData — is a pointer to the receive data variable.

This function gets data from the receive register for the specified data line. If there is no data available, this function waits until a receive before returning.

Returns:

None.

long I2SDataGetNonBlocking (unsigned long ulBase, unsigned long ulDataLine, unsigned long * pulData)

Receives data from the specified data line.

Parameters:

ulBase — is the base address of the I2S module.

ulDataLine — is one of the valid data lines.

pulData — is a pointer to the receive data variable.

This function gets data from the receive register for the specified data line.

Returns:

Returns 0 on success, -1 otherwise.

void I2SDataPut (unsigned long ulBase, unsigned long ulDataLine, unsigned long ulData)

Waits to send data over the specified data line.

Parameters:

ulBase — is the base address of the I2S module.

ulDataLine — is one of the valid data lines.

ulData — is the data to be transmitted.

This function sends the `ulData` to the transmit register for the specified data line. If there is no space available, this function waits until there is space available before returning.

Returns:

None.

void I2SDataPut (unsigned long ulBase, unsigned long ulDataLine, unsigned long ulData)

Waits to send data over the specified data line.

Parameters:

ulBase — is the base address of the I2S module.

ulDataLine — is one of the valid data lines.

ulData — is the data to be transmitted.

This function writes the `ucData` to the transmit register for the specified data line. This function does not block, so if there is no space available, then -1 is returned, and the application must retry the function later.

Returns:

Returns 0 on success, -1 otherwise.

12.4.3 APIs for Setting Up, Handling Interrupts, or Getting Status from I2S Peripheral

void I2SIntRegister (unsigned long ulBase, void(*)(void) pfnHandler)

Registers an interrupt handler for an I2S interrupt.

Parameters:

ulBase — is the base address of the I2S module.

pfnHandler — is a pointer to the function to be called when the I2S interrupt occurs.

This function registers the interrupt handler. This function enables the global interrupt in the interrupt controller; specific I2S interrupts must be enabled using `I2SIntEnable()`. The interrupt handler must clear the interrupt source.

See `IntRegister()` for information about registering interrupt handlers.

Returns:

None.

void I2SIntEnable (unsigned long ulBase, unsigned long ullIntFlags)

Enables individual I2S interrupt sources.

Parameters:

ulBase — is the base address of the I2S module.

ullIntFlags — is the bit mask of the interrupt sources to be enabled.

This function enables the indicated I2S interrupt sources. Only enabled sources can be reflected to the processor interrupt; disabled sources have no effect on the processor.

The `ullIntFlags` parameter is the logical OR for any of the following:

```
-I2S_INT_XUNDRN -I2S_INT_XSYNCERR -I2S_INT_XLAST -I2S_INT_XDATA  
-I2S_INT_XSTAFRM -I2S_INT_XDMA -I2S_INT_ROVRN -I2S_INT_RSYNCERR  
-I2S_INT_RLAST -I2S_INT_RDATA -I2S_INT_RSTAFRM -I2S_INT_RDMA
```

Returns:

None.

void I2SIntDisable (unsigned long ulBase, unsigned long ullIntFlags)

Disables individual I2S interrupt sources.

Parameters:

ulBase — is the base address of the I2S module.

ullIntFlags — is the bit mask of the interrupt sources to be disabled.

This function disables the indicated I2S interrupt sources. Only enabled sources can be reflected to the processor interrupt; disabled sources have no effect on the processor.

The `ullIntFlags` parameter has the same definition as the `ullIntFlags` parameter to `I2SIntEnable()`.

Returns:

None.

unsigned long I2SIntStatus (unsigned long ulBase)

Gets the current interrupt status.

Parameters:

ulBase — is the base address of the I2S module.

This function returns the raw interrupt status for I2S enumerated as a bit field of values:

```
-I2S_STS_XERR -I2S_STS_XDMAERR -I2S_STS_XSTAFRM -I2S_STS_XDATA
-I2S_STS_XLAST -I2S_STS_XSYNCERR -I2S_STS_XUNDRN -I2S_STS_XDMA
-I2S_STS_RERR -I2S_STS_RDMAERR -I2S_STS_RSTAFRM -I2S_STS_RDATA
-I2S_STS_RLAST -I2S_STS_RSYNCERR -I2S_STS_ROVERN -I2S_STS_RDMA
```

Returns:

Returns the current interrupt status, enumerated as a bit field of the values described above.

void I2SIntUnregister (unsigned long ulBase)

Unregisters an interrupt handler for a I2S interrupt.

Parameters:

ulBase — is the base address of the I2S module.

This function unregisters the interrupt handler. The function clears the handler to be called when a I2S interrupt occurs. This function also masks off the interrupt in the interrupt controller so that the interrupt handler no longer is called.

See `IntRegister()` for information about registering interrupt handlers.

Returns:

None.

void I2SIntClear (unsigned long ulBase, unsigned long ulStatFlags)

Clears I2S interrupt sources.

Parameters:

ulBase — is the base address of the I2S module.

ulStatFlags — is a bit mask of the interrupt sources to be cleared.

The specified I2S interrupt sources are cleared, so that they no longer assert. This function must be called in the interrupt handler to keep the interrupt from being recognized again immediately upon exit.

The `ulIntFlags` parameter is the logical OR of any of the value described in `I2SIntStatus()`.

Returns:

None.

Values that can be passed to I2SIntEnable() and I2SIntDisable() as the ulIntFlags parameter

Table 12-1 lists the values that can be passed to `I2SIntEnable()` and `I2SIntDisable()` as the `ulIntFlags` parameter.

Table 12-1. ullIntFlags Parameter

Tag	Value	Description
I2S_INT_XUNDR	0x00000001	Transmit underrun interrupt enable bit
I2S_INT_XSYNCERR	0x00000002	Unexpected transmit frame sync interrupt enable bit
I2S_INT_XLAST	0x00000010	Transmit last slot interrupt enable bit
I2S_INT_XDATA	0x00000020	Transmit data ready interrupt enable bit
I2S_INT_XSTAFRM	0x00000080	Transmit start of frame interrupt enable bit
I2S_INT_XDMA	0x80000000	
I2S_INT_ROVRN	0x00010000	Receiver overrun interrupt enable bit
I2S_INT_RSYNCERR	0x00020000	Unexpected receive frame sync interrupt enable bit
I2S_INT_RLAST	0x00100000	Receive start of frame interrupt enable bit
I2S_INT_RDATA	0x00200000	Receive data ready interrupt enable bit
I2S_INT_RSTAFRM	0x00800000	Receive start of frame interrupt enable bit
I2S_INT_RDMA	0x40000000	

Values that can be passed to I2SIntClear() as the ulStatFlags parameter and returned from I2SIntStatus()

Table 12-2 lists the values that can be passed to I2SIntClear() as the ulStatFlags parameter and returned from I2SIntStatus().

Table 12-2. ulStatFlags Parameter

Tag	Value	Description
I2S_STS_XERR	0x00000100	XERR bit always returns a logic-OR of: XUNDRN XSYNCERR XCKFAIL XDMAERR
I2S_STS_XDMAERR	0x00000080	Transmit DMA error flag. XDMAERR is set when the CPU or DMA writes more serializers through the data port in a given time slot than were programmed as transmitters
I2S_STS_XSTAFRM	0x00000040	Transmit start of frame flag
I2S_STS_XDATA	0x00000020	Transmit data ready flag. 1 indicates that data is copied from Tx Buffer to shift register. Tx Buffer is EMPTY and ready to be written. 0 indicates Tx Buffer is FULL
I2S_STS_XLAST	0x00000010	Transmit last slot flag. XLAST is set along with XDATA, if the current slot is the last slot in a frame.
I2S_STS_XSYNCERR	0x00000002	Unexpected transmit frame sync flag. XSYNCERR is set when a new transmit frame sync (AFSX) occurs before it is expected.
I2S_STS_XUNDRN	0x00000001	Transmitter underrun flag. XUNDRN is set when the transmit serializer is instructed to transfer data from Tx Buffer, but Tx Buffer has not yet been serviced with new data since the last transfer.
I2S_STS_XDMA	0x80000000	
I2S_STS_RERR	0x01000000	RERR bit always returns a logic-OR of: ROVRN RSYNCERR RCKFAIL RDMAERR. Allows a single bit to be checked to determine if a receiver error interrupt has occurred.
I2S_STS_RDMAERR	0x00800000	Receive DMA error. Receive DMA error flag. RDMAERR is set when the CPU or DMA reads more serializers through the data port in a given time slot than were programmed as receivers
I2S_STS_RSTAFRM	0x00400000	Receive start of frame flag. Indicates A new receive frame sync is detected
I2S_STS_RDATA	0x00200000	Receive data ready flag. Indicates data is transferred from shift register to Rx buffer and ready to be serviced by the CPU or DMA. When RDATA is set, it always causes a DMA event.
I2S_STS_RLAST	0x00100000	Receive last slot flag. RLAST is set along with RDATA, if the current slot is the last slot in a frame.

Table 12-2. uiStatFlags Parameter (continued)

Tag	Value	Description
I2S_STS_RSYNCERR	0x00020000	Unexpected receive frame sync. Unexpected receive frame sync flag. RSYNCERR is set when a new receive frame sync occurs before it is expected.
I2S_STS_ROVERN	0x00010000	Receive clock failure. Receiver overrun flag. ROVRN is set when the receive serializer is instructed to transfer data from XRSR to RBUF, but the former data in RBUF has not yet been read by the CPU or DMA.
I2S_STS_RDMA	0x40000000	

12.4.4 APIs to Control FIFO Structures Associated with I²S Peripheral

void I2SRxFIFODisable (unsigned long ulBase)

Disables receive FIFO.

Parameters:

ulBase — is the base address of the I²S module.

This function disables the I²S receive FIFO.

Returns:

None.

void I2SRxFIFOEnable (unsigned long ulBase, unsigned long ulRxLevel, unsigned long ulWordsPerTransfer)

Configures and enables receive FIFO.

Parameters:

ulBase — is the base address of the I²S module.

ulRxLevel — is the receive FIFO DMA request level.

ulWordsPerTransfer — is the number of words transferred from the FIFO.

This function configures and enables I²S receive FIFO.

The parameter **ulRxLevel** sets the level at which receive DMA requests are generated. This should be non-zero integer multiple of number of serializers enabled as receivers.

The parameter **ulWordsPerTransfer** sets the number of words transferred to the receive FIFO from the data lines. This value must equal the number of serializers used as receivers.

Returns:

None.

unsigned long I2SRxFIFOStatusGet (unsigned long ulBase)

Get the receive FIFO status.

Parameters:

ulBase — is the base address of the I²S module.

This function gets the number of 32-bit words currently in the receive FIFO.

Returns:

Returns receive FIFO status.

void I2STxFIFODisable (unsigned long ulBase)

Disables transmit FIFO.

Parameters:

ulBase — is the base address of the I²S module.

This function disables the I²S transmit FIFO.

Returns:

None.

void I2STxFIFOEnable (unsigned long ulBase, unsigned long ulTxLevel, unsigned long ulWordsPerTransfer)

Configures and enables transmit FIFO.

Parameters:

ulBase — is the base address of the I2S module.

ulTxLevel — is the transmit FIFO DMA request level.

ulWordsPerTransfer — is the number of words transferred from the FIFO.

This function configures and enables I2S transmit FIFO.

The parameter **ulTxLevel** sets the level at which transmit DMA requests are generated. This should be non-zero integer multiple of number of serializers enabled as transmitters.

The parameter **ulWordsPerTransfer** sets the number of words that are transferred from the transmit FIFO to the data lines. This value must equal the number of serializers used as transmitters.

Returns:

None.

unsigned long I2STxFIFOStatusGet (unsigned long ulBase)

Gets the transmit FIFO status.

Parameters:

ulBase — is the base address of the I2S module.

This function gets the number of 32-bit words currently in the transmit FIFO.

Returns:

Returns transmit FIFO status.

Analog-to-Digital Converter [ADC]

Topic	Page
13.1 Overview	346
13.2 Key Features.....	346
13.3 ADC Register Mapping	347
13.4 ADC_MODULE Registers	348
13.5 Initialization and Configuration	369
13.6 Peripheral Library APIs for ADC Operation	370

13.1 Overview


The CC3200 provides a general purpose, multi-channel Analog-to-Digital Converter (ADC). Each of the ADC channels supports 12-bit conversion resolution with sampling periodicity of 16 μ s (62.5 Ksps/channel). Each channel has an associated FIFO and DMA. For detailed electrical characteristics of the ADC, refer to the CC3200 data sheet ([SWAS032](#)).

13.2 Key Features


- Total of 8 channels
 - 4 external analog input channels for user applications
 - 4 internal channels reserved for SimpleLink subsystem (network and Wi-Fi).
- 12-bit resolution
- Fixed sampling rate of 16 μ s per channel. Equivalent to 62.5K samples/sec per channel
- Fixed round-robin sampling across all channels
- Samples are uniformly spaced and interleaved. Multiple user channels can be combined together to realize higher sampling rate. For example, all four channels can be shorted together to get an aggregate sampling rate of 250K samples/sec.
- DMA interface to transfer data to the application RAM; dedicated DMA channel for each channel
- Capability to timestamp ADC samples using 17-bit timer running on a 40-MHz clock. The user can read the timestamp along with the sample from the FIFO registers. Each sample in the FIFO contains actual data and a timestamp.

[Figure 13-1](#) shows the architecture of the ADC module in the CC3200.

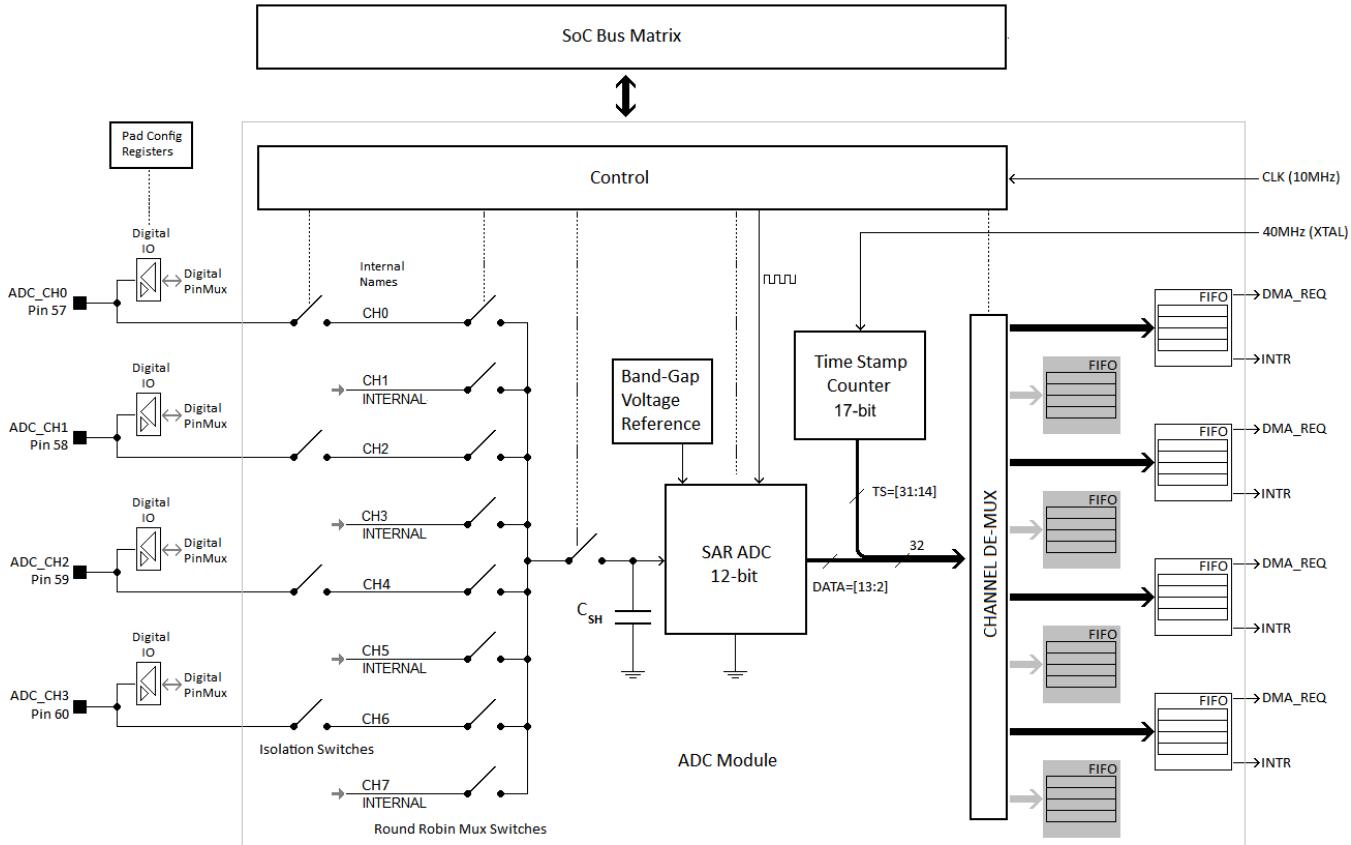Figure 13-1. Architecture of the ADC Module in CC3200



[Figure 13-2](#) shows the round-robin operation of the ADC.

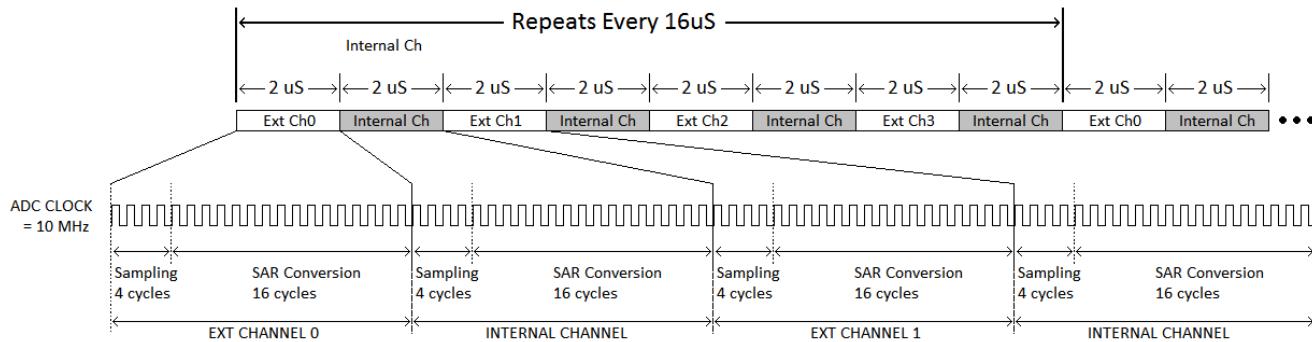Figure 13-2. Operation of the ADC


13.3 ADC Register Mapping

Naming convention for ADC registers: The CC3200 ADC module supports a total of 8 analog input channels: CH0 to CH7. Each of these channels are sampled at a fixed rate of 16 μs in a fixed round-robin fashion. See [Figure 13-2](#).

Out of these, the four channels (even) are available for application processor: CH0, CH2, CH4, CH6.

In the chip pin-mux description, these are referred to as ADC_CH0 to ADC_CH3. [Table 13-1](#) shows the name aliasing and the convention followed in register description in the following section of this chapter.

Table 13-1. ADC Registers

Pin Number	ADC Channel Name Alias in Pin Mux	Channel Name Used In ADC Module Register Description
57	ADC_CH0	CH0
58	ADC_CH1	CH2
59	ADC_CH2	CH4
60	ADC_CH3	CH6
N/A	N/A (Used internal to SoC)	CH1
N/A	N/A (Used internal to SoC)	CH3
N/A	N/A (Used internal to SoC)	CH5
N/A	N/A (Used internal to SoC)	CH7

The remaining channels (odd) are used for monitoring various internal levels by the SimpleLink subsystem in CC3200 SoC. Register bits and functions related to these internal channels are marked as reserved in the register description. These bits must not be modified by application code to ensure proper functioning of the system.

13.4 ADC_MODULE Registers

Table 13-2 lists the memory-mapped registers for the ADC_MODULE. All register offset addresses not listed in **Table 13-2** should be considered as reserved locations and the register contents should not be modified.

Table 13-2. ADC_MODULE Registers

Offset	Acronym	Register Name	Section
0h	ADC_CTRL	ADC control register	Section 13.4.1.1
24h	ADC_CH0_IRQ_EN	Channel 0 interrupt enable register	Section 13.4.1.2
2Ch	ADC_CH2_IRQ_EN	Channel 2 interrupt enable register	Section 13.4.1.3
34h	ADC_CH4_IRQ_EN	Channel 4 interrupt enable register	Section 13.4.1.4
3Ch	ADC_CH6_IRQ_EN	Channel 6 interrupt enable register	Section 13.4.1.5
44h	ADC_CH0_IRQ_STATUS	Channel 0 interrupt status register	Section 13.4.1.6
4Ch	ADC_CH2_IRQ_STATUS	Channel 2 interrupt status register	Section 13.4.1.7
54h	ADC_CH4_IRQ_STATUS	Channel 4 interrupt status register	Section 13.4.1.8
5Ch	ADC_CH6_IRQ_STATUS	Channel 6 interrupt status register	Section 13.4.1.9
64h	ADC_DMA_MODE_EN	DMA mode enable register	Section 13.4.1.10
68h	ADC_TIMER_CONFIGURATION	ADC timer configuration register	Section 13.4.1.11
70h	ADC_TIMER_CURRENT_COUNT	ADC timer current count register	Section 13.4.1.12
74h	CHANNEL0FIFODATA	CH0 FIFO DATA register	Section 13.4.1.13
7Ch	CHANNEL2FIFODATA	CH2 FIFO DATA register	Section 13.4.1.14
84h	CHANNEL4FIFODATA	CH4 FIFO DATA register	Section 13.4.1.15
8Ch	CHANNEL6FIFODATA	CH6 FIFO DATA register	Section 13.4.1.16
94h	ADC_CH0_FIFO_LVL	Channel 0 interrupt status register	Section 13.4.1.17
9Ch	ADC_CH2_FIFO_LVL	Channel 2 interrupt status register	Section 13.4.1.18
A4h	ADC_CH4_FIFO_LVL	Channel 4 interrupt status register	Section 13.4.1.19
ACh	ADC_CH6_FIFO_LVL	Channel 6 interrupt status register	Section 13.4.1.20
B8h	ADC_CH_ENABLE	ADC enable register for application channels	Section 13.4.1.21

13.4.1 ADC Register Description

The remainder of this section lists and describes the ADC registers, in numerical order by address offset.

13.4.1.1 ADC_CTRL Register (offset = 0h) [reset = 0h]

ADC_CTRL is shown in [Figure 13-3](#) and described in [Table 13-3](#).

Figure 13-3. ADC_CTRL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED							ADC_EN_APP S
R-0h							
R/W-0h							

Table 13-3. ADC_CTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-1	RESERVED	R	0h	
0	ADC_EN_APP S	R/W	0h	ADC enable for application processor

13.4.1.2 ADC_CH0_IRQ_EN Register (offset = 24h) [reset = 0h]

ADC_CH0_IRQ_EN is shown in [Figure 13-4](#) and described in [Table 13-4](#).

Figure 13-4. ADC_CH0_IRQ_EN Register

31	30	29	28	27	26	25	24				
RESERVED											
R-0h											
23	22	21	20	19	18	17	16				
RESERVED											
R-0h											
15	14	13	12	11	10	9	8				
RESERVED											
R-0h											
7	6	5	4	3	2	1	0				
RESERVED				ADC_CHANNEL0_IRQ_EN							
R-0h											
R/W-0h											

Table 13-4. ADC_CH0_IRQ_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	ADC_CHANNEL0_IRQ_EN	R/W	0h	Interrupt enable register for ADC channel Bit 3: when 1 -> enable FIFO overflow interrupt Bit 2: when 1 -> enable FIFO underflow interrupt Bit 1: when 1 -> enable FIFO empty interrupt Bit 0: when 1 -> enable FIFO full interrupt

13.4.1.3 ADC_CH2_IRQ_EN Register (offset = 2Ch) [reset = 0h]

ADC_CH2_IRQ_EN is shown in [Figure 13-5](#) and described in [Table 13-5](#).

Figure 13-5. ADC_CH2_IRQ_EN Register

31	30	29	28	27	26	25	24				
RESERVED											
R-0h											
23	22	21	20	19	18	17	16				
RESERVED											
R-0h											
15	14	13	12	11	10	9	8				
RESERVED											
R-0h											
7	6	5	4	3	2	1	0				
RESERVED				ADC_CHANNEL2_IRQ_EN							
R-0h											
R/W-0h											

Table 13-5. ADC_CH2_IRQ_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	ADC_CHANNEL2_IRQ_EN	R/W	0h	Interrupt enable register for ADC channel Bit 3: when 1 -> enable FIFO overflow interrupt Bit 2: when 1 -> enable FIFO underflow interrupt Bit 1: when 1 -> enable FIFO empty interrupt Bit 0: when 1 -> enable FIFO full interrupt

13.4.1.4 ADC_CH4_IRQ_EN Register (offset = 34h) [reset = 0h]

ADC_CH4_IRQ_EN is shown in [Figure 13-6](#) and described in [Table 13-6](#).

Figure 13-6. ADC_CH4_IRQ_EN Register

31	30	29	28	27	26	25	24				
RESERVED											
R-0h											
23	22	21	20	19	18	17	16				
RESERVED											
R-0h											
15	14	13	12	11	10	9	8				
RESERVED											
R-0h											
7	6	5	4	3	2	1	0				
RESERVED				ADC_CHANNEL4_IRQ_EN							
R-0h											
R/W-0h											

Table 13-6. ADC_CH4_IRQ_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	ADC_CHANNEL4_IRQ_EN	R/W	0h	Interrupt enable register for ADC channel Bit 3: when 1 -> enable FIFO overflow interrupt Bit 2: when 1 -> enable FIFO underflow interrupt Bit 1: when 1 -> enable FIFO empty interrupt Bit 0: when 1 -> enable FIFO full interrupt

13.4.1.5 ADC_CH6_IRQ_EN Register (offset = 3Ch) [reset = 0h]

ADC_CH6_IRQ_EN is shown in [Figure 13-7](#) and described in [Table 13-7](#).

Figure 13-7. ADC_CH6_IRQ_EN Register

31	30	29	28	27	26	25	24				
RESERVED											
R-0h											
23	22	21	20	19	18	17	16				
RESERVED											
R-0h											
15	14	13	12	11	10	9	8				
RESERVED											
R-0h											
7	6	5	4	3	2	1	0				
RESERVED				ADC_CHANNEL6_IRQ_EN							
R-0h											
R/W-0h											

Table 13-7. ADC_CH6_IRQ_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	ADC_CHANNEL6_IRQ_EN	R/W	0h	Interrupt enable register for ADC channel Bit 3: when 1 -> enable FIFO overflow interrupt Bit 2: when 1 -> enable FIFO underflow interrupt Bit 1: when 1 -> enable FIFO empty interrupt Bit 0: when 1 -> enable FIFO full interrupt

13.4.1.6 ADC_CH0_IRQ_STATUS Register (offset = 44h) [reset = 0h]

ADC_CH0_IRQ_STATUS is shown in Figure 13-8 and described in Table 13-8.

Figure 13-8. ADC_CH0_IRQ_STATUS Register

31	30	29	28	27	26	25	24				
RESERVED											
R-0h											
23	22	21	20	19	18	17	16				
RESERVED											
R-0h											
15	14	13	12	11	10	9	8				
RESERVED											
R-0h											
7	6	5	4	3	2	1	0				
RESERVED				ADC_CHANNEL0_IRQ_STATUS							
R-0h											
R/W-0h											

Table 13-8. ADC_CH0_IRQ_STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	ADC_CHANNEL0_IRQ_STATUS	R/W	0h	<p>Interrupt status register for ADC channel. Interrupt status can be cleared on write.</p> <p>Bit 3: when value 1 is written -> Clears FIFO overflow interrupt status in the next cycle. If same interrupt is set in the same cycle, then the interrupt would be set and the clear command ignored.</p> <p>Bit 2: when value 1 is written -> Clears FIFO underflow interrupt status in the next cycle.</p> <p>Bit 1: when value 1 is written -> Clears FIFO empty interrupt status in the next cycle.</p> <p>Bit 0: when value 1 is written -> Clears FIFO full interrupt status in the next cycle.</p>

13.4.1.7 ADC_CH2_IRQ_STATUS Register (offset = 4Ch) [reset = 0h]

 ADC_CH2_IRQ_STATUS is shown in [Figure 13-9](#) and described in [Table 13-9](#).

Figure 13-9. ADC_CH2_IRQ_STATUS Register

31	30	29	28	27	26	25	24				
RESERVED											
R-0h											
23	22	21	20	19	18	17	16				
RESERVED											
R-0h											
15	14	13	12	11	10	9	8				
RESERVED											
R-0h											
7	6	5	4	3	2	1	0				
RESERVED				ADC_CHANNEL2_IRQ_STATUS							
R-0h											
R/W-0h											

Table 13-9. ADC_CH2_IRQ_STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	ADC_CHANNEL2_IRQ_STATUS	R/W	0h	<p>Interrupt status register for ADC channel. Interrupt status can be cleared on write.</p> <p>Bit 3: when value 1 is written -> Clears FIFO overflow interrupt status in the next cycle. If the same interrupt is set in the same cycle, then the interrupt would be set and the clear command ignored.</p> <p>Bit 2: when value 1 is written -> Clears FIFO underflow interrupt status in the next cycle.</p> <p>Bit 1: when value 1 is written -> Clears FIFO empty interrupt status in the next cycle.</p> <p>Bit 0: when value 1 is written -> Clears FIFO full interrupt status in the next cycle.</p>

13.4.1.8 ADC_CH4_IRQ_STATUS Register (offset = 54h) [reset = 0h]

ADC_CH4_IRQ_STATUS is shown in [Figure 13-10](#) and described in [Table 13-10](#).

Figure 13-10. ADC_CH4_IRQ_STATUS Register

31	30	29	28	27	26	25	24				
RESERVED											
R-0h											
23	22	21	20	19	18	17	16				
RESERVED											
R-0h											
15	14	13	12	11	10	9	8				
RESERVED											
R-0h											
7	6	5	4	3	2	1	0				
RESERVED				ADC_CHANNEL4_IRQ_STATUS							
R-0h											
R/W-0h											

Table 13-10. ADC_CH4_IRQ_STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	ADC_CHANNEL4_IRQ_STATUS	R/W	0h	<p>Interrupt status register for ADC channel. Interrupt status can be cleared on write.</p> <p>Bit 3: when value 1 is written -> Clears FIFO overflow interrupt status in the next cycle. If the same interrupt is set in the same cycle, then the interrupt would be set and the clear command ignored.</p> <p>Bit 2: when value 1 is written -> Clears FIFO underflow interrupt status in the next cycle.</p> <p>Bit 1: when value 1 is written -> Clears FIFO empty interrupt status in the next cycle.</p> <p>Bit 0: when value 1 is written -> Clears FIFO full interrupt status in the next cycle.</p>

13.4.1.9 ADC_CH6_IRQ_STATUS Register (offset = 5Ch) [reset = 0h]

ADC_CH6_IRQ_STATUS is shown in [Figure 13-11](#) and described in [Table 13-11](#).

Figure 13-11. ADC_CH6_IRQ_STATUS Register

31	30	29	28	27	26	25	24				
RESERVED											
R-0h											
23	22	21	20	19	18	17	16				
RESERVED											
R-0h											
15	14	13	12	11	10	9	8				
RESERVED											
R-0h											
7	6	5	4	3	2	1	0				
RESERVED				ADC_CHANNEL6_IRQ_STATUS							
R-0h											
R/W-0h											

Table 13-11. ADC_CH6_IRQ_STATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-4	RESERVED	R	0h	
3-0	ADC_CHANNEL6_IRQ_STATUS	R/W	0h	<p>Interrupt status register for ADC channel. Interrupt status can be cleared on write.</p> <p>Bit 3: when value 1 is written -> Clears FIFO overflow interrupt status in the next cycle. If the same interrupt is set in the same cycle, then the interrupt would be set and the clear command ignored.</p> <p>Bit 2: when value 1 is written -> Clears FIFO underflow interrupt status in the next cycle.</p> <p>Bit 1: when value 1 is written -> Clears FIFO empty interrupt status in the next cycle.</p> <p>Bit 0: when value 1 is written -> Clears FIFO full interrupt status in the next cycle.</p>

13.4.1.10 ADC_DMA_MODE_EN Register (offset = 64h) [reset = 0h]

ADC_DMA_MODE_EN is shown in [Figure 13-12](#) and described in [Table 13-12](#).

Figure 13-12. ADC_DMA_MODE_EN Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED								DMA_MODEENABLE							
R-0h								R/W-0h							

Table 13-12. ADC_DMA_MODE_EN Register Field Descriptions

Bit	Field	Type	Reset	Description
31-8	RESERVED	R	0h	
7-0	DMA_MODEENABLE	R/W	0h	<p>This register enables DMA mode.</p> <p>Bit 0: channel 0 DMA mode enable.</p> <p>Bit 1: Reserved for internal channel</p> <p>Bit 2: channel 2 DMA mode enable.</p> <p>Bit 3: Reserved for internal channel.</p> <p>Bit 4: channel 4 DMA mode enable.</p> <p>Bit 5: Reserved for internal channel</p> <p>Bit 6: channel 6 DMA mode enable.</p> <p>Bit 7: Reserved for internal channel.</p> <p>0h = Only the interrupt mode is enabled.</p> <p>1h = Respective ADC channel is enabled for DMA.</p>

13.4.1.11 ADC_TIMER_CONFIGURATION Register (offset = 68h) [reset = 111111h]

 ADC_TIMER_CONFIGURATION is shown in [Figure 13-13](#) and described in [Table 13-13](#).

Figure 13-13. ADC_TIMER_CONFIGURATION Register

31	30	29	28	27	26	25	24
RESERVED						TIMEREN	TIMERRESET
R-0h						R/W-0h	R/W-0h
23	22	21	20	19	18	17	16
TIMERCOUNT							
R/W-111111h							
15	14	13	12	11	10	9	8
TIMERCOUNT							
R/W-111111h							
7	6	5	4	3	2	1	0
TIMERCOUNT							
R/W-111111h							

Table 13-13. ADC_TIMER_CONFIGURATION Register Field Descriptions

Bit	Field	Type	Reset	Description
31-26	RESERVED	R	0h	
25	TIMEREN	R/W	0h	1h = Timer is enabled
24	TIMERRESET	R/W	0h	1h = Reset timer
23-0	TIMERCOUNT	R/W	111111h	Timer count configuration. 17-bit counter is supported. Other MSBs are redundant.

13.4.1.12 ADC_TIMER_CURRENT_COUNT Register (offset = 70h) [reset = 0h]

ADC_TIMER_CURRENT_COUNT is shown in [Figure 13-14](#) and described in [Table 13-14](#).

Figure 13-14. ADC_TIMER_CURRENT_COUNT Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED																TIMERCURRENTCOUNT															
R-0h																R-0h															

Table 13-14. ADC_TIMER_CURRENT_COUNT Register Field Descriptions

Bit	Field	Type	Reset	Description
31-17	RESERVED	R	0h	
16-0	TIMERCURRENTCOUNT	R	0h	Timer count configuration

13.4.1.13 CHANNEL0FIFODATA Register (offset = 74h) [reset = 0h]

CHANNEL0FIFODATA is shown in [Figure 13-15](#) and described in [Table 13-15](#).

Figure 13-15. CHANNEL0FIFODATA Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
FIFO_RD_DATA																															
R-0h																															

Table 13-15. CHANNEL0FIFODATA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	FIFO_RD_DATA	R	0h	Read to this register returns ADC data, along with timestamp information in following format: [1:0] : Reserved [13:2] : ADC sample Bits [30:14]: Timestamp per ADC sample [31] : Reserved

13.4.1.14 CHANNEL2FIFODATA Register (offset = 7Ch) [reset = 0h]

CHANNEL2FIFODATA is shown in [Figure 13-16](#) and described in [Table 13-16](#).

Figure 13-16. CHANNEL2FIFODATA Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
FIFO_RD_DATA																															
R-0h																															

Table 13-16. CHANNEL2FIFODATA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	FIFO_RD_DATA	R	0h	<p>Read to this register returns ADC data, along with timestamp information in following format:</p> <p>[1:0] : Reserved</p> <p>[13:2] : ADC sample Bits</p> <p>[30:14]: Timestamp per ADC sample</p> <p>[31] : Reserved</p>

13.4.1.15 CHANNEL4FIFODATA Register (offset = 84h) [reset = 0h]

CHANNEL4FIFODATA is shown in [Figure 13-17](#) and described in [Table 13-17](#).

Figure 13-17. CHANNEL4FIFODATA Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
FIFO_RD_DATA																															
R-0h																															

Table 13-17. CHANNEL4FIFODATA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	FIFO_RD_DATA	R	0h	Read to this register returns ADC data, along with timestamp information in following format: [1:0] : Reserved [13:2] : ADC sample Bits [30:14]: Timestamp per ADC sample [31] : Reserved

13.4.1.16 CHANNEL6FIFODATA Register (offset = 8Ch) [reset = 0h]

CHANNEL6FIFODATA is shown in [Figure 13-18](#) and described in [Table 13-18](#).

Figure 13-18. CHANNEL6FIFODATA Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
FIFO_RD_DATA																															
R-0h																															

Table 13-18. CHANNEL6FIFODATA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	FIFO_RD_DATA	R	0h	<p>Read to this register returns ADC data, along with time stamp information in following format:</p> <p>[1:0] : Reserved</p> <p>[13:2] : ADC sample Bits</p> <p>[30:14]: Timestamp per ADC sample</p> <p>[31] : Reserved</p>

13.4.1.17 ADC_CH0_FIFO_LVL Register (offset = 94h) [reset = 0h]

ADC_CH0_FIFO_LVL is shown in [Figure 13-19](#) and described in [Table 13-19](#).

Figure 13-19. ADC_CH0_FIFO_LVL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED					ADC_CHANNEL0_FIFO_LVL		
R-0h							

Table 13-19. ADC_CH0_FIFO_LVL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-3	RESERVED	R	0h	
2-0	ADC_CHANNEL0_FIFO_LVL	R	0h	This register shows the current FIFO level. FIFO is 4 words wide. Possible supported levels are : 0x0 to 0x4.

13.4.1.18 ADC_CH2_FIFO_LVL Register (offset = 9Ch) [reset = 0h]

ADC_CH2_FIFO_LVL is shown in [Figure 13-20](#) and described in [Table 13-20](#).

Figure 13-20. ADC_CH2_FIFO_LVL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED					ADC_CHANNEL2_FIFO_LVL		
R-0h							

Table 13-20. ADC_CH2_FIFO_LVL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-3	RESERVED	R	0h	
2-0	ADC_CHANNEL2_FIFO_LVL	R	0h	This register shows the current FIFO level. FIFO is 4 words wide. Possible supported levels are : 0x0 to 0x4.

13.4.1.19 ADC_CH4_FIFO_LVL Register (offset = A4h) [reset = 0h]

 ADC_CH4_FIFO_LVL is shown in [Figure 13-21](#) and described in [Table 13-21](#).

Figure 13-21. ADC_CH4_FIFO_LVL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED						ADC_CHANNEL4_FIFO_LVL	
R-0h							

Table 13-21. ADC_CH4_FIFO_LVL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-3	RESERVED	R	0h	
2-0	ADC_CHANNEL4_FIFO_LVL	R	0h	This register shows the current FIFO level. FIFO is 4 words wide. Possible supported levels are : 0x0 to 0x4.

13.4.1.20 ADC_CH6_FIFO_LVL Register (offset = ACh) [reset = 0h]

ADC_CH6_FIFO_LVL is shown in [Figure 13-22](#) and described in [Table 13-22](#).

Figure 13-22. ADC_CH6_FIFO_LVL Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED							
R-0h							
15	14	13	12	11	10	9	8
RESERVED							
R-0h							
7	6	5	4	3	2	1	0
RESERVED					ADC_CHANNEL6_FIFO_LVL		
R-0h							

Table 13-22. ADC_CH6_FIFO_LVL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-3	RESERVED	R	0h	
2-0	ADC_CHANNEL6_FIFO_LVL	R	0h	This register shows the current FIFO level. FIFO is 4 words wide. Possible supported levels are : 0x0 to 0x4.

13.4.1.21 ADC_CH_ENABLE Register (offset = B8h) [reset = 0h]

ADC_CH_ENABLE is shown in [Figure 13-23](#) and described in [Table 13-23](#).

Figure 13-23. ADC_CH_ENABLE Register

31	30	29	28	27	26	25	24					
RESERVED												
R-0h												
23	22	21	20	19	18	17	16					
RESERVED												
R-0h												
15	14	13	12	11	10	9	8					
RESERVED												
R-0h												
7	6	5	4	3	2	1	0					
RESERVED			EXTERNAL_CH_GATE			RESERVED						
R-0h												
R/W-0h												
R-0h												

Table 13-23. ADC_CH_ENABLE Register Field Descriptions

Bit	Field	Type	Reset	Description
31-5	RESERVED	R	0h	
4-1	EXTERNAL_CH_GATE	R/W	0h	Bits[4:1] : to control ADC channel isolation switches. By default all channel analog inputs are isolated (value: 0). Bit1: 1 connects Channel '0' to Pin-57 (ADC_CH0) Bit2: 1 connects Channel '2' to Pin-58 (ADC_CH1) Bit3: 1 connects Channel '4' to Pin-59 (ADC_CH2) Bit4: 1 connects Channel '6' to Pin-60 (ADC_CH3)
0	RESERVED	R	0h	

13.5 Initialization and Configuration

This section provides a pseudo-code for the host initialization and configuration example, of the analog-to-digital converter channels.

1. Set the pin type as ADC for required pin
PinTypeADC(PIN_58, 0xFF)
2. Enable the ADC channel ADCChannel
Enable(ADC_BASE, ADC_CH_1)
3. Optionally configure internal timer for time stamping
ADCTimerConfig(ADC_BASE, 2^17)
ADCTimerEnable(ADC_BASE)
4. Enable the ADC module
ADCEnable(ADC_BASE)
5. Read out the ADC samples using following code

```
if( ADCFIFOlvGet(ADC_BASE, ADC_CH_1) )
{
  uiSample = ADCFIFORead(ADC_BASE, ADC_CH_1)
}
```

13.6 Peripheral Library APIs for ADC Operation

13.6.1 Overview

Four out of the eight channels of the ADC in the CC3200 are used internally for the SimpleLink subsystem (NWP and Wi-Fi). TI encourages applications to access the four external ADC channels through the peripheral library APIs. These APIs have been designed for optimal ADC operation of the four ADC channels available to the user, along with the internal ADC channels used for internal functionality of the device. In this section, the emphasis is on understanding the ADC APIs provided in the CC3200 Software Development Kit (Peripheral Library). This section lists the software APIs hosted in CC3200 SDK (Peripheral Library) that can be used by the user for easy access to ADC operation.

13.6.2 Configuring the ADC Channels

Configuration options for the application developer include:

- Enable the channel of interest (assuming the user has programmed the appropriate pins as mentioned in the device data sheet). Most importantly, the device pin is configured as an analog pin.
- Data transfer – CPU (FIFO Level Check and FIFO Read) or DMA
- Set up interrupts
- Set up timer for time-stamping samples

The following tables serve as a reference for values used for ulChannel and ullIntFlags:

Table 13-24. ulChannel Tags

Tag	Value
ADC_CH_0	0x00000000
ADC_CH_1	0x00000008
ADC_CH_2	0x00000010
ADC_CH_3	0x00000018

Table 13-25. ullIntFlags Tags

Tag	Value
ADC_DMA_DONE	0x00000010
ADC_FIFO_OVERFLOW	0x00000008
ADC_FIFO_UNDERFLOW	0x00000004
ADC_FIFO_EMPTY	0x00000002
ADC_FIFO_FULL	0x00000001

13.6.3 Basic APIs for Enabling and Configuring the Interface

13.6.3.1 void ADCEnable (unsigned long ulBase)

Enables the ADC.

Parameters:

ulBase Base address of the ADC

This function sets the ADC global enable.

Returns:

- None

13.6.3.2 void ADCDisable (unsigned long ulBase)

Disables the ADC.

Parameters:

ulBase Base address of the ADC

This function clears the ADC global enable.

Returns:

- None

13.6.3.3 void ADCChannelEnable (unsigned long ulBase, unsigned long ulChannel)

Enables a specified ADC channel.

Parameters:

ulBase Base address of the ADC

ulChannel One of the valid ADC channels

This function enables specified ADC channel and configures the pin as an analog pin.

Returns:

- None

13.6.3.4 void ADCChannelDisable (unsigned long ulBase, unsigned long ulChannel)

Disables a specified ADC channel.

Parameters:

ulBase Base address of the ADC

ulChannel One of the valid ADC channels

This function disables a specified ADC channel.

Returns:

- None

13.6.4 APIs for Data Transfer [Direct Access to FIFO and DMA Setup]

13.6.4.1 unsigned char ADCFIFOLvlGet (unsigned long ulBase, unsigned long ulChannel)

Gets the current FIFO level for a specified ADC channel.

Parameters:

ulBase Base address of the ADC

ulChannel One of the valid ADC channels

This function returns the current FIFO level for specified ADC channel.

The ulChannel parameter should be one of:

- ADC_CH_0 for channel 0
- ADC_CH_1 for channel 1
- ADC_CH_2 for channel 2
- ADC_CH_3 for channel 3

Returns:

- Returns the current FIFO level for a specified channel.

13.6.4.2 **unsigned long ADCFIFORead (unsigned long ulBase, unsigned long ulChannel)**

Reads FIFO for a specified ADC channel.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels

This function returns one data sample from the channel FIFO as specified by the ulChannel parameter.

The ulChannel parameter should be one of:

- ADC_CH_0 for channel 0
- ADC_CH_1 for channel 1
- ADC_CH_2 for channel 2
- ADC_CH_3 for channel 3

Returns:

- Returns one data sample from the channel FIFO.

13.6.4.3 **void ADCCDMAEnable (unsigned long ulBase, unsigned long ulChannel)**

Enables the ADC DMA operation for a specified channel.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels

This function enables the DMA operation for a specified ADC channel.

The ulChannel parameter should be one of:

- ADC_CH_0 for channel 0
- ADC_CH_1 for channel 1
- ADC_CH_2 for channel 2
- ADC_CH_3 for channel 3

Returns:

- None.

13.6.4.4 **void ADCCDMADisable (unsigned long ulBase, unsigned long ulChannel)**

Disables the ADC DMA operation for a specified channel.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels

This function disables the DMA operation for a specified ADC channel.

The ulChannel parameter should be one of:

- ADC_CH_0 for channel 0
- ADC_CH_1 for channel 1
- ADC_CH_2 for channel 2
- ADC_CH_3 for channel 3

Returns:

- None.

13.6.5 APIs for Interrupt Usage

13.6.5.1 void ADCIntEnable (unsigned long ulBase, unsigned long ulChannel, unsigned long ullIntFlags)

Enables individual interrupt sources for a specified channel.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels
ullIntFlags	The bit mask of the interrupt sources to be enabled

This function enables the indicated ADC interrupt sources. Only enabled sources can be reflected to the processor interrupt; disabled sources have no effect on the processor.

The ulChannel parameter should be one of:

- ADC_CH_0 for channel 0
- ADC_CH_1 for channel 1
- ADC_CH_2 for channel 2
- ADC_CH_3 for channel 3

The ullIntFlags parameter is the logical OR of any of:

- ADC_DMA_DONE for DMA done
- ADC_FIFO_OVERFLOW for FIFO over flow
- ADC_FIFO_UNDERFLOW for FIFO under flow
- ADC_FIFO_EMPTY for FIFO empty
- ADC_FIFO_FULL for FIFO full

Returns:

- None

13.6.5.2 void ADCIntDisable (unsigned long ulBase, unsigned long ulChannel, unsigned long ullIntFlags)

Disables individual interrupt sources for a specified channel.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels
ullIntFlags	The bit mask of the interrupt sources to be enabled

This function disables the indicated ADC interrupt sources. Only enabled sources can be reflected to the processor interrupt; disabled sources have no effect on the processor.

The ullIntFlags and ulChannel parameters should be as explained in [ADCIntEnable\(\)](#).

Returns:

- None

13.6.5.3 void ADCIntRegister (unsigned long ulBase, unsigned long ulChannel, void(*)(void) pfnHandler)

Enables and registers ADC interrupt handler for a specified channel.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels
pfnHandler	A pointer to the function to be called when the ADC channel interrupt occurs

This function enables and registers ADC interrupt handler for a specified channel. An individual interrupt for each channel should be enabled using [ADCIntEnable\(\)](#). It is the responsibility of the interrupt handler to clear the interrupt source.

The ulChannel parameter should be one of:

- ADC_CH_0 for channel 0
- ADC_CH_1 for channel 1
- ADC_CH_2 for channel 2
- ADC_CH_3 for channel 3

Returns:

- None

13.6.5.4 void ADCIntUnregister (unsigned long ulBase, unsigned long ulChannel)

Disables and unregisters ADC interrupt handler for a specified channel.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels

This function disables and unregisters ADC interrupt handler for a specified channel. This function also masks off the interrupt in the interrupt controller, so that the interrupt handler is no longer called.

The ulChannel parameter should be one of:

- ADC_CH_0 for channel 0
- ADC_CH_1 for channel 1
- ADC_CH_2 for channel 2
- ADC_CH_3 for channel 3

Returns:

- None

13.6.5.5 unsigned long ADCIntStatus (unsigned long ulBase, unsigned long ulChannel)

Gets the current channel interrupt status.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels

This function returns the interrupt status of the specified ADC channel. See [Table 13-25](#)

The parameter ulChannel should be as explained in [ADCIntEnable\(\)](#).

Returns:

- Return the ADC channel interrupt status, enumerated as a bit field of values described in [ADCIntEnable\(\)](#)

13.6.5.6 void ADCIntClear (unsigned long ulBase, unsigned long ulChannel, unsigned long ullIntFlags)

Clears the current channel interrupt sources.

Parameters:

ulBase	Base address of the ADC
ulChannel	One of the valid ADC channels
ullIntFlags	Bit mask of the interrupt sources to be cleared

This function clears an individual interrupt source for the specified ADC channel.

The ulChannel parameter should be as explained in [ADCIntEnable\(\)](#).

Returns:

- None

13.6.6 APIs for Setting Up ADC Timer for Time Stamping the Samples

13.6.6.1 void ADCTimerConfig (unsigned long ulBase, unsigned long ulValue)

Configures the ADC internal timer.

Parameters:

ulBase	Base address of the ADC
ulValue	Wrap-around value of the timer

This function configures the ADC internal timer. The ADC timer is 17-bit timer that internally time-stamps the ADC data samples. The user can read the timestamp, along with the sample, from the FIFO registers. Each sample in the FIFO contains 14-bit actual data and an 18-bit timestamp.

The ulValue parameter can take any value between 0 and 2^{17} .

Returns:

- None

13.6.6.2 void ADCTimerDisable (unsigned long ulBase)

Disables the ADC internal timer.

Parameters:

ulBase	Base address of the ADC
--------	-------------------------

This function disables the 17-bit ADC internal timer.

Returns:

- None

13.6.6.3 void ADCTimerEnable (unsigned long ulBase)

Enables the ADC internal timer.

Parameters:

ulBase Base address of the ADC

This function enables the 17-bit ADC internal timer.

Returns:

- None

13.6.6.4 void ADCTimerReset (unsigned long ulBase)

Resets the ADC internal timer.

Parameters:

ulBase Base address of the ADC

This function resets the 17-bit ADC internal timer.

Returns:

- None

13.6.6.5 unsigned long ADCTimerValueGet (unsigned long ulBase)

Gets the current value of ADC internal timer.

Parameters:

ulBase Base address of the ADC

This function gets the current value of the 17-bit ADC internal timer.

Returns:

- Returns the current value of the ADC internal timer.

Parallel Camera Interface Module


Topic	Page
14.1 Overview	378
14.2 Image Sensor Interface	378
14.3 Functional Description	379
14.4 Programming Model.....	383
14.5 Interrupt Handling.....	384
14.6 Camera Interface Module Functional Registers	385
14.7 Developer's Guide	399

14.1 Overview

The CC3200 camera core module can interface an external image sensor. It supports an 8-bit parallel image sensor interface (Non-BT) interface with vertical and horizontal synchronization signals. BT mode is not supported. The recommended maximum pixel clock is 1 MHz. The module stores the image data in a FIFO and can generate DMA requests.

Figure 14-1 shows how the camera core is connected to the rest of the system in the CC3200.

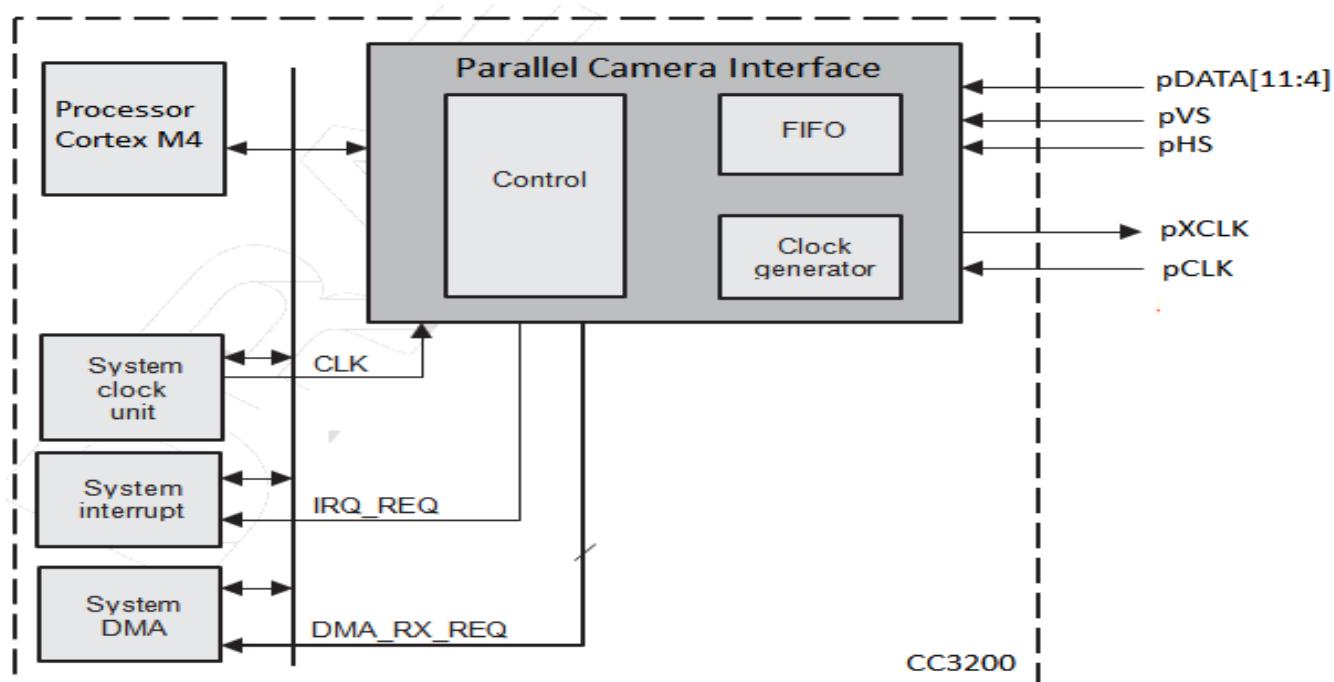Figure 14-1. The Camera Module Interfaces



14.2 Image Sensor Interface

Table 14-1 lists the image sensor interface signals.

Table 14-1. Image Sensor Interface Signals

Interface Name	I/O	Description
CAM_P_HS	I	Row trigger input signal. The polarity of CAM_P_HS can be reversed.
CAM_P_VS	I	Frame trigger input signal. The polarity of CAM_P_VS can be reversed.
CAM_MCLK	I	Input clock used to derive the external clock for the image sensor clock (see Section 14.3.4).
CAM_XCLK	O	External clock for the image sensor module. This clock is derived from the functional clock (see Section 14.3.4).
CAM_P_DATA [11:4]	I	Parallel input data bits. Upper 8 bits of the interface are connected to 8 bits from image sensor.

Table 14-1. Image Sensor Interface Signals (continued)

Interface Name	I/O	Description
CAM_P_CLK	I	Latch clock for the parallel input data. The data on the parallel interface are presented on CAM_P_DATA, one pixel for every CAM_P_CLK rising or falling edge.

14.3 Functional Description

The camera core transfers data from the image sensor into the buffer (FIFO) to generate DMA requests (one working on the threshold, the other on the remaining data in the FIFO to complete the frame acquisition).


The camera interface can provide a clock to the external image sensor module (CAM_XCLK). This clock is derived from the functional clock CAM_MCLK.

14.3.1 Modes of Operation


The camera interface uses the CAM_P_HS and CAM_P_VS signal to detect when the data is valid. This configuration can work with 8-bit data. No assumptions are made on the data format.

The pixel data is presented on CAM_P_DATA one pixel for every CAM_P_CLK rising edge (or falling, depending on the configuration of CAM_P_CLK polarity, defined in CC_CTRL.PAR_CLK_POL).

There are additional pixel times between rows that represent a blanking period. The active pixels are identified by a combination of two additional timing signals: horizontal synchronization (CAM_P_HS) and vertical synchronization (CAM_P_VS). During the image sensor readout, these signals define when a row of valid data begins and ends, and when a frame starts and ends. A bit field sets the CAM_P_HS polarity (NOBT_HS_POL) and CAM_P_VS polarity (NOBT_VS_POL).

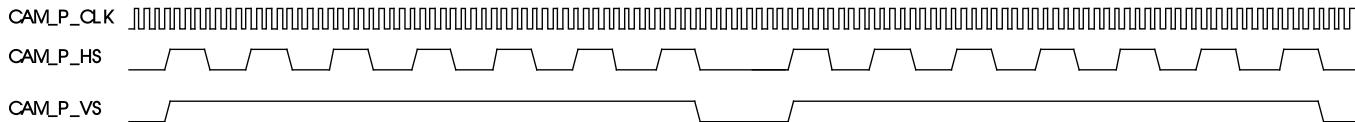Figure 14-2. Synchronization Signals and Frame Timing

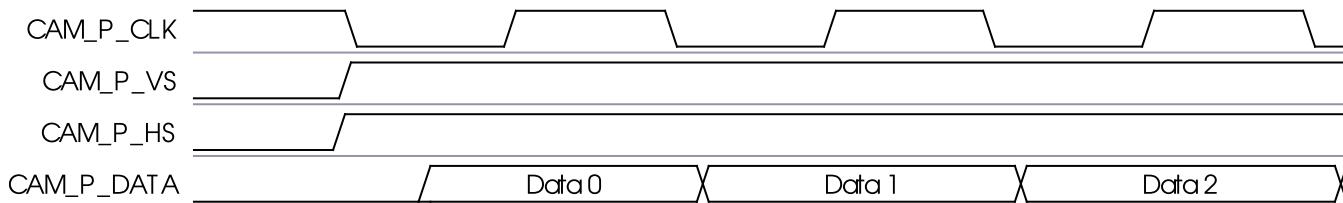
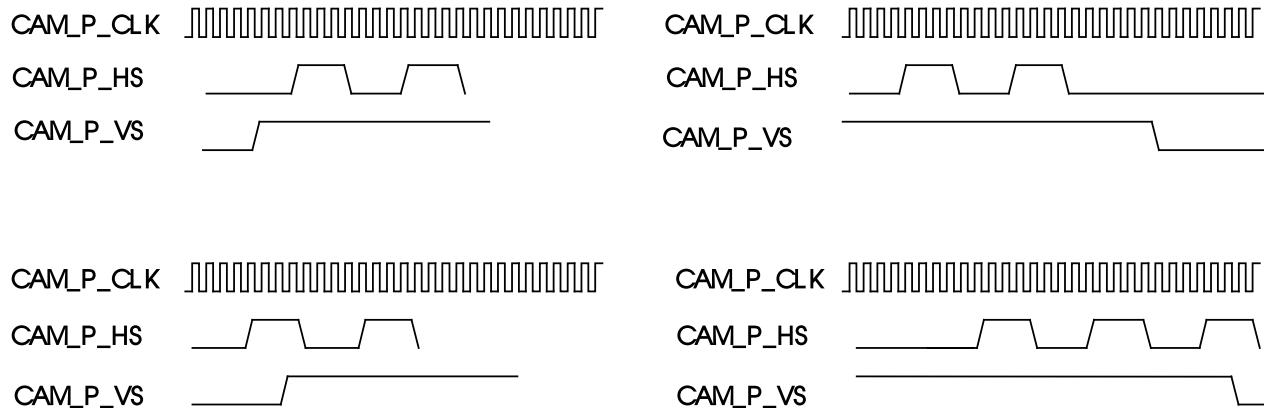
Note that the clock CAM_P_CLK is running during blanking periods (CAM_P_HS and CAM_P_VS inactive) and a minimum of 10 clock cycles are required between two consecutive CAM_P_VS active for proper operations when the line is not a multiple of 12 bytes, otherwise 1 clock cycle is enough to detect CAM_P_VS and work properly.

Figure 14-3. Synchronization Signals and Data Timing


The acquisition can start either on a beginning of a new frame (CAM_P_VS inactive and then active) or immediately in function of the CC_CTRL.NOBT_SYNCHRO register bit. Set CC_CTRL.NOBT_SYNCHRO to 1 to ensure a clean acquisition of the frame.

Data is accepted as long as CAM_P_HS and CAM_P_VS are both active (when CC_CTRL.NOBT_SYNCHRO is cleared 0):

Figure 14-4. Different Scenarios of CAM_P_HS and CAM_P_VS
Data is valid when both CAM_P_HS and CAM_P_VS are active (high in this example)



The camera core module supports decimation from the image sensor where CAM_P_HS toggles between pixels.

Figure 14-5. CAM_P_HS Toggles Between Pixels in Decimation


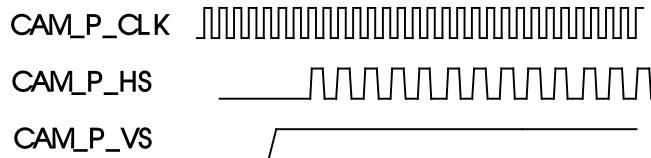



Figure 14-6. Parallel Camera I/F State Machine

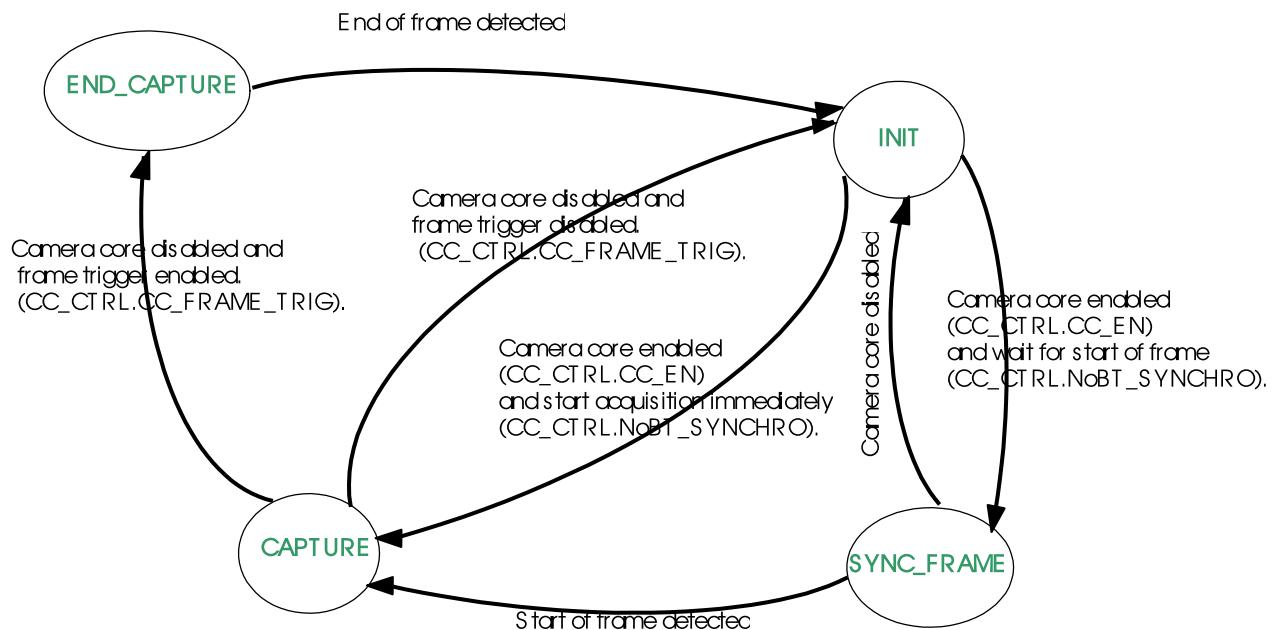

Parallel Camera I/F State Machine

Image data is stored differently in the FIFO, depending on the setting of the bit PAR_ORDERCAM, as shown in Figure 14-7.

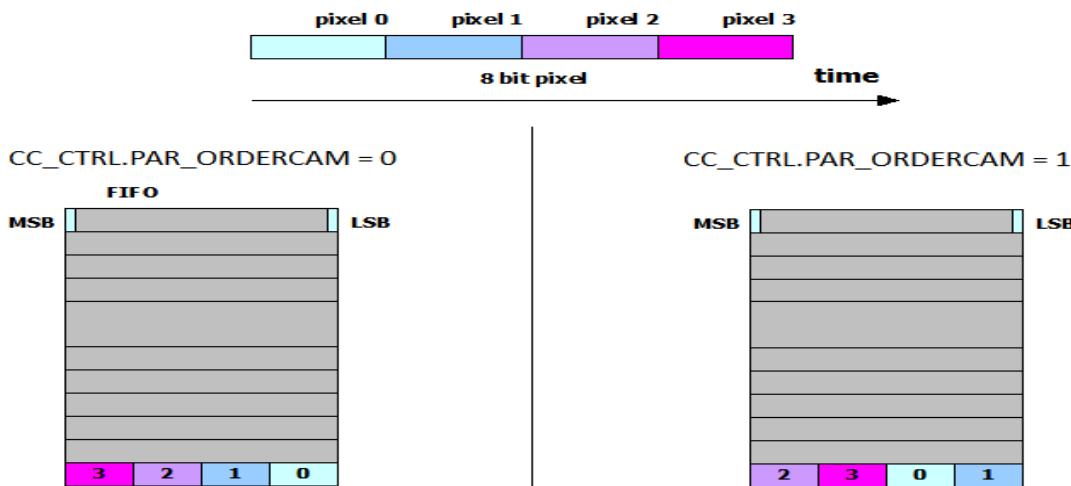Figure 14-7. FIFO Image Data Format



NOTE: The blanking period is automatically removed by the module.

14.3.2 FIFO Buffer

The internal data FIFO buffer is a 32-bit wide and 64-locations deep. Received data from the 8-bit parallel interface is stored in the buffer until read out by the CPU, which accesses the buffer by reading locations starting at the CC_FIFO_DATA register. When enabled, the buffer can generate DMA requests based on the FIFO_CTRL_DMA.THRESHOLD value.

The FIFO goes into overflow when a write is attempted to a full FIFO, due to the software being too slow or the throughput being too high. The content of the full FIFO is not corrupted by any further writes. During FIFO overflow, it is still possible to read data from the FIFO. Once the FIFO is no longer full, more writes are possible.

The FIFO goes into underflow when a read is attempted from an empty FIFO, due to software (too many read accesses). After an underflow, it is still possible to write. Once the FIFO is no longer empty, it is possible to read from FIFO.

The FIFO is reset by writing a 1 into CC_CTRL.CC_RST. If FIFO_OF_IRQ (or FIFO_UF_IRQ) is enabled, an overflow (or an underflow) generates an interrupt. The interrupt is cleared by writing a 1 to the bit FIFO_OF_IRQ (or FIFO_UF_IRQ); it is not necessary to apply CC_RST beforehand.

14.3.3 Reset

The camera core has two types of reset:

1. **Reset the Camera Core** – Reset the camera core module globally by setting the CC_SYSConfig.SoftReset bit to 1.

- 2. Reset the FIFOs and DMA control** – The internal state machines of the FIFO and the DMA control circuitry are reset by setting the CC_CTRL.CC_RST bit to 1. This bit is primarily used after an underflow or an overflow, to avoid re-configuring the entire module.

14.3.4 Clock Generation

The module divides down CAM_MCLK and generates CAM_XCLK clock to the external camera sensor. The configuration of the CAM_XCLK divider is programmable by setting the configuration register CC_CTRL_XCLK.

CAM_XCLK is not used by the camera core module itself. It is routed to the chip pin.

Table 14-2. Ratio of the XCLK Frequency Generator

Ratio	XCLK Based on CAM_MCLK (CAM_MCLK = 120 MHz)
0 (default)	Stable low level, divider not enabled
1	Stable high level, divider not enabled
2	60 MHz (division by 2)
3	40 MHz (division by 3)
4	30 MHz
5	24 MHz
6	20 MHz
7	17.14 MHz
8	15 MHz
9	13.3 MHz
10	12 MHz
11	10.91 MHz
12	10 MHz
...	...
30	4 MHz (division by 30)
31	Bypass (CAM_XCLK = CAM_MCLK)

14.3.5 Interrupt Generation

The interrupt line is asserted (active low) when one of the following events takes place:

- FIFO_UF – FIFO underflow
- FIFO_OF – FIFO overflow
- FIFO_THR – FIFO threshold
- FIFO_FULL – FIFO full
- FIFO_NOEMPTY – FIFO not empty (can be used to detect that a first data is written)
- FE – Frame End

When the CC_IRQSTATUS register is read, the register is not automatically reset. To reset the interrupt, write a 1 to the corresponding bit.

Each event that generates an interrupt can be individually enabled using the CC_IRQENABLE. When a particular event is not enabled (for example CC_IRQENABLE[5] = 0), the corresponding status (CC_IRQSTATUS[5] = 1) bit is flagged if the corresponding event occurs. This has no effect on the interrupt line, but can be used by the software to poll the status.

14.3.6 DMA Interface


The camera core module interfaces with a DMA controller. At the system level, the advantage is to discharge the CPU of the data transfers.

The module can generate a DMA request when the FIFO reaches the threshold programmed into CC_CTRL_DMA.FIFO_THRESHOLD.

The de-assertion of the DMA request takes place when a number of 32-bit words equal to the FIFO threshold are read by the DMA controller.

The DMA assertion and de-assertion is illustrated in [Figure 14-8](#), assuming a FIFO threshold of 8 plus some remaining data to end the frame acquisition.

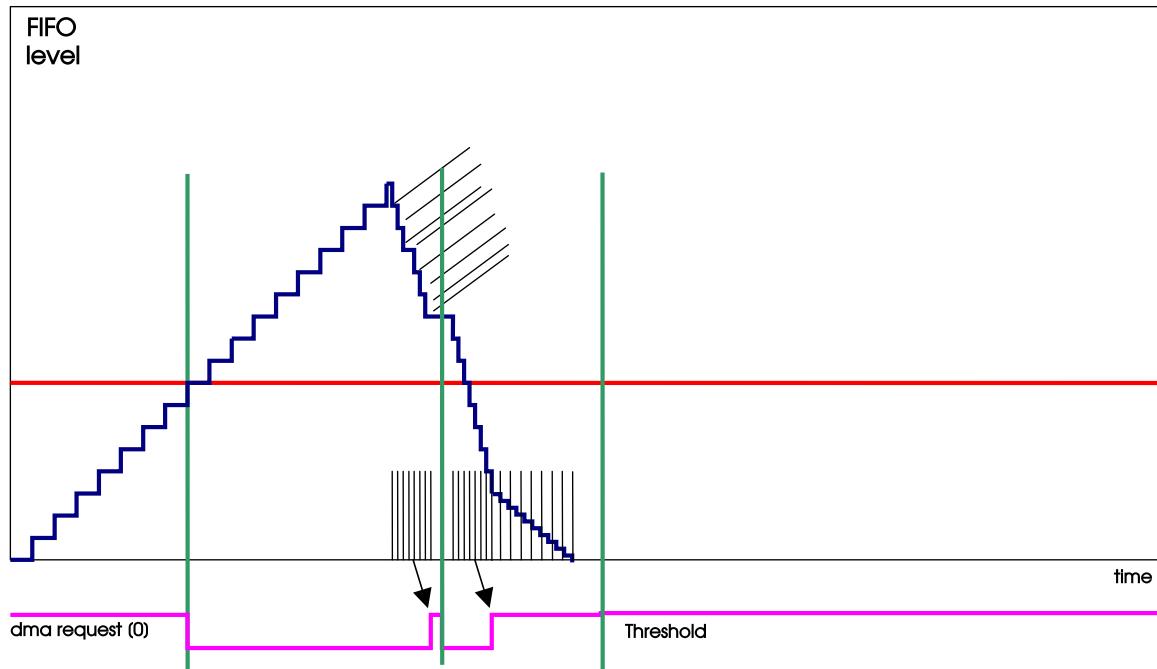Figure 14-8. Assertion and De-Assertion of the DMA Request Signal



14.4 Programming Model

This section deals with the programming model of the camera core module.

14.4.1 Camera Core Reset

The camera core module can accept a general software reset, propagated through all the hierarchy. This reset can initialize the module, and has the same effect as the hardware reset.

1. Set CC_SYSCONFIG.SOFTRESET to 1.
2. Read CC_SYSSTATUS.RESETDONE to check if it is 1, indicating that the reset took place.

If after 5 reads, CC_SYSSTATUS.RESETDONE still returns 0, assume that an error occurred during the reset stage.

The programmer should not set the CC_SYSCONFIG.SOFTRESET bit to 1 if the camera core module is integrated in a subsystem; it is safer to use the software reset at subsystem level.

14.4.2 Enable the Picture Acquisition

The camera core module must be set using the following programming model:

1. Configure the interrupt generation as required, using the CC_IRQSTATUS and CC_IRQENABLE registers (most common are overflow and underflow interrupts).
2. CC_CTRL_DMA.FIFO_THRESHOLD must be set to a specific value (depending on the DMA module), and CC_CTRL_DMA.DMA_EN must be set to 1 for normal usage of the module.
3. Configure the CC_CTRL_XCLK.

4. Enable the picture acquisition using the CC_CTRL. TI recommends setting CC_FRAME_TRIG and NOBT_SYNCHRO to 1 when CC_EN is set to 1, to start the acquisition. If software only acquires one frame acquisition, use the CC_ONE_SHOT register bit (in this case, the module is automatically disabled at the end of the frame).

14.4.3 Disable the Picture Acquisition

To end the picture acquisition, set the CC_CTRL.CC_EN to 0 in conjunction with setting CC_CTRL.CC_FRAME_TRIG to 1, to properly disable the frame acquisition. In that case, the camera core ends the current frame at the end, or stops immediately if there is no frame ongoing.

14.5 Interrupt Handling

14.5.1 FIFO_OF_IRQ (FIFO overflow)

1. Set CC_CTRL.CC_EN to 0 and CC_CTRL.CC_FRAME_TRIG to 0, thus stopping the data flow from the image sensor.
2. Clear the interrupt by writing 1 to the CC_IRQSTATUS.FIFO_OF_IRQ bit.
3. If the CC_CTRL_DMA.DMA_EN bit is set to 0, the CPU may keep reading the FIFO_DATA register, or stop reading. If the CC_CTRL_DMA.EN bit is set to 1, the CPU may stop the DMA, or let it run until there are no more DMA requests.
4. Reset FIFO pointers and internal camera core state machines by writing 1 to the CC_CTRL.CC_RST bit.
5. Set the CC_CTRL.CC_EN bit to 1, to re-enable the data flow from the image sensor.

If an overflow occurs, the entire data flow path must be reset to restart cleanly.

14.5.2 FIFO_UF_IRQ (FIFO underflow)

1. Set the CC_CTRL.CC_EN bit to 0 and the CC_CTRL.CC_FRAME_TRIG bit to 0, thus stopping the data flow from the image sensor.
2. Clear the interrupt by writing 1 to the CC_IRQSTATUS.FIFO_UF_IRQ bit.
3. Reset FIFO pointers and internal camera core state machines by writing 1 to the CC_CTRL.CC_RST bit.
4. Set the CC_CTRL.CC_EN bit to 1, to re-enable the data flow from the image sensor.

If an underflow occurs, the entire data flow path must be reset to restart cleanly.

14.6 Camera Interface Module Functional Registers

Table 14-3 lists the memory-mapped registers for the camera interface. All register offset addresses not listed in **Table 14-3** should be considered as reserved locations and the register contents should not be modified. TI recommends using the APIs instead of directly accessing the register bits in this module.

Table 14-3. CAMERA REGISTERS

Offset	Acronym	Register Name	Type	Reset	Section
10h	CC_SYSCONFIG	System Configuration Register	R/W	0h	Section 14.6.1.1
14h	CC_SYSSTATUS	System Status Register	R	0h	Section 14.6.1.2
18h	CC_IRQSTATUS	Interrupt Status Register	R/W	0h	Section 14.6.1.3
1Ch	CC_IRQENABLE	Interrupt Enable Register	R/W	0h	Section 14.6.1.4
40h	CC_CTRL	Control Register	R/W	1001h	Section 14.6.1.5
44h	CC_CTRL_DMA	Control DMA Register	R/W	16Fh	Section 14.6.1.6
48h	CC_CTRL_XCLK	External Clock Control Register	R/W	0h	Section 14.6.1.7
100h to 1FCh	CC_FIFODATA	FIFO Data Register	R	0h	Section 14.6.1.8

14.6.1 Functional Register Description


The remainder of this section lists and describes the camera interface module functional registers, in numerical order by address offset.

14.6.1.1 CC_SYSCONFIG Register (offset = 10h) [reset = 0h]

CC_SYSCONFIG is shown in [Figure 14-9](#) and described in [Table 14-4](#).

This register controls the various parameters of the OCP interface (CCP and parallel mode).

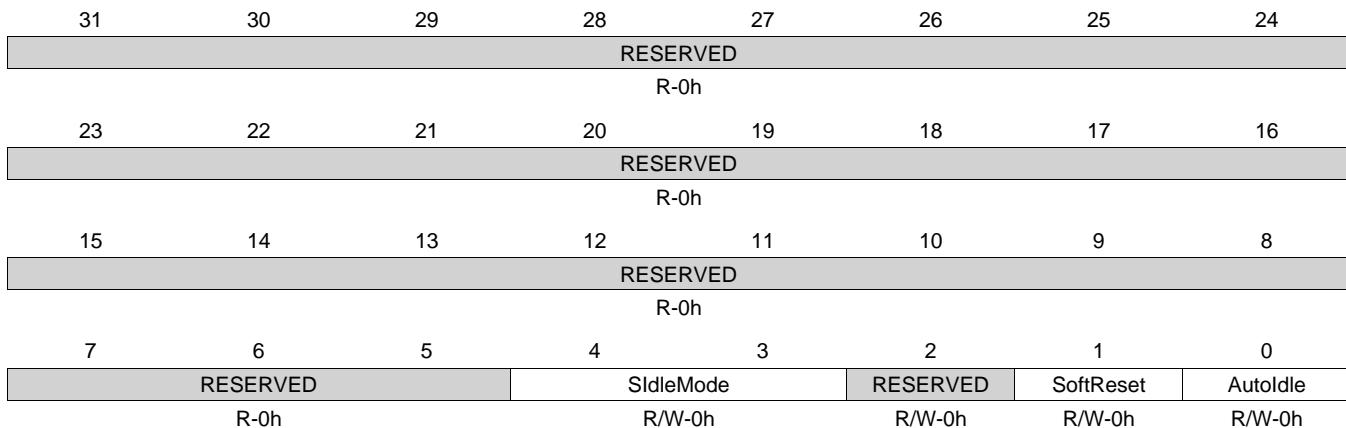Figure 14-9. CC_SYSCONFIG Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 14-4. CC_SYSCONFIG Register Field Descriptions

Bit	Field	Type	Reset	Description
31-5	RESERVED	R	0h	
4-3	SIdleMode	R/W	0h	Slave interface power management, req/ack control 00h = Force-idle. An idle request is acknowledged unconditionally. 01h = No-idle. An idle request is never acknowledged. 10h = Reserved (Smart-idle not implemented) 11h = Reserved – Do not use
2	RESERVED	R/W	0h	
1	SoftReset	R/W	0h	Software reset. Set this bit to 1 to trigger a module reset. The bit is automatically reset by the hardware. During reset it always returns 0. 0h = Normal mode 1h = The module is reset
0	Autidle	R/W	0h	Internal OCP clock gating strategy 0h = OCP clock is free-running 1h = Automatic OCP clock gating strategy is applied, based on the OCP interface activity


14.6.1.2 CC_SYSSTATUS Register (offset = 14h) [reset = 0h]

Register mask: FFFFFFFEh

CC_SYSSTATUS is shown in [Figure 14-10](#) and described in [Table 14-5](#).

This register provides status information about the module, excluding the interrupt status information (CCP and parallel mode)

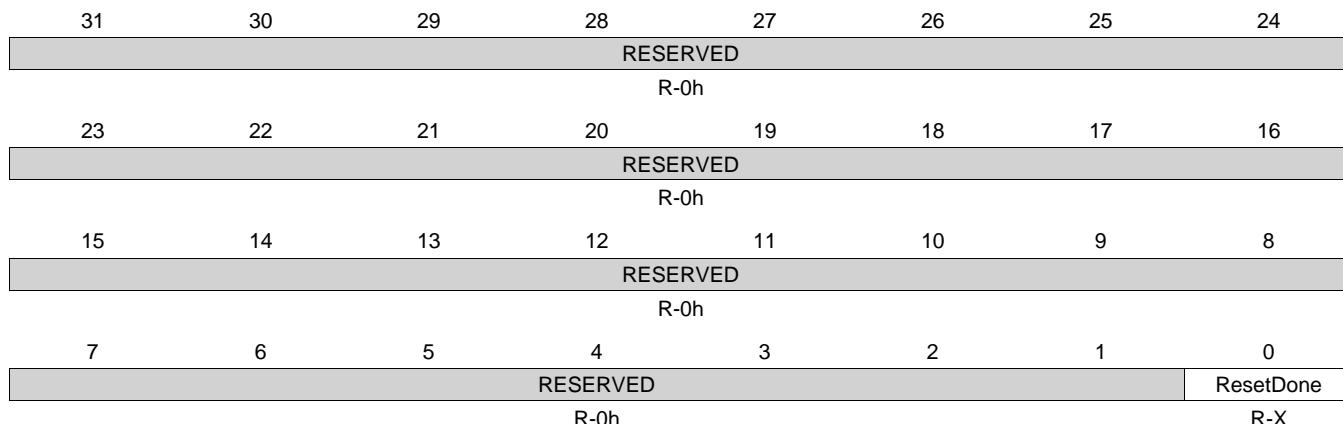Figure 14-10. CC_SYSSTATUS Register



LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 14-5. CC_SYSSTATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-1	RESERVED	R	0h	
0	ResetDone	R	X	Internal Reset Monitoring 0h = Internal module reset is ongoing. 1h = Reset completed

14.6.1.3 CC_IRQSTATUS Register (offset = 18h) [reset = 0h]

CC_IRQSTATUS is shown in [Figure 14-11](#) and described in [Table 14-6](#).

The interrupt status regroups all the status of the module internal events that can generate an interrupt (CCP and parallel mode)

Figure 14-11. CC_IRQSTATUS Register

31	30	29	28	27	26	25	24
RESERVED							
R-0h							
23	22	21	20	19	18	17	16
RESERVED				FS IRQ	LE IRQ	LS IRQ	FE IRQ
R-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h
15	14	13	12	11	10	9	8
RESERVED				FSP_ERR-IRQ	FW_ERR-IRQ	FSC_ERR-IRQ	SSC_ERR-IRQ
R/W-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
RESERVED			FIFO_NOEMPT Y IRQ	FIFO_FULL_IREQ	FIFO_THR_IREQ	FIFO_OF_IREQ	FIFO_UF_IREQ
R/W-0h			R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 14-6. CC_IRQSTATUS Register Field Descriptions

Bit	Field	Type	Reset	Description
31-20	RESERVED	R	0h	
19	FS IRQ	R/W	0h	Frame Start has occurred 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
18	LE IRQ	R/W	0h	Line End has occurred 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
17	LS IRQ	R/W	0h	Line Start has occurred 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
16	FE IRQ	R/W	0h	Frame End has occurred 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
15-12	RESERVED	R/W	0h	
11	FSP_ERR-IRQ	R/W	0h	FSP code error 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")

Table 14-6. CC_IRQSTATUS Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
10	FW_ERR_IRQ	R/W	0h	Frame Height Error 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
9	FSC_ERR_IRQ	R/W	0h	False Synchronization Code 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
8	SSC_ERR_IRQ	R/W	0h	Shifted Synchronization Code 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
7-5	RESERVED	R/W	0h	
4	FIFO_NOEMPTY_IRQ	R/W	0h	FIFO is not empty 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
3	FIFO_FULL_IRQ	R/W	0h	FIFO is full 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
2	FIFO_THR_IRQ	R/W	0h	FIFO threshold has been reached 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
1	FIFO_OF_IRQ	R/W	0h	FIFO overflow has occurred 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")
0	FIFO_UF_IRQ	R/W	0h	FIFO underflow has occurred 0h (W) = Event status bit unchanged 0h (R) = Event false 1h (W) = Event status bit is reset 1h (R) = Event is true ("pending")

14.6.1.4 CC_IRQENABLE Register (offset = 1Ch) [reset = 0h]

CC_IRQENABLE is shown in [Figure 14-12](#) and described in [Table 14-7](#).

The interrupt enable register enables or disables the module internal sources of interrupt on an event-by-event basis (CCP and parallel mode).

Figure 14-12. CC_IRQENABLE Register

31	30	29	28	27	26	25	24
RESERVED							
R/W-0h							
23	22	21	20	19	18	17	16
RESERVED				FS IRQ_EN	LE IRQ_EN	LS IRQ_EN	FE IRQ_EN
R/W-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h
15	14	13	12	11	10	9	8
RESERVED				FSP_ERR_IRQ_EN	FW_ERR_IRQ_EN	FSC_ERR_IRQ_EN	SSC_ERR_IRQ_EN
R/W-0h				R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
RESERVED			FIFO_NOEMPT_Y_IRQ_EN	FIFO_FULL_IRQ_EN	FIFO_THR_IRQ_EN	FIFO_OF_IRQ_EN	FIFO_UF_IRQ_EN
R/W-0h			R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 14-7. CC_IRQENABLE Register Field Descriptions

Bit	Field	Type	Reset	Description
31-20	RESERVED	R/W	0h	
19	FS IRQ_EN	R/W	0h	Frame Start Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
18	LE IRQ_EN	R/W	0h	Line End Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
17	LS IRQ_EN	R/W	0h	Line Start Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
16	FE IRQ_EN	R/W	0h	Frame End Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
15-12	RESERVED	R/W	0h	
11	FSP_ERR_IRQ_EN	R/W	0h	FSP code Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
10	FW_ERR_IRQ_EN	R/W	0h	Frame Height Error Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
9	FSC_ERR_IRQ_EN	R/W	0h	False Synchronization Code Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
8	SSC_ERR_IRQ_EN	R/W	0h	False Synchronization Code Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
7-5	RESERVED	R/W	0h	

Table 14-7. CC_IRQENABLE Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
4	FIFO_NOEMPTY_IRQ_EN	R/W	0h	FIFO Not Empty Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
3	FIFO_FULL_IRQ_EN	R/W	0h	FIFO Full Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
2	FIFO_THR_IRQ_EN	R/W	0h	FIFO Threshold Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
1	FIFO_OF_IRQ_EN	R/W	0h	FIFO Overflow Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs
0	FIFO_UF_IRQ_EN	R/W	0h	FIFO Underflow Interrupt Enable 0h = Event is masked 1h = Event generates an interrupt when it occurs

14.6.1.5 CC_CTRL Register (offset = 40h) [reset = 1001h]

CC_CTRL is shown in [Figure 14-13](#) and described in [Table 14-8](#).

This register controls the various parameters of the camera core block (CCP and parallel mode). In CCP_MODE, configure PAR_MODE to 0x0.

Figure 14-13. CC_CTRL Register

31	30	29	28	27	26	25	24
RESERVED							
R/W-0h							
23	22	21	20	19	18	17	16
RESERVED		CC_ONE_SHOT	CC_IF_SYNCHRO	CC_RST	CC_FRAME_TRIG	CC_EN	
R/W-0h		R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
15	14	13	12	11	10	9	8
RESERVED		NOBT_SYNCHRO	BT_CORRECT	PAR_ORDERCARAM	PAR_CLK_POL	NOBT_HS_POL	NOBT_VS_POL
R/W-0h		R/W-0h	R/W-1h	R/W-0h	R/W-0h	R/W-0h	R/W-0h
7	6	5	4	3	2	1	0
RESERVED		PORT_SELECT	PAR_MODE				
R/W-0h		R/W-0h	R/W-1h				

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 14-8. CC_CTRL Register Field Descriptions

Bit	Field	Type	Reset	Description
31-21	RESERVED	R/W	0h	
20	CC_ONE_SHOT	R/W	0h	One shot capability (one frame captured) This must be set in the same time ass CC_EN is set to 1. One frame acquisition starts and stops automatically. Reads returns 0 0h = No synchro (most of applications) 1h = Synchro enabled (should never be required)
19	CC_IF_SYNCHRO	R/W	0h	Synchronize all camera sensor inputs This must be set during the configuration phase before CC_EN set to 1. Used in very high frequency to avoid dependancy to the I/O timings. 0h = No synchro (most of applications) 1h = Synchro enabled (should never be required)
18	CC_RST	R/W	0h	Reset all the internal finite state machines of the camera core module by writing a 1 to this bit. Must be applied when CC_EN = 0. Reads returns 0
17	CC_FRAME_TRIG	R/W	0h	Sets the modality in which CC_EN works when disabling the sensor camera core. If CC_FRAME_TRIG = 1, by writing 0 to CC_EN the module is disabled at the end of the frame If CC_FRAME_TRIG = 0, by writing 0 to CC_EN the module is disabled immediately
16	CC_EN	R/W	0h	Enables the sensor interface of the camera core module. By writing 1 to this field, the module is enabled By writing 0 to this field, the module is disabled at the end of the frame if CC_FRAME_TRIG = 1, and is disabled immediately if CC_FRAME_TRIG = 0.
15-14	RESERVED	R/W	0h	

Table 14-8. CC_CTRL Register Field Descriptions (continued)

Bit	Field	Type	Reset	Description
13	NOBT_SYNCHRO	R/W	0h	Enables start at the beginning of the frame or not in NoBT 0h = Acquisition starts when vertical synchro is high 1h = Acquisition starts when vertical synchro goes from low to high (beginning of the frame) (recommended)
12	BT_CORRECT	R/W	1h	Enables the correct sync codes in BT mode. 0h = Correction is not enabled 1h = Correction is enabled
11	PAR_ORDERCAM	R/W	0h	Enables swap between image-data in parallel mode. 0h = Swap is not enabled 1h = Swap is enabled
10	PAR_CLK_POL	R/W	0h	Inverts the clock coming from the sensor in parallel mode. 0h = Clock not inverted - data sampled on rising edge 1h = Clock inverted - data sampled on falling edge
9	NOBT_HS_POL	R/W	0h	Sets the polarity of the synchronization signals in NOBT parallel mode. 0h = CAM_P_HS is active high 1h = CAM_P_HS is active low
8	NOBT_VS_POL	R/W	0h	Sets the polarity of the synchronization signals in NOBT parallel mode. 0h = CAM_P_VS is active high 1h = CAM_P_VS is active low
7-5	RESERVED	R/W	0h	
4	PORT_SELECT	R/W	0h	Determines which OCP port can perform read access from internal FIFO when DMA_EN bit is set to 1. 0h = OCP 2 1h = OCP 1
3-0	PAR_MODE	R/W	1h	Sets the protocol mode of the camera core module in parallel mode (when CCP_MODE = 0). 000h = Parallel NOBT 8-bit 001h = Parallel NOBT 10-bit 010h = Parallel NOBT 12-bit 011h = Reserved 100h = Parallel BT 8-bit 101h = Parallel BT 10-bit 110h = Reserved 111h = FIFO test mode.

14.6.1.6 CC_CTRL_DMA Register (offset = 44h) [reset = 16Fh]

CC_CTRL_DMA is shown in [Figure 14-14](#) and described in [Table 14-9](#).

This register controls the DMA interface of the camera core block (CCP and parallel mode).

Figure 14-14. CC_CTRL_DMA Register

31	30	29	28	27	26	25	24
RESERVED							
R/W-0h							
23	22	21	20	19	18	17	16
RESERVED							
R/W-0h							
15	14	13	12	11	10	9	8
RESERVED							
R/W-0h							
7	6	5	4	3	2	1	0
RESERVED		FIFO_THRESHOLD					
R/W-0h		R/W-7h					

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 14-9. CC_CTRL_DMA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-9	RESERVED	R/W	0h	
8	DMA1_DISABLE	R/W	1h	DMA1 disable capability. Only use DMA0 (threshold-based). 0h = DMA1 line can be activated 1h = DMA1 line can not be activated
8	DMA_EN	R/W	1h	Sets the number of DMA request lines. 0h = DMA interface disabled. The DMA request line stays inactive. 1h = DMA interface enabled. The DMA request line is operational.
7	RESERVED	R/W	0h	
6-0	FIFO_THRESHOLD	R/W	7h	Sets the threshold of the FIFO. The assertion of the DMA request line takes place when the threshold is reached. 0000000h = Threshold set to 1 0000001h = Threshold set to 2 ... 1111111h = Threshold set to 128

14.6.1.7 CC_CTRL_XCLK Register (offset = 48h) [reset = 0h]

CC_CTRL_XCLK is shown in [Figure 14-15](#) and described in [Table 14-10](#).

This register controls the value of the clock divisor used to generate the external clock (parallel mode). Refer to [Table 14-2](#) for details about the ratio of XCLK frequency.

Figure 14-15. CC_CTRL_XCLK Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16
RESERVED															
R/W-0h															
15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
RESERVED										XCLK_DIV					
R/W-0h															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 14-10. CC_CTRL_XCLK Register Field Descriptions

Bit	Field	Type	Reset	Description
31-5	RESERVED	R/W	0h	
4-0	XCLK_DIV	R/W	0h	Sets the clock divisor value for CAM_XCLK generation. Based on CAM_MCLK (value of CAM_MCLK IS 96 MHz). Divider not enabled 00000h = CAM_XCLK Stable low level 00001h = CAM_XCLK Stable high level from 2 to 30 = CAM_XCLK = CAM_MCLK / XCLK DIV 11111h = Bypass - CAM_XCLK = CAM_MCLK

14.6.1.8 CC_FIFODATA Register (offset = 4Ch) [reset = 0h]

Register mask: 0h

CC_FIFODATA is shown in [Figure 14-16](#) and described in [Table 14-11](#).

This register allows the user to write and read from the FIFO (CCP and parallel mode). Refer to [Section 14.3.2](#) for details about FIFO write and read accesses into this register bank.

Figure 14-16. CC_FIFODATA Register

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
FIFO_DATA																															
R/W-X																															

LEGEND: R/W = Read/Write; R = Read only; W1toCl = Write 1 to clear bit; -n = value after reset

Table 14-11. CC_FIFODATA Register Field Descriptions

Bit	Field	Type	Reset	Description
31-0	FIFO_DATA	R/W	X	Reads/writes the 32-bit word from/into the FIFO.

14.6.2 Peripheral Library APIs

This section lists the software APIs hosted in the CC3200 SDK (peripheral library) for configuring and using the camera interface module.

void CameraReset(unsigned long ulBase)

- **Description:** This function resets the camera core.
- **Parameters:**
 - **ulBase** Base address of the camera module
- **Return:** None

void CameraXClkConfig(unsigned long ulBase, unsigned long ulCamClkIn, unsigned long ulXClk)

- **Description:** This function sets the internal clock divider based on ulCamClkIn to generate XCLK as specified by ulXClk. The maximum supported division is 30.
- **Parameters:**
 - **ulBase** Base address of the camera module
 - **ulCamClkIn** Input clock frequency to camera module
 - **ulXClk** Required XCLK frequency
- **Return:** None

void CameraParamsConfig(unsigned long ulBase, unsigned long ulHSPol, unsigned long ulVSPol, unsigned long ulFlags)

- **Description:** This function sets different camera parameters.
- **Parameters:**
 - **ulBase** Base address of the camera module
 - **ulHSPol** Sets the HSync polarity
 - **ulVSPol** Sets the VSync polarity
 - **ulFlags** Configuration flags

The parameter ulHSPol should be on the following:

- **CAM_HS_POL_HI HSYNC** Polarity is active high
- **CAM_HS_POL_LO HSYNC** Polarity is active low

The parameter ulVSPol should be on the following:

- **CAM_VS_POL_HI VSYNC** Polarity is active high
- **CAM_VS_POL_LO VSYNC** Polarity is active low

The parameter **ulFlags** can be logical OR of one or more of the following or 0:

- **CAM_PCLK_RISE_EDGE PCLK** Polarity is active high
- **CAM_PCLK_FALL_EDGE PCLK** Polarity is active low
- **CAM_ORDERCAM_SWAP** Swap the byte order
- **CAM_NOBT_SYNCHRO** Enable to start capture at start of frame
- **CAM_IF_SYNCHRO** Synchronize all sensor inputs
- **Return:** None

void CameraXClkSet(unsigned long ulBase, unsigned char bXClkFlags)

- **Description:** This function sets the internal divide in specified mode.
- **Parameters:**

- **ulBase** Base address of the camera module
- **bXClkFlags** Sets the divider mode

The parameter **bXClkFlags** should be one of the following:

- **CAM_XCLK_STABLE_LO** XCLK line will be pulled low
- **CAM_XCLK_STABLE_HI** XCLK line will be pulled high
- **CAM_XCLK_DIV_BYPASS** XCLK divider is in bypass mode

- **Return:** None

void CameraDMAEnable(unsigned long ulBase)

- **Description:** This function enables a transfer request to DMA from the camera. DMA-specific configuration must be done separately.
- **Parameters:**
- **ulBase** Base address of the camera module.
- **Return:** None

void CameraDMADisable(unsigned long ulBase)

- **Description:** This function masks a transfer request to DMA from the camera.
- **Parameters:**
- **ulBase** Base address of the camera module.
- **Return:** None

void CameraThresholdSet(unsigned long ulBase, unsigned long ulThreshold)

- **Description:** This function sets the FIFO threshold for a DMA transfer request.
- **Parameters:**
- **ulBase** Base address of the camera module
- **ulThreshold** Specifies the FIFO level at which a DMA request is generated. This can be in the range of 1 to 64.
- **Return:** None

void CameraIntRegister(unsigned long ulBase, void (*pfnHandler)(void))

- **Description:** This function registers and enables a global camera interrupt from the interrupt controller. Individual camera interrupts source should be enabled using CameraIntEnable().
- **Parameters:**
- **ulBase** Base address of the camera module
- **Return:** None

void CameraIntUnregister(unsigned long ulBase)

- **Description:** This function unregisters and disables the global camera interrupt from the interrupt controller.
- **Parameters:**

- ***ulBase*** Base address of the camera module
- **Return:** None.

void CameralntEnable(unsigned long ulBase, unsigned long ullIntFlags)

- **Description:** This function enables individual camera interrupt sources.

- **Parameters:**

- ***ulBase*** Base address of the camera module
- ***ullIntFlags*** Bit mask of the interrupt sources to be enabled
The parameter *ullIntFlags* should be logical OR of one or more of the following:
 - **CAM_INT_DMA_DONE** DMA done interrupt
 - **CAM_INT_FE** Frame end interrupt
 - **CAM_INT_FSC_ERR** Frame sync error interrupt
 - **CAM_INT_FIFO_NOEMPTY** FIFO empty interrupt
 - **CAM_INT_FIFO_FULL** FIFO full interrupt
 - **CAM_INT_FIFO THR** FIFO reached threshold interrupt
 - **CAM_INT_FIFO_OF** FIFO overflow interrupt
 - **CAM_INT_FIFO UR** FIFO underflow interrupt

- **Return:** None

void CameralntDisable(unsigned long ulBase, unsigned long ullIntFlags)

- **Description:** This function disables individual camera interrupt sources.

- **Parameters:**

- ***ulBase*** Base address of the camera module
- ***ullIntFlags*** Bit mask of the interrupt sources to be disabled

- **Return:** None

unsigned long CameralntStatus(unsigned long ulBase)

- **Description:** This functions returns the current interrupt status for the camera.

- **Parameters:**

- ***ulBase*** Base address of the camera module
- **Return:** Returns the current interrupt status, enumerated as a bit field of values described in *CameralntEnable()*.

void CameralntClear(unsigned long ulBase, unsigned long ullIntFlags)

- **Description:** This function clears individual camera interrupt sources.

- **Parameters:**

- ***ulBase*** Base address of the camera module
- ***ullIntFlags*** Bit mask of the interrupt sources to be cleared

- **Return:** None

void CameraCaptureStart(unsigned long ulBase)

- **Description:** This function starts the image capture over the configured camera interface. This function should be called after completely configuring the camera module.

- **Parameters:**

- ***ulBase*** Base address of the camera module

- **Return:** None

void CameraCaptureStop(unsigned long ulBase, tBoolean blImmediate)

- **Description:** This function stops the image capture over the camera interface. The capture is stopped either immediately or at the end of the current frame, based on the *blImmediate* parameter.

- **Parameters:**

- ***ulBase*** Base address of the camera module
 - ***bImmediate*** True to stop capture immediately, False to stop at the end of the frame
 - **Return:** None
- void CameraBufferRead(unsigned long ulBase,unsigned long *pBuffer, unsigned char ucSize)**
- **Description:** This function reads the camera buffer (FIFO).
 - **Parameters:**
 - ***ulBase*** Base address of the camera module
 - ***pBuffer*** Pointer to the read buffer
 - ***ucSize*** Size to data to be read
 - **Return:** None

14.7 Developer's Guide

14.7.1 Using Peripheral Driver APIs for Capturing an Image

1. The clock for camera peripheral must be configured and enabled. Peripherals are clock-gated by default, and generate a bus fault if accessed without enabling the clock. The peripheral is ready to use after the software reset:


```
MAP_PRCMPeripheralClkEnable(PRCM_CAMERA, PRCM_RUN_MODE_CLK);
MAP_PRCMPeripheralReset(PRCM_CAMERA);
```
2. The camera parameters must be set next, using the peripheral driver API CameraParamsConfig. This function sets the appropriate bits in the CAMERA_O_CC_CTRL register for controlling the various parameters of the camera control block. The parameters are:
 - **ulHSPol:** Sets the polarity of the horizontal synchronization signal (CAM_P_HS). It can be either CAM_HS_POL_HI or CAM_HS_POL_LO.
 - **ulVSPol:** Sets the polarity of the vertical synchronization signal (CAM_P_VS). It can be either CAM_VS_POL_HI or CAM_VS_POL_LO.
 - **ulFlags:**
 - Should be set to (CAM_ORDERCAM_SWAP | CAM_NOBT_SYNCHRO) for starting acquisition/capture when CAM_P_VS goes from low to high with swapping the image data in FIFO. See [Section 14.3.1](#) for more details.
 - Should be set to CAM_NOBT_SYNCHRO for starting acquisition/capture when CAM_P_VS goes from low to high without swapping the image data in FIFO.

For high frequency operations, set CAM_IF_SYNCHRO to avoid dependency on the I/O timings.
3. The interrupt-handler must be registered, using the peripheral driver API CameraIntRegister. This function registers and enables global camera interrupts from the interrupt controller.
4. The external-clock must be derived by programming the clock-divider values. The peripheral driver API CameraXClkConfig sets the appropriate bits in this register for setting the internal clock divider.
5. MCLK is, by default, set to 120 MHz, and cannot be modified. Hence, an XCLK of:
 - 5 MHz can be derived by calling:


```
CameraXClkConfig(CAMERA_BASE, 120000000, 5000000)
```
 - 10 MHz can be derived by calling:


```
CameraXClkConfig(CAMERA_BASE, 120000000, 10000000)
```

Note: The maximum supported division is 30; a 2-MHz XCLK cannot be derived using a 120-MHz MCLK.
6. The FIFO threshold must be set using the peripheral driver API CameraThresholdSet. This function sets the threshold at which to generate a DMA request.


```
CameraThresholdSet(CAMERA_BASE, 8);
```
7. For handling the image data that is not a multiple of a FIFO threshold, the frame-end interrupt must be registered using the peripheral API CameralntEnable. This generates an interrupt at the end of every frame:

- ```
CameraIntEnable(CAMERA_BASE, CAM_INT_FE)
8. The DMA interface of the camera control block must be enabled by using the peripheral driver API CameraDMAEnable.
 CameraDMAEnable(CAMERA_BASE)
9. The DMA interface of the camera control block must be configured next. As an example, configure the DMA in ping-pong mode:
 • First initialize the DMA interface using the peripheral driver API UDMAInit.
 • The ping-pong transfer can be set up using the peripheral driver API DMASetupTransfer. The code below shows how this API could be used:
 DMASetupTransfer(UDMA_CH22_CAMERA, UDMA_MODE_PINGPONG, <total_dma_elements>, UDMA_SIZE_32,
 UDMA_ARB_8, (void *)CAM_BUFFER_ADDR, UDMA_SRC_INC_32,
 (void *)<data_buffer>, UDMA_DST_INC_32);
 <data_buffer> += <total_dma_elements>; /* Setup the buffer for pong */
 DMASetupTransfer(UDMA_CH22_CAMERA | UDMA_ALT_SELECT,
 UDMA_MODE_PINGPONG, <total_dma_elements>, UDMA_SIZE_32,
 UDMA_ARB_8, (void *)CAM_BUFFER_ADDR,
 UDMA_SRC_INC_32, (void
)<data_buffer>, UDMA_DST_INC_32); <data_buffer> += <total_dma_elements>; / Setup buffer for
 next ping */
10. The interrupts must be cleared and unmasked, by setting BIT-8 of DMA_DONE_INT_ACK and DMA_DONE_INT_MASK_CLR, respectively.
11. The image can now be captured using the peripheral driver API CameraCaptureStart. This function enables the sensor interface of the camera core module.
 • An interrupt is continuously generated until the capture is stopped, and the interrupt-handler registered above handles the interrupts appropriately.
 • Because the DMA is configured for ping-pong transfer, the <data_buffer> must be adjusted for the next ping-pong transaction.
 • Depending on the value set for <total_dma_elements>, a DMA-Done interrupt is generated every time after <total_dma_elements> elements are copied to memory.
```

Code snippet for handling the camera interrupts:

```
void <camera_interrupt_handler>() {
 /* Stop capture on receiving a frame-end */
 if(CameraIntStatus(CAMERA_BASE) & CAM_INT_FE)
 {
 CameraIntClear(CAMERA_BASE, CAM_INT_FE);
 CameraCaptureStop(CAMERA_BASE, true);
 }

 /* Check if 'CAM_THRESHOLD_DMA_DONE' is active */
 if(<write_register>(DMA_DONE_INT_STS_RAW) & (1<<8))
 {
 /* Clear the interrupt */
 <write_register>(DMA_DONE_INT_ACK) |= 1 << 8; <total_dma_elements> += <total_dma_elements>
 * <32-bits>; /* For every iteration, set either the ping or pong transactions */
 if(<check condition for even iterations>)
 {
 DMASetupTransfer(UDMA_CH22_CAMERA, UDMA_MODE_PINGPONG, <total_dma_elements>,
 UDMA_SIZE_32,
 UDMA_ARB_8, (void *)CAM_BUFFER_ADDR,
 (void *)<data_buffer>, UDMA_DST_INC_32);

 }
 else(<check condition for odd iterations>)
 {
 DMASetupTransfer(UDMA_CH22_CAMERA | UDMA_ALT_SELECT,
 UDMA_MODE_PINGPONG, <total_dma_elements>,
 UDMA_SIZE_32, UDMA_ARB_8, (void *)CAM_BUFFER_ADDR,
 UDMA_SRC_INC_32, (void *)<data_buffer>,
 UDMA_DST_INC_32);
 }
 }
}
```

```

 }

 /* Setup the buffer for the next ping/pong */<data_buffer> += <total_dma_elements>;
 if (<on an error>
 {
 /* Disable DMA and mask 'CAM_THRESHOLD_DMA_DONE' */
 UDMAStopTransfer(UDMA_CH22_CAMERA);<write_register>(0x44026090) |= 1 << 8;

 }
 }
}

```

12. The capture can be stopped using the peripheral driver API CameraCaptureStop. This function disables the sensor interface of the camera core module. The sensor interface can be disabled immediately, or at the end of current frame.
13. For stopping the image capture after a frame, disable the sensor interface immediately after the CAM\_INT\_FE interrupt.

#### **14.7.2 Using Peripheral Driver APIs for Communicating with Image Sensors**

Most image sensors provide a two-wire serial interface for external MCUs to control them. This section shows how to use the CC3200 I2C interface to communicate with these image sensors. The CC3200 includes one I2C module operating with standard (100-Kbps) or fast (400-Kbps) transmission speeds.

First configure and enable the clock for I2C peripheral. Peripherals are clock-gated by default and generate a bus fault if accessed without enabling the clock. The peripheral should be ready to use after the software reset.

```
MAP_PRCMPeripheralClkEnable(PRCM_I2CA0, PRCM_RUN_MODE_CLK);
MAP_PRCMPeripheralReset(PRCM_I2CA0);
```

The I2C master block must be configured and enabled next in either standard or fast mode, using the peripheral driver API MAP\_I2CMasterInitExpClk. The function internally computes the clock divider to achieve the fastest speed less than or equal to the desired speed.

```
MAP_I2CMasterInitExpClk (I2C_BASE, SYS_CLK, true); /* SYS_CLK is set to 80MHz */
```

The commands to the image sensor can then be written, and responses read. Normally a standard communication consists of:

- Generating a START condition
- Setting a I2C slave address
- Transferring data
- Generating a STOP condition

The master sends the slave address followed by the START condition. A slave with an address that matches this address responds by returning an acknowledgment bit. Once the slave addressing is achieved, data transfer can proceed byte-by-byte.

Peripheral driver APIs for writing and reading to and from an I2C slave:

##### **I2CMasterSlaveAddrSet**

- Description: Sets the address that the I2C master places on the bus.
- Parameters:
  - *ui32Base* is the base address of the I2C master module.
  - *ui8SlaveAddr* is an 7-bit slave address.
  - *bReceive* is the flag indicating the type of communication with the slave.

##### **I2CMasterDataPut**

- Description: Transmits a byte from the I2C master.
- Parameters:
  - *ui32Base* is the base address of the I2C master module.
  - *ui8Data* is data to be transmitted from the I2C master.

**I2CMasterDataGet**

- Description: Receives a byte that has been sent to the I2C master.
- Parameters:
  - *ui32Base* is the base address of the I2C master module

**I2CMasterIntClearEx**

- Description: Clears I2C master interrupt sources.
- Parameters:
  - *ui32Base* is the base address of the I2C master module.
  - *ui32IntFlags* is a bit mask of the interrupt sources to be cleared.

**I2CMasterTimeoutSet**

- Description: Sets the master clock timeout value.
- Parameters:
  - *ui32Base* is the base address of the I2C master module.
  - *ui32Value* is the number of I2C clocks before the timeout is asserted.

**I2CMasterControl**

- Description: Controls the state of the I2C master module.
- Parameters:
  - *ui32Base* is the base address of the I2C master module.
  - *ui32Cmd* is the command to be issued to the I2C master module.

**I2CMasterIntStatusEx**

- Description: Gets the current I2C master interrupt status.
- Parameters:
  - *ui32Base* is the base address of the I2C master module.
  - *bMasked* is false if the raw interrupt status is requested, and true if the masked interrupt status is requested.

## ***Power, Reset and Clock Management***

| Topic                                            | Page |
|--------------------------------------------------|------|
| 15.1 Overview .....                              | 404  |
| 15.2 Power Management Control Architecture ..... | 408  |
| 15.3 PRCM APIs .....                             | 411  |
| 15.4 Peripheral Macros.....                      | 417  |
| 15.5 Power Management Framework .....            | 418  |
| 15.6 PRCM Registers .....                        | 419  |

## Trademarks

AMBA, CoreSight are trademarks of ARM Limited.

### 15.1 Overview

The CC3200 SoC incorporates a highly optimized on-chip power management unit capable of operating directly from battery, without any external regulator.

The on-chip PMU includes a set of high-efficiency, fast transient response DC-DC converters, LDOs, and reference voltage generators. The on-chip PMU is connected to the input supply directly, and generates the internal voltages required by the different sections of the chip across power modes. The PMU is tightly synchronized with the WLAN radio, and avoids interference during radio receive and transmit operations.

The chip supports two supply configurations, which provide flexibility to system designers. In one configuration, the input supply voltage at chip pin supports a range of 2.1 V to 3.6 V for active operation. In the second configuration, the chip can be supplied a pre-regulated 1.85 V that meets the ripple, load-transient, and peak current requirements. Refer to the CC3200 data sheet ([SWAS032](#)) for electrical details.

#### 15.1.1 VBAT Wide-Voltage Connection

In the wide-voltage battery connection, the device is powered directly by the battery or pre-regulated 3.3-V supply. All other voltages required to operate the device are generated internally by the DC-DC converters. This is the most common usage for the device, as it supports wide-voltage operation from 2.1 V to 3.6 V.

#### 15.1.2 Pre-Regulated 1.85 V


The pre-regulated 1.85-V mode of operation applies an external regulated 1.85 V directly to the pins 10, 25, 33, 36, 37, 39, 44, 48, and 54 of the device. The VBAT and the VIO are also connected to the 1.85-V supply. The ANA1 DC-DC and PA DC-DC converters are bypassed. This mode provides the lowest BOM count version.

---

**NOTE:** The chip auto-detects which of the two configurations is being used based on the state of the DC-DC pins. The chip then enables the DC-DCs accordingly.

---

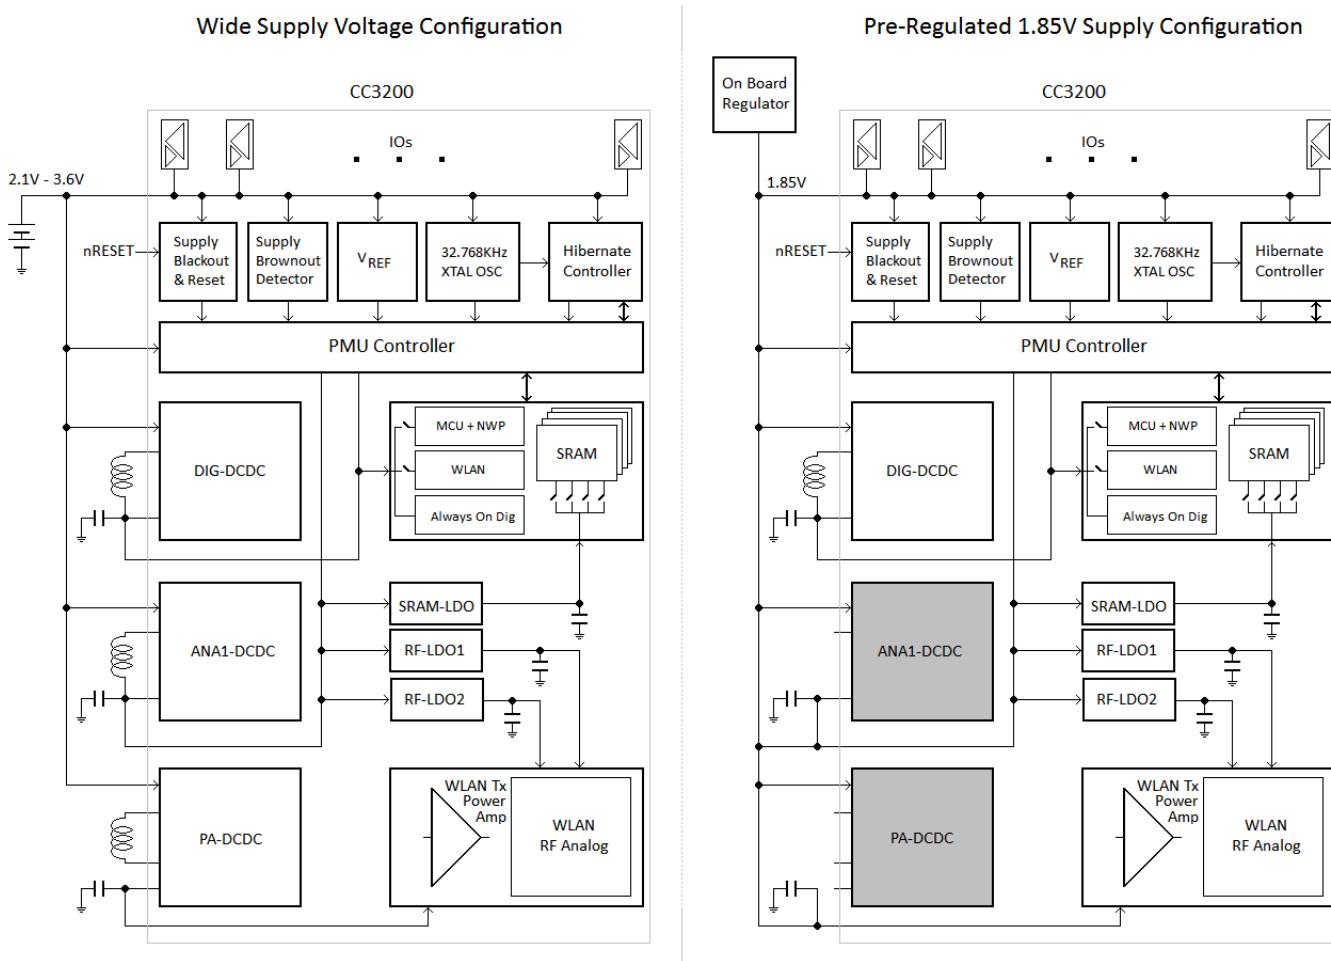**Figure 15-1. Power Management Unit Supports Two Supply Configurations**



The PMU includes the following key modules:

- Dig-DCDC: Generates 0.9-V to 1.2-V regulated output for digital core logic.
- ANA1-DCDC: Generates 1.8-V to 1.9-V regulated output for analog and RF.
- PA-DCDC: Generates 1.8-V to 1.9-V regulated output for WLAN transmit power-amplifier.
- Precision voltage reference
- Supply brown-out monitor:
  - Brownout level for wide-voltage mode: 2.1 V.
  - Brownout level for pre-regulated 1.85-V mode: 1.74 V.
- 32.768-KHz crystal oscillator:
  - Generates precision 32.768 KHz for RTC and WLAN power-save protocol timing.
  - Supports feeding an external square wave 32.768-KHz clock in lieu of XTAL.
- 32-KHz RC oscillator for chip startup: The 32.768-KHz XTAL oscillator requires 1.1 sec to become stable after first time power-up or chip reset (such as nRESET). Until the slow XTAL clock is stable, the system uses the alternate RC slow-clock.
- Hibernate controller: Implements the lowest current sleep mode of the chip (hibernate mode), and consists of the following functions:
  - Chip wake-up controller
  - RTC counter and RTC-based wakeup

- GPIO monitor and GPIO-based wakeup
- 2x32-bit general purpose direct-battery powered retention register
- Accessible from application processor through SoC-level interconnect
- Manages the PMU and I/Os when core digital is powered off
- PMU controller:
  - Controls all the low-level real-time sequencing of the DC-DCs, LDOs, and references.
  - Implements the low-level sequences associated with sleep mode transitions
  - Not directly accessible from the application processor
  - PMU state transitions are initiated by control signals from the PRCM

Refer to the CC3200 data sheet ([SWAS032](#)) for the chip wake-up sequence and timing parameters.

### 15.1.3 Supply Brownout and Blackout

BROWNOUT is the state where the supply voltage falls below the chip brownout threshold. For wide voltage mode,  $V_{\text{brownout}} = 2.1$  V. For pre-regulated 1.85-V mode,  $V_{\text{brownout}} = 1.74$  V. All DC-DCs are disabled and all digital logic is power-gated, as long as the chip is in BROWNOUT state. The hibernate controller, 2x32-bit general purpose retention register inside the hibernate controller, the 32.768-KHz XOSC, and the RTC counter are not impacted by BROWNOUT and continue to function. Once the supply voltage rises above  $V_{\text{brownout}}$ , the chip reboots.

BLACKOUT is the condition where the CC3x PMU incorporates a continuous time coarse analog supply voltage monitor that forces the PMU, including the hibernate controller, into a reset state where  $V_{\text{supply}} < V_{\text{blackout}}$ .  $V_{\text{blackout}}$  is typically 1.4 V and varies with temperature.

BLACKOUT ensures that there is a deterministic reset of the control registers and flags inside the hibernate module just before the supply falls, to ensure that the system operations are terminated reliably. In this way, when a proper supply level is restored, the PMU starts from a clean reset state without any corrupt control bits carried over from last session. The hibernate controller, 2x32-bit general purpose retention register inside the hibernate controller, the 32.768-KHz XOSC, and the RTC counter are all reset during BLACKOUT. For a functional perspective, the effect of BLACKOUT is similar to that of pulling down the chip reset pin (nRESET).


### 15.1.4 Application Processor Power Modes

From the application processor (Cortex M4 and its peripherals) standpoint, the following power modes are supported:

- ACTIVE mode
  - The processor is clocked at 80 MHz.
  - The required set of peripherals are running at configured clock rates.
- SLEEP mode
  - The processor is clock-gated until an interrupt event.
  - Reduces consumption by 3 mA with respect to ACTIVE.
  - Immediate wakeup.
  - The required set of peripherals is running at pre-configured clock rates.
  - By default, the sleep clock to the peripherals is disabled. If the application chooses to enter sleep anytime and requires certain peripherals to be active, the sleep clock to the peripheral must be enabled in advance (see [Section 15.6](#) and [Section 15.3](#)).
- DEEPSLEEP mode
  - The processor is clock-gated and PLL is disabled until an interrupt event.
  - Reduces consumption by 5 mA with respect to ACTIVE.
  - Using peripherals in conjunction with DEEPSLEEP is not recommended in the CC3200.
- Low-power deep-sleep mode (LPDS)
  - Up to 256 Kbyte of SRAM retention. No logic retention.

- TI SW API and framework provided for transparent save and restore of processor context, peripheral, and pin configurations.
- Total system current (including Wi-Fi and network periodic wakeup) is as low as 700 uA.
- When networking and Wi-Fi subsystems are disabled, the chip draws around 120 uA.
  - 40-MHz XTAL and PLL are turned off. 32.768-KHz XTAL is kept alive.
  - Most digital logic is turned off. Digital supply voltage is reduced to 0.9 V.
  - SRAM can be retained in multiples of 64 KB.
- Processor and peripheral registers are not retained. Global always ON configurations at SoC level are retained.
- Configurable wake-on-pad (one out of six pads).
- Less than 5-mS wake-up latency.
- Recommended for ultra-low power, always-connected cloud and Wi-Fi applications.
- Hibernate mode (HIB)
  - 32.768-KHz XTAL is kept alive .
  - Wake on RTC (for example, the 32-KHz slow clock counter) or selected GPIO.
  - No SRAM or logic retention.
  - 2x32-bit general purpose retention registers.
    - These registers are powered by the input supply directly, and retain their content as long as the chip is not reset (nRESET=1) and the supply stays above the blackout level (1.4 V).
    - Ultra-low current of 4 uA, including RTC.
    - Less than 10-mS wake-up latency.
    - Recommended for ultra-low power, infrequently-connected cloud and Wi-Fi applications.
  - A brief hibernation may also be used by software to implement a full system reboot as part of an over-the-air software upgrade (OTA), or to restore the system to a guaranteed clean state following a watchdog reset.
  - Once a brownout condition is detected, the application software may choose to enter hibernate mode to prevent further oscillatory brownouts that may cause unpredictable system behavior and possible damage to the end equipment. The system can subsequently be made to restart on a RTC timer, on a chip reset, or on plugging of new batteries.

For CC3200 applications where battery life is critical, maximize the fraction of time spent in LPDS or hibernate modes compared to active and other sleep modes (SLEEP, DEEPSLEEP).

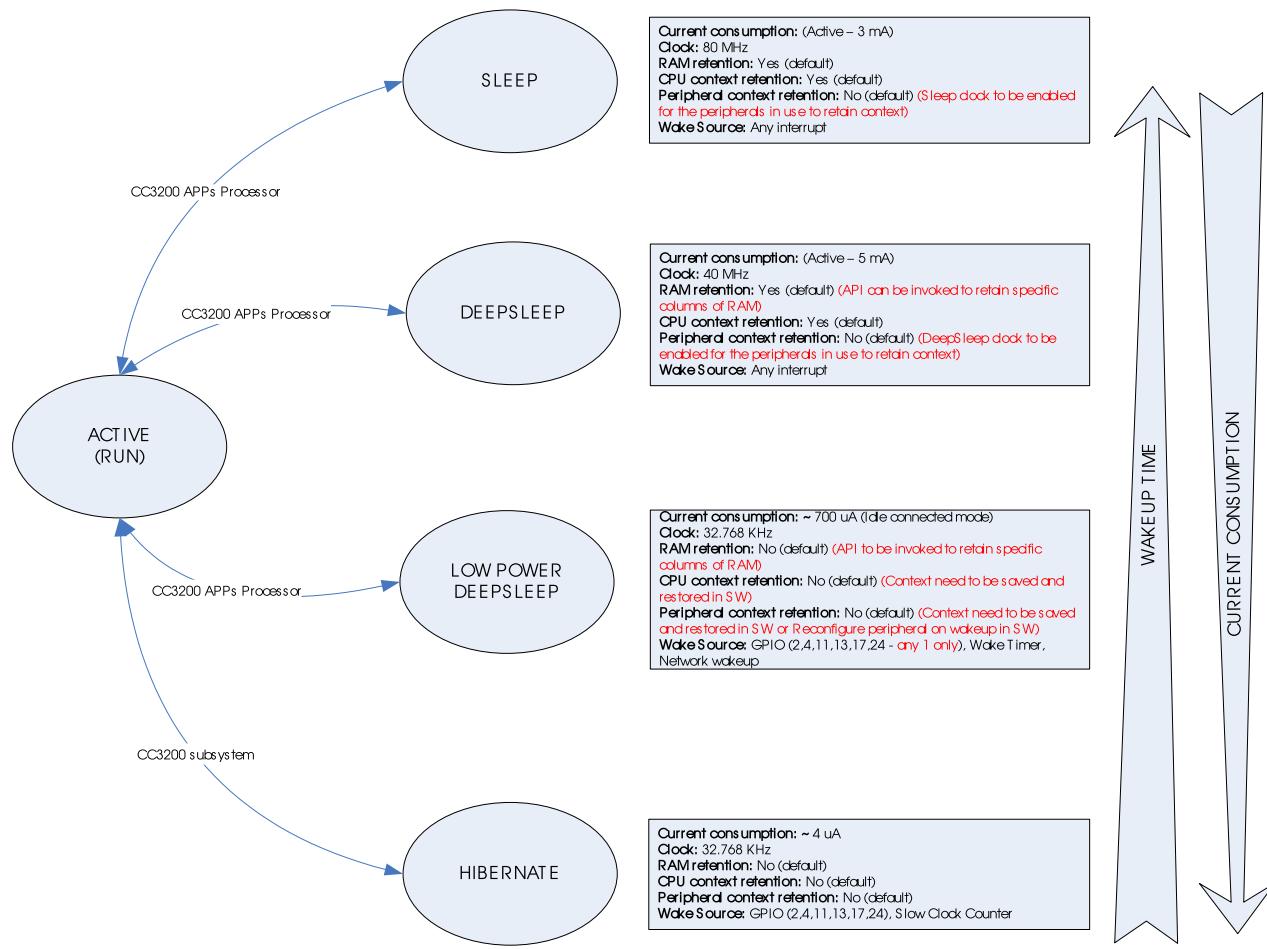**Figure 15-2. Sleep Modes**

## 15.2 Power Management Control Architecture

The CC3200 Wi-Fi microcontroller is a multi-processor system-on-chip with several subsystems independently cycling between active and sleep states (application processor, network processor, WLAN-MAC, and WLAN-PHY) for optimal energy usage. The activities of various subsystems are tied to the data and management traffic. In absence of events and traffic, all the systems are typically in a sleep state (LPDS).

The timing of sleep and wakeup do not need to be synchronized across subsystems. For example, in an idle-connected case, when the association to the AP is maintained most of the time, the WLAN subsystem is in LPDS and wakes up periodically for short intervals, only to listen for any incoming beacon packets and delivery pending messages from the AP (apart from occasional keep alive packet transmissions). While this repeats in multiples of the beacon period (104 mS), the application processor may implement its own sleep strategy with a different periodicity.

An advanced power management scheme has been implemented at the CC3200 chip level. This scheme handles the asynchronous sleep-wake requirements of multiple processors and Wi-Fi radio subsystems in a way that is transparent to the software, yet energy efficient.

The chip-level power management scheme is such that the application program is unaware of the power state transitions of the other subsystems. This approach insulates the user from the real-time complexities of a multi-processor system; it improves robustness by eliminating race conditions and simplifies the application development process.

As a result, the power mode of the chip can be different from the sleep state of the application software code. For example, when the application code requests for LPDS mode it is granted immediately; however, if the network processor or WLAN is active at that time, the chip does not enter LPDS until they are finished. In that case, the application processor is held under reset, which produces a safe result for the software, regardless of when the digital logic gets power-gated and when the voltage drops to 0.9 V. Similarly, on wake event for a particular subsystem, the chip as a whole transitions into active state ( $VDD\_DIG = 1.2$  V, 40-MHz XOSC and PLL-enabled) and then only that subsystem is awakened from LPDS. The other subsystems are held in reset until their respective wake events.


**Table 15-1** shows the feasible combinations of power states between the application processor and the network (including WLAN) subsystems. Refer to the CC3200 data sheet ([SWAS032](#)) for details of current consumption for these combinations.

**Table 15-1. Possible PM State Combinations of Application Processor and Network Subsystem (NWP+WLAN)**

| Application Processor (MCU)<br>Software State | Network Processor and WLAN<br>Software State | Resulting Power State of Chip, Core Logic<br>Voltage, and Clock |
|-----------------------------------------------|----------------------------------------------|-----------------------------------------------------------------|
| ACTIVE                                        | ACTIVE                                       | ACTIVE (1.2 V, 80 MHz, 32 KHz)                                  |
| ACTIVE                                        | SLEEP                                        | ACTIVE (1.2 V, 80 MHz, 32 KHz)                                  |
| ACTIVE                                        | LPDS (Fake-LPDS)                             | ACTIVE (1.2 V, 80 MHz, 32 KHz)                                  |
| SLEEP                                         | ACTIVE                                       | ACTIVE (1.2 V, 80 MHz, 32 KHz)                                  |
| SLEEP                                         | SLEEP                                        | ACTIVE (1.2 V, 80 MHz, 32 KHz)                                  |
| SLEEP                                         | LPDS (Fake-LPDS)                             | ACTIVE (1.2 V, 80 MHz, 32 KHz)                                  |
| LPDS (Fake-LPDS)                              | ACTIVE                                       | ACTIVE (1.2 V, 80 MHz, 32 KHz)                                  |
| LPDS (Fake-LPDS)                              | SLEEP                                        | ACTIVE (1.2 V, 80 MHz, 32 KHz)                                  |
| LPDS (Fake-LPDS)                              | LPDS (Fake-LPDS)                             | LPDS (True-LPDS) (0.9 V, 32 KHz)                                |
| Request For HIBERNATE                         | Don't Care                                   | HIBERNATE (0 V, 32 KHz)                                         |

Figure 15-3 shows the high-level architecture of the CC3200 SoC-level power management.

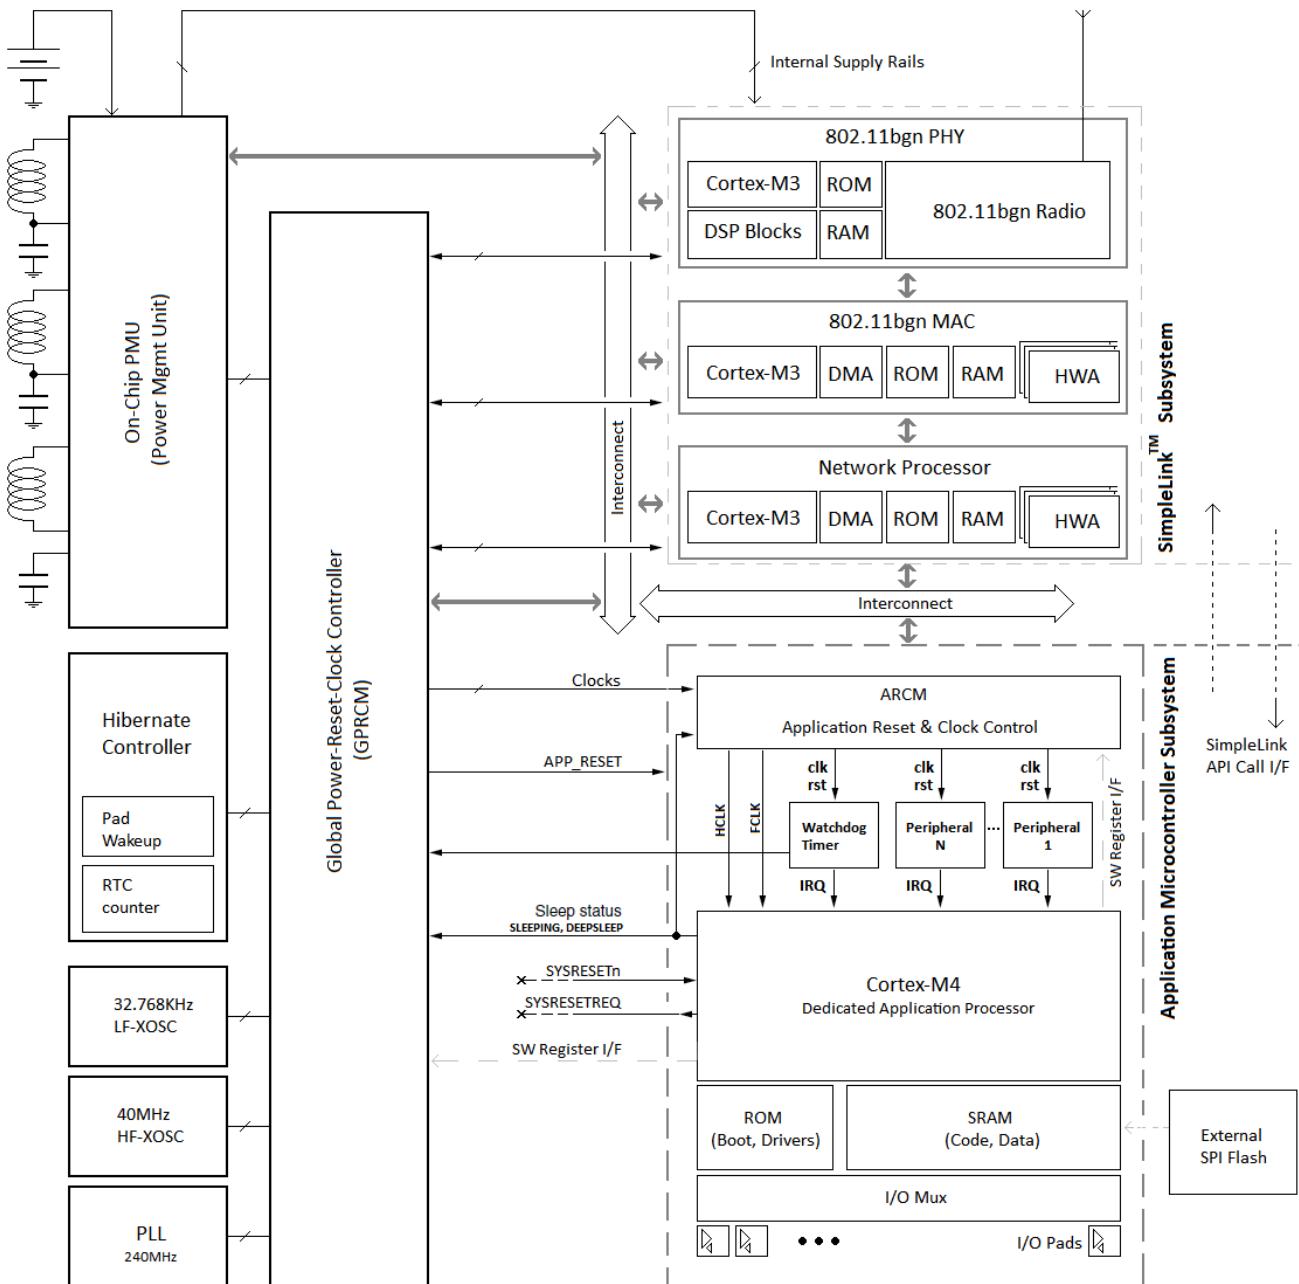**Figure 15-3. Power Management Control Architecture in CC3200**



### 15.2.1 Global Power-Reset-Clock Manager (GPRCM)

The global power-reset-clock manager module (GPRCM) receives the sleep requests from the subsystems and the wake events from associated sources. Based on sleep requests and wake events, the GPRCM controls the clock sources, PLL, power switches, and the PMU to change or gate/un-gate the supply, clocks, and resets to the following subsystems:

- Application processor (APPS)
- Networking processor (NWP)
- WLAN MAC and PHY processors (WLAN)

Programmable system clock frequency (using PLL) is not supported in the CC3200, due to co-existence reasons. For ease of programming and system robustness, application code has limited access to the chip power and clock management infrastructure in CC3200. The software interface to power management is limited to a subset of GPRCM registers, which are accessed through a set of easy-to-use API functions described in [Section 15.3](#).

### 15.2.2 Application Reset-Clock Manager (ARCM)

The application processor subsystem uses a local reset and clock control module called ARCM. The ARCM controls the reset, clock muxing, and clock gating to the application-specific peripheral modules. ARCM has no power control functionality. The application processor subsystem is a single power domain managed by GPRCM at the SoC level. Power-gating at an individual peripheral level does not lead to significant savings in a high-performance multi-processor system, and is not supported in the CC3200.

The ARCM registers can be accessed either directly or through a set of easy-to-use API functions described in [Section 15.3](#). The ARCM register map is described in [Section 15.6](#).

## 15.3 PRCM APIs

This section gives an overview of the PRCM APIs provided in the CC3200 Software Development Kit peripheral library. For more details, refer to the SDK documentation.

### 15.3.1 MCU Initialization

Booting from power-off or exiting hibernate low power mode, the user application can configure the mandatory MCU parameters by calling void `PRCMCC3200MCUInit()` API.

`void PRCMCC3200MCUInit(void)`

**Description:** This function sets the mandatory configuration for the MCU.

**Parameter:** None

**Return:** None

### 15.3.2 Reset Control

#### MCU Reset (Software Reset)

The MCU subsystem can be reset to its default state using the following API function call.

`void PRCMMCUReset(tBoolean bIncludeSubsystem)`

**Description:** This function performs a software reset of the MCU and associated peripherals. The core resumes execution in the ROM bootloader, which reloads the user application from sFlash.

**Parameter:** `bIncludeSubsystem` – If true, the MCU and its associated peripherals are reset; if false, only the MCU is reset.

**Return:** None

#### 15.3.3 Peripheral Reset

Individual peripherals can be reset to their default register state using the following API call.

`void PRCPPeripheralReset(unsigned long ulPeripheral)`

**Description:** This function performs a software reset of the specified peripheral.

**Parameter:** `ulPeripheral` – A valid peripheral macro (see [Section 15.4](#))

**Return:** None

#### 15.3.4 Reset Cause

The application processor restarts its execution from a reset vector after a reset. The application can determine the cause of the reset using the following API.

```
unsigned long PRCMSysResetCauseGet(void)
```

**Description:** This function acquires the reason for an MCU reset. This is a sticky status.

**Parameter:** None

**Return:** Returns the MCU reset cause as one of the following:

- **PRCM\_POWER\_ON**: Power-on reset
- **PRCM\_LPDS\_EXIT**: Exiting from LPDS
- **PRCM\_CORE\_RESET**: Software reset (core only)
- **PRCM\_MCU\_RESET**: Software reset (core and associated peripherals)
- **PRCM\_WDT\_RESET**: Watchdog reset
- **PRCM\_SOC\_RESET**: Software SOC reset
- **PRCM\_HIB\_EXIT**: Exiting from hibernate

### 15.3.5 Clock Control

Individual peripherals can be kept clock-gated or un-gated across different power modes. Any access to a clock-gated peripheral results in a bus fault. The following APIs can control the peripheral clock gating.

```
void PRCMPeripheralClkEnable(unsigned long ulPeripheral, unsigned long ulClkFlags)
```

**Description:** This function un-gates the specified peripheral clock and makes the peripheral accessible.

**Parameters:**

- **ulPeripheral**: One of the valid peripheral macros (see [Section 15.4](#))
- **ulClkFlag**: Power mode during which the clock is kept enabled and is bitwise or one or more of the following:
  - **PRCM\_RUN\_MODE\_CLK**: Un-gates clock to the peripheral during run mode.
  - **PRCM\_SLP\_MODE\_CLK**: Keeps the clock un-gated during sleep.
  - **PRCM\_DSPL\_MODE\_CLK**: Keeps the clock un-gated during deep sleep.

**Return:** None

```
void PRCMPeripheralClkDisable(unsigned long ulPeripheral, unsigned long ulClkFlags)
```

**Description:** This function gates a specified peripheral clock.

**Parameter:**

- **ulPeripheral**: One of the valid peripheral macros (see [Section 15.4](#)).
- **ulClkFlag**: Power mode during which the clock is kept disabled and is bitwise or one or more of the following:
  - **PRCM\_RUN\_MODE\_CLK**: Gates clock to the peripheral during run mode.
  - **PRCM\_SLP\_MODE\_CLK**: Keeps the clock gated during sleep.
  - **PRCM\_DSPL\_MODE\_CLK**: Keeps the clock gated during deep sleep.

**Return:** None

### 15.3.6 Low Power Modes

**SRAM Retention** – The CC3200 SRAM is organized in  $4 \times 64\text{-KB}$  columns. By default, all SRAM columns are configured to be retained across LPDS and deep sleep power modes. The application can enable or disable retention per column by calling the following API with the appropriate parameters:

```
void PRCMSRAMRetentionEnable(unsigned long ulSramColSel, unsigned long ulFlags)
```

**Description:** This function reads from a specified OCR register.

**Parameter:**

- **ulSramColSel**: Bit-packed representation of SRAM columns. **ulSramColSel** is logical or one or more of the following:

- **PRCM\_SRAM\_COL\_1:** SRAM column 1
- **PRCM\_SRAM\_COL\_2:** SRAM column 2
- **PRCM\_SRAM\_COL\_3:** SRAM column 3
- **PRCM\_SRAM\_COL\_4:** SRAM column 4
- **ulFlags:** Bit-packed representation of power modes. **ulFlags** is logical or one or more of the following:
  - **PRCM\_SRAM\_DSPL\_RET:** Configuration for DSPL
  - **PRCM\_SRAM\_LPDS\_RET:** Configuration for LPDS

**Return:** None

`void PRCMSRAMRetentionDisable(unsigned long ulSramColSel, unsigned long ulFlags)`

**Description:** This function reads from a specified OCR register.

**Parameter:**

- **ulSramColSel:** Bit-packed representation of SRAM columns. **ulSramColSel** is logical or one or more of the following:
  - **PRCM\_SRAM\_COL\_1:** SRAM column 1
  - **PRCM\_SRAM\_COL\_2:** SRAM column 2
  - **PRCM\_SRAM\_COL\_3:** SRAM column 3
  - **PRCM\_SRAM\_COL\_4:** SRAM column 4
- **ulFlags:** Bit-packed representation of power modes. **ulFlags** is logical or one or more of the following:
  - **PRCM\_SRAM\_DSPL\_RET:** Configuration for DSPL
  - **PRCM\_SRAM\_LPDS\_RET:** Configuration for LPDS

**Return:** None

### 15.3.7 Sleep (SLEEP)

This mode can be entered by calling the following API. In this mode, the core is halted at the point of invocation on this API with selective peripheral clock gating. The core resumes execution from the same location when it receives an interrupt.

`void PRCMSleepEnter()`

**Description:** Enter sleep power mode by invoking a WFI instruction.

**Parameter:** None

**Return:** None

### 15.3.8 Deep Sleep (DEEPSLEEP)

In this mode, the core is halted at the point of invocation on this API, with selective peripheral clock gating and SRAM retention. The core resumes execution from the same location when it receives an interrupt. This mode can be entered by calling the following API.

`void PRCDDeepSleepEnter ()`

**Description:** Enter deep-sleep power mode by executing a WFI instruction.

**Parameter:** None

**Return:** None

By default, the entire SRAM is retained during DSPL. The user can enable or disable SRAM retention using the APIs `PRCMSRAMRetentionEnable()` and `PRCMSRAMRetentionDisable()`. See [Section 15.3.6](#) for more details.

### 15.3.9 Low-Power Deep Sleep (LPDS)

In this mode, the MCU core and its associated peripheral are reset with selective SRAM column retention.

By default, the entire SRAM is retained during DSPL. The user can enable or disable SRAM retention using the APIs **PRCMSRAMRetentionEnable()** and **PRCMSRAMRetentionDisable()**. See [Section 15.3.6](#) for more details.

Core resumes its execution either in the ROM bootloader or a pre-configured location in SRAM (if the user sets restore info before entering LPDS) upon wakeup, due to configured wake sources which includes the following:

- Host IRQ – An interrupt from NWP
- LPDS Timer – Dedicated LPDS timer
- LPDS wakeup GPIOs – Six selected GPIOs

LPDS restore info can be set using the following API:

```
void PRCMLPDSRestoreInfoSet(unsigned long ulStackPtr, unsigned long ulProgCntr)
```

**Description:** This function sets the PC and stack pointer info that will be restored by the bootloader on exit from LPDS.

**Parameter:**

- **ulStackPtr:** Stack pointer restored on exit from LPDS.
- **ulProgCntr:** Program counter restored on exit from LPDS.

**Return:** None

LPDS wakeup sources can be configured using following APIs:

- void PRCMLPDSSleepSourceEnable(unsigned long ulLpdsWakeupsr)

**Description:** This function enables the specified LPDS wake-up sources.

**Parameter:** **ulLpdsWakeupsr:** Bit-packed representation of valid wake-up sources. **ulLpdsWakeupsr** is bitwise or one or more of the following:

- **PRCM\_LPDS\_HOST\_IRQ:** Interrupt from NWP
- **PRCM\_LPDS\_GPIO:** LPDS wake-up GPIOs
- **PRCM\_LPDS\_TIMER:** Dedicated LPDS timer

**Return:** None

- void PRCMLPDSSleepSourceDisable(unsigned long ulLpdsWakeupsr)

**Description:** This function disables the specified LPDS wake-up sources.

**Parameter:** **ulLpdsWakeupsr:** Bit-packed representation of valid wake-up sources. **ulLpdsWakeupsr** is bitwise or one or more of the following:

- **PRCM\_LPDS\_HOST\_IRQ:** Interrupt from NWP
- **PRCM\_LPDS\_GPIO:** LPDS wake-up GPIOs
- **PRCM\_LPDS\_TIMER:** Dedicated LPDS timer

**Return:** None

- void PRCMLPDSTimerIntervalSet(unsigned long ulTicks)

**Description:** This function sets the LPDS wake-up timer interval. The 32-bit timer is clocked at 32.768 KHz and triggers a wakeup on expiry. The timer is started only when the system enters LPDS

**Parameter:** **ulTicks:** Wake-up interval in 32.768-KHz ticks.

**Return:** None

- unsigned long PRCMLPDSSleepCauseGet(void)

**Description:** This function gets the LPDS wake-up cause.

**Parameter:** None

**Return:** Returns the LPDS wake-up cause enumerated as one of the following:

- **PRCM\_LPDS\_HOST\_IRQ:** Interrupt from NWP

- **PRCM\_LPDS\_GPIO:** LPDS wake-up GPIOs
- **PRCM\_LPDS\_TIMER:** Dedicated LPDS timer
- void **PRCMLPDSWakeUpGPIOSelect**(unsigned long ulGPIOPin, unsigned long ulType)

**Description:** Sets the specified GPIO as the wake-up source, and configures that GPIO to sense-specified.

**Parameter:**

- **ulGPIOPin:** One of the valid LPDS wake-up GPIOs. **ulGPIOPin** can be one of the following:
  - **PRCM\_LPDS\_GPIO2:** GPIO 2
  - **PRCM\_LPDS\_GPIO4:** GPIO 4
  - **PRCM\_LPDS\_GPIO13:** GPIO 13
  - **PRCM\_LPDS\_GPIO17:** GPIO 17
  - **PRCM\_LPDS\_GPIO11:** GPIO 11
  - **PRCM\_LPDS\_GPIO24:** GPIO 24
- **ulType:** Event Type. **ulType** can be one of the following:
  - **PRCM\_LPDS\_LOW\_LEVEL:** GPIO is held low (0)
  - **PRCM\_LPDS\_HIGH\_LEVEL:** GPIO is held high (1)
  - **PRCM\_LPDS\_FALL\_EDGE:** GPIO changes from high to low
  - **PRCM\_LPDS\_RISE\_EDGE:** GPIO changes from low to high

**Return:** None

- The user application can put the system in LPDS by invoking following the API function:

void **PRCMLPDSEnter**(void)

**Description:** This function puts the system into low-power deep-sleep (LPDS) power mode, and should be invoked after configuring the wake source, SRAM retention configuration, and system restore configuration.

**Parameter:** None

**Return:** None

### 15.3.10 Hibernate (HIB)

In this mode, the entire SOC loses its state, including the MCU subsystem, the NWP subsystem, and SRAM except 2 × 32-bit OCR registers and the free-running slow-clock counter. Core resumes its execution in the ROM bootloader upon wakeup due to configured wake sources, which include the following:

- Slow clock counter – Always-on 32.768-KHz counter
- HIB wakeup GPIOs – Six selected GPIOs

Hibernate wake-up sources are configured using following APIs:

- void **PRCMHibernateWakeupsSourceEnable**(unsigned long ulHIBWakupSrc)

**Description:** This function enables the specified HIB wake-up sources.

**Parameter:** **ulHIBWakupSrc:** Bit-packed representation of valid wake-up sources. **ulHIBWakupSrc** is bitwise or one or more of the following:

- **PRCM\_HIB\_SLOW\_CLK\_CTR:** Slow clock counter
- **PRCM\_HIB\_GPIO2:** GPIO 2
- **PRCM\_HIB\_GPIO4:** GPIO 4
- **PRCM\_HIB\_GPIO13:** GPIO 13
- **PRCM\_HIB\_GPIO17:** GPIO 17
- **PRCM\_HIB\_GPIO11:** GPIO 11

- **PRCM\_HIB\_GPIO24:** GPIO 24

**Return:** None

- void **PRCMHibernateWakeupsSourceDisable**(unsigned long ulHIBWakeupSrc)

**Description:** This function disables the specified HIB wake-up sources.

**Parameter:** **ulHIBWakeupSrc:** Bit-packed representation of valid wake-up sources. **ulHIBWakeupSrc** is bitwise or one or more of the following:

- **PRCM\_HIB\_SLOW\_CLK\_CTR:** Slow clock counter
- **PRCM\_HIB\_GPIO2:** GPIO 2
- **PRCM\_HIB\_GPIO4:** GPIO 4
- **PRCM\_HIB\_GPIO13:** GPIO 13
- **PRCM\_HIB\_GPIO17:** GPIO 17
- **PRCM\_HIB\_GPIO11:** GPIO 11
- **PRCM\_HIB\_GPIO24:** GPIO 24

**Return:** None

- unsigned long **PRCMHibernateWakeupsCauseGet**(void)

**Description:** This function gets the HIB wake-up cause.

**Parameter:** None

**Return:** Returns the HIB wake-up cause enumerated as one of the following:

- **PRCM\_HIB\_WAKEUP\_CAUSE\_SLOW\_CLOCK:** Slow clock counter
- **PRCM\_HIB\_WAKEUP\_CAUSE\_GPIO:** HIB wake-up GPIOs
- void **PRCMHibernateWakeUpGPIOSelect**(unsigned long ulMultiGPIOBitMap, unsigned long ulType)

**Description:** Sets the specified GPIOs as wake-up source and configures them to sense the specified event.

**Parameter:**

- **ulMultiGPIOBitMap:** One of the valid HIB wake-up GPIOs. **ulMultiGPIOBitMap** is logical OR of one or more of the following:
  - **PRCM\_LPDS\_GPIO2:** GPIO 2
  - **PRCM\_LPDS\_GPIO4:** GPIO 4
  - **PRCM\_LPDS\_GPIO13:** GPIO 13
  - **PRCM\_LPDS\_GPIO17:** GPIO 17
  - **PRCM\_LPDS\_GPIO11:** GPIO 11
  - **PRCM\_LPDS\_GPIO24:** GPIO 24
- **ulType:** Event Type. **ulType** can be one of the following:
  - **PRCM\_HIB\_LOW\_LEVEL:** GPIO is held low (0)
  - **PRCM\_HIB\_HIGH\_LEVEL:** GPIO is held high (1)
  - **PRCM\_HIB\_FALL\_EDGE:** GPIO changes from High to Low
  - **PRCM\_HIB\_RISE\_EDGE:** GPIO changes from Low to High

**Return:** None

- void **PRCMHibernateIntervalSet**(unsigned long long ullTicks)

**Description:** This function sets the HIB wake-up interval based on the current slow clock count. The 48-bit timer is clocked at 32.768 KHz and triggers a wakeup when the counter reaches a particular value. The function computes the wake-up count value by adding a specified interval to the current value of the slow clock counter.

**Parameter:** **ullTicks:** Wake-up interval in 32.768-KHz ticks

**Return:** None

- The application can put the system in HIB by invoking the following API:

**void PRCMHibernateEnter (void)**

**Description:** This function puts the system into hibernate power mode.

**Parameter:** None

**Return:** None

Two 32-bit on-chip retention registers (OCR) retained during the hibernate power mode can be accessed using the following APIs:

- **void PRCMOCRRegisterWrite(unsigned char ucIndex, unsigned long ulRegValue)**

**Description:** This function writes into a specified OCR register.

**Parameter:**

- **ucIndex:** Selects one out of two available registers, 0 or 1
- **ulRegValue:** 32-bit value

**Return:** None

- **unsigned long PRCMOCRRegisterRead(unsigned char ucIndex)**

**Description:** This function reads from a specified OCR register.

**Parameter:** **ucIndex:** Selects one out of two available registers, 0 or 1

**Return:** Returns a 32-bit value read from a specified OCR register.

### 15.3.11 Slow Clock Counter

The CC3200 has a 48-bit on-chip always-on slow counter running at 32.768 KHz, which can wake up the device from hibernate low-power mode, or generate an interrupt to the core on counting a particular match value. The following API returns the current value of the counter:

**unsigned long PRCMSlowClkCtrGet(void)**

**Description:** This function reads from a specified OCR register.

**Parameter:** None

**Return:** None

To set the match value to receive an interrupt call, use the following API with the appropriate value:

**void PRCMSlowClkCtrMatchSet(unsigned long long ullTicks)**

**Description:** This function sets the match value of the slow clock triggered interrupt.

**Parameter:** **ullTicks** 48-bit match value

**Return:** None

## 15.4 Peripheral Macros

**Table 15-2. Peripheral Macro Table**

| Macro       | Description                   |
|-------------|-------------------------------|
| PRCM_CAMERA | Camera interface              |
| PRCM_I2S    | I2S interface                 |
| PRCM_SDHOST | SDHost interface              |
| PRCM_GSPI   | General purpose SPI interface |
| PRCM_UDMA   | uDMA module                   |
| PRCM_GPIOA0 | General Purpose IO port A0    |

**Table 15-2. Peripheral Macro Table (continued)**

| Macro        | Description                           |
|--------------|---------------------------------------|
| PRCM_GPIOA1  | General Purpose IO port A1            |
| PRCM_GPIOA2  | General Purpose IO port A2            |
| PRCM_GPIOA3  | General Purpose IO port A3            |
| PRCM_WDT     | Watchdog module                       |
| PRCM_UARTA0  | UART interface A0                     |
| PRCM_UARTA1  | UART interface A1                     |
| PRCM_TIMERA0 | PRCM_TIMERA0 General purpose Timer A0 |
| PRCM_TIMERA1 | PRCM_TIMERA0 General purpose Timer A1 |
| PRCM_TIMERA2 | PRCM_TIMERA0 General purpose Timer A2 |
| PRCM_TIMERA3 | PRCM_TIMERA0 General purpose Timer A3 |
| PRCM_I2CA0   | I2C interface                         |

## 15.5 Power Management Framework

The CC3200 SDK comes with a power management software framework. This framework provides simple services that can be invoked by the application, and callback functions that can be overridden by the application code. For details refer to the [Power Management framework software documentation](#).

## 15.6 PRCM Registers

Table 15-3 lists the memory-mapped registers for the ARCM. All register offset addresses not listed in Table 15-3 should be considered as reserved locations, and the register contents should not be modified.

**Table 15-3. PRCM Registers**

| Offset | Acronym      | Register Name | Section                           |
|--------|--------------|---------------|-----------------------------------|
| 0h     | CAMCLKCFG    |               | <a href="#">Section 15.6.1.1</a>  |
| 4h     | CAMCLKEN     |               | <a href="#">Section 15.6.1.2</a>  |
| 8h     | CAMSWRST     |               | <a href="#">Section 15.6.1.3</a>  |
| 14h    | MCASPCLKEN   |               | <a href="#">Section 15.6.1.4</a>  |
| 18h    | MCASPSWRST   |               | <a href="#">Section 15.6.1.5</a>  |
| 20h    | SDIOMCLKCFG  |               | <a href="#">Section 15.6.1.6</a>  |
| 24h    | SDIOMCLKEN   |               | <a href="#">Section 15.6.1.7</a>  |
| 28h    | SDIOMSWRST   |               | <a href="#">Section 15.6.1.8</a>  |
| 2Ch    | APSPICLKCFG  |               | <a href="#">Section 15.6.1.9</a>  |
| 30h    | APSPICLKEN   |               | <a href="#">Section 15.6.1.10</a> |
| 34h    | APSPISWRST   |               | <a href="#">Section 15.6.1.11</a> |
| 48h    | DMACLKEN     |               | <a href="#">Section 15.6.1.12</a> |
| 4Ch    | DMASWRST     |               | <a href="#">Section 15.6.1.13</a> |
| 50h    | GPIO0CLKEN   |               | <a href="#">Section 15.6.1.14</a> |
| 54h    | GPIO0SWRST   |               | <a href="#">Section 15.6.1.15</a> |
| 58h    | GPIO1CLKEN   |               | <a href="#">Section 15.6.1.16</a> |
| 5Ch    | GPIO1SWRST   |               | <a href="#">Section 15.6.1.17</a> |
| 60h    | GPIO2CLKEN   |               | <a href="#">Section 15.6.1.18</a> |
| 64h    | GPIO2SWRST   |               | <a href="#">Section 15.6.1.19</a> |
| 68h    | GPIO3CLKEN   |               | <a href="#">Section 15.6.1.20</a> |
| 6Ch    | GPIO3SWRST   |               | <a href="#">Section 15.6.1.21</a> |
| 70h    | GPIO4CLKEN   |               | <a href="#">Section 15.6.1.22</a> |
| 74h    | GPIO4SWRST   |               | <a href="#">Section 15.6.1.23</a> |
| 78h    | WDTCLKEN     |               | <a href="#">Section 15.6.1.24</a> |
| 7Ch    | WDTSWRST     |               | <a href="#">Section 15.6.1.25</a> |
| 80h    | UART0CLKEN   |               | <a href="#">Section 15.6.1.26</a> |
| 84h    | UART0SWRST   |               | <a href="#">Section 15.6.1.27</a> |
| 88h    | UART1CLKEN   |               | <a href="#">Section 15.6.1.28</a> |
| 8Ch    | UART1SWRST   |               | <a href="#">Section 15.6.1.29</a> |
| 90h    | GPT0CLKCFG   |               | <a href="#">Section 15.6.1.30</a> |
| 94h    | GPT0SWRST    |               | <a href="#">Section 15.6.1.31</a> |
| 98h    | GPT1CLKEN    |               | <a href="#">Section 15.6.1.32</a> |
| 9Ch    | GPT1SWRST    |               | <a href="#">Section 15.6.1.33</a> |
| A0h    | GPT2CLKEN    |               | <a href="#">Section 15.6.1.34</a> |
| A4h    | GPT2SWRST    |               | <a href="#">Section 15.6.1.35</a> |
| A8h    | GPT3CLKEN    |               | <a href="#">Section 15.6.1.36</a> |
| ACh    | GPT3SWRST    |               | <a href="#">Section 15.6.1.37</a> |
| B0h    | MCASPCLKCFG0 |               | <a href="#">Section 15.6.1.38</a> |
| B4h    | MCASPCLKCFG1 |               | <a href="#">Section 15.6.1.39</a> |
| D8h    | I2CLCKEN     |               | <a href="#">Section 15.6.1.40</a> |
| DCh    | I2CSWRST     |               | <a href="#">Section 15.6.1.41</a> |
| E4h    | LPDSREQ      |               | <a href="#">Section 15.6.1.42</a> |
| ECh    | TURBOREQ     |               | <a href="#">Section 15.6.1.43</a> |
| 108h   | DSLPWAKECFG  |               | <a href="#">Section 15.6.1.44</a> |

**Table 15-3. PRCM Registers (continued)**

| Offset | Acronym     | Register Name | Section           |
|--------|-------------|---------------|-------------------|
| 10Ch   | DSLPTIMRCFG |               | Section 15.6.1.45 |
| 110h   | SLPWAKEEN   |               | Section 15.6.1.46 |
| 114h   | SLPTMRCFG   |               | Section 15.6.1.47 |
| 118h   | WAKENWP     |               | Section 15.6.1.48 |
| 120h   | RCM_IS      |               | Section 15.6.1.49 |
| 124h   | RCM_IEN     |               | Section 15.6.1.50 |

### 15.6.1 PRCM Register Description

The remainder of this section lists and describes the PRCM registers, in numerical order by address offset.

### 15.6.1.1 CAMCLKCFG Register (offset = 0h) [reset = 0h]

CAMCLKCFG is shown in [Figure 15-4](#) and described in [Table 15-4](#).

**Figure 15-4. CAMCLKCFG Register**

|          |    |    |    |           |    |    |    |      |    |    |    |          |    |    |    |
|----------|----|----|----|-----------|----|----|----|------|----|----|----|----------|----|----|----|
| 31       | 30 | 29 | 28 | 27        | 26 | 25 | 24 | 23   | 22 | 21 | 20 | 19       | 18 | 17 | 16 |
| RESERVED |    |    |    |           |    |    |    |      |    |    |    |          |    |    |    |
| R-0h     |    |    |    |           |    |    |    |      |    |    |    |          |    |    |    |
| 15       | 14 | 13 | 12 | 11        | 10 | 9  | 8  | 7    | 6  | 5  | 4  | 3        | 2  | 1  | 0  |
| RESERVED |    |    |    | DIVOFFTIM |    |    |    | NU1  |    |    |    | DIVONTIM |    |    |    |
| R-0h     |    |    |    | R/W-0h    |    |    |    | R-0h |    |    |    | R/W-0h   |    |    |    |

**Table 15-4. CAMCLKCFG Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                                                                                                         |
|-------|-----------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-11 | RESERVED  | R    | 0h    |                                                                                                                                                                                                                     |
| 10-8  | DIVOFFTIM | R/W  | 0h    | CAMERA_PLLCKDIV_OFF_TIME Configuration of OFF-TIME for dividing PLL clk (240 MHz) in generation of Camera func-clk:<br>000h = 1<br>001h = 2<br>010h = 3<br>011h = 4<br>100h = 5<br>101h = 6<br>110h = 7<br>111h = 8 |
| 7-3   | NU1       | R    | 0h    |                                                                                                                                                                                                                     |
| 2-0   | DIVONTIM  | R/W  | 0h    | CAMERA_PLLCKDIV_ON_TIME Configuration of ON-TIME for dividing PLL clk (240 MHz) in generation of Camera func-clk:<br>000h = 1<br>001h = 2<br>010h = 3<br>011h = 4<br>100h = 5<br>101h = 6<br>110h = 7<br>111h = 8   |

**15.6.1.2 CAMCLKEN Register (offset = 4h) [reset = 0h]**

CAMCLKEN is shown in [Figure 15-5](#) and described in [Table 15-5](#).

**Figure 15-5. CAMCLKEN Register**

|          |    |    |     |      |    |    |           |
|----------|----|----|-----|------|----|----|-----------|
| 31       | 30 | 29 | 28  | 27   | 26 | 25 | 24        |
| RESERVED |    |    |     |      |    |    |           |
| R-0h     |    |    |     |      |    |    |           |
| 23       | 22 | 21 | 20  | 19   | 18 | 17 | 16        |
|          |    |    | NU1 |      |    |    | DSLPCLKEN |
|          |    |    |     | R-0h |    |    | R-0h      |
| 15       | 14 | 13 | 12  | 11   | 10 | 9  | 8         |
|          |    |    | NU2 |      |    |    | SLPCLKEN  |
|          |    |    |     | R-0h |    |    | R/W-0h    |
| 7        | 6  | 5  | 4   | 3    | 2  | 1  | 0         |
|          |    |    | NU3 |      |    |    | RUNCLKEN  |
|          |    |    |     | R-0h |    |    | R/W-0h    |

**Table 15-5. CAMCLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                    |
|-------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------|
| 31-24 | RESERVED  | R    | 0h    |                                                                                                                |
| 23-17 | NU1       | R    | 0h    |                                                                                                                |
| 16    | DSLPCLKEN | R    | 0h    | CAMERA_DSPL_CLK_ENABLE<br>0h = Disable camera clk during deep-sleep mode                                       |
| 15-9  | NU2       | R    | 0h    |                                                                                                                |
| 8     | SLPCLKEN  | R/W  | 0h    | CAMERA_SLP_CLK_ENABLE<br>0h = Disable camera clk during sleep mode<br>1h = Enable camera clk during sleep mode |
| 7-1   | NU3       | R    | 0h    |                                                                                                                |
| 0     | RUNCLKEN  | R/W  | 0h    | CAMERA_RUN_CLK_ENABLE<br>0h = Disable camera clk during run mode<br>1h = Enable camera clk during run mode     |

### 15.6.1.3 CAMSWRST Register (offset = 8h) [reset = 0h]

CAMSWRST is shown in [Figure 15-6](#) and described in [Table 15-6](#).

**Figure 15-6. CAMSWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-6. CAMSWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                              |
|------|----------|------|-------|----------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                          |
| 1    | ENSTS    | R    | 0h    | CAMERA_ENABLED_STATUS<br>0h = Camera clocks/resets are disabled<br>1h = Camera clocks/resets are enabled |
| 0    | SWRST    | R/W  | 0h    | CAMERA_SOFT_RESET<br>0h = De-assert reset for Camera-core<br>1h = Assert reset for Camera-core           |

**15.6.1.4 MCASPCLKEN Register (offset = 14h) [reset = 0h]**

MCASPCLKEN is shown in [Figure 15-7](#) and described in [Table 15-7](#).

**Figure 15-7. MCASPCLKEN Register**

|          |    |    |     |      |    |    |           |
|----------|----|----|-----|------|----|----|-----------|
| 31       | 30 | 29 | 28  | 27   | 26 | 25 | 24        |
| RESERVED |    |    |     |      |    |    |           |
| R-0h     |    |    |     |      |    |    |           |
| 23       | 22 | 21 | 20  | 19   | 18 | 17 | 16        |
|          |    |    | NU1 |      |    |    | DSLPCLKEN |
|          |    |    |     | R-0h |    |    | R-0h      |
| 15       | 14 | 13 | 12  | 11   | 10 | 9  | 8         |
|          |    |    | NU2 |      |    |    | SLPCLKEN  |
|          |    |    |     | R-0h |    |    | R/W-0h    |
| 7        | 6  | 5  | 4   | 3    | 2  | 1  | 0         |
|          |    |    | NU3 |      |    |    | RUNCLKEN  |
|          |    |    |     | R-0h |    |    | R/W-0h    |

**Table 15-7. MCASPCLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                 |
|-------|-----------|------|-------|-------------------------------------------------------------------------------------------------------------|
| 31-24 | RESERVED  | R    | 0h    |                                                                                                             |
| 23-17 | NU1       | R    | 0h    |                                                                                                             |
| 16    | DSLPCLKEN | R    | 0h    | MCASP_DS LP CLK_ENABLE<br>0h = Disable MCASP clk during deep-sleep mode                                     |
| 15-9  | NU2       | R    | 0h    |                                                                                                             |
| 8     | SLPCLKEN  | R/W  | 0h    | MCASP_SLP_CLK_ENABLE<br>0h = Disable MCASP clk during sleep mode<br>1h = Enable MCASP clk during sleep mode |
| 7-1   | NU3       | R    | 0h    |                                                                                                             |
| 0     | RUNCLKEN  | R/W  | 0h    | MCASP_RUN_CLK_ENABLE<br>0h = Disable MCASP clk during run mode<br>1h = Enable MCASP clk during run mode     |

### 15.6.1.5 MCASPSWRST Register (offset = 18h) [reset = 0h]

MCASPSWRST is shown in [Figure 15-8](#) and described in [Table 15-8](#).

**Figure 15-8. MCASPSWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-8. MCASPSWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                           |
|------|----------|------|-------|-------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                       |
| 1    | ENSTS    | R    | 0h    | MCASP_ENABLED_STATUS<br>0h = MCASP Clocks/resets are disabled<br>1h = MCASP Clocks/resets are enabled |
| 0    | SWRST    | R/W  | 0h    | MCASP_SOFT_RESET<br>0h = De-assert reset for MCASP-core<br>1h = Assert reset for MCASP-core           |

**15.6.1.6 SDIOMCLKCFG Register (offset = 20h) [reset = 0h]**

SDIOMCLKCFG is shown in [Figure 15-9](#) and described in [Table 15-9](#).

**Figure 15-9. SDIOMCLKCFG Register**

|          |    |    |    |           |    |    |    |      |    |    |    |          |    |    |    |
|----------|----|----|----|-----------|----|----|----|------|----|----|----|----------|----|----|----|
| 31       | 30 | 29 | 28 | 27        | 26 | 25 | 24 | 23   | 22 | 21 | 20 | 19       | 18 | 17 | 16 |
| RESERVED |    |    |    |           |    |    |    |      |    |    |    |          |    |    |    |
| R-0h     |    |    |    |           |    |    |    |      |    |    |    |          |    |    |    |
| 15       | 14 | 13 | 12 | 11        | 10 | 9  | 8  | 7    | 6  | 5  | 4  | 3        | 2  | 1  | 0  |
| RESERVED |    |    |    | DIVOFFTIM |    |    |    | NU1  |    |    |    | DIVONTIM |    |    |    |
| R-0h     |    |    |    | R/W-0h    |    |    |    | R-0h |    |    |    | R/W-0h   |    |    |    |

**Table 15-9. SDIOMCLKCFG Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                                                                                                       |
|-------|-----------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-11 | RESERVED  | R    | 0h    |                                                                                                                                                                                                                   |
| 10-8  | DIVOFFTIM | R/W  | 0h    | MMCHS_PLLCKDIV_OFF_TIME Configuration of OFF-TIME for dividing PLL clk (240 MHz) in generation of MMCHS func-clk:<br>000h = 1<br>001h = 2<br>010h = 3<br>011h = 4<br>100h = 5<br>101h = 6<br>110h = 7<br>111h = 8 |
| 7-3   | NU1       | R    | 0h    |                                                                                                                                                                                                                   |
| 2-0   | DIVONTIM  | R/W  | 0h    | MMCHS_PLLCKDIV_ON_TIME Configuration of ON-TIME for dividing PLL clk (240 MHz) in generation of MMCHS func-clk:<br>000h = 1<br>001h = 2<br>010h = 3<br>011h = 4<br>100h = 5<br>101h = 6<br>110h = 7<br>111h = 8   |

### 15.6.1.7 SDIOMCLKEN Register (offset = 24h) [reset = 0h]

SDIOMCLKEN is shown in [Figure 15-10](#) and described in [Table 15-10](#).

**Figure 15-10. SDIOMCLKEN Register**

|          |    |    |     |      |    |    |           |
|----------|----|----|-----|------|----|----|-----------|
| 31       | 30 | 29 | 28  | 27   | 26 | 25 | 24        |
| RESERVED |    |    |     |      |    |    |           |
| R-0h     |    |    |     |      |    |    |           |
| 23       | 22 | 21 | 20  | 19   | 18 | 17 | 16        |
|          |    |    | NU1 |      |    |    | DSLPCLKEN |
|          |    |    |     | R-0h |    |    | R-0h      |
| 15       | 14 | 13 | 12  | 11   | 10 | 9  | 8         |
|          |    |    | NU2 |      |    |    | SLPCLKEN  |
|          |    |    |     | R-0h |    |    | R/W-0h    |
| 7        | 6  | 5  | 4   | 3    | 2  | 1  | 0         |
|          |    |    | NU3 |      |    |    | RUNCLKEN  |
|          |    |    |     | R-0h |    |    | R/W-0h    |

**Table 15-10. SDIOMCLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                 |
|-------|-----------|------|-------|-------------------------------------------------------------------------------------------------------------|
| 31-24 | RESERVED  | R    | 0h    |                                                                                                             |
| 23-17 | NU1       | R    | 0h    |                                                                                                             |
| 16    | DSLPCLKEN | R    | 0h    | MMCHS_DSLP_CLK_ENABLE<br>0h = Disable MMCHS clk during deep-sleep mode                                      |
| 15-9  | NU2       | R    | 0h    |                                                                                                             |
| 8     | SLPCLKEN  | R/W  | 0h    | MMCHS_SLP_CLK_ENABLE<br>0h = Disable MMCHS clk during sleep mode<br>1h = Enable MMCHS clk during sleep mode |
| 7-1   | NU3       | R    | 0h    |                                                                                                             |
| 0     | RUNCLKEN  | R/W  | 0h    | MMCHS_RUN_CLK_ENABLE<br>0h = Disable MMCHS clk during run mode<br>1h = Enable MMCHS clk during run mode     |

**15.6.1.8 SDIOMSWRST Register (offset = 28h) [reset = 0h]**

SDIOMSWRST is shown in [Figure 15-11](#) and described in [Table 15-11](#).

**Figure 15-11. SDIOMSWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-11. SDIOMSWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                   |
|------|----------|------|-------|---------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                               |
| 1    | ENSTS    | R    | 0h    | MMCHS_ENABLED_STATUS<br>0h = MMCHS Clocks and resets are disabled<br>1h = MMCHS Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | MMCHS_SOFT_RESET<br>0h = De-assert reset for MMCHS-core<br>1h = Assert reset for MMCHS-core                   |

### 15.6.1.9 APSPICLKCFG Register (offset = 2Ch) [reset = 0h]

APSPICLKCFG is shown in [Figure 15-12](#) and described in [Table 15-12](#).

**Figure 15-12. APSPICLKCFG Register**

|          |    |    |    |           |    |    |    |
|----------|----|----|----|-----------|----|----|----|
| 31       | 30 | 29 | 28 | 27        | 26 | 25 | 24 |
| RESERVED |    |    |    |           |    |    |    |
| R-0h     |    |    |    |           |    |    |    |
| 23       | 22 | 21 | 20 | 19        | 18 | 17 | 16 |
| RESERVED |    |    |    |           |    |    |    |
| R-0h     |    |    |    |           |    |    |    |
| 15       | 14 | 13 | 12 | 11        | 10 | 9  | 8  |
| NU1      |    |    |    | DIVOFFTIM |    |    |    |
| R-0h     |    |    |    |           |    |    |    |
| 7        | 6  | 5  | 4  | 3         | 2  | 1  | 0  |
| NU2      |    |    |    | DIVONTIM  |    |    |    |
| R-0h     |    |    |    |           |    |    |    |

**Table 15-12. APSPICLKCFG Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                                                                                                              |
|-------|-----------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                                                                                                                          |
| 16    | BAUDSEL   | R/W  | 0h    | MCSPI_A1_BAUD_CLK_SEL<br>0h = XTAL clk is used as baud clk for MCSPI_A1<br>1h = PLL divclk is used as baud clk for MCSPI_A1.                                                                                             |
| 15-11 | NU1       | R    | 0h    |                                                                                                                                                                                                                          |
| 10-8  | DIVOFFTIM | R/W  | 0h    | MCSPI_A1_PLLCLKDIV_OFF_TIME Configuration of OFF-TIME for dividing PLL clk (240 MHz) in generation of MCSPI_A1 func-clk:<br>000h = 1<br>001h = 2<br>010h = 3<br>011h = 4<br>100h = 5<br>101h = 6<br>110h = 7<br>111h = 8 |
| 7-3   | NU2       | R    | 0h    |                                                                                                                                                                                                                          |
| 2-0   | DIVONTIM  | R/W  | 0h    | MCSPI_A1_PLLCLKDIV_ON_TIME Configuration of ON-TIME for dividing PLL clk (240 MHz) in generation of MCSPI_A1 func-clk:<br>000h = 1<br>001h = 2<br>010h = 3<br>011h = 4<br>100h = 5<br>101h = 6<br>110h = 7<br>111h = 8   |

**15.6.1.10 APSPICLKEN Register (offset = 30h) [reset = 0h]**

APSPICLKEN is shown in [Figure 15-13](#) and described in [Table 15-13](#).

**Figure 15-13. APSPICLKEN Register**

|          |    |    |      |    |    |    |           |
|----------|----|----|------|----|----|----|-----------|
| 31       | 30 | 29 | 28   | 27 | 26 | 25 | 24        |
| RESERVED |    |    |      |    |    |    |           |
| R-0h     |    |    |      |    |    |    |           |
| 23       | 22 | 21 | 20   | 19 | 18 | 17 | 16        |
|          |    |    | NU1  |    |    |    | DSLPCLKEN |
|          |    |    | R-0h |    |    |    | R-0h      |
| 15       | 14 | 13 | 12   | 11 | 10 | 9  | 8         |
|          |    |    | NU2  |    |    |    | SLPCLKEN  |
|          |    |    | R-0h |    |    |    | R/W-0h    |
| 7        | 6  | 5  | 4    | 3  | 2  | 1  | 0         |
|          |    |    | NU3  |    |    |    | RUNCLKEN  |
|          |    |    | R-0h |    |    |    | R/W-0h    |

**Table 15-13. APSPICLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                          |
|-------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------|
| 31-24 | RESERVED  | R    | 0h    |                                                                                                                      |
| 23-17 | NU1       | R    | 0h    |                                                                                                                      |
| 16    | DSLPCLKEN | R    | 0h    | MCSPI_A1_DSPL_CLK_ENABLE<br>0h = Disable MCSPI_A1 clk during deep-sleep mode                                         |
| 15-9  | NU2       | R    | 0h    |                                                                                                                      |
| 8     | SLPCLKEN  | R/W  | 0h    | MCSPI_A1_SLP_CLK_ENABLE<br>0h = Disable MCSPI_A1 clk during sleep mode<br>1h = Enable MCSPI_A1 clk during sleep mode |
| 7-1   | NU3       | R    | 0h    |                                                                                                                      |
| 0     | RUNCLKEN  | R/W  | 0h    | MCSPI_A1_RUN_CLK_ENABLE<br>0h = Disable MCSPI_A1 clk during run mode<br>1h = Enable MCSPI_A1 clk during run mode     |

### 15.6.1.11 APSPISWRST Register (offset = 34h) [reset = 0h]

APSPISWRST is shown in [Figure 15-14](#) and described in [Table 15-14](#).

**Figure 15-14. APSPISWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-14. APSPISWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                            |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                        |
| 1    | ENSTS    | R    | 0h    | MCSPI_A1_ENABLED_STATUS<br>0h = MCSPI_A1 Clocks and resets are disabled<br>1h = MCSPI_A1 Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | MCSPI_A1_SOFT_RESET<br>0h = De-assert reset for MCSPI_A1-core<br>1h = Assert reset for MCSPI_A1-core                   |

**15.6.1.12 DMACLKEN Register (offset = 48h) [reset = 0h]**

DMACLKEN is shown in [Figure 15-15](#) and described in [Table 15-15](#).

**Figure 15-15. DMACLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-15. DMACLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                |
|-------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                            |
| 16    | DSLPCLKEN | R/W  | 0h    | UDMA_A_DSPLP_CLK_ENABLE<br>0h = Disable UDMA_A clk during deep-sleep mode<br>1h = Enable UDMA_A clk during deep-sleep mode |
| 15-9  | NU1       | R    | 0h    |                                                                                                                            |
| 8     | SLPCLKEN  | R/W  | 0h    | UDMA_A_SLP_CLK_ENABLE<br>0h = Disable UDMA_A clk during sleep mode<br>1h = Enable UDMA_A clk during sleep mode             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                            |
| 0     | RUNCLKEN  | R/W  | 0h    | UDMA_A_RUN_CLK_ENABLE<br>0h = Disable UDMA_A clk during run mode<br>1h = Enable UDMA_A clk during run mode                 |

### 15.6.1.13 DMASWRST Register (offset = 4Ch) [reset = 0h]

DMASWRST is shown in [Figure 15-16](#) and described in [Table 15-16](#).

**Figure 15-16. DMASWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-16. DMASWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | UDMA_A_ENABLED_STATUS<br>0h = UDMA_A Clocks and resets are disabled<br>1h = UDMA_A Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | UDMA_A_SOFT_RESET<br>0h = De-assert reset for DMA_A<br>1h = Assert reset for DMA_A                               |

**15.6.1.14 GPIO0CLKEN Register (offset = 50h) [reset = 0h]**

GPIO0CLKEN is shown in [Figure 15-17](#) and described in [Table 15-17](#).

**Figure 15-17. GPIO0CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-17. GPIO0CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                |
|-------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                            |
| 16    | DSLPCLKEN | R/W  | 0h    | GPIO_A_DS LP CLK_ENABLE<br>0h = Disable GPIO_A clk during deep-sleep mode<br>1h = Enable GPIO_A clk during deep-sleep mode |
| 15-9  | NU1       | R    | 0h    |                                                                                                                            |
| 8     | SLPCLKEN  | R/W  | 0h    | GPIO_A_SLP_CLK_ENABLE<br>0h = Disable GPIO_A clk during sleep mode<br>1h = Enable GPIO_A clk during sleep mode             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                            |
| 0     | RUNCLKEN  | R/W  | 0h    | GPIO_A_RUN_CLK_ENABLE<br>0h = Disable GPIO_A clk during run mode<br>1h = Enable GPIO_A clk during run mode                 |

### 15.6.1.15 GPIO0SWRST Register (offset = 54h) [reset = 0h]

GPIO0SWRST is shown in [Figure 15-18](#) and described in [Table 15-18](#).

**Figure 15-18. GPIO0SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-18. GPIO0SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPIO_A_ENABLED_STATUS<br>0h = GPIO_A Clocks and resets are disabled<br>1h = GPIO_A Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPIO_A_SOFT_RESET<br>0h = De-assert reset for GPIO_A<br>1h = Assert reset for GPIO_A                             |

**15.6.1.16 GPIO1CLKEN Register (offset = 58h) [reset = 0h]**

GPIO1CLKEN is shown in [Figure 15-19](#) and described in [Table 15-19](#).

**Figure 15-19. GPIO1CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-19. GPIO1CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                |
|-------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                            |
| 16    | DSLPCLKEN | R/W  | 0h    | GPIO_B_DS LP CLK_ENABLE<br>0h = Disable GPIO_B clk during deep-sleep mode<br>1h = Enable GPIO_B clk during deep-sleep mode |
| 15-9  | NU1       | R    | 0h    |                                                                                                                            |
| 8     | SLPCLKEN  | R/W  | 0h    | GPIO_B_SLP_CLK_ENABLE<br>0h = Disable GPIO_B clk during sleep mode<br>1h = Enable GPIO_B clk during sleep mode             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                            |
| 0     | RUNCLKEN  | R/W  | 0h    | GPIO_B_RUN_CLK_ENABLE<br>0h = Disable GPIO_B clk during run mode<br>1h = Enable GPIO_B clk during run mode                 |

### 15.6.1.17 GPIO1SWRST Register (offset = 5Ch) [reset = 0h]

GPIO1SWRST is shown in [Figure 15-20](#) and described in [Table 15-20](#).

**Figure 15-20. GPIO1SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-20. GPIO1SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPIO_B_ENABLED_STATUS<br>0h = GPIO_B Clocks and resets are disabled<br>1h = GPIO_B Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPIO_B_SOFT_RESET<br>0h = De-assert reset for GPIO_B<br>1h = Assert reset for GPIO_B                             |

**15.6.1.18 GPIO2CLKEN Register (offset = 60h) [reset = 0h]**

GPIO2CLKEN is shown in [Figure 15-21](#) and described in [Table 15-21](#).

**Figure 15-21. GPIO2CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-21. GPIO2CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                |
|-------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                            |
| 16    | DSLPCLKEN | R/W  | 0h    | GPIO_C_DS LP CLK_ENABLE<br>0h = Disable GPIO_C clk during deep-sleep mode<br>1h = Enable GPIO_C clk during deep-sleep mode |
| 15-9  | NU1       | R    | 0h    |                                                                                                                            |
| 8     | SLPCLKEN  | R/W  | 0h    | GPIO_C_SLP_CLK_ENABLE<br>0h = Disable GPIO_C clk during sleep mode<br>1h = Enable GPIO_C clk during sleep mode             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                            |
| 0     | RUNCLKEN  | R/W  | 0h    | GPIO_C_RUN_CLK_ENABLE<br>0h = Disable GPIO_C clk during run mode<br>1h = Enable GPIO_C clk during run mode                 |

### 15.6.1.19 GPIO2SWRST Register (offset = 64h) [reset = 0h]

GPIO2SWRST is shown in [Figure 15-22](#) and described in [Table 15-22](#).

**Figure 15-22. GPIO2SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-22. GPIO2SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPIO_C_ENABLED_STATUS<br>0h = GPIO_C Clocks and resets are disabled<br>1h = GPIO_C Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPIO_C_SOFT_RESET<br>0h = De-assert reset for GPIO_C<br>1h = Assert reset for GPIO_C                             |

**15.6.1.20 GPIO3CLKEN Register (offset = 68h) [reset = 0h]**

GPIO3CLKEN is shown in [Figure 15-23](#) and described in [Table 15-23](#).

**Figure 15-23. GPIO3CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-23. GPIO3CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                |
|-------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                            |
| 16    | DSLPCLKEN | R/W  | 0h    | GPIO_D_DS LP CLK_ENABLE<br>0h = Disable GPIO_D clk during deep-sleep mode<br>1h = Enable GPIO_D clk during deep-sleep mode |
| 15-9  | NU1       | R    | 0h    |                                                                                                                            |
| 8     | SLPCLKEN  | R/W  | 0h    | GPIO_D_SLP_CLK_ENABLE<br>0h = Disable GPIO_D clk during sleep mode<br>1h = Enable GPIO_D clk during sleep mode             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                            |
| 0     | RUNCLKEN  | R/W  | 0h    | GPIO_D_RUN_CLK_ENABLE<br>0h = Disable GPIO_D clk during run mode<br>1h = Enable GPIO_D clk during run mode                 |

### 15.6.1.21 GPIO3SWRST Register (offset = 6Ch) [reset = 0h]

GPIO3SWRST is shown in [Figure 15-24](#) and described in [Table 15-24](#).

**Figure 15-24. GPIO3SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-24. GPIO3SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPIO_D_ENABLED_STATUS<br>0h = GPIO_D Clocks and resets are disabled<br>1h = GPIO_D Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPIO_D_SOFT_RESET<br>0h = De-assert reset for GPIO_D<br>1h = Assert reset for GPIO_D                             |

**15.6.1.22 GPIO4CLKEN Register (offset = 70h) [reset = 0h]**

GPIO4CLKEN is shown in [Figure 15-25](#) and described in [Table 15-25](#).

**Figure 15-25. GPIO4CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-25. GPIO4CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                |
|-------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                            |
| 16    | DSLPCLKEN | R/W  | 0h    | GPIO_E_DS LP CLK_ENABLE<br>0h = Disable GPIO_E clk during deep-sleep mode<br>1h = Enable GPIO_E clk during deep-sleep mode |
| 15-9  | NU1       | R    | 0h    |                                                                                                                            |
| 8     | SLPCLKEN  | R/W  | 0h    | GPIO_E_SLP_CLK_ENABLE<br>0h = Disable GPIO_E clk during sleep mode<br>1h = Enable GPIO_E clk during sleep mode             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                            |
| 0     | RUNCLKEN  | R/W  | 0h    | GPIO_E_RUN_CLK_ENABLE<br>0h = Disable GPIO_E clk during run mode<br>1h = Enable GPIO_E clk during run mode                 |

### 15.6.1.23 GPIO4SWRST Register (offset = 74h) [reset = 0h]

GPIO4SWRST is shown in [Figure 15-26](#) and described in [Table 15-26](#).

**Figure 15-26. GPIO4SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-26. GPIO4SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPIO_E_ENABLED_STATUS<br>0h = GPIO_E Clocks and resets are disabled<br>1h = GPIO_E Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPIO_E_SOFT_RESET<br>0h = De-assert reset for GPIO_E<br>1h = Assert reset for GPIO_E                             |

**15.6.1.24 WDTCLKEN Register (offset = 78h) [reset = 0h]**

 WDTCLKEN is shown in [Figure 15-27](#) and described in [Table 15-27](#).

**Figure 15-27. WDTCLKEN Register**

|          |    |    |    |    |    |            |    |
|----------|----|----|----|----|----|------------|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25         | 24 |
| RESERVED |    |    |    |    |    | BAUDCLKSEL |    |
| R-0h     |    |    |    |    |    | R/W-0h     |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17         | 16 |
| RESERVED |    |    |    |    |    | DSLCLKEN   |    |
| R-0h     |    |    |    |    |    | R/W-0h     |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9          | 8  |
| NU1      |    |    |    |    |    | SLPCLKEN   |    |
| R-0h     |    |    |    |    |    | R/W-0h     |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1          | 0  |
| NU2      |    |    |    |    |    | RUNCLKEN   |    |
| R-0h     |    |    |    |    |    | R/W-0h     |    |

**Table 15-27. WDTCLKEN Register Field Descriptions**

| Bit   | Field      | Type | Reset | Description                                                                                                               |
|-------|------------|------|-------|---------------------------------------------------------------------------------------------------------------------------|
| 31-26 | RESERVED   | R    | 0h    |                                                                                                                           |
| 25-24 | BAUDCLKSEL | R/W  | 0h    | WDOG_A_BAUD_CLK_SEL<br>00h = Sysclk<br>01h = REF_CLK (38.4 MHz)<br>10/11h = Slow_clk                                      |
| 23-17 | RESERVED   | R    | 0h    |                                                                                                                           |
| 16    | DSLCLKEN   | R/W  | 0h    | WDOG_A_DSPL_CLK_ENABLE<br>0h = Disable WDOG_A clk during deep-sleep mode<br>1h = Enable WDOG_A clk during deep-sleep mode |
| 15-9  | NU1        | R    | 0h    |                                                                                                                           |
| 8     | SLPCLKEN   | R/W  | 0h    | WDOG_A_SLP_CLK_ENABLE<br>0h = Disable WDOG_A clk during sleep mode<br>1h = Enable WDOG_A clk during sleep mode            |
| 7-1   | NU2        | R    | 0h    |                                                                                                                           |
| 0     | RUNCLKEN   | R/W  | 0h    | WDOG_A_RUN_CLK_ENABLE<br>0h = Disable WDOG_A clk during run mode<br>1h = Enable WDOG_A clk during run mode                |

### 15.6.1.25 WDTSWRST Register (offset = 7Ch) [reset = 0h]

WDTSWRST is shown in [Figure 15-28](#) and described in [Table 15-28](#).

**Figure 15-28. WDTSWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-28. WDTSWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | WDOG_A_ENABLED_STATUS<br>0h = WDOG_A Clocks and resets are disabled<br>1h = WDOG_A Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | WDOG_A_SOFT_RESET<br>0h = De-assert reset for WDOG_A<br>1h = Assert reset for WDOG_A                             |

**15.6.1.26 UART0CLKEN Register (offset = 80h) [reset = 0h]**

UART0CLKEN is shown in [Figure 15-29](#) and described in [Table 15-29](#).

**Figure 15-29. UART0CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-29. UART0CLKEN Register Field Descriptions**

| Bit   | Field         | Type | Reset | Description                                                                                                                  |
|-------|---------------|------|-------|------------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED      | R    | 0h    |                                                                                                                              |
| 16    | UART0DSLPCLEN | R/W  | 0h    | UART_A0_DSPL_CLK_ENABLE<br>0h = Disable UART_A0 clk during deep-sleep mode<br>1h = Enable UART_A0 clk during deep-sleep mode |
| 15-9  | NU1           | R    | 0h    |                                                                                                                              |
| 8     | UART0SLPCLKEN | R/W  | 0h    | UART_A0_SLP_CLK_ENABLE<br>0h = Disable UART_A0 clk during sleep mode<br>1h = Enable UART_A0 clk during sleep mode            |
| 7-1   | NU2           | R    | 0h    |                                                                                                                              |
| 0     | UART0RCLKEN   | R/W  | 0h    | UART_A0_RUN_CLK_ENABLE<br>0h = Disable UART_A0 clk during run mode<br>1h = Enable UART_A0 clk during run mode                |

### 15.6.1.27 UART0SWRST Register (offset = 84h) [reset = 0h]

UART0SWRST is shown in [Figure 15-30](#) and described in [Table 15-30](#).

**Figure 15-30. UART0SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-30. UART0SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                         |
|------|----------|------|-------|---------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                     |
| 1    | ENSTS    | R    | 0h    | UART_A0_ENABLED_STATUS<br>0h = UART_A0 Clocks and resets are disabled<br>1h = UART_A0 Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | UART_A0_SOFT_RESET<br>0h = De-assert reset for UART_A0<br>1h = Assert reset for UART_A0                             |

**15.6.1.28 UART1CLKEN Register (offset = 88h) [reset = 0h]**

UART1CLKEN is shown in [Figure 15-31](#) and described in [Table 15-31](#).

**Figure 15-31. UART1CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-31. UART1CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                   |
|-------|-----------|------|-------|-------------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                               |
| 16    | DSLPCLKEN | R/W  | 0h    | UART_A1_DS LP CLK_ENABLE<br>0h = Disable UART_A1 clk during deep-sleep mode<br>1h = Enable UART_A1 clk during deep-sleep mode |
| 15-9  | NU1       | R    | 0h    |                                                                                                                               |
| 8     | SLPCLKEN  | R/W  | 0h    | UART_A1_SLP_CLK_ENABLE<br>0h = Disable UART_A1 clk during sleep mode<br>1h = Enable UART_A1 clk during sleep mode             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                               |
| 0     | RUNCLKEN  | R/W  | 0h    | UART_A1_RUN_CLK_ENABLE<br>0h = Disable UART_A1 clk during run mode<br>1h = Enable UART_A1 clk during run mode                 |

**15.6.1.29 UART1SWRST Register (offset = 8Ch) [reset = 0h]**

UART1SWRST is shown in [Figure 15-32](#) and described in [Table 15-32](#).

**Figure 15-32. UART1SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-32. UART1SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                         |
|------|----------|------|-------|---------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                     |
| 1    | ENSTS    | R    | 0h    | UART_A1_ENABLED_STATUS<br>0h = UART_A1 Clocks and resets are disabled<br>1h = UART_A1 Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | UART_A1_SOFT_RESET<br>0h = De-assert the soft reset for UART_A1<br>1h = Assert the soft reset for UART_A1           |

**15.6.1.30 GPT0CLKCFG Register (offset = 90h) [reset = 0h]**

GPT0CLKCFG is shown in [Figure 15-33](#) and described in [Table 15-33](#).

**Figure 15-33. GPT0CLKCFG Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-33. GPT0CLKCFG Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                  |
|-------|-----------|------|-------|------------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                              |
| 16    | DSLPCLKEN | R/W  | 0h    | GPT_A0_DS LP CLK_ENABLE<br>0h = Disable the GPT_A0 clock during deep-sleep<br>1h = Enable the GPT_A0 clock during deep-sleep |
| 15-9  | NU1       | R    | 0h    |                                                                                                                              |
| 8     | SLPCLKEN  | R/W  | 0h    | GPT_A0_SLP_CLK_ENABLE<br>0h = Disable the GPT_A0 clock during sleep<br>1h = Enable the GPT_A0 clock during sleep             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                              |
| 0     | RUNCLKEN  | R/W  | 0h    | GPT_A0_RUN_CLK_ENABLE<br>0h = Disable the GPT_A0 clock during run<br>1h = Enable the GPT_A0 clock during run                 |

### 15.6.1.31 GPT0SWRST Register (offset = 94h) [reset = 0h]

GPT0SWRST is shown in [Figure 15-34](#) and described in [Table 15-34](#).

**Figure 15-34. GPT0SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-34. GPT0SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPT_A0_ENABLED_STATUS<br>0h = GPT_A0 clocks and resets are disabled<br>1h = GPT_A0 clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPT_A0_SOFT_RESET<br>0h = De-assert the soft reset for GPT_A0<br>1h = Assert the soft reset for GPT_A0           |

**15.6.1.32 GPT1CLKEN Register (offset = 98h) [reset = 0h]**

GPT1CLKEN is shown in [Figure 15-35](#) and described in [Table 15-35](#).

**Figure 15-35. GPT1CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-35. GPT1CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                  |
|-------|-----------|------|-------|------------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                              |
| 16    | DSLPCLKEN | R/W  | 0h    | GPT_A1_DSPLP_CLK_ENABLE<br>0h = Disable the GPT_A1 clock during deep-sleep<br>1h = Enable the GPT_A1 clock during deep-sleep |
| 15-9  | NU1       | R    | 0h    |                                                                                                                              |
| 8     | SLPCLKEN  | R/W  | 0h    | GPT_A1_SLP_CLK_ENABLE<br>0h = Disable the GPT_A1 clock during sleep<br>1h = Enable the GPT_A1 clock during sleep             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                              |
| 0     | RUNCLKEN  | R/W  | 0h    | GPT_A1_RUN_CLK_ENABLE<br>0h = Disable the GPT_A1 clock during run<br>1h = Enable the GPT_A1 clock during run                 |

**15.6.1.33 GPT1SWRST Register (offset = 9Ch) [reset = 0h]**

GPT1SWRST is shown in [Figure 15-36](#) and described in [Table 15-36](#).

**Figure 15-36. GPT1SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-36. GPT1SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPT_A1_ENABLED_STATUS<br>0h = GPT_A1 clocks and resets are disabled<br>1h = GPT_A1 clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPT_A1_SOFT_RESET<br>0h = De-assert the soft reset for GPT_A1<br>1h = Assert the soft reset for GPT_A1           |

**15.6.1.34 GPT2CLKEN Register (offset = A0h) [reset = 0h]**

GPT2CLKEN is shown in [Figure 15-37](#) and described in [Table 15-37](#).

**Figure 15-37. GPT2CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-37. GPT2CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                  |
|-------|-----------|------|-------|------------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                              |
| 16    | DSLPCLKEN | R/W  | 0h    | GPT_A2_DS LP CLK_ENABLE<br>0h = Disable the GPT_A2 clock during deep-sleep<br>1h = Enable the GPT_A2 clock during deep-sleep |
| 15-9  | NU1       | R    | 0h    |                                                                                                                              |
| 8     | SLPCLKEN  | R/W  | 0h    | GPT_A2_SLP_CLK_ENABLE<br>0h = Disable the GPT_A2 clock during sleep<br>1h = Enable the GPT_A2 clock during sleep             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                              |
| 0     | RUNCLKEN  | R/W  | 0h    | GPT_A2_RUN_CLK_ENABLE<br>0h = Disable the GPT_A2 clock during run<br>1h = Enable the GPT_A2 clock during run                 |

**15.6.1.35 GPT2SWRST Register (offset = A4h) [reset = 0h]**

GPT2SWRST is shown in [Figure 15-38](#) and described in [Table 15-38](#).

**Figure 15-38. GPT2SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-38. GPT2SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPT_A2_ENABLED_STATUS<br>0h = GPT_A2 clocks and resets are disabled<br>1h = GPT_A2 clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPT_A2_SOFT_RESET<br>0h = De-assert the soft reset for GPT_A2<br>1h = Assert the soft reset for GPT_A2           |

**15.6.1.36 GPT3CLKEN Register (offset = A8h) [reset = 0h]**

GPT3CLKEN is shown in [Figure 15-39](#) and described in [Table 15-39](#).

**Figure 15-39. GPT3CLKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-39. GPT3CLKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                                  |
|-------|-----------|------|-------|------------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                              |
| 16    | DSLPCLKEN | R/W  | 0h    | GPT_A3_DS LP CLK_ENABLE<br>0h = Disable the GPT_A3 clock during deep-sleep<br>1h = Enable the GPT_A3 clock during deep-sleep |
| 15-9  | NU1       | R    | 0h    |                                                                                                                              |
| 8     | SLPCLKEN  | R/W  | 0h    | GPT_A3_SLP_CLK_ENABLE<br>0h = Disable the GPT_A3 clock during sleep<br>1h = Enable the GPT_A3 clock during sleep             |
| 7-1   | NU2       | R    | 0h    |                                                                                                                              |
| 0     | RUNCLKEN  | R/W  | 0h    | GPT_A3_RUN_CLK_ENABLE<br>0h = Disable the GPT_A3 clock during run<br>1h = Enable the GPT_A3 clock during run                 |

**15.6.1.37 GPT3SWRST Register (offset = ACh) [reset = 0h]**

GPT3SWRST is shown in [Figure 15-40](#) and described in [Table 15-40](#).

**Figure 15-40. GPT3SWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-40. GPT3SWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                      |
|------|----------|------|-------|------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                                  |
| 1    | ENSTS    | R    | 0h    | GPT_A3_ENABLED_STATUS<br>0h = GPT_A3 Clocks and resets are disabled<br>1h = GPT_A3 Clocks and resets are enabled |
| 0    | SWRST    | R/W  | 0h    | GPT_A3_SOFT_RESET<br>0h = De-assert the soft reset for GPT_A3<br>1h = Assert the soft reset for GPT_A3           |

**15.6.1.38 MCASPCLKCFG0 Register (offset = B0h) [reset = A0000h]**

MCASPCLKCFG0 is shown in [Figure 15-41](#) and described in [Table 15-41](#).

**Figure 15-41. MCASPCLKCFG0 Register**

|          |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23     | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    | DIVISR |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    | R/W-Ah |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  | 7      | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| FRACTN   |    |    |    |    |    |    |    | R/W-0h |    |    |    |    |    |    |    |

**Table 15-41. MCASPCLKCFG0 Register Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                  |
|-------|----------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-26 | RESERVED | R    | 0h    |                                                                                                                                                                                                                                                                              |
| 25-16 | DIVISR   | R/W  | Ah    | MCASP_FRAC_DIV_DIVISOR. If the root clock frequency is Fref and the required output clock frequency is Freq, the ratio of these two frequencies (Fref/Freq) can be represented as = I.F where I is the integer part of the ratio and F is the fractional part of the ratio.  |
| 15-0  | FRACTN   | R/W  | 0h    | MCASP_FRAC_DIV_FRACTION. If the root clock frequency is Fref and the required output clock frequency is Freq, the ratio of these two frequencies (Fref/Freq) can be represented as = I.F where I is the integer part of the ratio and F is the fractional part of the ratio. |

**15.6.1.39 MCASPCLKCFG1 Register (offset = B4h) [reset = 0h]**

MCASPCLKCFG1 is shown in [Figure 15-42](#) and described in [Table 15-42](#).

**Figure 15-42. MCASPCLKCFG1 Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| SPARE    |    |    |    |    |    |    |    |
| R/W-0h   |    |    |    |    |    |    |    |

**Table 15-42. MCASPCLKCFG1 Register Field Descriptions**

| Bit   | Field       | Type | Reset | Description                                                                                                                      |
|-------|-------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED    | R    | 0h    |                                                                                                                                  |
| 16    | DIVIDRSWRST | R/W  | 0h    | MCASP_FRAC_DIV_SOFT_RESET<br>0h = Do not assert the reset for MCASP frac clk-div<br>1h = Assert the reset for MCASP Frac-clk div |
| 15-10 | RESERVED    | R    | 0h    |                                                                                                                                  |
| 9-0   | SPARE       | R/W  | 0h    | MCASP_FRAC_DIV_PERIOD. This bitfield is not used in HW. Can be used as a spare RW register.                                      |

### 15.6.1.40 I2CLCKEN Register (offset = D8h) [reset = 0h]

I2CLCKEN is shown in [Figure 15-43](#) and described in [Table 15-43](#).

**Figure 15-43. I2CLCKEN Register**

|          |    |    |    |    |    |    |    |
|----------|----|----|----|----|----|----|----|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16 |
| RESERVED |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8  |
| NU1      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0  |
| NU2      |    |    |    |    |    |    |    |
| R-0h     |    |    |    |    |    |    |    |

**Table 15-43. I2CLCKEN Register Field Descriptions**

| Bit   | Field     | Type | Reset | Description                                                                                                        |
|-------|-----------|------|-------|--------------------------------------------------------------------------------------------------------------------|
| 31-17 | RESERVED  | R    | 0h    |                                                                                                                    |
| 16    | DSLPCLKEN | R/W  | 0h    | I2C_DSPL_CLK_ENABLE<br>0h = Disable the I2C clock during deep-sleep<br>1h = Enable the I2C Clock during deep-sleep |
| 15-9  | NU1       | R    | 0h    |                                                                                                                    |
| 8     | SLPCLKEN  | R/W  | 0h    | I2C_SLP_CLK_ENABLE<br>0h = Disable the I2C clock during sleep<br>1h = Enable the I2C clock during sleep            |
| 7-1   | NU2       | R    | 0h    |                                                                                                                    |
| 0     | RUNCLKEN  | R/W  | 0h    | I2C_RUN_CLK_ENABLE<br>0h = Disable the I2C clock during run<br>1h = Enable the I2C clock during run                |

#### 15.6.1.41 I2CSWRST Register (offset = DCh) [reset = 0h]

I2CSWRST is shown in [Figure 15-44](#) and described in [Table 15-44](#).

**Figure 15-44. I2CSWRST Register**

|          |    |    |    |    |    |       |        |
|----------|----|----|----|----|----|-------|--------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25    | 24     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 23       | 22 | 21 | 20 | 19 | 18 | 17    | 16     |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 15       | 14 | 13 | 12 | 11 | 10 | 9     | 8      |
| RESERVED |    |    |    |    |    |       |        |
| R-0h     |    |    |    |    |    |       |        |
| 7        | 6  | 5  | 4  | 3  | 2  | 1     | 0      |
| RESERVED |    |    |    |    |    | ENSTS | SWRST  |
| R-0h     |    |    |    |    |    | R-0h  | R/W-0h |

**Table 15-44. I2CSWRST Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                 |
|------|----------|------|-------|-------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED | R    | 0h    |                                                                                                             |
| 1    | ENSTS    | R    | 0h    | I2C_ENABLED_STATUS<br>0h = I2C clocks and resets are disabled<br>1h = I2C Clocks and resets are enabled     |
| 0    | SWRST    | R/W  | 0h    | I2C_SOFT_RESET<br>0h = De-assert the soft reset for Shared-I2C<br>1h = Assert the soft reset for Shared-I2C |

**15.6.1.42 LPDSREQ Register (offset = E4h) [reset = 0h]**

LPDSREQ is shown in [Figure 15-45](#) and described in [Table 15-45](#).

**Figure 15-45. LPDSREQ Register**

|          |    |    |    |    |    |    |         |
|----------|----|----|----|----|----|----|---------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24      |
| RESERVED |    |    |    |    |    |    |         |
| R-0h     |    |    |    |    |    |    |         |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16      |
| RESERVED |    |    |    |    |    |    |         |
| R-0h     |    |    |    |    |    |    |         |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8       |
| RESERVED |    |    |    |    |    |    |         |
| R-0h     |    |    |    |    |    |    |         |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0       |
| RESERVED |    |    |    |    |    |    | LPDSREQ |
| R-0h     |    |    |    |    |    |    | R/W-0h  |

**Table 15-45. LPDSREQ Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                            |
|------|----------|------|-------|----------------------------------------|
| 31-1 | RESERVED | R    | 0h    |                                        |
| 0    | LPDSREQ  | R/W  | 0h    | APPS_LPDS_REQ<br>1h = Request for LPDS |

**15.6.1.43 TURBOREQ Register (offset = ECh) [reset = 0h]**

TURBOREQ is shown in [Figure 15-46](#) and described in [Table 15-46](#).

**Figure 15-46. TURBOREQ Register**

|          |    |    |    |    |    |    |          |
|----------|----|----|----|----|----|----|----------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24       |
| RESERVED |    |    |    |    |    |    |          |
| R-0h     |    |    |    |    |    |    |          |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16       |
| RESERVED |    |    |    |    |    |    |          |
| R-0h     |    |    |    |    |    |    |          |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8        |
| RESERVED |    |    |    |    |    |    |          |
| R-0h     |    |    |    |    |    |    |          |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0        |
| RESERVED |    |    |    |    |    |    | TURBOREQ |
| R-0h     |    |    |    |    |    |    | R/W-0h   |

**Table 15-46. TURBOREQ Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                              |
|------|----------|------|-------|------------------------------------------|
| 31-1 | RESERVED | R    | 0h    |                                          |
| 0    | TURBOREQ | R/W  | 0h    | APPS_TURBO_REQ<br>1h = Request for TURBO |

**15.6.1.44 DS LPWAKECFG Register (offset = 108h) [reset = 0h]**

DSLPWAKECFG is shown in [Figure 15-47](#) and described in [Table 15-47](#).

**Figure 15-47. DS LPWAKECFG Register**

|          |    |    |    |    |    |                     |                     |
|----------|----|----|----|----|----|---------------------|---------------------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25                  | 24                  |
| RESERVED |    |    |    |    |    |                     |                     |
| R-0h     |    |    |    |    |    |                     |                     |
| 23       | 22 | 21 | 20 | 19 | 18 | 17                  | 16                  |
| RESERVED |    |    |    |    |    |                     |                     |
| R-0h     |    |    |    |    |    |                     |                     |
| 15       | 14 | 13 | 12 | 11 | 10 | 9                   | 8                   |
| RESERVED |    |    |    |    |    |                     |                     |
| R-0h     |    |    |    |    |    |                     |                     |
| 7        | 6  | 5  | 4  | 3  | 2  | 1                   | 0                   |
| RESERVED |    |    |    |    |    | EXITDSLPBYN<br>WPEN | EXITDSLPBYT<br>MREN |
| R-0h     |    |    |    |    |    |                     |                     |
| R/W-0h   |    |    |    |    |    |                     |                     |

**Table 15-47. DS LPWAKECFG Register Field Descriptions**

| Bit  | Field           | Type | Reset | Description                                                                                                                              |
|------|-----------------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED        | R    | 0h    |                                                                                                                                          |
| 1    | EXITDSLPBYNWPN  | R/W  | 0h    | DSLP_WAKE_FROM_NWP_ENABLE<br>0h = Disable NWP to wake APPS from deep-sleep<br>1h = Enable the NWP to wake APPS from deep-sleep           |
| 0    | EXITDSLPBYTMREN | R/W  | 0h    | DSLP_WAKE_TIMER_ENABLE<br>0h = Disable deep-sleep wake timer in APPS RCM<br>1h = Enable deep-sleep wake timer in APPS RCM for deep-sleep |

### 15.6.1.45 DSLPTIMRCFG Register (offset = 10Ch) [reset = 0h]

DSLPTIMRCFG is shown in [Figure 15-48](#) and described in [Table 15-48](#).

**Figure 15-48. DSLPTIMRCFG Register**

|            |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 31         | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15      | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| TIMROPPCFG |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | TIMRCFG |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| R/W-0h     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | R/W-0h  |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |

**Table 15-48. DSLPTIMRCFG Register Field Descriptions**

| Bit   | Field      | Type | Reset | Description                                                                                                            |
|-------|------------|------|-------|------------------------------------------------------------------------------------------------------------------------|
| 31-16 | TIMROPPCFG | R/W  | 0h    | DSLP_WAKE_TIMER_OPP_CFG Configuration (in slow_clks) which indicates when to request for OPP during deep-sleep exit.   |
| 15-0  | TIMRCFG    | R/W  | 0h    | DSLP_WAKE_TIMER_WAKE_CFG Configuration (in slow_clks) which indicates when to request for WAKE during deep-sleep exit. |

**15.6.1.46 SLPWAKEEN Register (offset = 110h) [reset = 0h]**

SLPWAKEEN is shown in [Figure 15-49](#) and described in [Table 15-49](#).

**Figure 15-49. SLPWAKEEN Register**

|          |    |    |    |    |    |          |           |
|----------|----|----|----|----|----|----------|-----------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25       | 24        |
| RESERVED |    |    |    |    |    |          |           |
| R-0h     |    |    |    |    |    |          |           |
| 23       | 22 | 21 | 20 | 19 | 18 | 17       | 16        |
| RESERVED |    |    |    |    |    |          |           |
| R-0h     |    |    |    |    |    |          |           |
| 15       | 14 | 13 | 12 | 11 | 10 | 9        | 8         |
| RESERVED |    |    |    |    |    |          |           |
| R-0h     |    |    |    |    |    |          |           |
| 7        | 6  | 5  | 4  | 3  | 2  | 1        | 0         |
| RESERVED |    |    |    |    |    | EITBYNWP | EXITBYTMR |
| R-0h     |    |    |    |    |    | R/W-0h   | R/W-0h    |

**Table 15-49. SLPWAKEEN Register Field Descriptions**

| Bit  | Field     | Type | Reset | Description                                                                                                                      |
|------|-----------|------|-------|----------------------------------------------------------------------------------------------------------------------------------|
| 31-2 | RESERVED  | R    | 0h    |                                                                                                                                  |
| 1    | EITBYNWP  | R/W  | 0h    | SLP_WAKE_FROM_NWP_ENABLE<br>0h = Disable the sleep wakeup due to NWP request<br>1h = Enable the sleep wakeup due to NWP request. |
| 0    | EXITBYTMR | R/W  | 0h    | SLP_WAKE_TIMER_ENABLE<br>0h = Disable the sleep wakeup due to sleep-timer<br>1h = Enable the sleep wakeup due to sleep-timer     |

**15.6.1.47 SLPTMRCFG Register (offset = 114h) [reset = 0h]**

SLPTMRCFG is shown in [Figure 15-50](#) and described in [Table 15-50](#).

**Figure 15-50. SLPTMRCFG Register**

|        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 31     | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| TMRCFG |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| R/W-0h |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |

**Table 15-50. SLPTMRCFG Register Field Descriptions**

| Bit  | Field  | Type | Reset | Description                                                                             |
|------|--------|------|-------|-----------------------------------------------------------------------------------------|
| 31-0 | TMRCFG | R/W  | 0h    | SLP_WAKE_TIMER_CFG Configuration (number of sysclks-80MHz) for the Sleep wake-up timer. |

**15.6.1.48 WAKENWP Register (offset = 118h) [reset = 0h]**

WAKENWP is shown in [Figure 15-51](#) and described in [Table 15-51](#).

**Figure 15-51. WAKENWP Register**

|          |    |    |    |    |    |    |         |
|----------|----|----|----|----|----|----|---------|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24      |
| RESERVED |    |    |    |    |    |    |         |
| R-0h     |    |    |    |    |    |    |         |
| 23       | 22 | 21 | 20 | 19 | 18 | 17 | 16      |
| RESERVED |    |    |    |    |    |    |         |
| R-0h     |    |    |    |    |    |    |         |
| 15       | 14 | 13 | 12 | 11 | 10 | 9  | 8       |
| RESERVED |    |    |    |    |    |    |         |
| R-0h     |    |    |    |    |    |    |         |
| 7        | 6  | 5  | 4  | 3  | 2  | 1  | 0       |
| RESERVED |    |    |    |    |    |    | WAKENWP |
| R-0h     |    |    |    |    |    |    | R/W-0h  |

**Table 15-51. WAKENWP Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                                            |
|------|----------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------|
| 31-1 | RESERVED | R    | 0h    |                                                                                                                                        |
| 0    | WAKENWP  | R/W  | 0h    | APPS_TO_NWP_WAKEUP_REQUEST. When 1 => APPS generated a wake request to NWP (When NWP is in any of its low-power modes : SLP/DSLP/LPDS) |

### 15.6.1.49 RCM\_IS Register (offset = 120h) [reset = 0h]

RCM\_IS is shown in [Figure 15-52](#) and described in [Table 15-52](#).

**Figure 15-52. RCM\_IS Register**

|          |                  |          |         |                   |                  |                   |                  |
|----------|------------------|----------|---------|-------------------|------------------|-------------------|------------------|
| 31       | 30               | 29       | 28      | 27                | 26               | 25                | 24               |
| RESERVED |                  |          |         |                   |                  |                   |                  |
| R-0h     |                  |          |         |                   |                  |                   |                  |
| 23       | 22               | 21       | 20      | 19                | 18               | 17                | 16               |
| RESERVED |                  |          |         |                   |                  |                   |                  |
| R-0h     |                  |          |         |                   |                  |                   |                  |
| 15       | 14               | 13       | 12      | 11                | 10               | 9                 | 8                |
| RESERVED | WAKETIMRIRQ<br>Q | RESERVED | PLLLOCK | RESERVED          |                  |                   |                  |
| R-0h     | R-0h             | R-0h     | R-0h    | R-0h              |                  |                   |                  |
| 7        | 6                | 5        | 4       | 3                 | 2                | 1                 | 0                |
| RESERVED |                  |          |         | EXITDSLPBYT<br>MR | EXITSLPBYTM<br>R | EXITDSLPBYN<br>WP | EXITSLPBYNW<br>P |
| R-0h     |                  |          |         | R-0h              | R-0h             | R-0h              | R-0h             |

**Table 15-52. RCM\_IS Register Field Descriptions**

| Bit   | Field         | Type | Reset | Description                                                                                                                                                                                                                            |
|-------|---------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-15 | RESERVED      | R    | 0h    |                                                                                                                                                                                                                                        |
| 14    | WAKETIMRIRQ   | R    | 0h    | To enable the RTC timer interrupt, set 0th bit of HIB3P3:MEM_HIB_RTC_IRQ_ENABLE(0x4402 F854) and 2nd bit of RCM_IEN(0x124) to 1,<br>1h = indicates interrupt to the Apps processor due to the RTC timer reaching the programmed value. |
| 13    | RESERVED      | R    | 0h    |                                                                                                                                                                                                                                        |
| 12    | PLLLOCK       | R    | 0h    | Enable this interrupt by setting 0th bit of RCM_IEN(0x124).<br>1h = indicates that an interrupt was received by the processor because of PLL lock.                                                                                     |
| 11-4  | RESERVED      | R    | 0h    |                                                                                                                                                                                                                                        |
| 3     | EXITDSLPBYTMR | R    | 0h    | apps_deep_sleep_timer_wake<br>1h = Indicates that deep-sleep timer expiry had caused the wakeup from deep-sleep.                                                                                                                       |
| 2     | EXITSLPBYTMR  | R    | 0h    | apps_sleep_timer_wake<br>1h = Indicates that sleep timer expiry had caused the wakeup from sleep.                                                                                                                                      |
| 1     | EXITDSLPBYNWP | R    | 0h    | apps_deep_sleep_wake_from_nwp<br>1h = Indicates that NWP had caused the wakeup from deep-sleep.                                                                                                                                        |
| 0     | EXITSLPBYNWP  | R    | 0h    | apps_sleep_wake_from_nwp<br>1h = Indicates that NWP had caused the wakeup from Sleep                                                                                                                                                   |

**15.6.1.50 RCM\_IEN Register (offset = 124h) [reset = 0h]**

RCM\_IEN is shown in [Figure 15-53](#) and described in [Table 15-53](#).

**Figure 15-53. RCM\_IEN Register**

|          |    |    |    |    |                   |          |            |
|----------|----|----|----|----|-------------------|----------|------------|
| 31       | 30 | 29 | 28 | 27 | 26                | 25       | 24         |
| RESERVED |    |    |    |    |                   |          |            |
| R-0h     |    |    |    |    |                   |          |            |
| 23       | 22 | 21 | 20 | 19 | 18                | 17       | 16         |
| RESERVED |    |    |    |    |                   |          |            |
| R-0h     |    |    |    |    |                   |          |            |
| 15       | 14 | 13 | 12 | 11 | 10                | 9        | 8          |
| RESERVED |    |    |    |    |                   |          |            |
| R-0h     |    |    |    |    |                   |          |            |
| 7        | 6  | 5  | 4  | 3  | 2                 | 1        | 0          |
| RESERVED |    |    |    |    | WAKETIMERIRQ<br>Q | RESERVED | PLLLOCKIRQ |
| R-0h     |    |    |    |    | R/W-0h            | R-0h     | R/W-0h     |

**Table 15-53. RCM\_IEN Register Field Descriptions**

| Bit  | Field        | Type | Reset | Description                                                                                                                                                                                                             |
|------|--------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-3 | RESERVED     | R    | 0h    |                                                                                                                                                                                                                         |
| 2    | WAKETIMERIRQ | R/W  | 0h    | To enable RTC timer interrupt set 0th bit of HIB3P3:MEM_HIB_RTC_IRQ_ENABLE(0x4402 F854) to 1<br>0h = Unmask this interrupt.<br>1h = Unmask interrupt to the Apps processor when RTC timer reaches the programmed value. |
| 1    | RESERVED     | R    | 0h    |                                                                                                                                                                                                                         |
| 0    | PLLLOCKIRQ   | R/W  | 0h    | 0h = Mask this interrupt<br>1h = Unmask Interrupt to Apps processor when PLL is locked.                                                                                                                                 |

## I/O Pads and Pin Multiplexing

| Topic                                       | Page |
|---------------------------------------------|------|
| 16.1 Overview .....                         | 472  |
| 16.2 I/O Pad Electrical Specifications..... | 472  |
| 16.3 Analog-Digital Pin Multiplexing .....  | 474  |
| 16.4 Special Ana/DIG Pins .....             | 475  |
| 16.5 Analog Mux Control Registers .....     | 477  |
| 16.6 Pins Available for Applications .....  | 479  |
| 16.7 Functional Pin Mux Configurations..... | 481  |
| 16.8 Pin Mapping Recommendations .....      | 495  |

## 16.1 Overview

The CC3200 features flexible wide-voltage I/Os. Supported features are:

- Programmable drive strength from 2 mA to 14 mA (nominal condition) in steps of 2 mA.
- Open drain mode
- Output buffer isolation
- Automatic output isolation during reset and hibernate
- Configurable pullup and pulldown (10-uA nominal)
- Software configurable pad state retention during LPDS

Each I/O pad cell in the CC3200 has the following ports:

- PAD: I/O pad connected to package pin and external components
- ODI: Level-shifted data from from PAD to core logic
- IDO: Input to I/O-cell from core.
- ioden: When level 1, this disables the PMOS xtors of the output stages, making them open-drain type. For example, I2C may use a open-drain configuration. Value gets latched at the rising edge of RET33.
- ioe\_n: If level 0, this enables the IDO to PAD path. Otherwise, PAD is tristated (except for the PU/PD, which are independent).
- ioen33: This control signal is driven by hibernate controller. Level 1 enables the IDO to PAD path. Otherwise, PAD is made Hi-Z (except for the PU/PD, which are independent). This is automatically controlled by hardware to Hi-Z; the main o/p drivers during chip reset (nRESET=0). On first time power-up, the chip performs a sense-on-power detection of board-level pullup and pulldown resistors on three specific device pins (SOP0, SOP1, and SOP2); after this is done, this control signal is made high. The user-defined I/O pads still remain in Hi-Z state until configured by the user program.
- 3-bit drive strength control (value gets latched at rising edge of RET33):
  - i2maen: Level 1 enables the approximately 2-mA output stage (in parallel with 4-mA and 8-mA drivers, if enabled)
  - i4maen: Level 1 enables the approximately 4-mA output stage (in parallel with 2-mA and 8-mA drivers, if enabled)
  - i8maen: Level 1 enables the approximately 8-mA output stage (in parallel with 4-mA and 2-mA drivers, if enabled)

**NOTE:** Any drive strength between 2 mA and 14 mA can be realized by enabling one or more of above drivers together. Treat these 3 pins as 3-bit binary-coded strength control.

- Pullup and pulldown controls (value gets latched at rising edge of RET33. Works independent of these: ioe\_n, ioen33, i2maen/i4maen/i8maen)
  - iwkpuen: 10-uA pull up (NOM\_25C\_3.3V)
  - iwpkden: 10-uA pull down (NOM\_25C\_3.3V)
- RET33: Control signal from hibernate controller module. Puts the I/O in low power retention mode. The control and data signals are latched on rising edge (except ioen33). The internal bias for high-speed level-shifter is automatically disabled when RET33 is 1. By default, this signal is controlled by the power management state machine in the hibernate controller. By default, this signal goes high on entry to hibernate mode. On exit from hibernate, RET33 returns to level 0 to allow the device firmware and application software to access the I/O pads.

## 16.2 I/O Pad Electrical Specifications

**Table 16-1. GPIO Pin Electrical Specifications (25 C)(Except Pin 29, 30, 45, 50, 52 , 53)**

| GPIO Pin Electrical Specifications (25 C)(Except Pin 29, 30, 45, 50, 52 , 53) |                 |     |     |     |      |
|-------------------------------------------------------------------------------|-----------------|-----|-----|-----|------|
| Parameter                                                                     | Parameter Name  | Min | Nom | Max | Unit |
| C <sub>IN</sub>                                                               | Pin capacitance |     | 4   |     | pF   |

**Table 16-1. GPIO Pin Electrical Specifications (25 C)(Except Pin 29, 30, 45, 50, 52 , 53) (continued)**

| GPIO Pin Electrical Specifications (25 C)(Except Pin 29, 30, 45, 50, 52 , 53) |                                                     |                       |   |                         |    |
|-------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------|---|-------------------------|----|
| V <sub>IH</sub>                                                               | High-level input voltage                            | 0.65* V <sub>DD</sub> |   | V <sub>DD</sub> + 0.5 V | V  |
| V <sub>IL</sub>                                                               | Low-level input voltage                             | -0.5                  |   | 0.35* V <sub>DD</sub>   | V  |
| I <sub>IH</sub>                                                               | High-level input current                            |                       | 5 |                         | nA |
| I <sub>IL</sub>                                                               | Low-level input current                             |                       | 5 |                         | nA |
| V <sub>OH</sub>                                                               | High-level output voltage (V <sub>DD</sub> = 3.0 V) | 2.4                   |   |                         | V  |
| V <sub>OL</sub>                                                               | Low-level output voltage (V <sub>DD</sub> = 3.0 V)  |                       |   | 0.4                     | V  |
| I <sub>OH</sub>                                                               | High-level source current, V <sub>OH</sub> =2.4     |                       |   |                         |    |
|                                                                               | 2-mA Drive                                          | 2                     |   |                         | mA |
|                                                                               | 4-mA Drive                                          | 4                     |   |                         | mA |
|                                                                               | 6-mA Drive                                          | 6                     |   |                         | mA |
|                                                                               | 8-mA Drive                                          | 8                     |   |                         | mA |
|                                                                               | 10-mA Drive                                         | 10                    |   |                         | mA |
|                                                                               | 12-mA Drive                                         | 12                    |   |                         | mA |
|                                                                               | 14-mA Drive                                         | 14                    |   |                         | mA |
| I <sub>OL</sub>                                                               | Low-level sink current, V <sub>OH</sub> =0.4        |                       |   |                         |    |
|                                                                               | 2-mA Drive                                          | 2                     |   |                         | mA |
|                                                                               | 4-mA Drive                                          | 4                     |   |                         | mA |
|                                                                               | 6-mA Drive                                          | 6                     |   |                         | mA |
|                                                                               | 8-mA Drive                                          | 8                     |   |                         | mA |
|                                                                               | 10-mA Drive                                         | 10                    |   |                         | mA |
|                                                                               | 12-mA Drive                                         | 12                    |   |                         | mA |
|                                                                               | 14-mA Drive                                         | 14                    |   |                         | mA |

**Table 16-2. GPIO Pin Electrical Specifications (25 C) For Pins 29, 30, 45, 50, 52 , 53**

| GPIO Pin Electrical Specifications (25 C) For Pins 29, 30, 45, 50, 52 , 53 |                                                     |                       |     |                         |      |
|----------------------------------------------------------------------------|-----------------------------------------------------|-----------------------|-----|-------------------------|------|
| Parameter                                                                  | Parameter Name                                      | Min                   | Nom | Max                     | Unit |
| C <sub>IN</sub>                                                            | Pin capacitance                                     |                       | 7   |                         | pF   |
| V <sub>IH</sub>                                                            | High-level input voltage                            | 0.65* V <sub>DD</sub> |     | V <sub>DD</sub> + 0.5 V | V    |
| V <sub>IL</sub>                                                            | Low-level input voltage                             | -0.5                  |     | 0.35* V <sub>DD</sub>   | V    |
| I <sub>IH</sub>                                                            | High-level input current                            |                       | 50  |                         | nA   |
| I <sub>IL</sub>                                                            | Low-level input current                             |                       | 50  |                         | nA   |
| V <sub>OH</sub>                                                            | High-level output voltage (V <sub>DD</sub> = 3.0 V) | 2.4                   |     |                         | V    |
| I <sub>OH</sub>                                                            | High-level source current, V <sub>OH</sub> = 2.4    |                       |     |                         |      |
|                                                                            | 2-mA Drive                                          | 1.5                   |     |                         | mA   |
|                                                                            | 4-mA Drive                                          | 2.5                   |     |                         | mA   |
|                                                                            | 6-mA Drive                                          | 3.5                   |     |                         | mA   |
|                                                                            | 8-mA Drive                                          | 4.0                   |     |                         | mA   |
|                                                                            | 10-mA Drive                                         | 4.5                   |     |                         | mA   |
|                                                                            | 12-mA Drive                                         | 5.0                   |     |                         | mA   |
|                                                                            | 14-mA Drive                                         | 5.0                   |     |                         | mA   |

**Table 16-2. GPIO Pin Electrical Specifications (25 C) For Pins 29, 30, 45, 50, 52 , 53 (continued)**

| GPIO Pin Electrical Specifications (25 C) For Pins 29, 30, 45, 50, 52 , 53 |             |     |  |  |    |
|----------------------------------------------------------------------------|-------------|-----|--|--|----|
| Low-level sink current, $V_{OH} = 0.4$                                     |             |     |  |  |    |
| $I_{OL}$                                                                   | 2-mA Drive  | 1.5 |  |  | mA |
|                                                                            | 4-mA Drive  | 2.5 |  |  | mA |
|                                                                            | 6-mA Drive  | 3.5 |  |  | mA |
|                                                                            | 8-mA Drive  | 4.0 |  |  | mA |
|                                                                            | 10-mA Drive | 4.5 |  |  | mA |
|                                                                            | 12-mA Drive | 5.0 |  |  | mA |
|                                                                            | 14-mA Drive | 5.0 |  |  | mA |

**Table 16-3. Pin Internal Pullup and Pulldown Electrical Specifications (25 C)**

| Parameter | Parameter Name                                       | Min | Nom | Max | Unit |
|-----------|------------------------------------------------------|-----|-----|-----|------|
| $I_{OH}$  | Pullup current, $V_{OH} = 2.4$ ( $V_{DD} = 3.0$ V)   | 5   |     |     | uA   |
| $I_{OL}$  | Pulldown current, $V_{OL} = 0.4$ ( $V_{DD} = 3.0$ V) | 5   |     |     | uA   |


**NOTE:** TI recommends using the lowest possible drive-strength that is adequate for the applications. This minimizes the risk of interference to WLAN radio and mitigates any potential degradation of RF sensitivity and performance. The default drive-strength setting is 6 mA.

### 16.3 Analog-Digital Pin Multiplexing

The CC3200 implements an advanced analog-digital pin multiplexing scheme to maximize the number of functional signals in a compact 64-pin QFN package. Pins are multiplexed with analog-test, RF-test, clock and power-management functionalities. This is shown in [Figure 16-1](#).

The control registers for the analog signal mux and switches (S1 through S10 in [Figure 16-1](#)) are described in [Section 16.5](#).

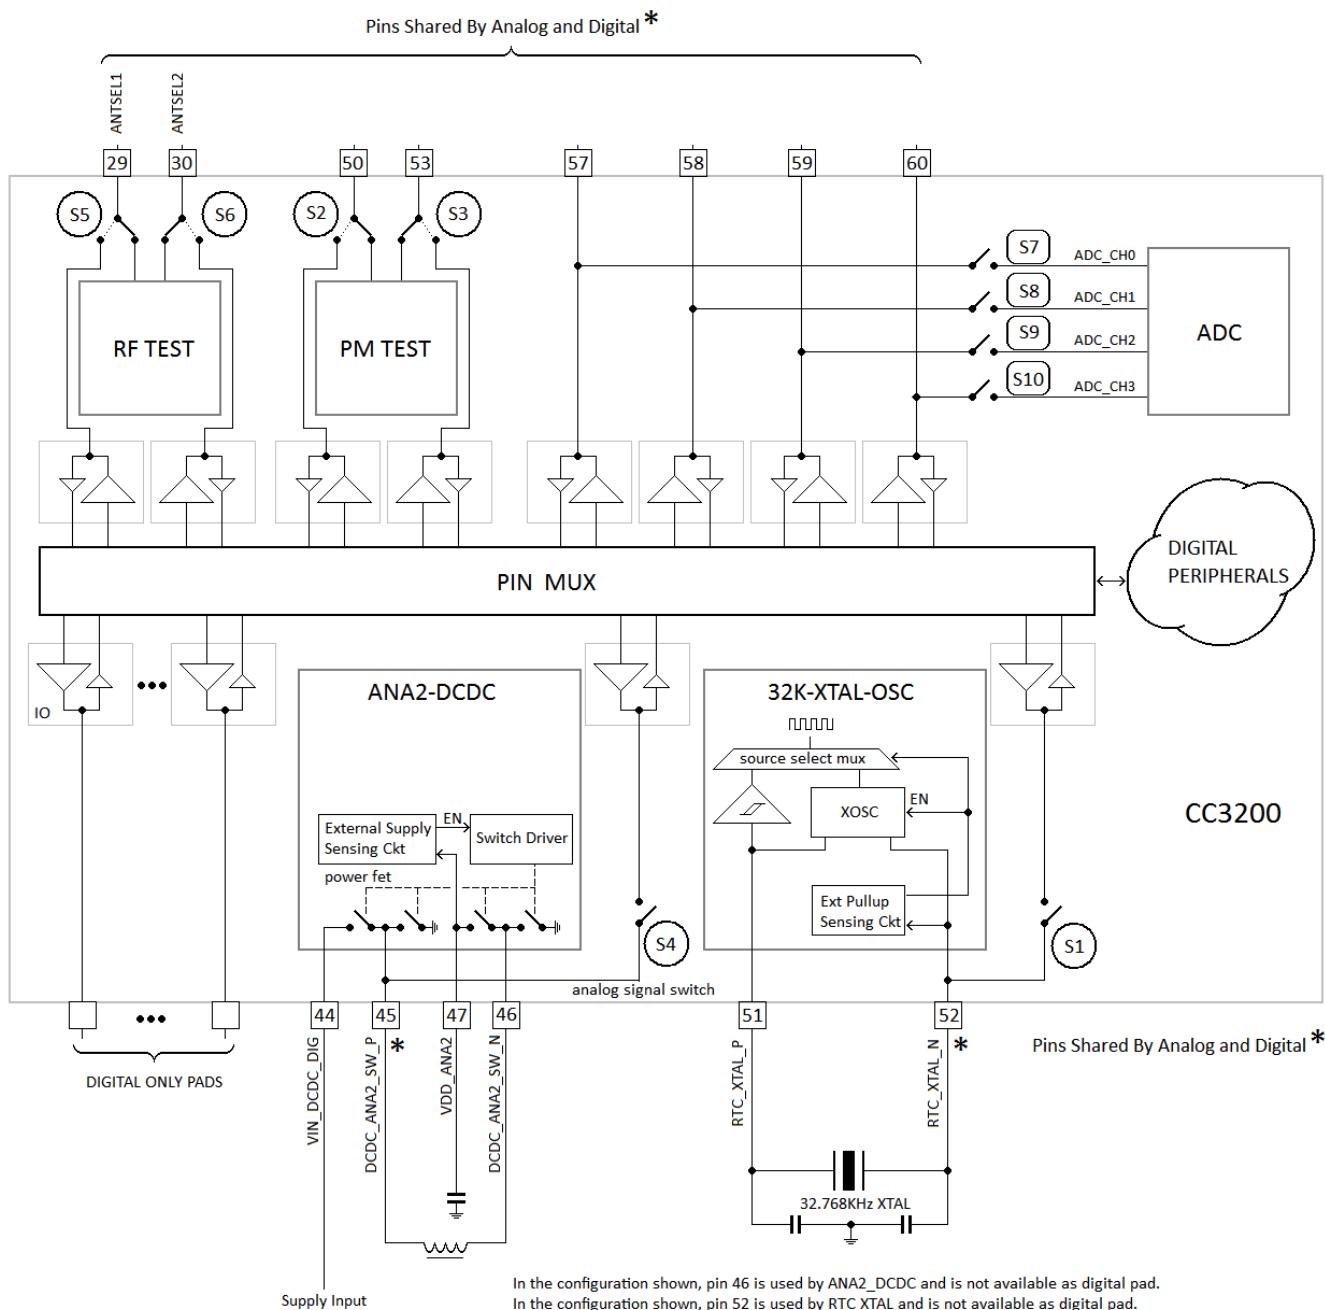**Figure 16-1. Board Configuration to Use Pins 45 and 52 as Digital Signals**



## 16.4 Special Ana/DIG Pins


### 16.4.1 Pin 45 and 52

Pin 45 and pin 52 are used by an internal DC-DC (ANA2\_DCDC) and the RTC XTAL oscillator, respectively. These modules use automatic configuration sensing. Thus, some board-level configuration is required to use pin 45 and pin 52 as digital pads. This is shown in [Figure 16-2](#).

**NOTE:** In a CC3200R device, ANA2 DC-DC is not required, which allows pins to be used for digital functions. However, pin 47 must be shorted to the supply input.

Typically pin 52 is used up for RTC XTAL in most applications. In some applications, however, a 32.768-KHz square wave clock may be available on board. In such cases, the XTAL may be removed, freeing up pin 52 for digital functions. The external clock must then be applied at pin 51. For the chip to automatically detect this configuration, a 100K pullup resistor must be connected between pin 52 and the supply line. To prevent false detection, TI recommends that pin 52 is used for output-only functionalities.

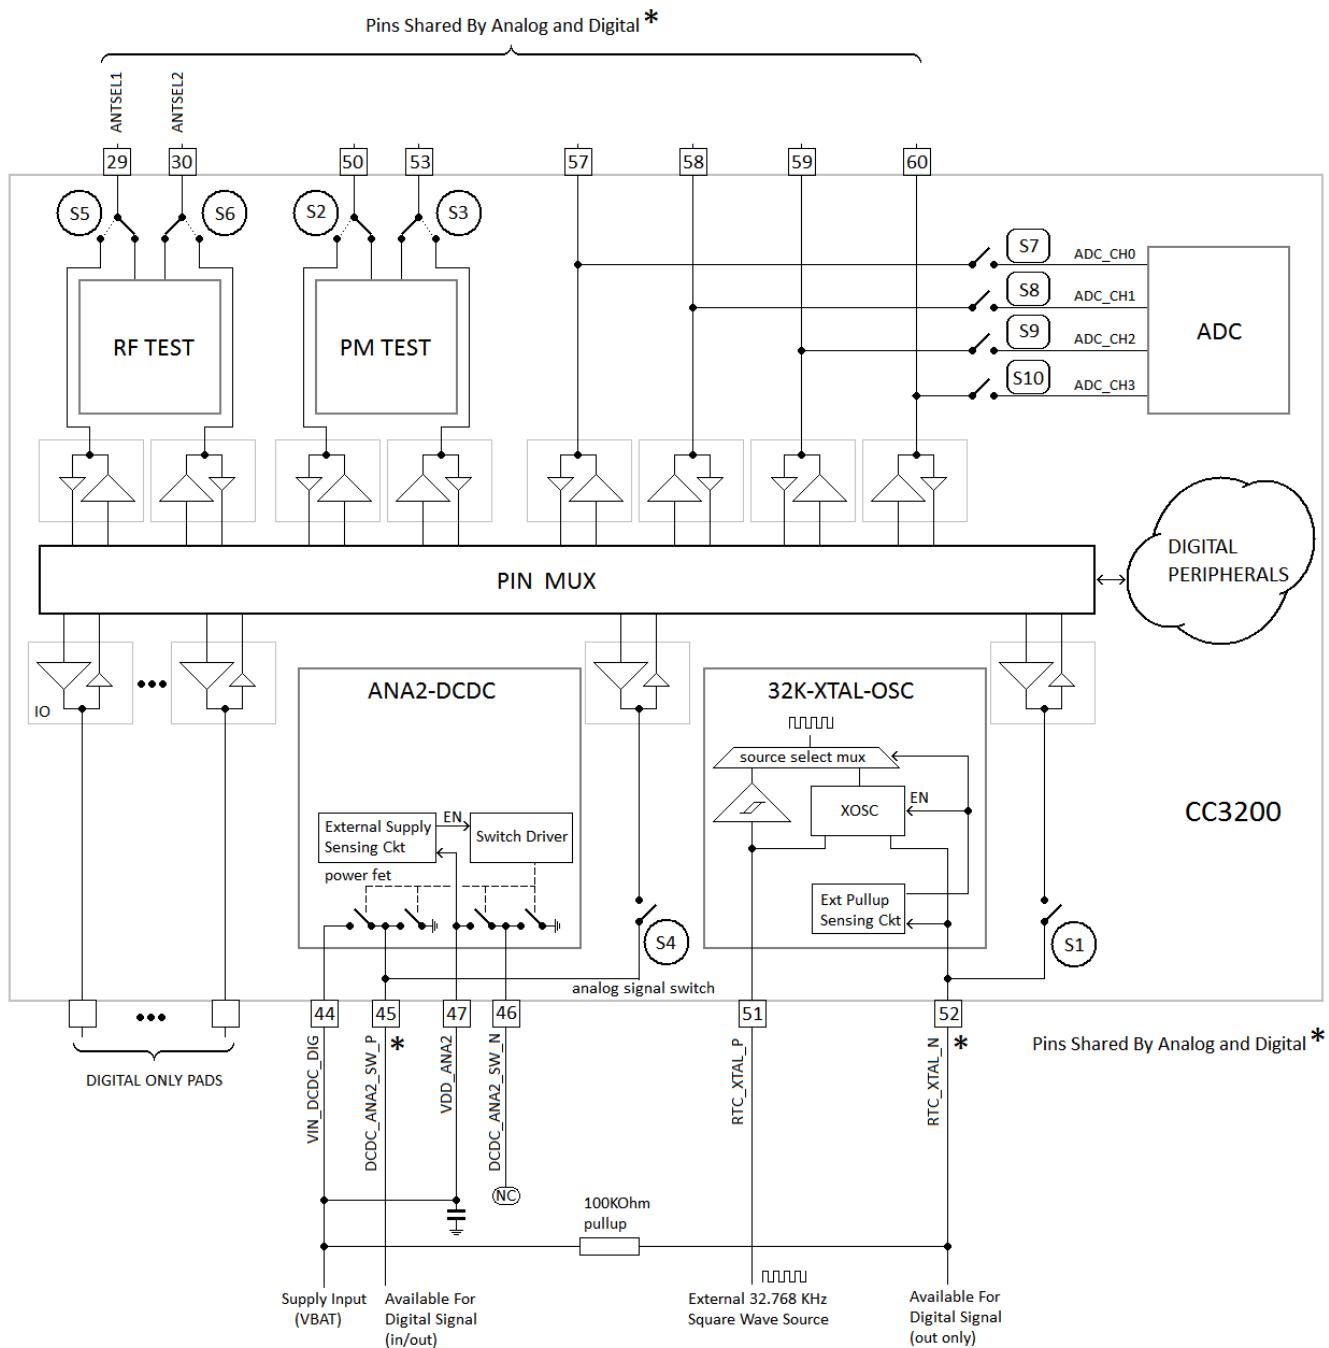**Figure 16-2. Board Configuration to Use Pins 45 and 52 as Digital Signals**



### 16.4.2 Pin 29 and 30

Pin 29 and pin 30 are reserved for WLAN antenna diversity. These pins control an external RF switch, which multiplexes the RF pin of the CC3200 between two antennas. These pins should not be used for other functions.

### 16.4.3 Pin 57, 58, 59, 60

These pins are shared by the ADC inputs and digital I/O pad cells.

---

**NOTE:** The ADC inputs are tolerant up to 1.8 V. The digital pads, on the other hand, can swing up to 3.63 V. Thus, care must be taken to prevent accidental damage to the ADC inputs. TI recommends that the output buffers of the digital I/Os corresponding to the desired ADC channel should be disabled first (for example, by making them Hi-Z), and thereafter the respective pass switches (S7, S8, S9, and S10) should be enabled.

---

## 16.5 Analog Mux Control Registers

The internal analog switches and muxes for the ana-dig pins must be configured correctly for proper device operation, and to avoid damaging the device. Once a digital I/O pad cell is routed correctly to the package pin using these analog switches, the functional pin-mux must be configured to select the desired digital interface pin to be brought out of the chip. In other words, these pins require two levels of mux configuration.

The CC3200 ROM firmware automatically configures the analog switches and muxes for pins 29, 30, 45, 50, 52, and 53 as part of the chip initialization sequence, which occurs after exiting from global reset (nRESET pulled high from low), exiting from hibernate, or exiting from LPDS. The application code can directly use these six pins like any other digital pins.

The ADC inputs, on the other hand, can tolerate levels only up to 1.8 V. Application code must therefore enable the analog switches for one or more ADC inputs, after ensuring there are no other internal or external drivers on the pins that can go above 1.8 V. The output buffer, pullup, and pulldown should be disabled while ADC inputs are connected to the pins, to avoid damaging the device.

Table 16-4 describes the register bits used to configure the internal analog switches and muxes for the ana-dig pins.

**Table 16-4. Analog Mux Control Registers and Bits**

| Analog Mux Control Registers and Bits |                                                                    |                                                                      |             |                                                                                                                    |
|---------------------------------------|--------------------------------------------------------------------|----------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------|
| Pin                                   | Analog Mux Control Register and Bit                                | Write Values                                                         | Reset Value | Notes                                                                                                              |
| 29                                    | Register: MEM_TOPMUXCTRL_IFORCE<br>Address: 0x4402 E178<br>Bit [0] | 0: GPIO26 Digital path not enabled<br>1: GPIO26 Digital path enabled | 0           | ANTSEL1 (GPIO26)<br>Device init FW enables the digital path.<br>No user configuration required for the analog mux. |
| 30                                    | Register: MEM_TOPMUXCTRL_IFORCE<br>Address: 0x4402 E178<br>Bit [1] | 0: GPIO27 Digital path not enabled<br>1: GPIO27 Digital path enabled | 0           | ANTSEL2 (GPIO27)<br>Device init FW enables the digital path.<br>No user configuration required for the analog mux. |
| 45                                    | Register: MEM_HIB_CONFIG<br>Address: 0x4402 F850<br>Bit [19]       | 0: Digital path not enabled<br>1: Digital path enabled               | 0           | Device init FW enables the digital path.<br>No user configuration required for the analog mux.                     |
| 50                                    | Register: MEM_HIB_CONFIG<br>Address: 0x4402 F850<br>Bit [17]       | 0: Digital path not enabled<br>1: Digital path enabled               | 0           | Device init FW enables the digital path.<br>No user configuration required for the analog mux.                     |

**Table 16-4. Analog Mux Control Registers and Bits (continued)**

| Analog Mux Control Registers and Bits |                                                              |                                                                          |   |                                                                                                                                                                       |
|---------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 52                                    | Register: MEM_HIB_CONFIG<br>Address: 0x4402 F850<br>Bit [16] | 0: Digital path not enabled<br>1: Digital path enabled                   | 0 | Device init FW enables the digital path.<br>No user configuration required for the analog mux.                                                                        |
| 53                                    | Register: MEM_HIB_CONFIG<br>Address: 0x4402 F850<br>Bit [18] | 0: Digital path not enabled<br>1: Digital path enabled                   | 0 | Device init FW enables the digital path.<br>No user configuration required for the analog mux.                                                                        |
| 57                                    | Register: ADCSPARE1<br>Address: 0x4402 E8B8<br>Bit [1]       | 0: ADC channel 0 path is not enabled<br>1: ADC channel 0 path is enabled | 0 | Digital I/O cell is always connected to this pin, and application software must make the digital I/O Hi-Z before enabling analog mux, to prevent damaging the device. |
| 58                                    | Register: ADCSPARE1<br>Address: 0x4402 E8B8<br>Bit [2]       | 0: ADC channel 1 path is not enabled<br>1: ADC channel 1 path is enabled | 0 | Digital I/O cell is always connected to this pin, and application software must make the digital I/O Hi-Z before enabling analog mux, to prevent damaging the device. |
| 59                                    | Register: ADCSPARE1<br>Address: 0x4402 E8B8<br>Bit [3]       | 0: ADC channel 2 path is not enabled<br>1: ADC channel 2 path is enabled | 0 | Digital I/O cell is always connected to this pin, and application software must make the digital I/O Hi-Z before enabling analog mux, to prevent damaging the device. |
| 60                                    | Register: ADCSPARE1<br>Address: 0x4402 E8B8<br>Bit [4]       | 0: ADC channel 3 path is not enabled<br>1: ADC channel 3 path is enabled | 0 | Digital I/O cell is always connected to this pin, and application software must make the digital I/O Hi-Z before enabling analog mux, to prevent damaging the device. |

**Table 16-5** describes the default behavior and configurations required for some of the ana-dig multiplexed I/Os used for digital signals.

**Table 16-5. Board Level Behavior**

| Board Level Behavior |                                                                                                                 |                                                                      |                                                                     |
|----------------------|-----------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------|
| Pin                  | Board Level Configuration and Usage                                                                             | Default State At First Powerup or Forced Reset                       | State After Disabling Analog Path(in ACTIVE, LPDS, HIB power modes) |
| 29                   | Connected to enable pin of RF switch (ANTSEL1).<br>Other usage not recommended.                                 | Analog is isolated.<br>Digital I/O cell is also isolated.            | Determined by the I/O cell state, like other digital I/Os.          |
| 30                   | Connected to enable pin of RF switch (ANTSEL2).<br>Other usage not recommended.                                 | Analog is isolated.<br>Digital I/O cell is also isolated.            | Determined by the I/O cell state, like other digital I/Os.          |
| 45                   | VDD_ANA2 (pin 47) must be shorted to input supply rail.<br>Otherwise this pin will be driven by the ANA2 DCDC   | Analog is isolated.<br>Digital I/O cell is also isolated.            | Determined by the I/O cell state, like other digital I/Os.          |
| 50                   | Generic Input/Output                                                                                            | Analog is isolated.<br>Digital I/O cell is also isolated.            | Determined by the I/O cell state, like other digital I/Os.          |
| 52                   | This pin must have an external pullup of 100K to supply rail.<br>This pin must be used for output only signals. | Analog is isolated.<br>Digital I/O cell is also isolated.            | Determined by the I/O cell state, like other digital I/Os.          |
| 53                   | Generic Input/Output                                                                                            | Analog is isolated.<br>Digital I/O cell is also isolated.            | Determined by the I/O cell state, like other digital I/Os.          |
| 57                   | Analog signal<br>(1.8-V absolute max. 1.46-V full scale)                                                        | ADC is isolated.<br>Digital I/O cell is directly connected but Hi-Z. | Determined by the I/O cell state, like other digital I/Os.          |

**Table 16-5. Board Level Behavior (continued)**

| Board Level Behavior |                                                          |  |                                                                      |  |                                                            |
|----------------------|----------------------------------------------------------|--|----------------------------------------------------------------------|--|------------------------------------------------------------|
| 58                   | Analog signal<br>(1.8-V absolute max. 1.46-V full scale) |  | ADC is isolated.<br>Digital I/O cell is directly connected but Hi-Z. |  | Determined by the I/O cell state, like other digital I/Os. |
| 59                   | Analog signal<br>(1.8-V absolute max. 1.46-V full scale) |  | ADC is isolated.<br>Digital I/O cell is directly connected but Hi-Z. |  | Determined by the I/O cell state, like other digital I/Os. |
| 60                   | Analog signal<br>(1.8-V absolute max. 1.46-V full scale) |  | ADC is isolated.<br>Digital I/O cell is directly connected but Hi-Z. |  | Determined by the I/O cell state, like other digital I/Os. |

## 16.6 Pins Available for Applications

Table 16-6 shows the pins available for application signals under various board level configurations.

**Table 16-6. GPIO/Pins Available for Application**

| Pkg Pin | Name            | Pins That Can be Used by Application Using<br>40MHz XTAL<br>Yes = 1 |                                                               |                                                                     |                                                                     | Pins That Can be Used by Application Using<br>40MHz TCXO<br>(For Full Industrial Temp Range)<br>Yes = 1 |                                                               |                                                                             |                                                                             |
|---------|-----------------|---------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|
|         |                 | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with 32-<br>KHz XTAL       | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with 32-<br>KHz XTAL | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with<br>external<br>32 KHz | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with<br>external<br>32 KHz | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with 32-<br>KHz XTAL                                           | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with 32-<br>KHz XTAL | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with<br>external<br>32-KHz<br>XTAL | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with<br>external<br>32-KHz<br>XTAL |
| 1       | GPIO10          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 2       | GPIO11          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 3       | GPIO12          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 4       | GPIO13          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 5       | GPIO14          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 6       | GPIO15          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 7       | GPIO16          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 8       | GPIO17          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 9       | VDD_DIG1        |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 10      | VIN_IO1         |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 11      | FLASH_SP_I_CLK  |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 12      | FLASH_SP_I_DOUT |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 13      | FLASH_SP_I_DIN  |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 14      | FLASH_SP_I_CS   |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 15      | GPIO22          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 16      | TDI             |                                                                     | 1                                                             |                                                                     | 1                                                                   |                                                                                                         | 1                                                             |                                                                             | 1                                                                           |
| 17      | TDO             |                                                                     | 1                                                             |                                                                     | 1                                                                   |                                                                                                         | 1                                                             |                                                                             | 1                                                                           |
| 18      | GPIO28          | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 19      | TCK             |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 20      | TMS             |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 21      | SOP2            | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 0<br>(TCXO_EN )                                                                                         | 0<br>(TCXO_EN )                                               | 0<br>(TCXO_EN )                                                             | 0<br>(TCXO_EN )                                                             |

Table 16-6. GPIO/Pins Available for Application (continued)

| Pkg Pin | Name               | Pins That Can be Used by Application Using<br>40MHz XTAL<br>Yes = 1 |                                                               |                                                                     |                                                                     | Pins That Can be Used by Application Using<br>40MHz TCXO<br>(For Full Industrial Temp Range)<br>Yes = 1 |                                                               |                                                                             |                                                                             |
|---------|--------------------|---------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|
|         |                    | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with 32-<br>KHz XTAL       | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with 32-<br>KHz XTAL | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with<br>external<br>32 KHz | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with<br>external<br>32 KHz | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with 32-<br>KHz XTAL                                           | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with 32-<br>KHz XTAL | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with<br>external<br>32-KHz<br>XTAL | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with<br>external<br>32-KHz<br>XTAL |
| 22      | WLAN_XT<br>AL_N    |                                                                     |                                                               | 0                                                                   | 0                                                                   |                                                                                                         |                                                               | 1                                                                           | 1                                                                           |
| 23      | WLAN_XT<br>AL_P    |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 24      | VDD_PLL            |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 25      | LDO_IN2            |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 26      | NC                 |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 27      | NC                 |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 28      | NC                 |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 29      | ANTSEL1            |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 30      | ANTSEL2            |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 31      | RF_BG              |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 32      | nRESET             |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 33      | VDD_PA_I<br>N      |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 34      | SOP1               |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 35      | SOP0               |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 36      | LDO_IN1            |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 37      | VIN_DCDC<br>_ANA   |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 38      | DCDC_AN<br>A_SW    |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 39      | VIN_DCDC<br>_PA    |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 40      | DCDC_PA<br>_SW_P   |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 41      | DCDC_PA<br>_SW_N   |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 42      | DCDC_PA<br>_OUT    |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 43      | DCDC_DI<br>G_SW    |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 44      | VIN_DCDC<br>_DIG   |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 45      | DCDC_AN<br>A2_SW_P |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 46      | DCDC_AN<br>A2_SW_N |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 47      | VDD_ANA<br>2       |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 48      | VDD_ANA<br>1       |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 49      | VDD_RAM            |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 50      | GPIO0              | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |

**Table 16-6. GPIO/Pins Available for Application (continued)**

| Pkg Pin                         | Name                    | Pins That Can be Used by Application Using<br>40MHz XTAL<br>Yes = 1 |                                                               |                                                                     |                                                                     | Pins That Can be Used by Application Using<br>40MHz TCXO<br>(For Full Industrial Temp Range)<br>Yes = 1 |                                                               |                                                                             |                                                                             |
|---------------------------------|-------------------------|---------------------------------------------------------------------|---------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|
|                                 |                         | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with 32-<br>KHz XTAL       | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with 32-<br>KHz XTAL | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with<br>external<br>32 KHz | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with<br>external<br>32 KHz | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with 32-<br>KHz XTAL                                           | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with 32-<br>KHz XTAL | 4-Wire<br>JTAG<br>SOP[2:0] =<br>"000"<br>with<br>external<br>32-KHz<br>XTAL | 2-Wire<br>JTAG<br>SOP[2:0] =<br>"001"<br>with<br>external<br>32-KHz<br>XTAL |
| 51                              | RTC_XTAL_P              |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 52                              | RTC_XTAL_N              | 0                                                                   | 0                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 53                              | GPIO30                  | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 54                              | VIN_IO2                 |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 55                              | GPIO1                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 56                              | VDD_DIG2                |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| 57                              | GPIO2                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 58                              | GPIO3                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 59                              | GPIO4                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 60                              | GPIO5                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 61                              | GPIO6                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 62                              | GPIO7                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 63                              | GPIO8                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 64                              | GPIO9                   | 1                                                                   | 1                                                             | 1                                                                   | 1                                                                   | 1                                                                                                       | 1                                                             | 1                                                                           | 1                                                                           |
| 65                              | GND<br>(THERMAL<br>PAD) |                                                                     |                                                               |                                                                     |                                                                     |                                                                                                         |                                                               |                                                                             |                                                                             |
| Total available for application |                         | 22                                                                  | 24                                                            | 23                                                                  | 25                                                                  | 22                                                                                                      | 24                                                            | 23                                                                          | 25                                                                          |

## 16.7 Functional Pin Mux Configurations

Pin mux configurations supported in the CC3200 are listed in [Table 16-7](#).

Table 16-7. Pin Multiplexing

| General Pin Attributes |           |     |                         |                        |                 | Function                            |                                |               |                               |                     | Pad States          |                    |            |
|------------------------|-----------|-----|-------------------------|------------------------|-----------------|-------------------------------------|--------------------------------|---------------|-------------------------------|---------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias | Use | Select as Wakeup Source | Config Addl Analog Mux | Muxed with JTAG | Dig. Pin Mux Config Reg             | Dig. Pin Mux Config Mode Value | Signal Name   | Signal Description            | Signal Direction    | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 1                      | GPIO10    | I/O | No                      | No                     | No              | GPIO_PAD_CONFIG_10<br>(0x4402 E0C8) | 0                              | GPIO10        | General-Purpose I/O           | I/O                 | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                     | 1                              | I2C_SCL       | I2C Clock                     | O<br>(Open Drain)   | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 3                              | GT_PWM06      | Pulse-Width Modulated O/P     | O                   | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 7                              | UART1_TX      | UART TX Data                  | O                   | 1                   |                    |            |
|                        |           |     |                         |                        |                 |                                     | 6                              | SDCARD_CLK    | SD Card Clock                 | O                   | 0                   |                    |            |
|                        |           |     |                         |                        |                 |                                     | 12                             | GT_CCP01      | Timer Capture Port            | I                   | Hi-Z                |                    |            |
| 2                      | GPIO11    | I/O | Yes                     | No                     | No              | GPIO_PAD_CONFIG_11<br>(0x4402 E0CC) | 0                              | GPIO11        | General-Purpose I/O           | I/O                 | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                     | 1                              | I2C_SDA       | I2C Data                      | I/O<br>(Open Drain) | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 3                              | GT_PWM07      | Pulse-Width Modulated O/P     | O                   | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 4                              | pXCLK (XVCLK) | Free Clock To Parallel Camera | O                   | 0                   |                    |            |
|                        |           |     |                         |                        |                 |                                     | 6                              | SDCARD_CMD    | SD Card Command Line          | I/O                 | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 7                              | UART1_RX      | UART RX Data                  | I                   | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 12                             | GT_CCP02      | Timer Capture Port            | I                   | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 13                             | McAFSX        | I2S Audio Port Frame Sync     | O                   | Hi-Z                |                    |            |

<sup>(1)</sup> LPDS mode: The state of unused GPIOs in LPDS is input with 500-kΩ pulldown. For all used GPIOs, the user can enable internal pulls, which would hold them in a valid state.

<sup>(2)</sup> Hibernate mode: The CC3200 device leaves the digital pins in a Hi-Z state without any internal pulls when the device enters hibernate state. This can cause glitches on output lines, unless held at valid levels by external resistors.

**Table 16-7. Pin Multiplexing (continued)**

| General Pin Attributes |           |     |                         |                        |                 | Function                            |                                |                       |                                 |                  | Pad States          |                    |            |
|------------------------|-----------|-----|-------------------------|------------------------|-----------------|-------------------------------------|--------------------------------|-----------------------|---------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias | Use | Select as Wakeup Source | Config Addl Analog Mux | Muxed with JTAG | Dig. Pin Mux Config Reg             | Dig. Pin Mux Config Mode Value | Signal Name           | Signal Description              | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 3                      | GPIO12    | I/O | No                      | No                     | No              | GPIO_PAD_CONFIG_12<br>(0x4402 E0D0) | 0                              | GPIO12                | General Purpose I/O             | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                     | 3                              | McACLK                | I2S Audio Port Clock O          | O                | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 4                              | pVS (VSYNC)           | Parallel Camera Vertical Sync   | I                | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 5                              | I2C_SCL               | I2C Clock                       | I/O (Open Drain) | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 7                              | UART0_TX              | UART0 TX Data                   | O                | 1                   |                    |            |
|                        |           |     |                         |                        |                 |                                     | 12                             | GT_CCP03              | Timer Capture Port              | I                | Hi-Z                |                    |            |
| 4                      | GPIO13    | I/O | Yes                     | No                     | No              | GPIO_PAD_CONFIG_13<br>(0x4402 E0D4) | 0                              | GPIO13                | General-Purpose I/O             | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                     | 5                              | I2C_SDA               | I2C Data                        | I/O (Open Drain) |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 4                              | pHS (HORIZONTAL SYNC) | Parallel Camera Horizontal Sync | I                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 7                              | UART0_RX              | UART0 RX Data                   | I                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 12                             | GT_CCP04              | Timer Capture Port              | I                |                     |                    |            |
| 5                      | GPIO14    | I/O | No                      | No                     | No              | GPIO_PAD_CONFIG_14<br>(0x4402 E0D8) | 0                              | GPIO14                | General-Purpose I/O             | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                     | 5                              | I2C_SCL               | I2C Clock                       | I/O (Open Drain) |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 7                              | GSPI_CLK              | General SPI Clock               | I/O              |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 4                              | pDATA8 (CAM_D4)       | Parallel Camera Data Bit 4      | I                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 12                             | GT_CCP05              | Timer Capture Port              | I                |                     |                    |            |

Table 16-7. Pin Multiplexing (continued)

| General Pin Attributes |           |     |                         |                        |                 | Function                            |                                |                  |                               |                  | Pad States          |                    |            |
|------------------------|-----------|-----|-------------------------|------------------------|-----------------|-------------------------------------|--------------------------------|------------------|-------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias | Use | Select as Wakeup Source | Config Addl Analog Mux | Muxed with JTAG | Dig. Pin Mux Config Reg             | Dig. Pin Mux Config Mode Value | Signal Name      | Signal Description            | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 6                      | GPIO15    | I/O | No                      | No                     |                 | GPIO_PAD_CONFIG_15<br>(0x4402 E0DC) | 0                              | GPIO15           | General-Purpose I/O           | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                     | 5                              | I2C_SDA          | I2C Data                      | I/O (Open Drain) |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 7                              | GSPI_MISO        | General SPI MISO              | I/O              |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 4                              | pDATA9 (CAM_D5)  | Parallel Camera Data Bit 5    | I                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 8                              | SDCARD_DAT_A     | SD Card Data                  | I/O              |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 13                             | GT_CCP06         | Timer Capture Port            | I                |                     |                    |            |
| 7                      | GPIO16    | I/O | No                      | No                     |                 | GPIO_PAD_CONFIG_16<br>(0x4402 E0E0) | 0                              | GPIO16           | General-Purpose I/O           | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                     | 7                              | GSPI_MOSI        | General SPI MOSI              | I/O              | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 4                              | pDATA10 (CAM_D6) | Parallel Camera Data Bit 6    | I                | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 5                              | UART1_TX         | UART1 TX Data                 | O                | 1                   |                    |            |
|                        |           |     |                         |                        |                 |                                     | 8                              | SDCARD_CLK       | SD Card Clock                 | O                | 0                   |                    |            |
|                        |           |     |                         |                        |                 |                                     | 13                             | GT_CCP07         | Timer Capture Port            | I                | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                     | 0                              | GPIO17           | General-Purpose I/O           | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
| 8                      | GPIO17    | I/O | Wake-Up Source          | No                     |                 | GPIO_PAD_CONFIG_17<br>(0x4402 E0E4) | 5                              | UART1_RX         | UART1 RX Data                 | I                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 7                              | GSPI_CS          | General SPI Chip Select       | I/O              |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 8                              | SDCARD_CMD       | SD Card Command Line          | I/O              |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | 4                              | pDATA11 (CAM_D7) | Parallel Camera Data Bit 7    | I                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                     | N/A                            | VDD_DIG1         | Internal Digital Core Voltage |                  |                     |                    |            |

**Table 16-7. Pin Multiplexing (continued)**

| General Pin Attributes |                |            |                         |                        |                     | Function                            |                                |                |                                                 |                  | Pad States          |                    |            |  |  |
|------------------------|----------------|------------|-------------------------|------------------------|---------------------|-------------------------------------|--------------------------------|----------------|-------------------------------------------------|------------------|---------------------|--------------------|------------|--|--|
| Pkg Pin                | Pin Alias      | Use        | Select as Wakeup Source | Config Addl Analog Mux | Muxed with JTAG     | Dig. Pin Mux Config Reg             | Dig. Pin Mux Config Mode Value | Signal Name    | Signal Description                              | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |  |  |
| 10                     | VIN_IO1        | Sup. input | N/A                     | N/A                    | N/A                 | N/A                                 | N/A                            | VIN_IO1        | Chip Supply Voltage (VBAT)                      |                  |                     |                    |            |  |  |
| 11                     | FLASH_SPI_CLK  | O          | N/A                     | N/A                    | N/A                 | N/A                                 | N/A                            | FLASH_SPI_CLK  | Clock To SPI Serial Flash (Fixed Default)       | O                | Hi-Z                | Hi-Z               | Hi-Z       |  |  |
| 12                     | FLASH_SPI_DOUT | O          | N/A                     | N/A                    | N/A                 | N/A                                 | N/A                            | FLASH_SPI_DOUT | Data To SPI Serial Flash (Fixed Default)        | O                | Hi-Z                | Hi-Z               | Hi-Z       |  |  |
| 13                     | FLASH_SPI_DIN  | I          | N/A                     | N/A                    | N/A                 | N/A                                 | N/A                            | FLASH_SPI_DIN  | Data From SPI Serial Flash (Fixed Default)      | I                |                     |                    |            |  |  |
| 14                     | FLASH_SPI_CS   | O          | N/A                     | N/A                    | N/A                 | N/A                                 | N/A                            | FLASH_SPI_CS   | Chip Select To SPI Serial Flash (Fixed Default) | O                | 1                   | Hi-Z               | Hi-Z       |  |  |
| 15                     | GPIO22         | I/O        | No                      | No                     | No                  | GPIO_PAD_CONFIG_22<br>(0x4402 E0F8) | 0                              | GPIO22         | General-Purpose I/O                             | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |  |  |
|                        |                |            |                         |                        |                     |                                     | 7                              | McAFSX         | I2S Audio Port Frame Sync                       | O                | Hi-Z                |                    |            |  |  |
|                        |                |            |                         |                        |                     |                                     | 5                              | GT_CCP04       | Timer Capture Port                              | I                |                     |                    |            |  |  |
| 16                     | TDI            | I/O        | No                      | No                     | MUXed with JTAG TDI | GPIO_PAD_CONFIG_23<br>(0x4402 E0FC) | 1                              | TDI            | JTAG TDI. Reset Default Pinout.                 | I                | Hi-Z                | Hi-Z               | Hi-Z       |  |  |
|                        |                |            |                         |                        |                     |                                     | 0                              | GPIO23         | General-Purpose I/O                             | I/O              |                     | Hi-Z               |            |  |  |
|                        |                |            |                         |                        |                     |                                     | 2                              | UART1_TX       | UART1 TX Data                                   | O                | 1                   |                    |            |  |  |
|                        |                |            |                         |                        |                     |                                     | 9                              | I2C_SCL        | I2C Clock                                       | I/O (Open Drain) | Hi-Z                |                    |            |  |  |

Table 16-7. Pin Multiplexing (continued)

| General Pin Attributes |           |     |                         |                        |                          | Function                            |                                |             |                                   |                  | Pad States          |                    |            |
|------------------------|-----------|-----|-------------------------|------------------------|--------------------------|-------------------------------------|--------------------------------|-------------|-----------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias | Use | Select as Wakeup Source | Config Addl Analog Mux | Muxed with JTAG          | Dig. Pin Mux Config Reg             | Dig. Pin Mux Config Mode Value | Signal Name | Signal Description                | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 17                     | TDO       | I/O | Wake-up source          | No                     | MUXed with JTAG TDO      | GPIO_PAD_CONFIG_24<br>(0x4402 E100) | 1                              | TDO         | JTAG TDO. Reset Default Pinout.   | O                | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                          |                                     | 0                              | GPIO24      | General-Purpose I/O               | I/O              |                     |                    |            |
|                        |           |     |                         |                        |                          |                                     | 5                              | PWM0        | Pulse Width Modulated O/P         | O                |                     |                    |            |
|                        |           |     |                         |                        |                          |                                     | 2                              | UART1_RX    | UART1 RX Data                     | I                |                     |                    |            |
|                        |           |     |                         |                        |                          |                                     | 9                              | I2C_SDA     | I2C Data                          | I/O (Open Drain) |                     |                    |            |
|                        |           |     |                         |                        |                          |                                     | 4                              | GT_CCP06    | Timer Capture Port                | I                |                     |                    |            |
|                        |           |     |                         |                        |                          |                                     | 6                              | McAFSX      | I2S Audio Port Frame Sync         | O                |                     |                    |            |
| 18                     | GPIO28    | I/O |                         | No                     |                          | GPIO_PAD_CONFIG_28<br>(0x4402 E110) | 0                              | GPIO28      | General-Purpose I/O               | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
| 19                     | TCK       | I/O | No                      | No                     | MUXed with JTAG/SWD-TCK  |                                     | 1                              | TCK         | JTAG/SWD TCK Reset Default Pinout | I                | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                          |                                     | 8                              | GT_PWM03    | Pulse Width Modulated O/P         | O                |                     |                    |            |
| 20                     | TMS       | I/O | No                      | No                     | MUXed with JTAG/SWD-TMSC | GPIO_PAD_CONFIG_29<br>(0x4402 E114) | 1                              | TMS         | JTAG/SWD TMS Reset Default Pinout | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                          |                                     | 0                              | GPIO29      | General-Purpose I/O               |                  |                     |                    |            |

**Table 16-7. Pin Multiplexing (continued)**

| General Pin Attributes |             |           |                         |                          |                 | Function                            |                                |             |                                           |                  | Pad States          |                    |            |
|------------------------|-------------|-----------|-------------------------|--------------------------|-----------------|-------------------------------------|--------------------------------|-------------|-------------------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias   | Use       | Select as Wakeup Source | Config Addl Analog Mux   | Muxed with JTAG | Dig. Pin Mux Config Reg             | Dig. Pin Mux Config Mode Value | Signal Name | Signal Description                        | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 21                     | SOP2        | O Only    | No                      | No                       | No              | GPIO_PAD_CONFIG_25<br>(0x4402 E104) | 0                              | GPIO25      | General-Purpose I/O                       | O                | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |             |           |                         |                          |                 |                                     | 9                              | GT_PWM02    | Pulse Width Modulated O/P                 | O                | Hi-Z                |                    |            |
|                        |             |           |                         |                          |                 |                                     | 2                              | McAFSX      | I2S Audio Port Frame Sync                 | O                | Hi-Z                |                    |            |
|                        |             |           |                         |                          |                 |                                     | See <sup>(3)</sup>             | TCXO_EN     | Enable to Optional External 40-MHz TCXO   | O                | O                   |                    |            |
|                        |             |           |                         |                          |                 |                                     | See <sup>(4)</sup>             | SOP2        | Sense-On-Power 2                          | I                |                     |                    |            |
| 22                     | WLAN_XTAL_N | WLAN Ana. | N/A                     | N/A                      | N/A             | N/A                                 | See <sup>(3)</sup>             | WLAN_XTAL_N | 40-MHz XTAL Pulldown if ext TCXO is used. |                  |                     |                    |            |
| 23                     | WLAN_XTAL_P | WLAN Ana. | N/A                     | N/A                      | N/A             | N/A                                 |                                | WLAN_XTAL_P | 40-MHz XTAL or TCXO clock input           |                  |                     |                    |            |
| 24                     | VDD_PLL     | Int. Pwr  | N/A                     | N/A                      | N/A             | N/A                                 |                                | VDD_PLL     | Internal analog voltage                   |                  |                     |                    |            |
| 25                     | LDO_IN2     | Int. Pwr  | N/A                     | N/A                      | N/A             | N/A                                 |                                | LDO_IN2     | Analog RF supply from ANA DC-DC output    |                  |                     |                    |            |
| 26                     | NC          | WLAN Ana. | N/A                     | N/A                      | N/A             | N/A                                 |                                | NC          | Reserved                                  |                  |                     |                    |            |
| 27                     | NC          | WLAN Ana. | N/A                     | N/A                      | N/A             | N/A                                 |                                | NC          | Reserved                                  |                  |                     |                    |            |
| 28                     | NC          | WLAN Ana. | N/A                     | N/A                      | N/A             | N/A                                 |                                | NC          | Reserved                                  |                  |                     |                    |            |
| 29                     | ANTSEL1     | O Only    | No                      | User config not required | No              | GPIO_PAD_CONFIG_26<br>(0x4402 E108) | 0                              | ANTSEL1     | Antenna Selection Control                 | O                | Hi-Z                | Hi-Z               | Hi-Z       |
| 30                     | ANTSEL2     | O Only    | No                      | User config not required | No              | GPIO_PAD_CONFIG_27<br>(0x4402 E10C) | 0                              | ANTSEL2     | Antenna Selection Control                 | O                | Hi-Z                | Hi-Z               | Hi-Z       |

<sup>(3)</sup> For details on proper use, see the *Drive Strength and Reset States for Analog-Digital Multiplexed Pins* section of the CC3200 data sheet ([SWAS032](#)).

<sup>(4)</sup> This pin is one of three that must have a passive pullup or pulldown resistor on board to configure the chip hardware power-up mode. Because of this, if this pin is used for digital functions, it must be output only.

Table 16-7. Pin Multiplexing (continued)

| General Pin Attributes |               |                |                         |                        |                 | Function                |                                |              |                                                            |                  | Pad States          |                    |            |
|------------------------|---------------|----------------|-------------------------|------------------------|-----------------|-------------------------|--------------------------------|--------------|------------------------------------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias     | Use            | Select as Wakeup Source | Config Addl Analog Mux | Muxed with JTAG | Dig. Pin Mux Config Reg | Dig. Pin Mux Config Mode Value | Signal Name  | Signal Description                                         | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 31                     | RF_BG         | WLAN Ana.      | N/A                     | N/A                    | N/A             | N/A                     |                                | RF_BG        | RF BG band                                                 |                  |                     |                    |            |
| 32                     | nRESET        | Glob. Rst      | N/A                     | N/A                    | N/A             | N/A                     |                                | nRESET       | Master chip reset. Active low.                             |                  |                     |                    |            |
| 33                     | VDD_PA_IN     | Int. Pwr       | N/A                     | N/A                    | N/A             | N/A                     |                                | VDD_PA_IN    | PA supply voltage from PA DC-DC output.                    |                  |                     |                    |            |
| 34                     | SOP1          | Config Sense   | N/A                     | N/A                    | N/A             | N/A                     |                                | SOP1         | Sense On Power 1                                           |                  |                     |                    |            |
| 35                     | SOP0          | Config Sense   | N/A                     | N/A                    | N/A             | N/A                     |                                | SOP0         | Sense On Power 0                                           |                  |                     |                    |            |
| 36                     | LDO_IN1       | Internal Power | N/A                     | N/A                    | N/A             | N/A                     |                                | LDO_IN1      | Analog RF supply from ana DC-DC output                     |                  |                     |                    |            |
| 37                     | VIN_DCDC_ANA  | Supply Input   | N/A                     | N/A                    | N/A             | N/A                     |                                | VIN_DCDC_ANA | Analog DC-DC input (connected to chip input supply [VBAT]) |                  |                     |                    |            |
| 38                     | DCDC_ANA_SW   | Internal Power | N/A                     | N/A                    | N/A             | N/A                     |                                | DCDC_ANA_SW  | Analog DC-DC switching node.                               |                  |                     |                    |            |
| 39                     | VIN_DCDC_PA   | Supply Input   | N/A                     | N/A                    | N/A             | N/A                     |                                | VIN_DCDC_PA  | PA DC-DC input (connected to chip input supply [VBAT])     |                  |                     |                    |            |
| 40                     | DCDC_PA_S_W_P | Internal Power | N/A                     | N/A                    | N/A             | N/A                     |                                | DCDC_PA_SW_P | PA DC-DC switching node                                    |                  |                     |                    |            |
| 41                     | DCDC_PA_S_W_N | Internal Power | N/A                     | N/A                    | N/A             | N/A                     |                                | DCDC_PA_SW_N | PA DC-DC switching node                                    |                  |                     |                    |            |
| 42                     | DCDC_PA_O_UT  | Internal Power | N/A                     | N/A                    | N/A             | N/A                     |                                | DCDC_PA_OU_T | PA buck converter output                                   |                  |                     |                    |            |
| 43                     | DCDC_DIG_SW   | Internal Power | N/A                     | N/A                    | N/A             | N/A                     |                                | DCDC_DIG_SW  | DIG DC-DC switching node                                   |                  |                     |                    |            |
| 44                     | VIN_DCDC_DIG  | Supply Input   | N/A                     | N/A                    | N/A             | N/A                     |                                | VIN_DCDC_DIG | DIG DC-DC input (connected to chip input supply [VBAT])    |                  |                     |                    |            |

**Table 16-7. Pin Multiplexing (continued)**

| General Pin Attributes |                |                |                         |                                               |                 | Function                            |                                |                |                                          |                  | Pad States          |                    |            |
|------------------------|----------------|----------------|-------------------------|-----------------------------------------------|-----------------|-------------------------------------|--------------------------------|----------------|------------------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias      | Use            | Select as Wakeup Source | Config Addl Analog Mux                        | Muxed with JTAG | Dig. Pin Mux Config Reg             | Dig. Pin Mux Config Mode Value | Signal Name    | Signal Description                       | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 45 <sup>(5)</sup>      | DCDC_ANA2_SW_P | I/O            | No                      | User config not required<br><sup>(6)(7)</sup> | No              | GPIO_PAD_CONFIG_31<br>(0x4402 E11C) | 0                              | GPIO31         | General-Purpose I/O                      | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |                |                |                         |                                               |                 |                                     | 9                              | UART0_RX       | UART0 RX Data                            | I                |                     |                    |            |
|                        |                |                |                         |                                               |                 |                                     | 12                             | McAFSX         | I2S Audio Port Frame Sync                | O                |                     |                    |            |
|                        |                |                |                         |                                               |                 |                                     | 2                              | UART1_RX       | UART1 RX Data                            | I                |                     |                    |            |
|                        |                |                |                         |                                               |                 |                                     | 6                              | McAXR0         | I2S Audio Port Data 0 (RX/TX)            | I/O              |                     |                    |            |
|                        |                |                |                         |                                               |                 |                                     | 7                              | GSPI_CLK       | General SPI Clock                        | I/O              |                     |                    |            |
|                        |                |                |                         |                                               |                 |                                     | See <sup>(8)</sup>             | DCDC_ANA2_SW_P | ANA2 DC-DC Converter +ve Switching Node. |                  |                     |                    |            |
| 46                     | DCDC_ANA2_SW_N | Internal Power | N/A                     | N/A                                           | N/A             | N/A                                 | N/A                            | DCDC_ANA2_SW_N | ANA2 DC-DC Converter -ve Switching Node. |                  |                     |                    |            |
| 47                     | VDD_ANA2       | Internal Power | N/A                     | N/A                                           | N/A             | N/A                                 | N/A                            | VDD_ANA2       | ANA2 DC-DC O                             |                  |                     |                    |            |
| 48                     | VDD_ANA1       | Internal Power | N/A                     | N/A                                           | N/A             | N/A                                 | N/A                            | VDD_ANA1       | Analog supply fed by ANA2 DC-DC output   |                  |                     |                    |            |
| 49                     | VDD_RAM        | Internal Power | N/A                     | N/A                                           | N/A             | N/A                                 | N/A                            | VDD_RAM        | SRAM LDO output                          |                  |                     |                    |            |

<sup>(5)</sup> Pin 45 is used by an internal DC-DC (ANA2\_DCDC) and pin 52 is used by the RTC XTAL oscillator. These modules use automatic configuration sensing. Therefore, some board-level configuration is required to use pin 45 and pin 52 as digital pads (see [Figure 16-2](#)). Because the CC3200R device does not require ANA2\_DCDC, the pin can always be used for digital functions. However, pin 47 must be shorted to the supply input. Typically, pin 52 is used for RTC XTAL in most applications. However, in some applications, a 32.768-kHz square-wave clock might always be available onboard. In such cases, the XTAL can be removed to free up pin 52 for digital functions. The external clock must then be applied at pin 51. For the chip to automatically detect this configuration, a 100K pullup resistor must be connected between pin 52 and the supply line. To prevent false detection, TI recommends using pin 52 for output-only functions.

<sup>(6)</sup> Device firmware automatically enables the digital path during ROM boot.

<sup>(7)</sup> VDD\_FLASH must be shorted to V<sub>supply</sub>.

<sup>(8)</sup> For details on proper use, see the [Drive Strength and Reset States for Analog-Digital Multiplexed Pins](#) section of the CC3200 data sheet ([SWAS032](#)).

Table 16-7. Pin Multiplexing (continued)

| General Pin Attributes |            |           |                         |                          |                 | Function                           |                                |             |                                                            |                  | Pad States          |                    |            |
|------------------------|------------|-----------|-------------------------|--------------------------|-----------------|------------------------------------|--------------------------------|-------------|------------------------------------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias  | Use       | Select as Wakeup Source | Config Addl Analog Mux   | Muxed with JTAG | Dig. Pin Mux Config Reg            | Dig. Pin Mux Config Mode Value | Signal Name | Signal Description                                         | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 50                     | GPIO0      | I/O       | No                      | User config not required | No              | GPIO_PAD_CONFIG_0<br>(0x4402 E0A0) | 0                              | GPIO0       | General-Purpose I/O                                        | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |            |           |                         |                          |                 |                                    | 12                             | UART0_CTS   | UART0 Clear To Send Input (Active Low)                     | I                | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |            |           |                         |                          |                 |                                    | 6                              | McAXR1      | I2S Audio Port Data 1 (RX/TX)                              | I/O              | Hi-Z                |                    |            |
|                        |            |           |                         |                          |                 |                                    | 7                              | GT_CCP00    | Timer Capture Port                                         | I                | Hi-Z                |                    |            |
|                        |            |           |                         |                          |                 |                                    | 9                              | GSPI_CS     | General SPI Chip Select                                    | I/O              | Hi-Z                |                    |            |
|                        |            |           |                         |                          |                 |                                    | 10                             | UART1_RTS   | UART1 Request To Send O (Active Low)                       | O                | 1                   |                    |            |
|                        |            |           |                         |                          |                 |                                    | 3                              | UART0_RTS   | UART0 Request To Send O (Active Low)                       | O                | 1                   |                    |            |
|                        |            |           |                         |                          |                 |                                    | 4                              | McAXR0      | I2S Audio Port Data 0 (RX/TX)                              | I/O              | Hi-Z                |                    |            |
| 51                     | RTC_XTAL_P | RTC Clock | N/A                     | N/A                      | N/A             | N/A                                |                                | RTC_XTAL_P  | Connect 32.768-kHz XTAL or Force external CMOS level clock |                  |                     |                    |            |

**Table 16-7. Pin Multiplexing (continued)**

| General Pin Attributes |            |              |                                              |                                          |                 | Function                            |                                |             |                                                                      |                  | Pad States          |                    |            |
|------------------------|------------|--------------|----------------------------------------------|------------------------------------------|-----------------|-------------------------------------|--------------------------------|-------------|----------------------------------------------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias  | Use          | Select as Wakeup Source                      | Config Addl Analog Mux                   | Muxed with JTAG | Dig. Pin Mux Config Reg             | Dig. Pin Mux Config Mode Value | Signal Name | Signal Description                                                   | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 52 <sup>(9)</sup>      | RTC_XTAL_N | O Only       | User config not required <sup>(10)(11)</sup> | No                                       | No              | GPIO_PAD_CONFIG_32<br>(0x4402 E120) |                                | RTC_XTAL_N  | Connect 32.768-kHz XTAL or connect a 100-kΩ to V <sub>supply</sub> . |                  |                     | Hi-Z               | Hi-Z       |
|                        |            |              |                                              |                                          |                 |                                     | 0                              | GPIO32      | General-Purpose I/O                                                  | I/O              | Hi-Z                |                    |            |
|                        |            |              |                                              |                                          |                 |                                     | 2                              | McACLK      | I2S Audio Port Clock O                                               | O                | Hi-Z                |                    |            |
|                        |            |              |                                              |                                          |                 |                                     | 4                              | McAXR0      | I2S Audio Port Data (Only O Mode Supported On Pin 52)                | O                | Hi-Z                |                    |            |
|                        |            |              |                                              |                                          |                 |                                     | 6                              | UART0 RTS   | UART0 Request To Send O (Active Low)                                 | O                | 1                   |                    |            |
|                        |            |              |                                              |                                          |                 |                                     | 8                              | GSPI_MOSI   | General SPI MOSI                                                     | I/O              | Hi-Z                |                    |            |
| 53                     | GPIO30     | I/O          | No                                           | User config not required <sup>(10)</sup> | No              | GPIO_PAD_CONFIG_30<br>(0x4402 E118) | 0                              | GPIO30      | General-Purpose I/O                                                  | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |            |              |                                              |                                          |                 |                                     | 9                              | UART0 TX    | UART0 TX Data                                                        | O                | 1                   |                    |            |
|                        |            |              |                                              |                                          |                 |                                     | 2                              | McACLK      | I2S Audio Port Clock O                                               | O                | Hi-Z                |                    |            |
|                        |            |              |                                              |                                          |                 |                                     | 3                              | McAFSX      | I2S Audio Port Frame Sync                                            | O                | Hi-Z                |                    |            |
|                        |            |              |                                              |                                          |                 |                                     | 4                              | GT_CCP05    | Timer Capture Port                                                   | I                | Hi-Z                |                    |            |
|                        |            |              |                                              |                                          |                 |                                     | 7                              | GSPI_MISO   | General SPI MISO                                                     | I/O              | Hi-Z                |                    |            |
| 54                     | VIN_IO2    | Supply Input | N/A                                          | N/A                                      | N/A             | N/A                                 |                                | VIN_IO2     | Chip Supply Voltage (VBAT)                                           |                  |                     |                    |            |

<sup>(9)</sup> Pin 45 is used by an internal DC-DC (ANA2\_DCDC) and pin 52 is used by the RTC XTAL oscillator. These modules use automatic configuration sensing. Therefore, some board-level configuration is required to use pin 45 and pin 52 as digital pads (see [Figure 16-2](#)). Because the CC3200R device does not require ANA2\_DCDC, the pin can always be used for digital functions. However, pin 47 must be shorted to the supply input. Typically, pin 52 is used for RTC XTAL in most applications. However, in some applications, a 32.768-kHz square-wave clock might always be available onboard. In such cases, the XTAL can be removed to free up pin 52 for digital functions. The external clock must then be applied at pin 51. For the chip to automatically detect this configuration, a 100K pullup resistor must be connected between pin 52 and the supply line. To prevent false detection, TI recommends using pin 52 for output-only functions.

<sup>(10)</sup> Device firmware automatically enables the digital path during ROM boot.

<sup>(11)</sup> To use the digital functions, RTC\_XTAL\_N must be pulled high to V<sub>supply</sub> using a 100-kΩ resistor

Table 16-7. Pin Multiplexing (continued)

| General Pin Attributes |           |                                        |                         |                         |                 | Function                           |                                |               |                                         |                  | Pad States          |                    |            |
|------------------------|-----------|----------------------------------------|-------------------------|-------------------------|-----------------|------------------------------------|--------------------------------|---------------|-----------------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias | Use                                    | Select as Wakeup Source | Config Addl Analog Mux  | Muxed with JTAG | Dig. Pin Mux Config Reg            | Dig. Pin Mux Config Mode Value | Signal Name   | Signal Description                      | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 55                     | GPIO1     | I/O                                    | No                      | No                      | No              | GPIO_PAD_CONFIG_1<br>(0x4402 E0A4) | 0                              | GPIO1         | General-Purpose I/O                     | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |                                        |                         |                         |                 |                                    | 3                              | UART0_TX      | UART0 TX Data                           | O                | 1                   |                    |            |
|                        |           |                                        |                         |                         |                 |                                    | 4                              | pCLK (PIXCLK) | Pixel Clock From Parallel Camera Sensor | I                | Hi-Z                |                    |            |
|                        |           |                                        |                         |                         |                 |                                    | 6                              | UART1_TX      | UART1 TX Data                           | O                | 1                   |                    |            |
|                        |           |                                        |                         |                         |                 |                                    | 7                              | GT_CCP01      | Timer Capture Port                      | I                | Hi-Z                |                    |            |
| 56                     | VDD_DIG2  | Internal Power                         | N/A                     | N/A                     | N/A             | N/A                                |                                | VDD_DIG2      | Internal Digital Core Voltage           |                  |                     |                    |            |
| 57 <sup>(12)</sup>     | GPIO2     | Analog Input (up to 1.5 V)/Digital I/O | Wake-Up Source          | See <sup>(13)(14)</sup> | No              | GPIO_PAD_CONFIG_2<br>(0x4402 E0A8) | See <sup>(15)</sup>            | ADC_CH0       | ADC Channel 0 Input (1.5 V max)         | I                |                     |                    |            |
|                        |           |                                        |                         |                         |                 |                                    | 0                              | GPIO2         | General-Purpose I/O                     | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |                                        |                         |                         |                 |                                    | 3                              | UART0_RX      | UART0 RX Data                           | I                | Hi-Z                |                    |            |
|                        |           |                                        |                         |                         |                 |                                    | 6                              | UART1_RX      | UART1 RXt Data                          | I                | Hi-Z                |                    |            |
|                        |           |                                        |                         |                         |                 |                                    | 7                              | GT_CCP02      | Timer Capture Port                      | I                | Hi-Z                |                    |            |

<sup>(12)</sup> This pin is shared by the ADC inputs and digital I/O pad cells. Important: The ADC inputs are tolerant up to 1.8 V. On the other hand, the digital pads can tolerate up to 3.6 V. Hence, care must be taken to prevent accidental damage to the ADC inputs. TI recommends that the output buffers of the digital I/Os corresponding to the desired ADC channel be disabled first (that is, converted to high-impedance state), and thereafter the respective pass switches (S7, S8, S9, S10) should be enabled. See the *Drive Strength and Reset States for Analog-Digital Multiplexed Pins* section of the CC3200 data sheet ([SWAS032](#)).

<sup>(13)</sup> Pin 45 is used by an internal DC-DC (ANA2\_DCDC) and pin 52 is used by the RTC XTAL oscillator. These modules use automatic configuration sensing. Therefore, some board-level configuration is required to use pin 45 and pin 52 as digital pads (see [Figure 16-2](#)). Because the CC3200R device does not require ANA2\_DCDC, the pin can always be used for digital functions. However, pin 47 must be shorted to the supply input. Typically, pin 52 is used for RTC XTAL in most applications. However, in some applications, a 32.768-kHz square-wave clock might always be available onboard. In such cases, the XTAL can be removed to free up pin 52 for digital functions. The external clock must then be applied at pin 51. For the chip to automatically detect this configuration, a 100K pullup resistor must be connected between pin 52 and the supply line. To prevent false detection, TI recommends using pin 52 for output-only functions.

<sup>(14)</sup> Requires user configuration to enable the ADC channel analog switch. (The switch is off by default.) The digital I/O is always connected, and must be made Hi-Z before enabling the ADC switch.

<sup>(15)</sup> For details on proper use, see the *Drive Strength and Reset States for Analog-Digital Multiplexed Pins* section of the CC3200 data sheet ([SWAS032](#)).

**Table 16-7. Pin Multiplexing (continued)**

| General Pin Attributes |           |                                         |                         |                         |                 | Function                           |                                |                 |                                 |                  | Pad States          |                    |            |
|------------------------|-----------|-----------------------------------------|-------------------------|-------------------------|-----------------|------------------------------------|--------------------------------|-----------------|---------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias | Use                                     | Select as Wakeup Source | Config Addl Analog Mux  | Muxed with JTAG | Dig. Pin Mux Config Reg            | Dig. Pin Mux Config Mode Value | Signal Name     | Signal Description              | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 58 <sup>(16)</sup>     | GPIO3     | Analog Input (up to 1.5 V)/Digital I/O. | No                      | See <sup>(17)(18)</sup> | No              | GPIO_PAD_CONFIG_3<br>(0x4402 E0AC) | See <sup>(19)</sup>            | ADC_CH1         | ADC Channel 1 Input (1.5 V max) | I                |                     | Hi-Z               | Hi-Z       |
|                        |           |                                         |                         |                         |                 |                                    | 0                              | GPIO3           | General-Purpose I/O             | I/O              | Hi-Z                |                    |            |
|                        |           |                                         |                         |                         |                 |                                    | 6                              | UART1_TX        | UART1 TX Data                   | O                | 1                   |                    |            |
|                        |           |                                         |                         |                         |                 |                                    | 4                              | pDATA7 (CAM_D3) | Parallel Camera Data Bit 3      | I                | Hi-Z                |                    |            |
| 59 <sup>(16)</sup>     | GPIO4     | Analog Input (up to 1.5 V)/Digital I/O. | Wake-up Source          | See <sup>(17)(18)</sup> | No              | GPIO_PAD_CONFIG_4<br>(0x4402 E0B0) | See <sup>(19)</sup>            | ADC_CH2         | ADC Channel 2 Input (1.4 V max) | I                |                     | Hi-Z               | Hi-Z       |
|                        |           |                                         |                         |                         |                 |                                    | 0                              | GPIO4           | General-Purpose I/O             | I/O              | Hi-Z                |                    |            |
|                        |           |                                         |                         |                         |                 |                                    | 6                              | UART1_RX        | UART1 RX Data                   | I                | Hi-Z                |                    |            |
|                        |           |                                         |                         |                         |                 |                                    | 4                              | pDATA6 (CAM_D2) | Parallel Camera Data Bit 2      | I                | Hi-Z                |                    |            |
| 60 <sup>(16)</sup>     | GPIO5     | Analog Input (up to 1.5 V)/Digital I/O. | No                      | See <sup>(17)(18)</sup> | No              | GPIO_PAD_CONFIG_5<br>(0x4402 E0B4) | See <sup>(19)</sup>            | ADC_CH3         | ADC Channel 3 Input (1.4 V max) | I                |                     | Hi-Z               | Hi-Z       |
|                        |           |                                         |                         |                         |                 |                                    | 0                              | GPIO5           | General-Purpose I/O             | I/O              | Hi-Z                |                    |            |
|                        |           |                                         |                         |                         |                 |                                    | 4                              | pDATA5 (CAM_D1) | Parallel Camera Data Bit 1      | I                | Hi-Z                |                    |            |
|                        |           |                                         |                         |                         |                 |                                    | 6                              | McAXR1          | I2S Audio Port Data 1 (RX/TX)   | I/O              | Hi-Z                |                    |            |
|                        |           |                                         |                         |                         |                 |                                    | 7                              | GT_CCP05        | Timer Capture Port              | I                | Hi-Z                |                    |            |

<sup>(16)</sup> This pin is shared by the ADC inputs and digital I/O pad cells. Important: The ADC inputs are tolerant up to 1.8 V. On the other hand, the digital pads can tolerate up to 3.6 V. Hence, care must be taken to prevent accidental damage to the ADC inputs. TI recommends that the output buffers of the digital I/Os corresponding to the desired ADC channel be disabled first (that is, converted to high-impedance state), and thereafter the respective pass switches (S7, S8, S9, S10) should be enabled. See the *Drive Strength and Reset States for Analog-Digital Multiplexed Pins* section of the CC3200 data sheet ([SWAS032](#)).

<sup>(17)</sup> Pin 45 is used by an internal DC-DC (ANA2\_DCDC) and pin 52 is used by the RTC XTAL oscillator. These modules use automatic configuration sensing. Therefore, some board-level configuration is required to use pin 45 and pin 52 as digital pads (see [Figure 16-2](#)). Because the CC3200R device does not require ANA2\_DCDC, the pin can always be used for digital functions. However, pin 47 must be shorted to the supply input. Typically, pin 52 is used for RTC XTAL in most applications. However, in some applications, a 32.768-kHz square-wave clock might always be available onboard. In such cases, the XTAL can be removed to free up pin 52 for digital functions. The external clock must then be applied at pin 51. For the chip to automatically detect this configuration, a 100K pullup resistor must be connected between pin 52 and the supply line. To prevent false detection, TI recommends using pin 52 for output-only functions.

<sup>(18)</sup> Requires user configuration to enable the ADC channel analog switch. (The switch is off by default.) The digital I/O is always connected, and must be made Hi-Z before enabling the ADC switch.

<sup>(19)</sup> For details on proper use, see the *Drive Strength and Reset States for Analog-Digital Multiplexed Pins* section of the CC3200 data sheet ([SWAS032](#)).

Table 16-7. Pin Multiplexing (continued)

| General Pin Attributes |           |     |                         |                        |                 | Function                           |                                |                 |                                         |                  | Pad States          |                    |            |
|------------------------|-----------|-----|-------------------------|------------------------|-----------------|------------------------------------|--------------------------------|-----------------|-----------------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias | Use | Select as Wakeup Source | Config Addl Analog Mux | Muxed with JTAG | Dig. Pin Mux Config Reg            | Dig. Pin Mux Config Mode Value | Signal Name     | Signal Description                      | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 61                     | GPIO6     | No  | No                      | No                     | No              | GPIO_PAD_CONFIG_6<br>(0x4402 E0B8) | 0                              | GPIO6           | General-Purpose I/O                     | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                    | 5                              | UART0_RTS       | UART0 Request To Send O (Active Low)    | O                | 1                   |                    |            |
|                        |           |     |                         |                        |                 |                                    | 4                              | pDATA4 (CAM_D0) | Parallel Camera Data Bit 0              | I                | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                    | 3                              | UART1_CTS       | UART1 Clear To Send Input (Active Low)  | I                | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                    | 6                              | UART0_CTS       | UART0 Clear To Send Input (Active Low)  | I                | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                    | 7                              | GT_CCP06        | Timer Capture Port                      | I                | Hi-Z                |                    |            |
| 62                     | GPIO7     | I/O | No                      | No                     | No              | GPIO_PAD_CONFIG_7<br>(0x4402 E0BC) | 0                              | GPIO7           | General-Purpose I/O                     | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                    | 13                             | McACLKX         | I2S Audio Port Clock O                  | O                | Hi-Z                |                    |            |
|                        |           |     |                         |                        |                 |                                    | 3                              | UART1_RTS       | UART1 Request To Send O (Active Low)    | O                | 1                   |                    |            |
|                        |           |     |                         |                        |                 |                                    | 10                             | UART0_RTS       | UART0 Request To Send O (Active Low)    | O                | 1                   |                    |            |
|                        |           |     |                         |                        |                 |                                    | 11                             | UART0_TX        | UART0 TX Data                           | O                | 1                   |                    |            |
| 63                     | GPIO8     | I/O | No                      | No                     | No              | GPIO_PAD_CONFIG_8<br>(0x4402 E0C0) | 0                              | GPIO8           | General-Purpose I/O                     | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                    | 6                              | SDCARD_IRQ      | Interrupt from SD Card (Future support) | I                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                    | 7                              | McAFSX          | I2S Audio Port Frame Sync               | O                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                    | 12                             | GT_CCP06        | Timer Capture Port                      | I                |                     |                    |            |

**Table 16-7. Pin Multiplexing (continued)**

| General Pin Attributes |           |     |                         |                        |                 | Function                           |                                |              |                                   |                  | Pad States          |                    |            |
|------------------------|-----------|-----|-------------------------|------------------------|-----------------|------------------------------------|--------------------------------|--------------|-----------------------------------|------------------|---------------------|--------------------|------------|
| Pkg Pin                | Pin Alias | Use | Select as Wakeup Source | Config Addl Analog Mux | Muxed with JTAG | Dig. Pin Mux Config Reg            | Dig. Pin Mux Config Mode Value | Signal Name  | Signal Description                | Signal Direction | LPDS <sup>(1)</sup> | Hib <sup>(2)</sup> | nRESET = 0 |
| 64                     | GPIO9     | I/O | No                      | No                     | No              | GPIO_PAD_CONFIG_9<br>(0x4402 E0C4) | 0                              | GPIO9        | General-Purpose I/O               | I/O              | Hi-Z                | Hi-Z               | Hi-Z       |
|                        |           |     |                         |                        |                 |                                    | 3                              | GT_PWM05     | Pulse Width Modulated O/P         | O                |                     |                    |            |
|                        |           |     |                         |                        |                 |                                    | 6                              | SDCARD_DAT_A | SD Cad Data                       | I/O              |                     |                    |            |
|                        |           |     |                         |                        |                 |                                    | 7                              | McAXR0       | I2S Audio Port Data (Rx/Tx)       | I/O              |                     |                    |            |
|                        |           |     |                         |                        |                 |                                    | 12                             | GT_CCP00     | Timer Capture Port                | I                |                     |                    |            |
| 65                     | GND_TAB   |     |                         |                        |                 |                                    |                                |              | Thermal pad and electrical ground |                  |                     |                    |            |

## 16.8 Pin Mapping Recommendations

For certain high speed interfaces, TI recommends using the following pin groups.

Recommended pin groups for I2S:

**Table 16-8. Pin Groups for I2S**

| Audio Interface (I2S) |              |              |              |
|-----------------------|--------------|--------------|--------------|
| Signal                | Pin Group #1 | Pin Group #2 | Pin Group #3 |
| Data 0                | 45           | 64           | 52 (Tx Only) |
| Data 1                | 50           | 50           | 50           |
| Clock                 | 53           | 62           | 53           |
| Frame Sync            | 63           | 63           | 45           |

Recommended pin groups for SPI:

**Table 16-9. Pin Groups for SPI**

| SPI Interface (GSPI) |                        |                        |
|----------------------|------------------------|------------------------|
| Signal               | Supported Pin Group #1 | Supported Pin Group #2 |
| MOSI                 | 7                      | 52                     |
| MISO                 | 6                      | 53                     |
| CLK                  | 5                      | 45                     |
| CS                   | 8                      | 50                     |

Recommended pin groups for SD-Card I/F:

**Table 16-10. Pin Groups for SD-Card I/F**

| SD Card Master (1 bit Mode) Interface |              |              |
|---------------------------------------|--------------|--------------|
| Signal                                | Pin Group #1 | Pin Group #2 |
| CLK                                   | 1 (GPIO_10)  | 7 (GPIO_16)  |
| CMD                                   | 2 (GPIO_11)  | 8 (GPIO_17)  |
| DATA                                  | 64 (GPIO_09) | 6 (GPIO_15)  |
| IRQ (Future Support)                  | 63 (GPIO_8)  | 63 (GPIO_8)  |

### 16.8.1 Pad Configuration Registers for Application Pins

Table 16-11 lists the configuration registers associated with the device pins.

**Table 16-11. Pad Configuration Registers**

| Package Pin # | GPIO # <sup>(1)</sup> | Digital Pad Config Register | Physical Address |
|---------------|-----------------------|-----------------------------|------------------|
| 50            | GPIO0 / (ANA)         | GPIO_PAD_CONFIG_0           | 0x4402 E0A0      |
| 55            | GPIO1                 | GPIO_PAD_CONFIG_1           | 0x4402 E0A4      |
| 57            | GPIO2                 | GPIO_PAD_CONFIG_2           | 0x4402 E0A8      |
| 58            | GPIO3                 | GPIO_PAD_CONFIG_3           | 0x4402 E0AC      |
| 59            | GPIO4                 | GPIO_PAD_CONFIG_4           | 0x4402 E0B0      |
| 60            | GPIO5                 | GPIO_PAD_CONFIG_5           | 0x4402 E0B4      |
| 61            | GPIO6                 | GPIO_PAD_CONFIG_6           | 0x4402 E0B8      |
| 62            | GPIO7                 | GPIO_PAD_CONFIG_7           | 0x4402 E0BC      |
| 63            | GPIO8                 | GPIO_PAD_CONFIG_8           | 0x4402 E0C0      |
| 64            | GPIO9                 | GPIO_PAD_CONFIG_9           | 0x4402 E0C4      |
| 1             | GPIO10                | GPIO_PAD_CONFIG_10          | 0x4402 E0C8      |
| 2             | GPIO11                | GPIO_PAD_CONFIG_11          | 0x4402 E0CC      |
| 3             | GPIO12                | GPIO_PAD_CONFIG_12          | 0x4402 E0D0      |

<sup>(1)</sup> Pins are referred either by number or by the GPIO mapped to that pin. Functionalities available on a pin are not limited to that name. Refer to the pin-mux table for all possible functional mapping.

**Table 16-11. Pad Configuration Registers (continued)**

| Package Pin # | GPIO #( <sup>(1)</sup> )               | Digital Pad Config Register | Physical Address |
|---------------|----------------------------------------|-----------------------------|------------------|
| 4             | GPIO13                                 | GPIO_PAD_CONFIG_13          | 0x4402 E0D4      |
| 5             | GPIO14                                 | GPIO_PAD_CONFIG_14          | 0x4402 E0D8      |
| 6             | GPIO15                                 | GPIO_PAD_CONFIG_15          | 0x4402 E0DC      |
| 7             | GPIO16                                 | GPIO_PAD_CONFIG_16          | 0x4402 E0E0      |
| 8             | GPIO17                                 | GPIO_PAD_CONFIG_17          | 0x4402 E0E4      |
| 11            | GPIO18 (SPI_FLASH_CLK) <sup>(2)</sup>  | GPIO_PAD_CONFIG_18          | 0x4402 E0E8      |
| 12            | GPIO19 (SPI_FLASH_DOUT) <sup>(2)</sup> | GPIO_PAD_CONFIG_19          | 0x4402 E0EC      |
| 13            | GPIO20 (SPI_FLASH_DIN) <sup>(2)</sup>  | GPIO_PAD_CONFIG_20          | 0x4402 E0F0      |
| 14            | GPIO21 (SPI_FLASH_CS) <sup>(2)</sup>   | GPIO_PAD_CONFIG_21          | 0x4402 E0F4      |
| 15            | GPIO22                                 | GPIO_PAD_CONFIG_22          | 0x4402 E0F8      |
| 16            | GPIO23 (TDI)                           | GPIO_PAD_CONFIG_23          | 0x4402 E0FC      |
| 17            | GPIO24 (TDO)                           | GPIO_PAD_CONFIG_24          | 0x4402 E100      |
| 18            | GPIO28                                 | GPIO_PAD_CONFIG_40          | 0x4402 E140      |
| 19            | GPIO28 (TCK)                           | GPIO_PAD_CONFIG_28          | 0x4402 E110      |
| 21            | GPIO25 (SOP2)                          | GPIO_PAD_CONFIG_25          | 0x4402 E104      |
| 29            | GPIO26 (ANTSEL1)                       | GPIO_PAD_CONFIG_26          | 0x4402 E108      |
| 30            | GPIO27 (ANTSEL2)                       | GPIO_PAD_CONFIG_27          | 0x4402 E10C      |
| 20            | GPIO29 (TMS)                           | GPIO_PAD_CONFIG_29          | 0x4402 E114      |
| 53            | GPIO30 (ANA)                           | GPIO_PAD_CONFIG_30          | 0x4402 E118      |
| 45            | GPIO31 (DCDC_ANA2_SW_P)                | GPIO_PAD_CONFIG_31          | 0x4402 E11C      |
| 52            | GPIO32 (RTC_XTAL_N)                    | GPIO_PAD_CONFIG_32          | 0x4402 E120      |

<sup>(2)</sup> These four pins are dedicated for the external SPI serial flash. These cannot be used or shared in any way for other functions.

### 16.8.1.1 Pad Mux and Electrical Configuration Register Bit Definitions

#### 16.8.1.1.1 GPIO\_PAD\_CONFIG\_0 to GPIO\_PAD\_CONFIG\_32

**Table 16-12. GPIO\_PAD\_CONFIG\_0 to GPIO\_PAD\_CONFIG\_32 Register Description**

| Bit   | Field    | Type | Reset | Description |
|-------|----------|------|-------|-------------|
| 31-12 | Reserved | R    | 0     |             |

**Table 16-12. GPIO\_PAD\_CONFIG\_0 to GPIO\_PAD\_CONFIG\_32 Register Description (continued)**

| Bit  | Field               | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|------|---------------------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 11-0 | MEM_GPIO_PAD_CONFIG | RW   | 0xC61 | [3:0] CONFMODE.<br>Determines which functional signal is routed to the pad. Refer to the pin mux table.<br>[4] Enable open-drain mode (for example, when used as I2C).<br>[7:5] DRIVESTRENGTH<br>111 = 14 mA<br>110 = 12 mA<br>101 = 10 mA<br>100 = 8 mA<br>011 = 6 mA<br>010 = 4 mA<br>001 = 2 mA<br>000 = Output driver not enabled<br>[8] Enable internal weak pullup<br>[9] Enable internal weak pulldown<br>[10] Pad output enable override value. Level enables the pad output buffer. Otherwise, the output buffer is tristated. This does not affect the internal pullup or pulldown, which are controlled independently by bit 8 and bit 9.<br>[11] This enables over-riding of the pad output buffer enable. When this bit is set to logic 1, the value in bit 4 controls the state of the pad output buffer. When this bit is set to logic 0, the state of the pad output buffer is directly controlled by the peripheral module to which the pad is functionally muxed. |


### 16.8.2 PAD Behavior During Reset and Hibernate

By default, all digital pads are Hi-Z during forced reset ( $nRESET=0$ ) and hibernate. This includes the serial-flash and JTAG pins.

On exit from chip reset or hibernate, the SPI-Flash pads and JTAG pads are configured automatically by the resident ROM firmware during device initialization. The ROM bootloader then reads the application image from the external SPI flash, loads it into SRAM, and makes a jump. At this point all other digital I/Os are in the reset default state (which is Hi-Z). The application code must configure the I/Os. The application code must also configure any associated analog muxes for pins that are shared by both digital and analog or PM functions.

### 16.8.3 Control Architecture

The I/O pad data and control path architecture in the CC3200 is shown in [Figure 16-3](#).

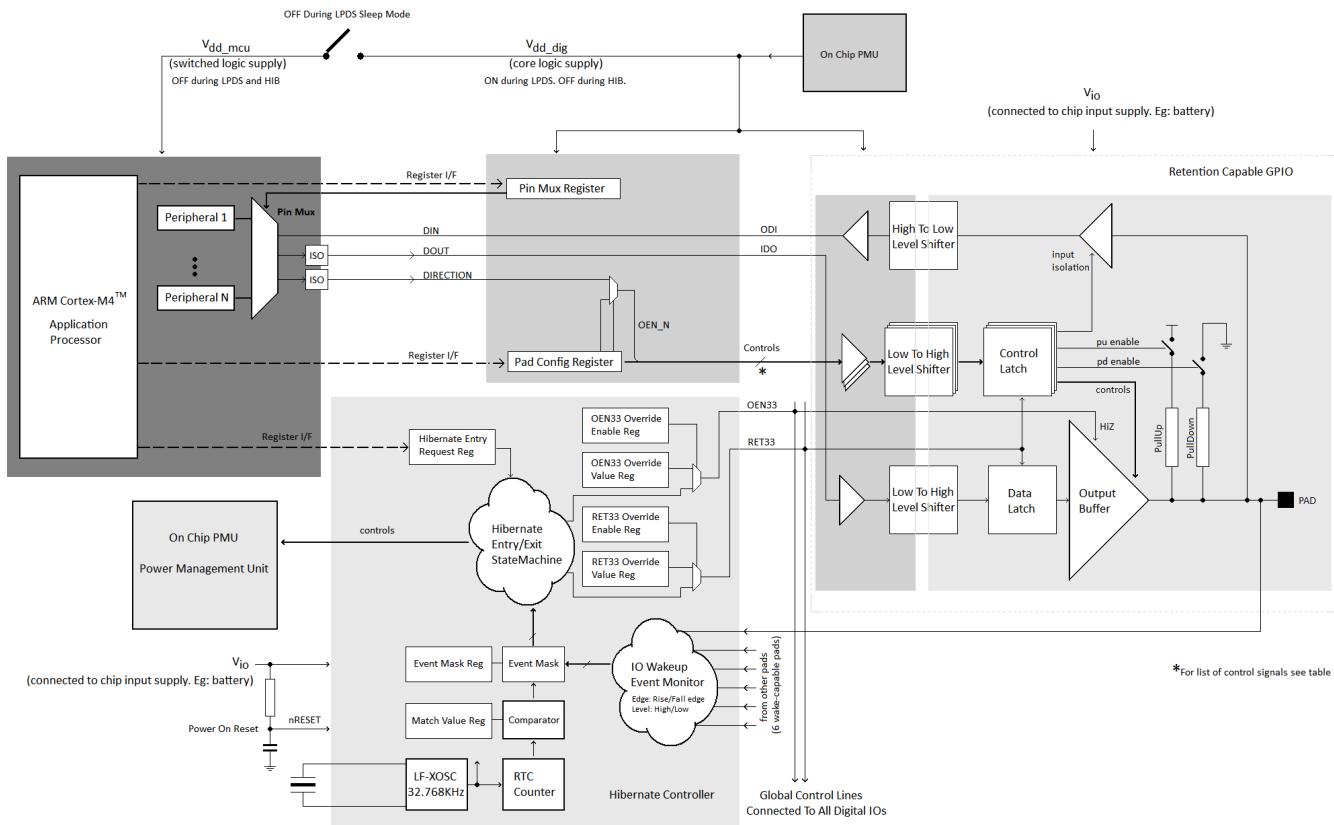**Figure 16-3. I/O Pad Data and Control Path Architecture in CC3200**


#### 16.8.4 CC3200 Pin-mux Examples

Table 16-13 shows recommended pin-out for several application classes.

Table 16-13. Recommended Pin Multiplexing Configurations

| CC3200 Recommended Pinout Grouping Use – Examples <sup>(1)</sup> |                                                                                                             |                                                                                                                                          |                                                                                                                      |                                                                                                                                |                                                                                                                           |                                                                                                           |                                                                                                                        |                                                                                                                                                     |                                                                                       |                                                                                 |                     |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|---------------------|
|                                                                  | Home Security High-end Toys                                                                                 | Wifi Audio ++ Industrial                                                                                                                 | Sensor-Tag                                                                                                           | Home Security Toys                                                                                                             | Wifi Audio ++ Industrial                                                                                                  | WiFi Remote w/ 7x7 keypad and audio                                                                       | Sensor Door-Lock Fire-Alarm Toys w/o Cam                                                                               | Industrial Home Appliances                                                                                                                          | Industrial Home Appliances Smart-Plug                                                 | Industrial Home Appliances                                                      | GPIOs               |
|                                                                  | External 32 kHz <sup>(2)</sup>                                                                              | External 32 kHz <sup>(2)</sup>                                                                                                           |                                                                                                                      |                                                                                                                                |                                                                                                                           |                                                                                                           |                                                                                                                        |                                                                                                                                                     |                                                                                       | External TCXO 40 MHZ (-40 to +85°C)                                             |                     |
|                                                                  | Cam + I2S (Tx or Rx) + I2C + SPI + SWD + UART-Tx + (App Logger) 2 GPIO + 1PWM + *4 overlaid wakeup from Hib | I2S (Tx and Rx) + 1 Ch ADC + 1x 4wire UART + 1x 2wire UART + 1bit SD Card + SPI + I2C + SWD + 3 GPIO + 1 PWM + 1 GPIO with Wake-From-Hib | I2S (Tx and Rx) + 2 Ch ADC + 2wire UART + SPI + I2C + SWD + (App Logger) 4 GPIO + 1PWM + *4 overlaid wakeup from HIB | Cam + I2S (Tx and Rx) + 1 Ch ADC + 2x 2wire UART + 1bit SD Card + SPI + I2C + SWD + 4 GPIO + 1 PWM + 1 GPIO with Wake-From-Hib | I2S (Tx and Rx) + 1 Ch ADC + 2x 2wire UART + 1bit SD Card + SPI + I2C + SWD + 15 GPIO + 1 PWM + 1 GPIO with Wake-From-Hib | I2S (Tx or Rx) + 2 Ch ADC + 2 wire UART (Tx Only) I2C + SWD + 15 GPIO + 1 PWM + 1 GPIO with Wake-From-Hib | I2S (Tx or Rx) + 2 Ch ADC + 2 wire UART + 1x 2wire UART + SPI + I2C + 3 PMW + 3 GPIO with Wake-From-Hib + 5 GPIO SWD + | 4 Ch ADC + 1x 4wire UART + 1x 2wire UART + SPI + I2C + SWD + 3 PMW + 9 GPIO + 2 PWM + 6 GPIO + 1 GPIO with Wake-From-Hib Enable for Ext 40 MHz TCXO | 3 Ch ADC + 2wire UART + SPI + I2C + SWD + 3 PWM + 11 GPIO + 5 GPIO with Wake-From-Hib | 2 Ch ADC + 2wire UART + I2C + SWD + 3 PWM + 11 GPIO + 5 GPIO with Wake-From-Hib |                     |
| Pin Number                                                       | Pinout #11                                                                                                  | Pinout #10                                                                                                                               | Pinout #9                                                                                                            | Pinout #8                                                                                                                      | Pinout #7                                                                                                                 | Pinout #6                                                                                                 | Pinout #5                                                                                                              | Pinout #4                                                                                                                                           | Pinout #3                                                                             | Pinout #2                                                                       | Pinout #1           |
| 52                                                               | GSPI-MOSI                                                                                                   | McASP-D0 (Tx)                                                                                                                            |                                                                                                                      |                                                                                                                                |                                                                                                                           |                                                                                                           |                                                                                                                        |                                                                                                                                                     |                                                                                       |                                                                                 | GPIO_32 output only |
| 53                                                               | GSPI-MISO                                                                                                   | MCASP-ACLKX                                                                                                                              | MCASP-ACLKX                                                                                                          | GPIO_30                                                                                                                        | GPIO_30                                                                                                                   | GPIO_30                                                                                                   | GPIO_30                                                                                                                | UART0-TX                                                                                                                                            | GPIO_30                                                                               | UART0-TX                                                                        | GPIO_30             |
| 45                                                               | GSPI-CLK                                                                                                    | McASP-AFSX                                                                                                                               | McASP-D0                                                                                                             | GPIO_31                                                                                                                        | McASP-AFSX                                                                                                                | McASP-AFSX                                                                                                | McASP-AFSX                                                                                                             | UART0-RX                                                                                                                                            | GPIO_31                                                                               | UART0-RX                                                                        | GPIO_31             |
| 50                                                               | GSPI-CS                                                                                                     | McASP-D1 (Rx)                                                                                                                            | McASP-D1                                                                                                             | McASP-D1                                                                                                                       | McASP-D1                                                                                                                  | McASP-D1                                                                                                  | McASP-D1                                                                                                               | UART0-CTS                                                                                                                                           | GPIO_0                                                                                | GPIO_0                                                                          | GPIO_0              |
| 55                                                               | pCLK (PIXCLK)                                                                                               | UART0-TX                                                                                                                                 | UART0-TX                                                                                                             | PIXCLK                                                                                                                         | UART0-TX                                                                                                                  | UART0-TX                                                                                                  | UART0-TX                                                                                                               | GPIO-1                                                                                                                                              | UART0-TX                                                                              | GPIO_1                                                                          | GPIO_1              |
| 57                                                               | (wake) GPIO2                                                                                                | UART0-RX                                                                                                                                 | UART0-RX                                                                                                             | (wake) GPIO2                                                                                                                   | UART0-RX                                                                                                                  | GPIO_2                                                                                                    | UART0-RX                                                                                                               | ADC-0                                                                                                                                               | UART0-RX                                                                              | (wake) GPIO_2                                                                   | (wake) GPIO_2       |
| 58                                                               | pDATA7 (D3)                                                                                                 | UART1-TX                                                                                                                                 | ADC-CH1                                                                                                              | pDATA7 (D3)                                                                                                                    | UART1-TX                                                                                                                  | GPIO_3                                                                                                    | ADC-1                                                                                                                  | ADC-1                                                                                                                                               | ADC-1                                                                                 | ADC-1                                                                           | GPIO_3              |
| 59                                                               | pDATA6 (D2)                                                                                                 | UART1-RX                                                                                                                                 | (wake) GPIO_4                                                                                                        | pDATA6 (D2)                                                                                                                    | UART1-RX                                                                                                                  | GPIO_4                                                                                                    | (wake) GPIO_4                                                                                                          | ADC-2                                                                                                                                               | ADC-2                                                                                 | (wake) GPIO_4                                                                   | (wake) GPIO_4       |
| 60                                                               | pDATA5 (D1)                                                                                                 | ADC-3                                                                                                                                    | ADC-3                                                                                                                | pDATA5 (D1)                                                                                                                    | ADC-3                                                                                                                     | ADC-3                                                                                                     | ADC-3                                                                                                                  | ADC-3                                                                                                                                               | ADC-3                                                                                 | ADC-3                                                                           | GPIO_5              |
| 61                                                               | pDATA4 (D0)                                                                                                 | UART1-CTS                                                                                                                                | GPIO_6                                                                                                               | pDATA4 (D0)                                                                                                                    | GPIO_6                                                                                                                    | GPIO_6                                                                                                    | GPIO_6                                                                                                                 | UART0-RTS                                                                                                                                           | GPIO_6                                                                                | GPIO_6                                                                          | GPIO_6              |

<sup>(1)</sup> Pins marked "wake" can be configured to wake up the chip from hibernate or LPDS state. In the current silicon revision, any wake pin can trigger wake up from hibernate. The wake-up monitor in the hibernate control module logically ORs these pins applying a selection mask. However, wakeup from LPDS state can be triggered only by one of the wake-up pins that can be configured before entering LPDS. The core digital wake-up monitor uses a mux to select one of these pins to monitor.

<sup>(2)</sup> The device supports the feeding of an external 32.768-kHz clock. This configuration frees one pin (32K\_XTAL\_N) to use in output-only mode with a 100K pullup.


**Table 16-13. Recommended Pin Multiplexing Configurations (continued)**

| CC3200 Recommended Pinout Grouping Use – Examples <sup>(1)</sup> |                      |                |                |                      |                |                |                |                |                |                |                  |                |
|------------------------------------------------------------------|----------------------|----------------|----------------|----------------------|----------------|----------------|----------------|----------------|----------------|----------------|------------------|----------------|
| 62                                                               | McASP-ACLKX          | UART1-RTS      | GPIO_7         | McASP-ACLKX          | McASP-ACLKX    | McASP-ACLKX    | McASP-ACLKX    | GPIO_7         | GPIO_7         | GPIO_7         | GPIO_7           | GPIO_7         |
| 63                                                               | McASP-AFSX           | SDCARD-IRQ     | McASP-AFSX     | McASP-AFSX           | SDCARD-IRQ     | GPIO_8         | GPIO_8         | GPIO_8         | GPIO_8         | GPIO_8         | GPIO_8           | GPIO_8         |
| 64                                                               | McASP-D0             | SDCARD-DATA    | GT_PWM5        | McASP-D0             | SDCARD-DATA    | GPIO_9         | GT_PWM5        | GT_PWM5        | GT_PWM5        | GT_PWM5        | GT_PWM5          | GPIO_9         |
| 1                                                                | UART1-TX             | SDCARD-CLK     | GPIO_10        | UART1-TX             | SDCARD-CLK     | GPIO_10        | GT_PWM6        | UART1-TX       | GT_PWM6        | GPIO_10        | GPIO_10          | GPIO_10        |
| 2                                                                | (wake) pXCLK (XVCLK) | SDCARD-CMD     | (wake) GPIO_11 | (wake) pXCLK (XVCLK) | SDCARD-CMD     | GPIO_11        | (wake) GPIO_11 | UART1-RX       | (wake) GPIO_11 | (wake) GPIO_11 | (wake) GPIO_11   | (wake) GPIO_11 |
| 3                                                                | pVS (VSYNC)          | I2C-SCL        | I2C-SCL        | pVS (VSYNC)          | I2C-SCL        | GPIO_12        | I2C-SCL        | I2C-SCL        | GPIO_12        | GPIO_12        | GPIO_12          | GPIO_12        |
| 4                                                                | (wake) pHS (HSYNC)   | I2C-SDA        | I2C-SDA        | (wake) pHS (Hsync)   | I2C-SDA        | GPIO_13        | I2C-SDA        | I2C-SDA        | (wake) GPIO_13 | (wake) GPIO_13 | (wake) GPIO_13   | (wake) GPIO_13 |
| 5                                                                | pDATA8 (D4)          | GSPI-CLK       | GSPI-CLK       | pDATA8 (D4)          | GSPI-CLK       | I2C-SCL        | GSPI-CLK       | GSPI-CLK       | GSPI-CLK       | I2C-SCL        | GPIO_14          | GPIO_14        |
| 6                                                                | pDATA9 (D5)          | GSPI-MISO      | GSPI-MISO      | pDATA9 (D5)          | GSPI-MISO      | I2C-SDA        | GSPI-MISO      | GSPI-MISO      | GSPI-MISO      | I2C-SDA        | GPIO_15          | GPIO_15        |
| 7                                                                | pDATA10 (D6)         | GSPI-MOSI      | GSPI-MOSI      | pDATA10 (D6)         | GSPI-MOSI      | GPIO_16        | GSPI-MOSI      | GSPI-MOSI      | GSPI-MOSI      | GPIO_16        | GPIO_16          | GPIO_16        |
| 8                                                                | (wake) pDATA11 (D7)  | GSPI-CS        | GSPI-CS        | (wake) pDATA11 (D7)  | GSPI-CS        | GPIO_17        | GSPI-CS        | GSPI-CS        | (wake) GPIO_17 | (wake) GPIO_17 | (wake) GPIO_17   | (wake) GPIO_17 |
| 11                                                               | SPI-FLASH_CLK        | SPI-FLASH_CLK  | SPI-FLASH_CLK  | SPI-FLASH_CLK        | SPI-FLASH_CLK  | SPI-FLASH_CLK  | SPI-FLASH_CLK  | SPI-FLASH_CLK  | SPI-FLASH_CLK  | SPI-FLASH_CLK  | SPI-FLASH_CLK    | SPI-FLASH_CLK  |
| 12                                                               | SPI-FLASH-DOUT       | SPI-FLASH-DOUT | SPI-FLASH-DOUT | SPI-FLASH-DOUT       | SPI-FLASH-DOUT | SPI-FLASH-DOUT | SPI-FLASH-DOUT | SPI-FLASH-DOUT | SPI-FLASH-DOUT | SPI-FLASH-DOUT | SPI-FLASH-DOUT   | SPI-FLASH-DOUT |
| 13                                                               | SPI-FLASH-DIN        | SPI-FLASH-DIN  | SPI-FLASH-DIN  | SPI-FLASH-DIN        | SPI-FLASH-DIN  | SPI-FLASH-DIN  | SPI-FLASH-DIN  | SPI-FLASH-DIN  | SPI-FLASH-DIN  | SPI-FLASH-DIN  | SPI-FLASH-DIN    | SPI-FLASH-DIN  |
| 14                                                               | SPI-FLASH-CS         | SPI-FLASH-CS   | SPI-FLASH-CS   | SPI-FLASH-CS         | SPI-FLASH-CS   | SPI-FLASH-CS   | SPI-FLASH-CS   | SPI-FLASH-CS   | SPI-FLASH-CS   | SPI-FLASH-CS   | SPI-FLASH-CS     | SPI-FLASH-CS   |
| 15                                                               | GPIO_22              | GPIO_22        | GPIO_22        | GPIO_22              | GPIO_22        | GPIO_22        | GPIO_22        | GPIO_22        | GPIO_22        | GPIO_22        | GPIO_22          | GPIO_22        |
| 16                                                               | I2C-SCL              | GPIO_23        | GPIO_23        | I2C-SCL              | GPIO_23          | GPIO_23        |
| 17                                                               | I2C-SDA              | (wake) GPIO_24 | (wake) GPIO_24 | I2C-SDA              | (wake) GPIO_24 | GT-PWM0        | (wake) GPIO_24   | (wake) GPIO_24 |
| 19                                                               | SWD-TCK              | SWD-TCK        | SWD-TCK        | SWD-TCK              | SWD-TCK        | SWD-TCK        | SWD-TCK        | SWD-TCK        | SWD-TCK        | SWD-TCK        | SWD-TCK          | SWD-TCK        |
| 20                                                               | SWD-TMS              | SWD-TMS        | SWD-TMS        | SWD-TMS              | SWD-TMS        | SWD-TMS        | SWD-TMS        | SWD-TMS        | SWD-TMS        | SWD-TMS        | SWD-TMS          | SWD-TMS        |
| 18                                                               | GPIO_28              | GPIO_28        | GPIO_28        | GPIO_28              | GPIO_28        | GPIO_28        | GPIO_28        | GPIO_28        | GPIO_28        | GPIO_28        | GPIO_28          | GPIO_28        |
| 21                                                               | GT_PWM2              | GT_PWM2        | GT_PWM2        | GT_PWM2              | GT_PWM2        | GT_PWM2        | GT_PWM2        | TCXO_EN        | GT_PWM2        | GT_PWM2        | GPIO_25 out only |                |

### 16.8.5 Wake on Pad

The CC3200 supports wake from hibernate and LPDS on pad events for up to six pins. The implementation for hibernate is shown in Figure 16-4.

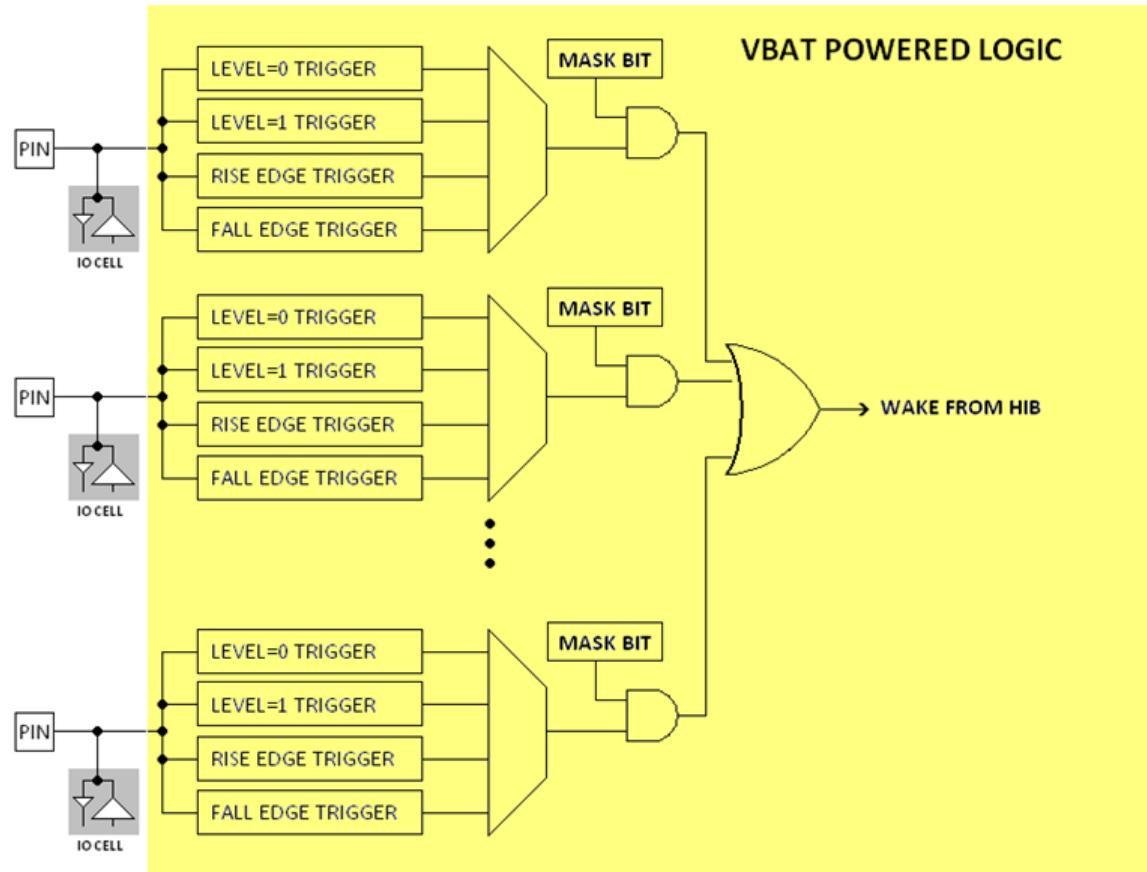**Figure 16-4. Wake on Pad for Hibernate Mode**



Similar capability is available in LPDS mode as well. However, in case of LPDS, only one pin at a time can be selected as the wake-up source. Wake-up sources are covered in detail in .

### 16.8.6 Sense on Power

The CC3200 implements a sense on power scheme. By using a few board level pull resistors, the CC3200 can be configured by the user to power up in one of the three following modes:

1. Fn4WJ: Functional mode with 4-wire JTAG mapped to fixed pins
2. Fn2WJ: Functional mode with 2-wire SWD mapped to fixed pins
3. LDfrUART : UART load mode for flashing the system during development and in OEM assembly line (for example: serial flash connected to CC3200R)

Sense-on-power (SoP) values are sensed from the device pin during power up. This encoding determines the boot flow, as well as the default mapping for some of the pins (JTAG, SWD, UART0). Three SoP pins are used for this purpose. Before the device is taken out of reset, the SoP values are made available on a register and determine the device character while powering up. [Table 16-14](#) shows the pull configurations.

**Table 16-14. Sense-on-Power Configurations**

| <b>SoP Mode</b> | <b>SoP[2]</b> | <b>SoP[1]</b> | <b>SoP[0]</b> | <b>Name</b>            | <b>Comment</b>                                                                                                                                    |
|-----------------|---------------|---------------|---------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| LDfrUART        | Pullup        | Pulldown      | Pulldown      | UARTLOAD (4-wire JTAG) | Factory/Lab Flash/SRAM load through UART                                                                                                          |
| Fn2WJ           | Pulldown      | Pulldown      | Pullup        | FUNCTIONAL_2WJ         | Functional development mode. In this mode, two-pin JTAG is available to the developer. TMS and TCK are available for debugger connection.         |
| Fn4WJ           | Pulldown      | Pulldown      | Pulldown      | FUNCTIONAL_4WJ         | Functional development mode. In this mode, four pin JTAG is available to developer. TDI, TMS, TCK, and TDO are available for debugger connection. |

The recommended value of a pull resistor for SOP0, SOP1 is 100 KΩ. The recommended value of a pull resistor for SOP2 is 10 KΩ.

SOP2 may be used by the application after chip power up is complete. To avoid spurious SOP values being sensed at power up, TI recommends that the SOP2 pin should be used only for output signals. SOP0 and SOP1, on the other hand, are multiplexed with WLAN analog test pins, and not available for application.

## **Software Development Kit Examples**

---



---



---

The CC3200 SDK kit contains several examples of sample code for most of the peripherals covered in this document. [Table A-1](#) provides links to examples for each of the peripherals. Also refer to the [CC3200 SDK Sample Applications](#) wiki page.

**Table A-1. Peripheral Samples**

| Peripheral                | Chapter    | Sample Examples with URLs                                                            |
|---------------------------|------------|--------------------------------------------------------------------------------------|
| DMA                       | Chapter 4  | 1. <a href="#">uDMA Application</a><br>2. <a href="#">UART DMA Application</a>       |
| GPIO                      | Chapter 5  | 1. <a href="#">Blinky Application</a><br>2. <a href="#">Timer Demo Application</a>   |
| UART                      | Chapter 6  | 1. <a href="#">UART Demo Application</a><br>2. <a href="#">UART DMA Application</a>  |
| I2C                       | Chapter 7  | 1. <a href="#">I2C Application</a>                                                   |
| SPI                       | Chapter 8  | 1. <a href="#">SPI Reference Application</a>                                         |
| GPT                       | Chapter 9  | 1. <a href="#">PWM Application</a>                                                   |
| WDT                       | Chapter 10 | 1. <a href="#">Watchdog Demo Application</a>                                         |
| SD Host                   | Chapter 11 | 1. <a href="#">SDHost Application</a><br>2. <a href="#">SDHost FatFS Application</a> |
| I2S                       | Chapter 12 | 1. <a href="#">Wi-Fi Audio Application</a>                                           |
| ADC                       | Chapter 13 | 1. <a href="#">ADC Reference</a>                                                     |
| Parallel camera interface | Chapter 14 | 1. <a href="#">Camera Application</a>                                                |

## CC3200 Miscellaneous Registers

This chapter lists miscellaneous registers which do not belong to any one module, but hold information corresponding to multiple modules and peripherals.

### B.1 Miscellaneous Register Summary

[Table B-1](#) lists the memory-mapped registers for the REGISTER\_SUMMARY. All register offset addresses not listed in [Table B-1](#) should be considered as reserved locations and the register contents should not be modified.

**Table B-1. Miscellaneous Register Summary**

| Offset | Acronym    | Register Name       | Section                       |
|--------|------------|---------------------|-------------------------------|
| 8Ch    | DMA_IMR    | DMA_IMR Register    | <a href="#">Section B.1.1</a> |
| 90h    | DMA_IMS    | DMA_IMS Register    | <a href="#">Section B.1.2</a> |
| 94h    | DMA_IMC    | DMA_IMC Register    | <a href="#">Section B.1.3</a> |
| 9Ch    | DMA_ICR    | DMA_ICR Register    | <a href="#">Section B.1.4</a> |
| A0h    | DMA_MIS    | DMA_MIS Register    | <a href="#">Section B.1.5</a> |
| A4h    | DMA_RIS    | DMA_RIS Register    | <a href="#">Section B.1.6</a> |
| B0h    | GPTTRIGSEL | GPTTRIGSEL Register | <a href="#">Section B.1.7</a> |

### B.1.1 DMA\_IMR Register (offset = 8Ch) [reset = FF0Fh]

Register mask: FF0Fh

DMA\_IMR is shown in [Figure B-1](#) and described in [Table B-2](#).

**Figure B-1. DMA\_IMR Register**

|          |    |    |    |         |         |         |         |
|----------|----|----|----|---------|---------|---------|---------|
| 31       | 30 | 29 | 28 | 27      | 26      | 25      | 24      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 23       | 22 | 21 | 20 | 19      | 18      | 17      | 16      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 15       | 14 | 13 | 12 | 11      | 10      | 9       | 8       |
| ADCWR    |    |    |    | MCASPWR | MCASPRD | CAMEMPT | CAMFULL |
| R/W-Fh   |    |    |    | R/W-1h  | R/W-1h  | R/W-1h  | R/W-1h  |
| 7        | 6  | 5  | 4  | 3       | 2       | 1       | 0       |
| RESERVED |    |    |    | APSPIWR | APSPIRD | SDIOMWR | SDIOMRD |
| R-X      |    |    |    | R/W-1h  | R/W-1h  | R/W-1h  | R/W-1h  |

**Table B-2. DMA\_IMR Register Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                                        |
|-------|----------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-16 | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                                    |
| 15-12 | ADCWR    | R/W  | Fh    | ADC_WR_DMA_DONE_INT_MASK<br>bit 15: ADC channel 6 interrupt enable/disable<br>bit 14: ADC channel 4 interrupt enable/disable<br>bit 13: ADC channel 2 interrupt enable/disable<br>bit 12: ADC channel 0 interrupt enable/disable<br>0h = interrupt enabled<br>1h = disable corresponding interrupt |
| 11    | MCASPWR  | R/W  | 1h    | MCASP_WR_DMA_DONE_INT_MASK<br>0h = interrupt enabled<br>1h = disable corresponding interrupt                                                                                                                                                                                                       |
| 10    | MCASPRD  | R/W  | 1h    | MCASP_RD_DMA_DONE_INT_MASK<br>0h = interrupt enabled<br>1h = disable corresponding interrupt                                                                                                                                                                                                       |
| 9     | CAMEMPT  | R/W  | 1h    | CAM_FIFO_EMPTY_DMA_DONE_INT_MASK<br>0h = interrupt enabled<br>1h = disable corresponding interrupt                                                                                                                                                                                                 |
| 8     | CAMFULL  | R/W  | 1h    | CAM_THRESHHOLD_DMA_DONE_INT_MASK<br>0h = interrupt enabled<br>1h = disable corresponding interrupt                                                                                                                                                                                                 |
| 7-4   | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                                    |
| 3     | APSPIWR  | R/W  | 1h    | APPS_SPI_WR_DMA_DONE_INT_MASK<br>0h = interrupt enabled<br>1h = disable corresponding interrupt                                                                                                                                                                                                    |
| 2     | APSPIRD  | R/W  | 1h    | APPS_SPI_RD_DMA_DONE_INT_MASK<br>0h = interrupt enabled<br>1h = disable corresponding interrupt                                                                                                                                                                                                    |
| 1     | SDIOMWR  | R/W  | 1h    | SDIOM_WR_DMA_DONE_INT_MASK<br>0h = interrupt enabled<br>1h = disable corresponding interrupt                                                                                                                                                                                                       |

**Table B-2. DMA\_IMR Register Field Descriptions (continued)**

| Bit | Field   | Type | Reset | Description                                                                                  |
|-----|---------|------|-------|----------------------------------------------------------------------------------------------|
| 0   | SDIOMRD | R/W  | 1h    | SDIOM_RD_DMA_DONE_INT_MASK<br>0h = interrupt enabled<br>1h = disable corresponding interrupt |

### B.1.2 DMA\_IMS Register (offset = 90h) [reset = 0h]

Register mask: FF0Fh

DMA\_IMS is shown in [Figure B-2](#) and described in [Table B-3](#).

**Figure B-2. DMA\_IMS Register**

|          |    |    |    |         |         |         |         |
|----------|----|----|----|---------|---------|---------|---------|
| 31       | 30 | 29 | 28 | 27      | 26      | 25      | 24      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 23       | 22 | 21 | 20 | 19      | 18      | 17      | 16      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 15       | 14 | 13 | 12 | 11      | 10      | 9       | 8       |
| ADCWR    |    |    |    | MCASPWR | MCASPRD | CAMEMPT | CAMFULL |
| R/W-0h   |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |
| 7        | 6  | 5  | 4  | 3       | 2       | 1       | 0       |
| RESERVED |    |    |    | APSPIWR | APSPIRD | SDIOMWR | SDIOMRD |
| R-X      |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |

**Table B-3. DMA\_IMS Register Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                                                               |
|-------|----------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-16 | RESERVED | R    | X     |                                                                                                                                                                                                                                                           |
| 15-12 | ADCWR    | R/W  | 0h    | ADC_WR_DMA_DONE_INT_MASK_SET<br>bit 15: ADC channel 6 DMA Done IRQ<br>bit 14: ADC channel 4 DMA Done IRQ<br>bit 13: ADC channel 2 DMA Done IRQ<br>bit 12: ADC channel 0 DMA Done IRQ<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ |
| 11    | MCASPWR  | R/W  | 0h    | MCASP_WR_DMA_DONE_INT_MASK_SET<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ                                                                                                                                                       |
| 10    | MCASPRD  | R/W  | 0h    | MCASP_RD_DMA_DONE_INT_MASK_SET<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ                                                                                                                                                       |
| 9     | CAMEMPT  | R/W  | 0h    | CAM_FIFO_EMPTY_DMA_DONE_INT_MASK_SET<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ                                                                                                                                                 |
| 8     | CAMFULL  | R/W  | 0h    | CAM_THRESHHOLD_DMA_DONE_INT_MASK_SET<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ                                                                                                                                                 |
| 7-4   | RESERVED | R    | X     |                                                                                                                                                                                                                                                           |
| 3     | APSPIWR  | R/W  | 0h    | APPS_SPI_WR_DMA_DONE_INT_MASK_SET<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ                                                                                                                                                    |
| 2     | APSPIRD  | R/W  | 0h    | APPS_SPI_RD_DMA_DONE_INT_MASK_SET<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ                                                                                                                                                    |
| 1     | SDIOMWR  | R/W  | 0h    | SDIOM_WR_DMA_DONE_INT_MASK_SET<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ                                                                                                                                                       |

**Table B-3. DMA\_IMS Register Field Descriptions (continued)**

| Bit | Field   | Type | Reset | Description                                                                                         |
|-----|---------|------|-------|-----------------------------------------------------------------------------------------------------|
| 0   | SDIOMRD | R/W  | 0h    | SDIOM_RD_DMA_DONE_INT_MASK_SET<br>0h = No effect<br>1h = Set mask of the corresponding DMA DONE IRQ |

### B.1.3 DMA\_IMC Register (offset = 94h) [reset = 0h]

Register mask: FF0Fh

DMA\_IMC is shown in [Figure B-3](#) and described in [Table B-4](#).

**Figure B-3. DMA\_IMC Register**

|          |    |    |    |         |         |         |         |
|----------|----|----|----|---------|---------|---------|---------|
| 31       | 30 | 29 | 28 | 27      | 26      | 25      | 24      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 23       | 22 | 21 | 20 | 19      | 18      | 17      | 16      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 15       | 14 | 13 | 12 | 11      | 10      | 9       | 8       |
| ADCWR    |    |    |    | MCASPWR | MCASPRD | CAMEMPT | CAMFULL |
| R/W-0h   |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |
| 7        | 6  | 5  | 4  | 3       | 2       | 1       | 0       |
| RESERVED |    |    |    | APSPIWR | APSPIRD | SDIOMWR | SDIOMRD |
| R-X      |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |

**Table B-4. DMA\_IMC Register Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                     |
|-------|----------|------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-16 | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                 |
| 15-12 | ADCWR    | R/W  | 0h    | ADC_WR_DMA_DONE_INT_MASK_CLR<br>bit 15: ADC channel 6 DMA Done IRQ mask<br>bit 14: ADC channel 4 DMA Done IRQ mask<br>bit 13: ADC channel 2 DMA Done IRQ mask<br>bit 12: ADC channel 0 DMA Done IRQ mask<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ |
| 11    | MCASPWR  | R/W  | 0h    | MCASP_WR_DMA_DONE_INT_MASK_CLR<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ                                                                                                                                                                           |
| 10    | MCASPRD  | R/W  | 0h    | MCASP_RD_DMA_DONE_INT_MASK_CLR<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ                                                                                                                                                                           |
| 9     | CAMEMPT  | R/W  | 0h    | CAM_FIFO_EMPTY_DMA_DONE_INT_MASK_CLR<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ                                                                                                                                                                     |
| 8     | CAMFULL  | R/W  | 0h    | CAM_THRESHHOLD_DMA_DONE_INT_MASK_CLR<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ                                                                                                                                                                     |
| 7-4   | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                 |
| 3     | APSPIWR  | R/W  | 0h    | APPS_SPI_WR_DMA_DONE_INT_MASK_CLR<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ                                                                                                                                                                        |
| 2     | APSPIRD  | R/W  | 0h    | APPS_SPI_RD_DMA_DONE_INT_MASK_CLR<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ                                                                                                                                                                        |
| 1     | SDIOMWR  | R/W  | 0h    | SDIOM_WR_DMA_DONE_INT_MASK_CLR<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ                                                                                                                                                                           |

**Table B-4. DMA\_IMC Register Field Descriptions (continued)**

| Bit | Field   | Type | Reset | Description                                                                                           |
|-----|---------|------|-------|-------------------------------------------------------------------------------------------------------|
| 0   | SDIOMRD | R/W  | 0h    | SDIOM_RD_DMA_DONE_INT_MASK_CLR<br>0h = No effect<br>1h = Clear mask of the corresponding DMA DONE IRQ |

### B.1.4 DMA\_ICR Register (offset = 9Ch) [reset = 0h]

Register mask: FF0Fh

DMA\_ICR is shown in [Figure B-4](#) and described in [Table B-5](#).

**Figure B-4. DMA\_ICR Register**

|          |    |    |    |         |         |         |         |
|----------|----|----|----|---------|---------|---------|---------|
| 31       | 30 | 29 | 28 | 27      | 26      | 25      | 24      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 23       | 22 | 21 | 20 | 19      | 18      | 17      | 16      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 15       | 14 | 13 | 12 | 11      | 10      | 9       | 8       |
| ADCWR    |    |    |    | MCASPWR | MCASPRD | CAMEMPT | CAMFULL |
| R/W-0h   |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |
| 7        | 6  | 5  | 4  | 3       | 2       | 1       | 0       |
| RESERVED |    |    |    | APSPIWR | APSPIRD | SDIOMWR | SDIOMRD |
| R-X      |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |

**Table B-5. DMA\_ICR Register Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                                             |
|-------|----------|------|-------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-16 | RESERVED | R    | X     |                                                                                                                                                                                                                                         |
| 15-12 | ADCWR    | R/W  | 0h    | ADC_WR_DMA_DONE_INT_ACK<br>bit 15: ADC channel 6 DMA Done IRQ<br>bit 14: ADC channel 4 DMA Done IRQ<br>bit 13: ADC channel 2 DMA Done IRQ<br>bit 12: ADC channel 0 DMA Done IRQ<br>0h = No effect<br>1h = Clear corresponding interrupt |
| 11    | MCASPWR  | R/W  | 0h    | MCASP_WR_DMA_DONE_INT_ACK<br>0h = No effect<br>1h = Clear corresponding interrupt                                                                                                                                                       |
| 10    | MCASPRD  | R/W  | 0h    | MCASP_RD_DMA_DONE_INT_ACK<br>0h = No effect<br>1h = Clear corresponding interrupt                                                                                                                                                       |
| 9     | CAMEMPT  | R/W  | 0h    | CAM_FIFO_EMPTY_DMA_DONE_INT_ACK<br>0h = No effect<br>1h = Clear corresponding interrupt                                                                                                                                                 |
| 8     | CAMFULL  | R/W  | 0h    | CAM_THRESHHOLD_DMA_DONE_INT_ACK<br>0h = No effect<br>1h = Clear corresponding interrupt                                                                                                                                                 |
| 7-4   | RESERVED | R    | X     |                                                                                                                                                                                                                                         |
| 3     | APSPIWR  | R/W  | 0h    | APPS_SPI_WR_DMA_DONE_INT_ACK<br>0h = No effect<br>1h = Clear corresponding interrupt                                                                                                                                                    |
| 2     | APSPIRD  | R/W  | 0h    | APPS_SPI_RD_DMA_DONE_INT_ACK<br>0h = No effect<br>1h = Clear corresponding interrupt                                                                                                                                                    |
| 1     | SDIOMWR  | R/W  | 0h    | SDIOM_WR_DMA_DONE_INT_ACK<br>0h = No effect<br>1h = Clear corresponding interrupt                                                                                                                                                       |

**Table B-5. DMA\_ICR Register Field Descriptions (continued)**

| Bit | Field   | Type | Reset | Description                                                                       |
|-----|---------|------|-------|-----------------------------------------------------------------------------------|
| 0   | SDIOMRD | R/W  | 0h    | SDIOM_RD_DMA_DONE_INT_ACK<br>0h = No effect<br>1h = Clear corresponding interrupt |

### B.1.5 DMA\_MIS Register (offset = A0h) [reset = 0h]

Register mask: FF0Fh

DMA\_MIS is shown in [Figure B-5](#) and described in [Table B-6](#).

**Figure B-5. DMA\_MIS Register**

|          |    |    |    |         |         |         |         |
|----------|----|----|----|---------|---------|---------|---------|
| 31       | 30 | 29 | 28 | 27      | 26      | 25      | 24      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 23       | 22 | 21 | 20 | 19      | 18      | 17      | 16      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 15       | 14 | 13 | 12 | 11      | 10      | 9       | 8       |
| ADCWR    |    |    |    | MCASPWR | MCASPRD | CAMEMPT | CAMFULL |
| R/W-0h   |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |
| 7        | 6  | 5  | 4  | 3       | 2       | 1       | 0       |
| RESERVED |    |    |    | APSPIWR | APSPIRD | SDIOMWR | SDIOMRD |
| R-X      |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |

**Table B-6. DMA\_MIS Register Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                           |
|-------|----------|------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-16 | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                                                                                       |
| 15-12 | ADCWR    | R/W  | 0h    | ADC_WR_DMA_DONE_INT_STS_MASKED<br>bit 15: ADC channel 6 DMA Done IRQ<br>bit 14: ADC channel 4 DMA Done IRQ<br>bit 13: ADC channel 2 DMA Done IRQ<br>bit 12: ADC channel 0 DMA Done IRQ<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive. |
| 11    | MCASPWR  | R/W  | 0h    | MCASP_WR_DMA_DONE_INT_STS_MASKED<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive.                                                                                                                                                       |
| 10    | MCASPRD  | R/W  | 0h    | MCASP_RD_DMA_DONE_INT_STS_MASKED<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive.                                                                                                                                                       |
| 9     | CAMEMPT  | R/W  | 0h    | CAM_FIFO_EMPTY_DMA_DONE_INT_STS_MASKED<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive.                                                                                                                                                 |
| 8     | CAMFULL  | R/W  | 0h    | CAM_THRESHOLD_DMA_DONE_INT_STS_MASKED<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive.                                                                                                                                                  |
| 7-4   | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                                                                                       |

**Table B-6. DMA\_MIS Register Field Descriptions (continued)**

| Bit | Field   | Type | Reset | Description                                                                                                                                                                                        |
|-----|---------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3   | APSPIWR | R/W  | 0h    | APPS_SPI_WR_DMA_DONE_INT_STS_MASKED<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive. |
| 2   | APSPIRD | R/W  | 0h    | APPS_SPI_RD_DMA_DONE_INT_STS_MASKED<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive. |
| 1   | SDIOMWR | R/W  | 0h    | SDIOM_WR_DMA_DONE_INT_STS_MASKED<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive.    |
| 0   | SDIOMRD | R/W  | 0h    | SDIOM_RD_DMA_DONE_INT_STS_MASKED<br>0h = Corresponding interrupt is inactive or masked by DMA_DONE_INT mask.<br>1h = Corresponding interrupt is active and not masked. Read is non-destructive.    |

### B.1.6 DMA\_RIS Register (offset = A4h) [reset = 0h]

Register mask: FF0Fh

DMA\_RIS is shown in [Figure B-6](#) and described in [Table B-7](#).

**Figure B-6. DMA\_RIS Register**

|          |    |    |    |         |         |         |         |
|----------|----|----|----|---------|---------|---------|---------|
| 31       | 30 | 29 | 28 | 27      | 26      | 25      | 24      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 23       | 22 | 21 | 20 | 19      | 18      | 17      | 16      |
| RESERVED |    |    |    |         |         |         |         |
| R-X      |    |    |    |         |         |         |         |
| 15       | 14 | 13 | 12 | 11      | 10      | 9       | 8       |
| ADCWR    |    |    |    | MCASPWR | MCASPRD | CAMEMPT | CAMFULL |
| R/W-0h   |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |
| 7        | 6  | 5  | 4  | 3       | 2       | 1       | 0       |
| RESERVED |    |    |    | APSPIWR | APSPIRD | SDIOMWR | SDIOMRD |
| R-X      |    |    |    | R/W-0h  | R/W-0h  | R/W-0h  | R/W-0h  |

**Table B-7. DMA\_RIS Register Field Descriptions**

| Bit   | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                                          |
|-------|----------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-16 | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                                      |
| 15-12 | ADCWR    | R/W  | 0h    | ADC_WR_DMA_DONE_INT_STS_RAW<br>bit 15: ADC channel 6 DMA Done IRQ<br>bit 14: ADC channel 4 DMA Done IRQ<br>bit 13: ADC channel 2 DMA Done IRQ<br>bit 12: ADC channel 0 DMA Done IRQ<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive. |
| 11    | MCASPWR  | R/W  | 0h    | MCASP_WR_DMA_DONE_INT_STS_RAW<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive.                                                                                                                                                       |
| 10    | MCASPRD  | R/W  | 0h    | MCASP_RD_DMA_DONE_INT_STS_RAW<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive.                                                                                                                                                       |
| 9     | CAMEMPT  | R/W  | 0h    | CAM_FIFO_EMPTY_DMA_DONE_INT_STS_RAW<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive.                                                                                                                                                 |
| 8     | CAMFULL  | R/W  | 0h    | CAM_THRESHHOLD_DMA_DONE_INT_STS_RAW<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive.                                                                                                                                                 |
| 7-4   | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                                      |
| 3     | APSPIWR  | R/W  | 0h    | APPS_SPI_WR_DMA_DONE_INT_STS_RAW<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive.                                                                                                                                                    |
| 2     | APSPIRD  | R/W  | 0h    | APPS_SPI_RD_DMA_DONE_INT_STS_RAW<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive.                                                                                                                                                    |
| 1     | SDIOMWR  | R/W  | 0h    | SDIOM_WR_DMA_DONE_INT_STS_RAW<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive.                                                                                                                                                       |

**Table B-7. DMA\_RIS Register Field Descriptions (continued)**

| Bit | Field   | Type | Reset | Description                                                                                                                                    |
|-----|---------|------|-------|------------------------------------------------------------------------------------------------------------------------------------------------|
| 0   | SDIOMRD | R/W  | 0h    | SDIOM_RD_DMA_DONE_INT_STS_RAW<br>0h = Corresponding interrupt is inactive.<br>1h = Corresponding interrupt is active. Read is non-destructive. |

### B.1.7 GPTTRIGSEL Register (offset = B0h) [reset = 0h]

GPTTRIGSEL is shown in [Figure B-7](#) and described in [Table B-8](#).

**Figure B-7. GPTTRIGSEL Register**

|          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|---|---|---|---|---|---|---|---|---|---|
| 31       | 30 | 29 | 28 | 27 | 26 | 25 | 24 | 23 | 22 | 21 | 20 | 19 | 18 | 17 | 16 | 15      | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| RESERVED |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | TRIGSEL |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |
| R-X      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | R/W-0h  |    |    |    |    |    |   |   |   |   |   |   |   |   |   |   |

**Table B-8. GPTTRIGSEL Register Field Descriptions**

| Bit  | Field    | Type | Reset | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------|----------|------|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 31-8 | RESERVED | R    | X     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 7-0  | TRIGSEL  | R/W  | 0h    | <p>GPT_TRIG_SEL</p> <p>When this bit is set to logic 1: enable external trigger mode for APPS GPT CP0 and CP1 pin.</p> <p>Bit 0: when set to 1, enable external GPT trigger 0 on GPTA0 CP0 pin</p> <p>Bit 1: when set to 1, enable external GPT trigger 1 on GPTA0 CP1 pin</p> <p>Bit 2: when set to 1, enable external GPT trigger 2 on GPTA1 CP0 pin</p> <p>Bit 3: when set to 1, enable external GPT trigger 3 on GPTA1 CP1 pin</p> <p>Bit 4: when set to 1, enable external GPT trigger 4 on GPTA2 CP0 pin</p> <p>Bit 5: when set to 1, enable external GPT trigger 5 on GPTA2 CP1 pin</p> <p>Bit 6: when set to 1, enable external GPT trigger 6 on GPTA3 CP0 pin</p> <p>Bit 7: when set to 1, enable external GPT trigger 7 on GPTA3 CP1 pin</p> |

## Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from October 1, 2014 to March 31, 2016 (from B Revision (October 2014) to C Revision) | Page |
|-----------------------------------------------------------------------------------------------|------|
| • Updated UARTCTL Register. ....                                                              | 149  |
| • Updated UARTIM Register. ....                                                               | 152  |
| • Updated UARTRIS Register. ....                                                              | 154  |
| • Updated UARTRMIS Register. ....                                                             | 156  |
| • Updated UARTICR Register. ....                                                              | 158  |
| • Added PWM Outputs/Signals to CCP Pins table. ....                                           | 262  |

## Revision History

| Changes from A Revision (September 2014) to B Revision   | Page |
|----------------------------------------------------------|------|
| • Updated UARTFR Register description. ....              | 143  |
| • Added Appendix B: CC3200 Miscellaneous Registers. .... | 507  |

| Changes from Original (June 2014) to A Revision                      | Page |
|----------------------------------------------------------------------|------|
| • Removed SPI_WAKEUPENABLE register.....                             | 245  |
| • Added EXTCLK bit to SPI_CHCTRL Register .....                      | 256  |
| • Updated AFL bit of SPI_XFERLEVEL Register. ....                    | 259  |
| • Removed WDTMIS register. ....                                      | 305  |
| • Removed WDTMIS register. ....                                      | 306  |
| • Added MCU Watch Dog Controller Usage Caveats Section. ....         | 313  |
| • Updated MCASP Module image.....                                    | 331  |
| • Changed Time Stamp Counter from 18-bit to 17-bit. ....             | 346  |
| • Changed CHANNEL0FIFODATA register description.....                 | 361  |
| • Changed CHANNEL2FIFODATA register description.....                 | 362  |
| • Changed CHANNEL4FIFODATA register description.....                 | 363  |
| • Changed CHANNEL6FIFODATA register description.....                 | 364  |
| • Changed possible supported levels from 0x3 to 0x4. ....            | 365  |
| • Changed possible supported levels from 0x3 to 0x4. ....            | 366  |
| • Changed possible supported levels from 0x3 to 0x4. ....            | 367  |
| • Changed possible supported levels from 0x3 to 0x4. ....            | 368  |
| • Fixed Pin totals. ....                                             | 481  |
| • Added SDCARD_DATA, SDCARD_CLK and SDCARD_CMD values to table. .... | 484  |
| • Changed ADC Channel 3 Input from 1.5 V to 1.4 V.....               | 493  |

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

| Products                     | Applications                                                                         |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |
|                              | <b>TI E2E Community</b>                                                              |
|                              | <a href="http://e2e.ti.com">e2e.ti.com</a>                                           |