

# ESP32-C6-WROOM-1

# ESP32-C6-WROOM-1U

## Datasheet Version 1.4

Module that supports 2.4 GHz Wi-Fi 6 (802.11ax), Bluetooth® 5 (LE), Zigbee and Thread (802.15.4)

Built around ESP32-C6 series of SoCs, 32-bit RISC-V single-core microprocessor

Flash up to 8 MB

23 GPIOs, rich set of peripherals

On-board PCB antenna or external antenna connector



ESP32-C6-WROOM-1



ESP32-C6-WROOM-1U

# 1 Module Overview

## Note:

Check the link or the QR code to make sure that you use the latest version of this document:

[https://espressif.com/documentation/esp32-c6-wroom-1\\_wroom-1u\\_datasheet\\_en.pdf](https://espressif.com/documentation/esp32-c6-wroom-1_wroom-1u_datasheet_en.pdf)



## 1.1 Features

### CPU and On-Chip Memory

- ESP32-C6 embedded, 32-bit RISC-V single-core microprocessor, up to 160 MHz
- ROM: 320 KB
- HP SRAM: 512 KB
- LP SRAM: 16 KB

### Wi-Fi

- 1T1R in 2.4 GHz band
- Operating frequency: 2412 ~ 2484 MHz
- IEEE 802.11ax-compliant
  - 20 MHz-only non-AP mode
  - MCS0 ~ MCS9
  - Uplink and downlink OFDMA, especially suitable for simultaneous connections in high-density environments
  - Downlink MU-MIMO (multi-user, multiple input, multiple output) to increase network capacity
  - Beamformee that improves signal quality
  - Channel quality indication (CQI)
  - DCM (dual carrier modulation) to improve link robustness
  - Spatial reuse to maximize parallel transmissions
  - Target wake time (TWT) that optimizes power saving mechanisms
- Fully compatible with IEEE 802.11b/g/n protocol

- 20 MHz and 40 MHz bandwidth
- Data rate up to 150 Mbps
- Wi-Fi Multimedia (WMM)
- TX/RX A-MPDU, TX/RX A-MSDU
- Immediate Block ACK
- Fragmentation and defragmentation
- Transmit opportunity (TXOP)
- Automatic Beacon monitoring (hardware TSF)
- 4 × virtual Wi-Fi interfaces
- Simultaneous support for Infrastructure BSS in Station mode, SoftAP mode, Station + SoftAP mode, and promiscuous mode  
*Note that when ESP32-C6 scans in Station mode, the SoftAP channel will change along with the Station channel*
- 802.11mc FTM

### Bluetooth®

- Bluetooth LE: Bluetooth 5.3 certified
- Bluetooth mesh
- High power mode (20 dBm)
- Speed: 125 Kbps, 500 Kbps, 1 Mbps, 2 Mbps
- Advertising extensions
- Multiple advertisement sets
- Channel selection algorithm #2
- LE power control

- Internal co-existence mechanism between Wi-Fi and Bluetooth to share the same antenna

## IEEE 802.15.4

- Compliant with IEEE 802.15.4-2015 protocol
- OQPSK PHY in 2.4 GHz band
- Data rate: 250 Kbps
- Thread 1.3
- Zigbee 3.0

## Peripherals

- GPIO, SPI, parallel IO interface, UART, I2C, I2S, RMT (TX/RX), pulse counter, LED PWM, USB Serial/JTAG controller, MCPWM, SDIO slave controller, GDMA, TWAI® controller, on-chip debug functionality via JTAG, event task matrix, ADC, temperature sensor, system timer, general-purpose timers, and watchdog timers

## Integrated Components on Module

- 40 MHz crystal oscillator
- SPI flash

## Antenna Options

- On-board PCB antenna (ESP32-C6-WROOM-1)
- External antenna via a connector (ESP32-C6-WROOM-1U)

## Operating Conditions

- Operating voltage/Power supply: 3.0 ~ 3.6 V
- Operating ambient temperature: -40 ~ 85 °C

## Certification

- RF certification: See [certificates](#)
- Green certification: RoHS/REACH

## Test

- HTOL/HTSL/uHAST/TCT/ESD

## 1.2 Series Comparison

ESP32-C6-WROOM-1 and ESP32-C6-WROOM-1U are two powerful, general-purpose Wi-Fi, IEEE 802.15.4, and Bluetooth LE modules. The rich set of peripherals and high performance make the module an ideal choice for smart homes, industrial automation, health care, consumer electronics, etc.

ESP32-C6-WROOM-1 comes with a PCB antenna. ESP32-C6-WROOM-1U comes with a connector for an external antenna. They both feature an external SPI flash up to 8 MB.

Both ESP32-C6-WROOM-1 and ESP32-C6-WROOM-1U come in two versions:

- 4 MB flash version
- 8 MB flash version

The two versions only vary in flash part number. In this datasheet unless otherwise stated, ESP32-C6-WROOM-1 and ESP32-C6-WROOM-1U refer to the variants in 4 MB and 8 MB flash versions.

The series comparison for the two modules is as follows:

**Table 1-1. ESP32-C6-WROOM-1 (ANT) Series Comparison<sup>1</sup>**

Part Number	Flash <sup>2,3</sup>	Ambient Temp. <sup>4</sup> (°C)	Size <sup>5</sup> (mm)
ESP32-C6-WROOM-1-N4	4 MB (Quad SPI)	-40 ~ 85	18.0 × 25.5 × 3.1
ESP32-C6-WROOM-1-N8	8 MB (Quad SPI)		
ESP32-C6-WROOM-1-N16	16 MB (Quad SPI)		

<sup>1</sup> This table shares the same notes presented in Table 1-2 below.

**Table 1-2. ESP32-C6-WROOM-1U (CONN) Series Comparison**

Part Number	Flash <sup>2,3</sup>	Ambient Temp. <sup>4</sup> (°C)	Size <sup>5</sup> (mm)
ESP32-C6-WROOM-1U-N4	4 MB (Quad SPI)	-40 ~ 85	18.0 × 19.2 × 3.2
ESP32-C6-WROOM-1U-N8	8 MB (Quad SPI)		
ESP32-C6-WROOM-1U-N16	16 MB (Quad SPI)		

<sup>2</sup> For specifications, refer to Section 6.5 *Memory Specifications*.

<sup>3</sup> By default, the SPI flash on the module operates at a maximum clock frequency of 80 MHz and does not support the auto suspend feature. If you need the flash auto suspend feature, please [contact us](#).

<sup>4</sup> Ambient temperature specifies the recommended temperature range of the environment immediately outside the Espressif module.

<sup>5</sup> For details, refer to Section 10.1 *Physical Dimensions*.

At the core of the modules is ESP32-C6, a 32-bit RISC-V single-core processor.

**Note:**

For more information on ESP32-C6, please refer to [ESP32-C6 Series Datasheet](#).

Please contact our [sales team](#) if you require modules with 4 MB flash and maximum ambient temperature of 105 °C.

## 1.3 Applications

- Smart Home
- Industrial Automation
- Health Care
- Consumer Electronics
- Smart Agriculture
- POS Machines
- Service Robot
- Audio Devices
- Generic Low-power IoT Sensor Hubs
- Generic Low-power IoT Data Loggers

# Contents

<b>1</b>	<b>Module Overview</b>	<b>2</b>
1.1	Features	2
1.2	Series Comparison	3
1.3	Applications	4
<b>2</b>	<b>Block Diagram</b>	<b>9</b>
<b>3</b>	<b>Pin Definitions</b>	<b>10</b>
3.1	Pin Layout	10
3.2	Pin Description	10
<b>4</b>	<b>Boot Configurations</b>	<b>12</b>
4.1	Chip Boot Mode Control	13
4.2	SDIO Sampling and Driving Clock Edge Control	14
4.3	ROM Messages Printing Control	14
4.4	JTAG Signal Source Control	15
4.5	Chip Power-up and Reset	15
<b>5</b>	<b>Peripherals</b>	<b>17</b>
5.1	Functional Overview	17
5.2	Peripheral Description	17
5.2.1	Connectivity Interface	17
5.2.1.1	UART Controller	17
5.2.1.2	SPI Controller	18
5.2.1.3	I2C Controller	19
5.2.1.4	I2S Controller	19
5.2.1.5	Pulse Count Controller	20
5.2.1.6	USB Serial/JTAG Controller	20
5.2.1.7	Two-wire Automotive Interface	21
5.2.1.8	SDIO Slave Controller	21
5.2.1.9	LED PWM Controller	22
5.2.1.10	Motor Control PWM	22
5.2.1.11	Remote Control Peripheral	23
5.2.1.12	Parallel IO Controller	24
5.2.2	Analog Signal Processing	24
5.2.2.1	SAR ADC	24
5.2.2.2	Temperature Sensor	25
<b>6</b>	<b>Electrical Characteristics</b>	<b>26</b>
6.1	Absolute Maximum Ratings	26
6.2	Recommended Operating Conditions	26
6.3	DC Characteristics (3.3 V, 25 °C)	26
6.4	Current Consumption Characteristics	27

6.4.1	Current Consumption in Active Mode	27
6.4.2	Current Consumption in Other Modes	28
6.5	Memory Specifications	28
<b>7</b>	<b>RF Characteristics</b>	<b>30</b>
7.1	Wi-Fi Radio	30
7.1.1	Wi-Fi RF Transmitter (TX) Characteristics	30
7.1.2	Wi-Fi RF Receiver (RX) Characteristics	31
7.2	Bluetooth 5 (LE) Radio	33
7.2.1	Bluetooth LE RF Transmitter (TX) Characteristics	33
7.2.2	Bluetooth LE RF Receiver (RX) Characteristics	34
7.3	802.15.4 Radio	36
7.3.1	802.15.4 RF Transmitter (TX) Characteristics	37
7.3.2	802.15.4 RF Receiver (RX) Characteristics	37
<b>8</b>	<b>Module Schematics</b>	<b>38</b>
<b>9</b>	<b>Peripheral Schematics</b>	<b>40</b>
<b>10</b>	<b>Physical Dimensions</b>	<b>41</b>
10.1	Physical Dimensions	41
10.2	Dimensions of External Antenna Connector	42
<b>11</b>	<b>PCB Layout Recommendations</b>	<b>44</b>
11.1	PCB Land Pattern	44
11.2	Module Placement for PCB Design	45
<b>12</b>	<b>Product Handling</b>	<b>46</b>
12.1	Storage Conditions	46
12.2	Electrostatic Discharge (ESD)	46
12.3	Reflow Profile	46
12.4	Ultrasonic Vibration	47
	<b>Datasheet Versioning</b>	<b>48</b>
	<b>Related Documentation and Resources</b>	<b>49</b>
	<b>Revision History</b>	<b>50</b>

## List of Tables

1-1	ESP32-C6-WROOM-1 (ANT) Series Comparison <sup>1</sup>	4
1-2	ESP32-C6-WROOM-1U (CONN) Series Comparison	4
3-1	Pin Definitions	11
4-1	Default Configuration of Strapping Pins	12
4-2	Description of Timing Parameters for the Strapping Pins	13
4-3	Chip Boot Mode Control	13
4-4	SDIO Input Sampling Edge/Output Driving Edge Control	14
4-5	UART0 ROM Message Printing Control	14
4-6	USB Serial/JTAG ROM Message Printing Control	15
4-7	JTAG Signal Source Control	15
4-8	Description of Timing Parameters for Power-up and Reset	16
6-1	Absolute Maximum Ratings	26
6-2	Recommended Operating Conditions	26
6-3	DC Characteristics (3.3 V, 25 °C)	26
6-4	Current Consumption for Wi-Fi (2.4 GHz) in Active Mode	27
6-5	Current Consumption for Bluetooth LE in Active Mode	27
6-6	Current Consumption for 802.15.4 in Active Mode	27
6-7	Current Consumption in Modem-sleep Mode	28
6-8	Current Consumption in Low-Power Modes	28
6-9	Flash Specifications	28
7-1	Wi-Fi RF Characteristics	30
7-2	TX Power with Spectral Mask and EVM Meeting 802.11 Standards	30
7-3	TX EVM Test <sup>1</sup>	30
7-4	RX Sensitivity	31
7-5	Maximum RX Level	32
7-6	RX Adjacent Channel Rejection	32
7-7	Bluetooth LE RF Characteristics	33
7-8	Bluetooth LE - Transmitter Characteristics - 1 Mbps	33
7-9	Bluetooth LE - Transmitter Characteristics - 2 Mbps	33
7-10	Bluetooth LE - Transmitter Characteristics - 125 Kbps	34
7-11	Bluetooth LE - Transmitter Characteristics - 500 Kbps	34
7-12	Bluetooth LE - Receiver Characteristics - 1 Mbps	34
7-13	Bluetooth LE - Receiver Characteristics - 2 Mbps	35
7-14	Bluetooth LE - Receiver Characteristics - 125 Kbps	36
7-15	Bluetooth LE - Receiver Characteristics - 500 Kbps	36
7-16	802.15.4 RF Characteristics	36
7-17	802.15.4 Transmitter Characteristics - 250 Kbps	37
7-18	802.15.4 Receiver Characteristics - 250 Kbps	37

## List of Figures

2-1	ESP32-C6-WROOM-1 Block Diagram	9
2-2	ESP32-C6-WROOM-1U Block Diagram	9
3-1	Pin Layout (Top View)	10
4-1	Visualization of Timing Parameters for the Strapping Pins	13
4-2	Visualization of Timing Parameters for Power-up and Reset	15
8-1	ESP32-C6-WROOM-1 Schematics	38
8-2	ESP32-C6-WROOM-1U Schematics	39
9-1	Peripheral Schematics	40
10-1	ESP32-C6-WROOM-1 Physical Dimensions	41
10-2	ESP32-C6-WROOM-1U Physical Dimensions	41
10-3	Dimensions of External Antenna Connector	42
11-1	ESP32-C6-WROOM-1 Recommended PCB Land Pattern	44
11-2	ESP32-C6-WROOM-1U Recommended PCB Land Pattern	45
12-1	Reflow Profile	46



## 2 Block Diagram

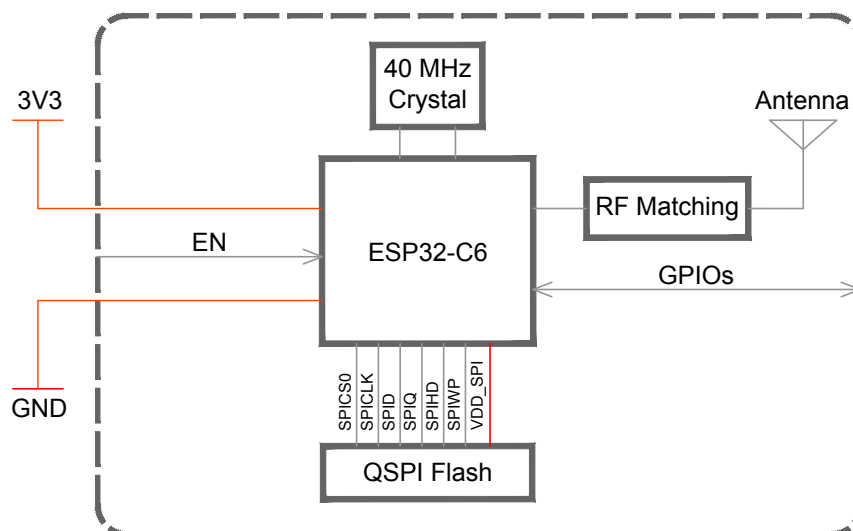


Figure 2-1. ESP32-C6-WROOM-1 Block Diagram

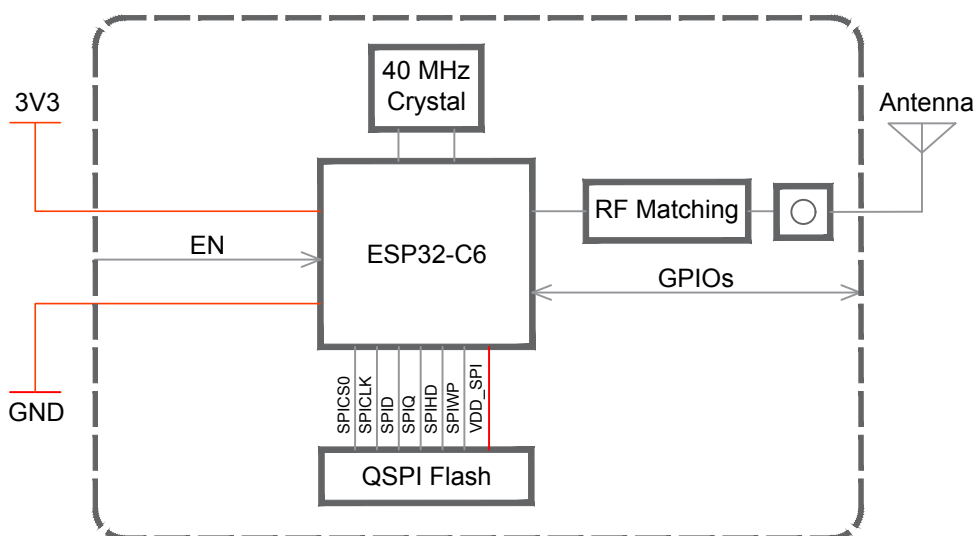


Figure 2-2. ESP32-C6-WROOM-1U Block Diagram

**Note:**

For the pin mapping between the chip and the in-package flash, please refer to [ESP32-C6 Series Datasheet](#) > Table *Pin Mapping Between Chip and Flash*.

## 3 Pin Definitions

### 3.1 Pin Layout

The pin diagram below shows the approximate location of pins on the module. For the actual diagram drawn to scale, please refer to Figure 10.1 *Physical Dimensions*.

The pin diagram is applicable for ESP32-C6-WROOM-1 and ESP32-C6-WROOM-1U, but the latter has no keepout zone.

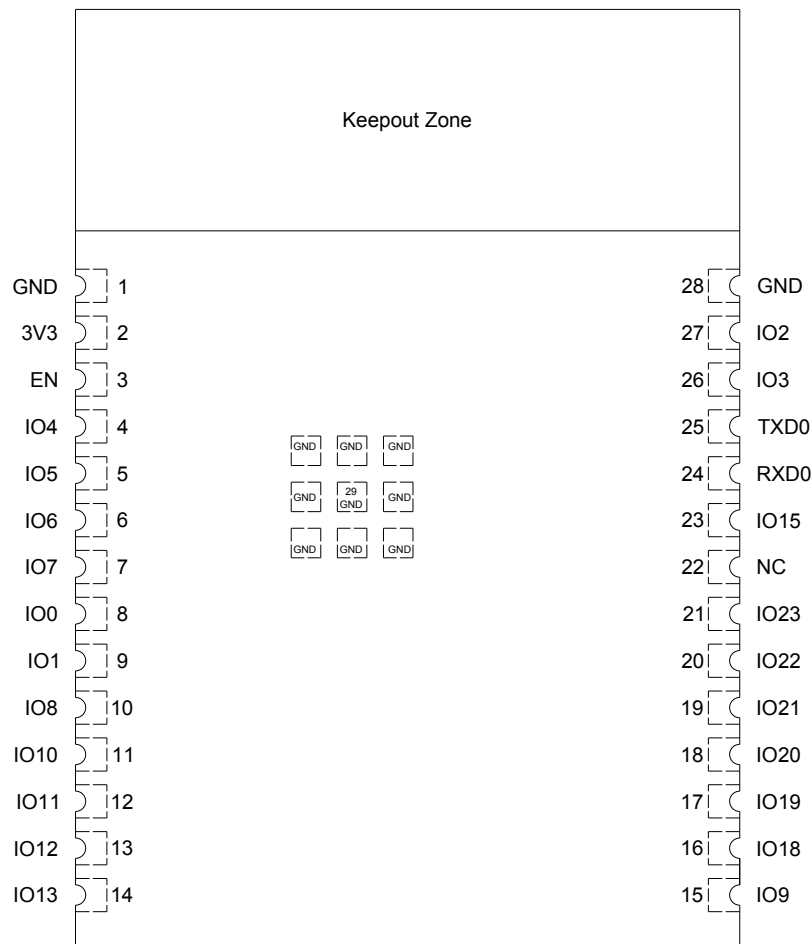


Figure 3-1. Pin Layout (Top View)

### 3.2 Pin Description

The module has 29 pins. See pin definitions in Table 3-1 *Pin Definitions*.

Table 3-1. Pin Definitions

Name	No.	Type <sup>1</sup>	Function
GND	1	P	Ground
3V3	2	P	Power supply
EN	3	I	High: on, enables the chip. Low: off, the chip powers off. Note: Do not leave the EN pin floating.
IO4	4	I/O/T	MTMS, GPIO4, LP_GPIO4, LP_UART_RXD, ADC1_CH4, FSPiHD
IO5	5	I/O/T	MTDI, GPIO5, LP_GPIO5, LP_UART_TXD, ADC1_CH5, FSPiWP
IO6	6	I/O/T	MTCK, GPIO6, LP_GPIO6, LP_I2C_SDA, ADC1_CH6, FSPiCLK
IO7	7	I/O/T	MTDO, GPIO7, LP_GPIO7, LP_I2C_SCL, FSPiD
IO0	8	I/O/T	GPIO0, XTAL_32K_P, LP_GPIO0, LP_UART_DTRN, ADC1_CH0
IO1	9	I/O/T	GPIO1, XTAL_32K_N, LP_GPIO1, LP_UART_DSRN, ADC1_CH1
IO8	10	I/O/T	GPIO8
IO10	11	I/O/T	GPIO10
IO11	12	I/O/T	GPIO11
IO12	13	I/O/T	GPIO12, USB_D-
IO13	14	I/O/T	GPIO13, USB_D+
IO9	15	I/O/T	GPIO9
IO18	16	I/O/T	GPIO18, SDIO_CMD, FSPiCS2
IO19	17	I/O/T	GPIO19, SDIO_CLK, FSPiCS3
IO20	18	I/O/T	GPIO20, SDIO_DATA0, FSPiCS4
IO21	19	I/O/T	GPIO21, SDIO_DATA1, FSPiCS5
IO22	20	I/O/T	GPIO22, SDIO_DATA2
IO23	21	I/O/T	GPIO23, SDIO_DATA3
NC	22	—	NC
IO15	23	I/O/T	GPIO15
RXD0	24	I/O/T	UORXD, GPIO17, FSPiCS1
TXD0	25	I/O/T	UOTXD, GPIO16, FSPiCS0
IO3	26	I/O/T	GPIO3, LP_GPIO3, LP_UART_CTSN, ADC1_CH3
IO2	27	I/O/T	GPIO2, LP_GPIO2, LP_UART_RTSN, ADC1_CH2, FSPiQ
GND	28	P	Ground
EPAD	29	P	Ground

<sup>1</sup> P: power supply; I: input; O: output; T: high impedance.

## 4 Boot Configurations

**Note:**

The content below is excerpted from [ESP32-C6 Series Datasheet](#) > Chapter *Boot Configurations*. For the strapping pin mapping between the chip and modules, please refer to Chapter 8 *Module Schematics*.

The chip allows for configuring the following boot parameters through strapping pins and eFuse parameters at power-up or a hardware reset, without microcontroller interaction.

- **Chip boot mode**
  - Strapping pin: GPIO8 and GPIO9
- **SDIO Sampling and Driving Clock Edge**
  - Strapping pin: MTMS and MTDI
- **ROM message printing**
  - Strapping pin: GPIO8
  - eFuse parameter: EFUSE\_UART\_PRINT\_CONTROL and EFUSE\_DIS\_USB\_SERIAL\_JTAG\_ROM\_PRINT
- **JTAG signal source**
  - Strapping pin: GPIO15
  - eFuse parameter: EFUSE\_DIS\_PAD\_JTAG, EFUSE\_DIS\_USB\_JTAG, and EFUSE\_JTAG\_SEL\_ENABLE

The default values of all the above eFuse parameters are 0, which means that they are not burnt. Given that eFuse is one-time programmable, once programmed to 1, it can never be reverted to 0. For how to program eFuse parameters, please refer to [ESP32-C6 Technical Reference Manual](#) > Chapter *eFuse Controller*.

The default values of the strapping pins, namely the logic levels, are determined by pins' internal weak pull-up/pull-down resistors at reset if the pins are not connected to any circuit, or connected to an external high-impedance circuit.

Table 4-1. Default Configuration of Strapping Pins

Strapping Pin	Default Configuration	Bit Value
MTMS	Floating	–
MTDI	Floating	–
GPIO8	Floating	–
GPIO9	Weak pull-up	1
GPIO15	Floating	–

To change the bit values, the strapping pins should be connected to external pull-down/pull-up resistances. If the ESP32-C6 is used as a device by a host MCU, the strapping pin voltage levels can also be controlled by the host MCU.


All strapping pins have latches. At Chip Reset, the latches sample the bit values of their respective strapping pins and store them until the chip is powered down or shut down. The states of latches cannot be changed in

any other way. It makes the strapping pin values available during the entire chip operation, and the pins are freed up to be used as regular IO pins after reset. For details on Chip Reset, see [ESP32-C6 Technical Reference Manual](#) > Chapter Reset and Clock.

The timing of signals connected to the strapping pins should adhere to the *setup time* and *hold time* specifications in Table 4-2 and Figure 4-1.

**Table 4-2. Description of Timing Parameters for the Strapping Pins**

Parameter	Description	Min (ms)
$t_{SU}$	<i>Setup time</i> is the time reserved for the power rails to stabilize before the CHIP_PU pin is pulled high to activate the chip.	0
$t_H$	<i>Hold time</i> is the time reserved for the chip to read the strapping pin values after CHIP_PU is already high and before these pins start operating as regular IO pins.	3

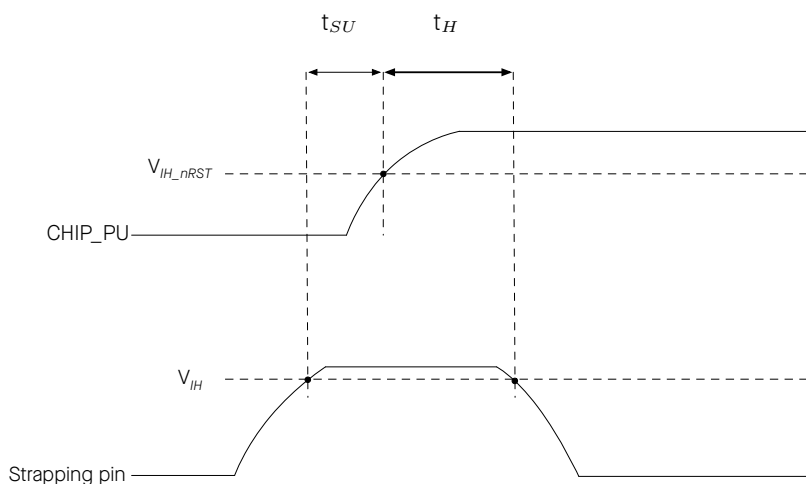

**Figure 4-1. Visualization of Timing Parameters for the Strapping Pins**

## 4.1 Chip Boot Mode Control

GPIO8 and GPIO9 control the boot mode after the reset is released. See Table 4-3 [Chip Boot Mode Control](#).

**Table 4-3. Chip Boot Mode Control**

Boot Mode	GPIO8	GPIO9
<b>SPI boot mode</b>	Any value	<b>1</b>
Joint download boot mode <sup>2</sup>	1	0

<sup>1</sup> **Bold** marks the default value and configuration.

<sup>2</sup> Joint Download Boot mode supports the following download methods:

- USB-Serial-JTAG Download Boot
- UART Download Boot
- SDIO Download Boot

## 4.2 SDIO Sampling and Driving Clock Edge Control

The strapping pin MTMS and MTDI can be used to decide on which clock edge to sample signals and drive output lines. See Table 4-4 *SDIO Input Sampling Edge/Output Driving Edge Control*.

Table 4-4. SDIO Input Sampling Edge/Output Driving Edge Control

Edge behavior	MTMS	MTDI
Falling edge sampling, falling edge output	0	0
Falling edge sampling, rising edge output	0	1
Rising edge sampling, falling edge output	1	0
Rising edge sampling, rising edge output	1	1

<sup>1</sup> MTMS and MTDI are floating by default, so above are not default configurations.

## 4.3 ROM Messages Printing Control

During the boot process, ROM message printing is enabled if LP\_AON\_STORE4\_REG[0] is 0 (default), and disabled if LP\_AON\_STORE4\_REG[0] is 1. When ROM message printing is enabled, the messages can be printed to:

- (Default) UART0 and USB Serial/JTAG controller
- USB Serial/JTAG controller
- UART0

EFUSE\_UART\_PRINT\_CONTROL and GPIO8 control ROM messages printing to **UART0** as shown in Table 4-5 *UART0 ROM Message Printing Control*.

Table 4-5. UART0 ROM Message Printing Control

UART0 ROM Code Printing	EFUSE_UART_PRINT_CONTROL	GPIO8
<b>Enabled</b>	<b>0</b>	Ignored
	1	0
	2	1
Disabled	1	1
	2	0
	3	Ignored

<sup>1</sup> **Bold** marks the default value and configuration.

EFUSE\_DIS\_USB\_SERIAL\_JTAG\_ROM\_PRINT controls the printing to **USB Serial/JTAG controller** as shown in Table 4-6 *USB Serial/JTAG ROM Message Printing Control*.

Table 4-6. USB Serial/JTAG ROM Message Printing Control

USB Serial/JTAG ROM Code Printing	EFUSE_DIS_USB_SERIAL_JTAG <sup>2</sup>	EFUSE_DIS_USB_SERIAL_JTAG_ROM_PRINT
Enabled	<b>0</b>	<b>0</b>
Disabled	0	1
	1	Ignored

<sup>1</sup> **Bold** marks the default value and configuration.

<sup>2</sup> EFUSE\_DIS\_USB\_SERIAL\_JTAG controls whether to disable USB Serial/JTAG.

## 4.4 JTAG Signal Source Control

The strapping pin GPIO15 can be used to control the source of JTAG signals during the early boot process. This pin does not have any internal pull resistors and the strapping value must be controlled by the external circuit that cannot be in a high impedance state.

As Table 4-7 *JTAG Signal Source Control* shows, GPIO15 is used in combination with EFUSE\_DIS\_PAD\_JTAG, EFUSE\_DIS\_USB\_JTAG and EFUSE\_JTAG\_SEL\_ENABLE.

Table 4-7. JTAG Signal Source Control

JTAG Signal Source	EFUSE_DIS_PAD_JTAG	EFUSE_DIS_USB_JTAG	EFUSE_JTAG_SEL_ENABLE	GPIO15
USB Serial/JTAG Controller	<b>0</b>	<b>0</b>	<b>0</b>	Ignored
	0	0	1	1
	1	0	Ignored	Ignored
JTAG pins <sup>2</sup>	0	0	1	0
	0	1	Ignored	Ignored
JTAG is disabled	1	1	Ignored	Ignored

<sup>1</sup> **Bold** marks the default value and configuration.

<sup>2</sup> JTAG pins refer to MTDI, MTCK, MTMS, and MTDO.

## 4.5 Chip Power-up and Reset

Once the power is supplied to the chip, its power rails need a short time to stabilize. After that, CHIP\_PU – the pin used for power-up and reset – is pulled high to activate the chip. For information on CHIP\_PU as well as power-up and reset timing, see Figure 4-2 and Table 4-8.

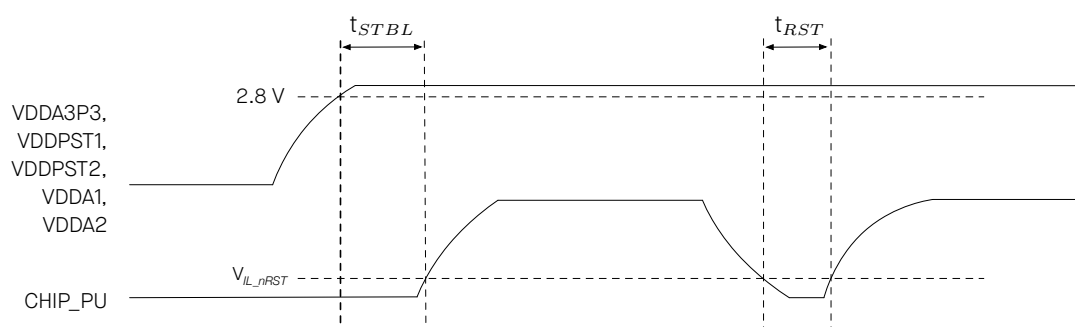


Figure 4-2. Visualization of Timing Parameters for Power-up and Reset

Table 4-8. Description of Timing Parameters for Power-up and Reset

Parameter	Description	Min ( $\mu$ s)
$t_{STBL}$	Time reserved for the power rails of VDDA3P3, VDDPST1, VDDPST2, VDDA1 and VDDA2 to stabilize before the CHIP_PU pin is pulled high to activate the chip	50
$t_{RST}$	Time reserved for CHIP_PU to stay below $V_{IL\_nRST}$ to reset the chip (see Table 6-3)	50



## 5 Peripherals

### 5.1 Functional Overview

ESP32-C6 integrates a rich set of peripherals including SPI, parallel IO interface, UART, I2C, I2S, RMT (TX/RX), LED PWM, USB Serial/JTAG controller, MCPWM, SDIO slave controller, GDMA, TWAI<sup>®</sup> controller, on-chip debug functionality via JTAG, event task matrix, ADC, as well as up to 23 GPIOs, etc.

For detailed information about module peripherals, please refer to [ESP32-C6 Series Datasheet](#) > Section *Functional Description*. Note that the ADC measurement range and accuracy in the [ESP32-C6 Series Datasheet](#) are applicable to modules manufactured on and after the PW Number **PW-2023-07-XXX** on packaging labels. For modules manufactured earlier than these PW numbers, please ask our [sales team](#) to provide the actual range and accuracy according to batches.

**Note:**

The content below is excerpted from [ESP32-C6 Series Datasheet](#) > Section *Peripherals*. Some information may not be applicable to ESP32-C6-WROOM-1 and ESP32-C6-WROOM-1U as not all the IO signals are exposed on the module. To learn more details about peripherals signals, please refer to [ESP32-C6 Technical Reference Manual](#) > Section *Peripheral Signal List*.

### 5.2 Peripheral Description

This section describes the chip's peripheral capabilities, covering connectivity interfaces and on-chip sensors that extend its functionality.

#### 5.2.1 Connectivity Interface

This subsection describes the connectivity interfaces on the chip that enable communication and interaction with external devices and networks.

##### 5.2.1.1 UART Controller

The UART Controller in the ESP32-C6 chip facilitates the transmission and reception of asynchronous serial data between the chip and external UART devices. It consists of two UARTs in the main system, and one low-power LP UART.

**Feature List**

- Programmable baud rates up to 5 MBaud
- RAM shared by TX FIFOs and RX FIFOs
- Support for various lengths of data bits and stop bits
- Parity bit support
- Special character AT\_CMD detection
- RS485 protocol support (not supported by LP UART)
- IrDA protocol support (not supported by LP UART)

- High-speed data communication using GDMA (not supported by LP UART)
- Receive timeout feature
- UART as the wake-up source
- Software and hardware flow control

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

### 5.2.1.2 SPI Controller

ESP32-C6 has the following SPI interfaces:

- **SPI0** used by ESP32-C6's cache and GDMA to access in-package or off-package flash
- **SPI1** used by the CPU to access in-package or off-package flash
- **SPI2** is a general-purpose SPI controller with access to general-purpose DMA channels

SPI0 and SPI1 are reserved for system use, and only SPI2 is available for users.

#### Features of SPI0 and SPI1

- Supports Single SPI, Dual SPI, Quad SPI (QPI) modes
- Data transmission is in bytes

#### Features of SPI2

- Supports operation as a master or slave
- Support for GDMA
- Supports Single SPI, Dual SPI, Quad SPI (QPI) modes
- Configurable clock polarity (CPOL) and phase (CPHA)
- Configurable clock frequency
- Data transmission is in bytes
- Configurable read and write data bit order: most-significant bit (MSB) first, or least-significant bit (LSB) first
- As a master
  - Supports 2-line full-duplex communication with clock frequency up to 80 MHz
  - Supports 1-, 2-, 4-line half-duplex communication with clock frequency up to 80 MHz
  - Provides six FSPICS... pins for connection with six independent SPI slaves
  - Configurable CS setup time and hold time
- As a slave
  - Supports 2-line full-duplex communication with clock frequency up to 40 MHz

- Supports 1-, 2-, 4-line half-duplex communication with clock frequency up to 40 MHz

#### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

### 5.2.1.3 I2C Controller

The I2C Controller supports communication between the master and slave devices using the I2C bus.

#### Feature List

- Two I2C controllers: one in the main system and one in the low-power system
- Communication with multiple external devices
- Master and slave modes for I2C, and master mode only for LP I2C
- Standard mode (100 Kbit/s) and fast mode (400 Kbit/s)
- SCL clock stretching in slave mode
- Programmable digital noise filtering
- Support for 7-bit and 10-bit addressing, as well as dual address mode

#### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

### 5.2.1.4 I2S Controller

The I2S Controller in the ESP32-C6 chip provides a flexible communication interface for streaming digital data in multimedia applications, particularly digital audio applications.

#### Feature List

- Master mode and slave mode
- Full-duplex and half-duplex communications
- Separate TX and RX units that can work independently or simultaneously
- A variety of audio standards supported:
  - TDM Philips standard
  - TDM MSB alignment standard
  - TDM PCM standard
  - PDM standard
- PCM-to-PDM TX interface
- Configurable high-precision BCK clock, with frequency up to 40 MHz

- Sampling frequencies can be 8 kHz, 16 kHz, 32 kHz, 44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 128 kHz, 192 kHz, etc.
- 8-/16-/24-/32-bit data communication
- Direct Memory Access (DMA)
- A-law and  $\mu$ -law compression/decompression algorithms for improved signal-to-quantization noise ratio
- Flexible data format control

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.1.5 Pulse Count Controller

The Pulse Count Controller (PCNT) is designed to count input pulses by tracking rising and falling edges of the input pulse signal.

### Feature List

- Four independent pulse counters with two channels each
- Counter modes: increment, decrement, or disable
- Glitch filtering for input pulse signals and control signals
- Selection between counting on rising or falling edges of the input pulse signal

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.1.6 USB Serial/JTAG Controller

The USB Serial/JTAG controller in the ESP32-C6 chip provides an integrated solution for communicating to the chip over a standard USB CDC-ACM serial port as well as a convenient method for JTAG debugging. It eliminates the need for external chips or JTAG adapters, saving space and reducing cost.

### Feature List

- USB 2.0 full speed compliant, capable of up to 12 Mbit/s transfer speed (Note that this controller does not support the faster 480 Mbit/s high-speed transfer mode)
- CDC-ACM virtual serial port and JTAG adapter functionality
- CDC-ACM:
  - CDC-ACM adherent serial port emulation (plug-and-play on most modern OSes)
  - Host controllable chip reset and entry into download mode
- JTAG adapter functionality:
  - Fast communication with CPU debugging core using a compact representation of JTAG instructions

- Support for reprogramming of attached flash memory through the ROM startup code
- Internal PHY

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.1.7 Two-wire Automotive Interface

The Two-wire Automotive Interface (TWAI®) is a multi-master, multi-cast communication protocol designed for automotive applications. The TWAI controller facilitates the communication based on this protocol.

### Feature List

- Compatible with ISO 11898-1 protocol (CAN Specification 2.0)
- Standard frame format (11-bit ID) and extended frame format (29-bit ID)
- Bit rates from 1 Kbit/s to 1 Mbit/s
- Multiple modes of operation: Normal, Listen Only, and Self-Test (no acknowledgment required)
- Special transmissions: Single-shot and Self Reception
- Acceptance filter (single and dual filter modes)
- Error detection and handling: error counters, configurable error warning limit, error code capture, arbitration lost capture, automatic transceiver standby

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.1.8 SDIO Slave Controller

The SDIO Slave Controller in the ESP32-C6 chip provides hardware support for the Secure Digital Input/Output (SDIO) device interface. It allows an SDIO host to access the ESP32-C6 via an SDIO bus protocol.

### Feature List

- Compatible with SD Physical Layer Specification V2.00 and SDIO V2.00 specifications
- Support for SPI, 1-bit SDIO, and 4-bit SDIO transfer modes
- Clock range of 0 ~ 50 MHz
- Configurable sample and drive clock edge
- Integrated and SDIO-accessible registers for information interaction
- Support for SDIO interrupt mechanism
- Automatic padding data and discarding the padded data on the SDIO bus
- Block size up to 512 bytes
- Interrupt vector between the host and slave for bidirectional interrupt

- Support DMA for data transfer
- Support for wake-up from sleep when connection is retained

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.1.9 LED PWM Controller

The LED PWM Controller (LEDC) is designed to generate PWM signals for LED control.

### Feature List

- Six independent PWM generators
- Maximum PWM duty cycle resolution of 20 bits
- Four independent timers with 20-bit counters, configurable fractional clock dividers and counter overflow values
- Adjustable phase of PWM signal output
- PWM duty cycle dithering
- Automatic duty cycle fading
  - Linear duty cycle fading — only one duty cycle range
  - Gamma curve fading — up to 16 duty cycle ranges for each PWM generator, with independently configured fading direction (increase or decrease), fading amount, number of fades, and fading frequency
- PWM signal output in low-power mode (Light-sleep mode)
- Event generation and task response achieved by the Event Task Matrix (ETM)

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.1.10 Motor Control PWM

The Motor Control Pulse Width Modulator (MCPWM) is designed for driving digital motors and smart light. The MCPWM is divided into five main modules: PWM timers, PWM operators, Capture module, Fault Detection module, and Event Task Matrix (ETM) module.

### Feature List

- Three PWM timers for precise timing and frequency control
  - Every PWM timer has a dedicated 8-bit clock prescaler
  - The 16-bit counter in the PWM timer can work in count-up mode, count-down mode, or count-up-down mode

- Hardware or software synchronization to trigger a reload on the PWM timer or the prescaler's restart, with selectable hardware synchronization source
- Three PWM operators for generating waveform pairs
  - Six PWM outputs to operate in several topologies
  - Configurable dead time on rising and falling edges; each set up independently
  - Modulating of PWM output by high-frequency carrier signals, useful when gate drivers are insulated with a transformer
- Capture module for hardware-based signal processing
  - Speed measurement of rotating machinery
  - Measurement of elapsed time between position sensor pulses
  - Period and duty cycle measurement of pulse train signals
  - Decoding current or voltage amplitude derived from duty-cycle-encoded signals of current/voltage sensors
  - Three individual capture channels, each of which with a 32-bit time-stamp register
  - Selection of edge polarity and prescaling of input capture signals
  - The capture timer can sync with a PWM timer or external signals
- Fault Detection module
  - Programmable fault handling in both cycle-by-cycle mode and one-shot mode
  - A fault condition can force the PWM output to either high or low logic levels
- Event generation and task response achieved by the Event Task Matrix (ETM)

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.1.11 Remote Control Peripheral

The Remote Control Peripheral (RMT) controls the transmission and reception of infrared remote control signals.

#### Feature List

- Four channels for sending and receiving infrared remote control signals
- Independent transmission and reception capabilities for each channel
- Support for Normal TX/RX mode, Wrap TX/RX mode, Continuous TX mode
- Modulation on TX pulses and Demodulation on RX pulses
- RX filtering for improved signal reception
- Ability to transmit data simultaneously on multiple channels
- Clock divider counter, state machine, and receiver for each RX channel

- Default allocation of RAM blocks to channels based on channel number
- RAM containing 16-bit entries with “level” and “period” fields

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.1.12 Parallel IO Controller

The Parallel IO Controller (PARLIO) in the ESP32-C6 chip enables data transfer between external devices and internal memory on a parallel bus through GDMA. It consists of a transmitter (TX unit) and a receiver (RX unit), making it a versatile interface for connecting various peripherals.

##### Feature List

- 1/2/4/8/16-bit configurable data bus width
- Half-duplex communication with 16-bit data bus width and full-duplex communication with 8-bit data bus width
- Bit reordering in 1/2/4-bit data bus width mode
- RX unit supports 15 receive modes categorized into three major categories: Level Enable mode, Pulse Enable mode, and Software Enable mode
- TX unit can generate a valid signal aligned with TX

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

#### 5.2.2 Analog Signal Processing

This subsection describes components on the chip that sense and process real-world data.

##### 5.2.2.1 SAR ADC

ESP32-C6 integrates a Successive Approximation Analog-to-Digital Converter (SAR ADC) to convert analog signals into digital representations.

##### Feature List

- 12-bit sampling resolution
- Analog voltage sampling from up to seven pins
- Attenuation of input signals for voltage conversion
- Software-triggered one-time sampling
- Timer-triggered multi-channel scanning
- DMA continuous conversion for seamless data transfer
- Two filters with configurable filter coefficient



- Threshold monitoring which helps to trigger an interrupt
- Support for Event Task Matrix

### Pin Assignment

For details, see [ESP32-C6 Series Datasheet](#) > Section *Peripheral Pin Assignment*.

### 5.2.2.2 Temperature Sensor

The Temperature Sensor in the ESP32-C6 chip allows for real-time monitoring of temperature changes inside the chip.

#### Feature List

- Measurement range:  $-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$
- Software triggering, wherein the data can be read continuously once triggered
- Hardware automatic triggering and temperature monitoring
- Configurable temperature offset based on the environment to improve the accuracy
- Adjustable measurement range
- Two automatic monitoring wake-up modes: absolute value mode and incremental value mode
- Support for Event Task Matrix

## 6 Electrical Characteristics

### 6.1 Absolute Maximum Ratings

Stresses above those listed in Table 6-1 *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under Table 6-2 *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Table 6-1. Absolute Maximum Ratings

Symbol	Parameter	Min	Max	Unit
VDD33	Power supply voltage	-0.3	3.6	V
T <sub>STORE</sub>	Storage temperature	-40	105	°C

### 6.2 Recommended Operating Conditions

Table 6-2. Recommended Operating Conditions

Symbol	Parameter	Min	Typ	Max	Unit
VDD33	Power supply voltage	3.0	3.3	3.6	V
I <sub>VDD</sub>	Current delivered by external power supply	0.5	—	—	A
T <sub>A</sub>	Operating ambient temperature	85 °C version	-40	85	°C
		105 °C version		105	

### 6.3 DC Characteristics (3.3 V, 25 °C)

Table 6-3. DC Characteristics (3.3 V, 25 °C)

Parameter	Description	Min	Typ	Max	Unit
C <sub>IN</sub>	Pin capacitance	—	2	—	pF
V <sub>IH</sub>	High-level input voltage	0.75 × VDD <sup>1</sup>	—	VDD <sup>1</sup> + 0.3	V
V <sub>IL</sub>	Low-level input voltage	-0.3	—	0.25 × VDD <sup>1</sup>	V
I <sub>IH</sub>	High-level input current	—	—	50	nA
I <sub>IL</sub>	Low-level input current	—	—	50	nA
V <sub>OH</sub> <sup>2</sup>	High-level output voltage	0.8 × VDD <sup>1</sup>	—	—	V
V <sub>OL</sub> <sup>2</sup>	Low-level output voltage	—	—	0.1 × VDD <sup>1</sup>	V
I <sub>OH</sub>	High-level source current (VDD <sup>1</sup> = 3.3 V, V <sub>OH</sub> ≥ 2.64 V, PAD_DRIVER = 3)	—	40	—	mA
I <sub>OL</sub>	Low-level sink current (VDD <sup>1</sup> = 3.3 V, V <sub>OL</sub> = 0.495 V, PAD_DRIVER = 3)	—	28	—	mA
R <sub>PU</sub>	Internal weak pull-up resistor	—	45	—	kΩ
R <sub>PD</sub>	Internal weak pull-down resistor	—	45	—	kΩ
V <sub>IH_nRST</sub>	Chip reset release voltage (CHIP_PU voltage is within the specified range)	0.75 × VDD <sup>1</sup>	—	VDD <sup>1</sup> + 0.3	V

$V_{IL\_nRST}$	Chip reset voltage (CHIP_PU voltage is within the specified range)	-0.3	—	$0.25 \times VDD^1$	V
----------------	--	------	---	---------------------	---

<sup>1</sup> VDD – voltage from a power pin of a respective power domain.

<sup>2</sup>  $V_{OH}$  and  $V_{OL}$  are measured using high-impedance load.

## 6.4 Current Consumption Characteristics

### 6.4.1 Current Consumption in Active Mode

The current consumption measurements are taken with a 3.3 V supply at 25 °C ambient temperature.

TX current consumption is rated at a 100% duty cycle.

RX current consumption is rated when the peripherals are disabled and the CPU idle.

**Table 6-4. Current Consumption for Wi-Fi (2.4 GHz) in Active Mode**

Work Mode	RF Condition	Description	Peak (mA)
Active (RF working)	TX	802.11b, 1 Mbps, DSSS @ 20.5 dBm	382
		802.11g, 54 Mbps, OFDM @ 19.0 dBm	316
		802.11n, HT20, MCS7 @ 18.0 dBm	295
		802.11n, HT40, MCS7 @ 17.5 dBm	280
		802.11ax, MCS9 @ 15.5 dBm	251
	RX	802.11b/g/n, HT20	78
		802.11n, HT40	82
		802.11ax, HE20	78

**Table 6-5. Current Consumption for Bluetooth LE in Active Mode**

Work Mode	RF Condition	Description	Peak (mA)
Active (RF working)	TX	Bluetooth LE @ 19.0 dBm	309
		Bluetooth LE @ 9.0 dBm	190
		Bluetooth LE @ 0 dBm	130
		Bluetooth LE @ -16.0 dBm	93
	RX	Bluetooth LE	73

**Table 6-6. Current Consumption for 802.15.4 in Active Mode**

Work Mode	RF Condition	Description	Peak (mA)
Active (RF working)	TX	802.15.4 @ 19.0 dBm	302
		802.15.4 @ 12.0 dBm	185
		802.15.4 @ 0 dBm	117
		802.15.4 @ -16.0 dBm	91
	RX	802.15.4	73

**Note:**

The content below is excerpted from *Section Current Consumption in Other Modes* in [ESP32-C6 Series Datasheet](#).

## 6.4.2 Current Consumption in Other Modes

**Table 6-7. Current Consumption in Modem-sleep Mode**

Mode	CPU Frequency (MHz)	Description	Typ (mA)	
			All Peripherals Clocks Disabled	All Peripherals Clocks Enabled <sup>1</sup>
Modem-sleep <sup>2, 3</sup>	160	CPU is running	27	38
		CPU is idle	17	28
	80	CPU is running	19	30
		CPU is idle	14	25

<sup>1</sup> In practice, the current consumption might be different depending on which peripherals are enabled.

<sup>2</sup> In Modem-sleep mode, Wi-Fi is clock gated.

<sup>3</sup> In Modem-sleep mode, the consumption might be higher when accessing flash.

**Table 6-8. Current Consumption in Low-Power Modes**

Mode	Description	Typ (μA)
Light-sleep	CPU and wireless communication modules are powered down, peripheral clocks are disabled, and all GPIOs are high-impedance	180
	CPU, wireless communication modules and peripherals are powered down, and all GPIOs are high-impedance	35
Deep-sleep	RTC timer and LP memory are powered on	7
Power off	CHIP_PU is set to low level, the chip is powered off	1

## 6.5 Memory Specifications

The data below is sourced from the memory vendor datasheet. These values are guaranteed through design and/or characterization but are not fully tested in production. Devices are shipped with the memory erased.

**Table 6-9. Flash Specifications**

Parameter	Description	Min	Typ	Max	Unit
VCC	Power supply voltage (1.8 V)	1.65	1.80	2.00	V
	Power supply voltage (3.3 V)	2.7	3.3	3.6	V
F <sub>C</sub>	Maximum clock frequency	80	—	—	MHz
—	Program/erase cycles	100,000	—	—	cycles
T <sub>RET</sub>	Data retention time	20	—	—	years
T <sub>PP</sub>	Page program time	—	0.8	5	ms

Cont'd on next page

Table 6-9 – cont'd from previous page

Parameter	Description	Min	Typ	Max	Unit
$T_{SE}$	Sector erase time (4 KB)	—	70	500	ms
$T_{BE1}$	Block erase time (32 KB)	—	0.2	2	s
$T_{BE2}$	Block erase time (64 KB)	—	0.3	3	s
$T_{CE}$	Chip erase time (16 Mb)	—	7	20	s
	Chip erase time (32 Mb)	—	20	60	s
	Chip erase time (64 Mb)	—	25	100	s
	Chip erase time (128 Mb)	—	60	200	s
	Chip erase time (256 Mb)	—	70	300	s

## 7 RF Characteristics

This section contains tables with RF characteristics of the Espressif product.

The RF data is measured at the antenna port, where RF cable is connected, including the front-end loss. The external antennas used for the tests on the modules with external antenna connectors have an impedance of 50  $\Omega$ .

Devices should operate in the center frequency range allocated by regional regulatory authorities. The target center frequency range and the target transmit power are configurable by software. See [ESP RF Test Tool and Test Guide](#) for instructions.

Unless otherwise stated, the RF tests are conducted with a 3.3 V ( $\pm 5\%$ ) supply at 25 °C ambient temperature.

### 7.1 Wi-Fi Radio

Table 7-1. Wi-Fi RF Characteristics

Name	Description
Center frequency range of operating channel	2412 ~ 2484 MHz
Wi-Fi wireless standard	IEEE 802.11b/g/n/ax

#### 7.1.1 Wi-Fi RF Transmitter (TX) Characteristics

Table 7-2. TX Power with Spectral Mask and EVM Meeting 802.11 Standards

Rate	Min (dBm)	Typ (dBm)	Max (dBm)
802.11b, 1 Mbps, DSSS	—	20.5	—
802.11b, 11 Mbps, CCK	—	20.5	—
802.11g, 6 Mbps, OFDM	—	20.0	—
802.11g, 54 Mbps, OFDM	—	19.0	—
802.11n, HT20, MCS0	—	19.0	—
802.11n, HT20, MCS7	—	18.0	—
802.11n, HT40, MCS0	—	18.5	—
802.11n, HT40, MCS7	—	17.5	—
802.11ax, HE20, MCS0	—	19.0	—
802.11ax, HE20, MCS9	—	15.5	—

Table 7-3. TX EVM Test<sup>1</sup>

Rate	Min (dB)	Typ (dB)	Limit (dB)
802.11b, 1 Mbps, DSSS	—	-25.0	-10.0
802.11b, 11 Mbps, CCK	—	-25.0	-10.0

Cont'd on next page

Table 7-3 – cont'd from previous page

Rate	Min (dB)	Typ (dB)	Limit (dB)
802.11g, 6 Mbps, OFDM	—	–24.0	–5.0
802.11g, 54 Mbps, OFDM	—	–28.0	–25.0
802.11n, HT20, MCS0	—	–27.5	–5.0
802.11n, HT20, MCS7	—	–30.0	–27.0
802.11n, HT40, MCS0	—	–27.0	–5.0
802.11n, HT40, MCS7	—	–29.5	–27.0
802.11ax, HE20, MCS0	—	–27.0	–5.0
802.11ax, HE20, MCS9	—	–34.0	–32.0

<sup>1</sup> EVM is measured at the corresponding typical TX power provided in Table 7-2 *TX Power with Spectral Mask and EVM Meeting 802.11 Standards* above.

## 7.1.2 Wi-Fi RF Receiver (RX) Characteristics

For RX tests, the PER (packet error rate) limit is 8% for 802.11b, and 10% for 802.11g/n/ax.

Table 7-4. RX Sensitivity

Rate	Min (dBm)	Typ (dBm)	Max (dBm)
802.11b, 1 Mbps, DSSS	—	–99.2	—
802.11b, 2 Mbps, DSSS	—	–96.8	—
802.11b, 5.5 Mbps, CCK	—	–93.6	—
802.11b, 11 Mbps, CCK	—	–90.0	—
802.11g, 6 Mbps, OFDM	—	–94.0	—
802.11g, 9 Mbps, OFDM	—	–93.0	—
802.11g, 12 Mbps, OFDM	—	–92.4	—
802.11g, 18 Mbps, OFDM	—	–90.0	—
802.11g, 24 Mbps, OFDM	—	–86.8	—
802.11g, 36 Mbps, OFDM	—	–83.0	—
802.11g, 48 Mbps, OFDM	—	–78.8	—
802.11g, 54 Mbps, OFDM	—	–77.6	—
802.11n, HT20, MCS0	—	–93.6	—
802.11n, HT20, MCS1	—	–92.0	—
802.11n, HT20, MCS2	—	–89.4	—
802.11n, HT20, MCS3	—	–86.0	—
802.11n, HT20, MCS4	—	–82.8	—
802.11n, HT20, MCS5	—	–78.6	—
802.11n, HT20, MCS6	—	–77.0	—
802.11n, HT20, MCS7	—	–75.4	—
802.11n, HT40, MCS0	—	–91.0	—
802.11n, HT40, MCS1	—	–89.6	—

Cont'd on next page

Table 7-4 – cont'd from previous page

Rate	Min (dBm)	Typ (dBm)	Max (dBm)
802.11n, HT40, MCS2	—	–87.0	—
802.11n, HT40, MCS3	—	–83.4	—
802.11n, HT40, MCS4	—	–80.4	—
802.11n, HT40, MCS5	—	–76.2	—
802.11n, HT40, MCS6	—	–74.6	—
802.11n, HT40, MCS7	—	–73.2	—
802.11ax, HE20, MCS0	—	–93.8	—
802.11ax, HE20, MCS1	—	–91.0	—
802.11ax, HE20, MCS2	—	–88.0	—
802.11ax, HE20, MCS3	—	–85.6	—
802.11ax, HE20, MCS4	—	–82.0	—
802.11ax, HE20, MCS5	—	–78.0	—
802.11ax, HE20, MCS6	—	–76.6	—
802.11ax, HE20, MCS7	—	–74.4	—
802.11ax, HE20, MCS8	—	–70.8	—
802.11ax, HE20, MCS9	—	–68.6	—

Table 7-5. Maximum RX Level

Rate	Min (dBm)	Typ (dBm)	Max (dBm)
802.11b, 1 Mbps, DSSS	—	5	—
802.11b, 11 Mbps, CCK	—	5	—
802.11g, 6 Mbps, OFDM	—	5	—
802.11g, 54 Mbps, OFDM	—	0	—
802.11n, HT20, MCS0	—	5	—
802.11n, HT20, MCS7	—	0	—
802.11n, HT40, MCS0	—	5	—
802.11n, HT40, MCS7	—	0	—
802.11ax, HE20, MCS0	—	5	—
802.11ax, HE20, MCS9	—	0	—

Table 7-6. RX Adjacent Channel Rejection

Rate	Min (dB)	Typ (dB)	Max (dB)
802.11b, 1 Mbps, DSSS	—	38	—
802.11b, 11 Mbps, CCK	—	38	—
802.11g, 6 Mbps, OFDM	—	31	—
802.11g, 54 Mbps, OFDM	—	20	—

Cont'd on next page



Table 7-6 – cont'd from previous page

Rate	Min (dB)	Typ (dB)	Max (dB)
802.11n, HT20, MCS0	—	31	—
802.11n, HT20, MCS7	—	16	—
802.11n, HT40, MCS0	—	28	—
802.11n, HT40, MCS7	—	10	—
802.11ax, HE20, MCS0	—	25	—
802.11ax, HE20, MCS9	—	2	—

## 7.2 Bluetooth 5 (LE) Radio

Table 7-7. Bluetooth LE RF Characteristics

Name	Description
Center frequency range of operating channel	2402 ~ 2480 MHz
RF transmit power range	-16.0 ~ 19.0 dBm

### 7.2.1 Bluetooth LE RF Transmitter (TX) Characteristics

Table 7-8. Bluetooth LE - Transmitter Characteristics - 1 Mbps

Parameter	Description	Min	Typ	Max	Unit
Carrier frequency offset and drift	Max. $ f_n _{n=0, 1, 2, 3, \dots k}$	—	1.3	—	kHz
	Max. $ f_0 - f_n _{n=2, 3, 4, \dots k}$	—	1.5	—	kHz
	Max. $ f_n - f_{n-5} _{n=6, 7, 8, \dots k}$	—	0.9	—	kHz
	$ f_1 - f_0 $	—	0.6	—	kHz
Modulation characteristics	$\Delta F1_{avg}$	—	249.9	—	kHz
	Min. $\Delta F2_{max}$ (for at least 99.9% of all $\Delta F2_{max}$ )	—	212.1	—	kHz
	$\Delta F2_{avg}/\Delta F1_{avg}$	—	0.88	—	—
In-band emissions	$\pm 2$ MHz offset	—	-29	—	dBm
	$\pm 3$ MHz offset	—	-36	—	dBm
	$> \pm 3$ MHz offset	—	-39	—	dBm

Table 7-9. Bluetooth LE - Transmitter Characteristics - 2 Mbps

Parameter	Description	Min	Typ	Max	Unit
Carrier frequency offset and drift	Max. $ f_n _{n=0, 1, 2, 3, \dots k}$	—	2.2	—	kHz
	Max. $ f_0 - f_n _{n=2, 3, 4, \dots k}$	—	1.1	—	kHz
	Max. $ f_n - f_{n-5} _{n=6, 7, 8, \dots k}$	—	1.1	—	kHz
	$ f_1 - f_0 $	—	0.5	—	kHz
Modulation characteristics	$\Delta F1_{avg}$	—	499.4	—	kHz

Cont'd on next page

Table 7-9 – cont'd from previous page

Parameter	Description	Min	Typ	Max	Unit
	Min. $\Delta F2_{\max}$ (for at least 99.9% of all $\Delta F2_{\max}$ )	—	443.5	—	kHz
	$\Delta F2_{\text{avg}}/\Delta F1_{\text{avg}}$	—	0.95	—	—
In-band emissions	$\pm 4$ MHz offset	—	-40	—	dBm
	$\pm 5$ MHz offset	—	-41	—	dBm
	$> \pm 5$ MHz offset	—	-42	—	dBm

Table 7-10. Bluetooth LE - Transmitter Characteristics - 125 Kbps

Parameter	Description	Min	Typ	Max	Unit
Carrier frequency offset and drift	Max. $ f_n _{n=0, 1, 2, 3, \dots k}$	—	0.7	—	kHz
	Max. $ f_0 - f_n _{n=1, 2, 3, \dots k}$	—	0.3	—	kHz
	$ f_0 - f_3 $	—	0.1	—	kHz
	Max. $ f_n - f_{n-3} _{n=7, 8, 9, \dots k}$	—	0.4	—	kHz
Modulation characteristics	$\Delta F1_{\text{avg}}$	—	250.0	—	kHz
	Min. $\Delta F1_{\max}$ (for at least 99.9% of all $\Delta F1_{\max}$ )	—	238.0	—	kHz
In-band emissions	$\pm 2$ MHz offset	—	-29	—	dBm
	$\pm 3$ MHz offset	—	-36	—	dBm
	$> \pm 3$ MHz offset	—	-39	—	dBm

Table 7-11. Bluetooth LE - Transmitter Characteristics - 500 Kbps

Parameter	Description	Min	Typ	Max	Unit
Carrier frequency offset and drift	Max. $ f_n _{n=0, 1, 2, 3, \dots k}$	—	0.5	—	kHz
	Max. $ f_0 - f_n _{n=1, 2, 3, \dots k}$	—	0.3	—	kHz
	$ f_0 - f_3 $	—	0.1	—	kHz
	Max. $ f_n - f_{n-3} _{n=7, 8, 9, \dots k}$	—	0.4	—	kHz
Modulation characteristics	$\Delta F2_{\text{avg}}$	—	230.7	—	kHz
	Min. $\Delta F2_{\max}$ (for at least 99.9% of all $\Delta F2_{\max}$ )	—	217.6	—	kHz
In-band emissions	$\pm 2$ MHz offset	—	-28	—	dBm
	$\pm 3$ MHz offset	—	-36	—	dBm
	$> \pm 3$ MHz offset	—	-39	—	dBm

## 7.2.2 Bluetooth LE RF Receiver (RX) Characteristics

Table 7-12. Bluetooth LE - Receiver Characteristics - 1 Mbps

Parameter	Description	Min	Typ	Max	Unit
Sensitivity @30.8% PER	—	—	-98.0	—	dBm
Maximum received signal @30.8% PER	—	—	8	—	dBm

Cont'd on next page

Table 7-12 – cont'd from previous page

Parameter		Description	Min	Typ	Max	Unit
C/I and receiver selectivity performance	Co-channel	$F = F_0$ MHz	—	7	—	dB
	Adjacent channel	$F = F_0 + 1$ MHz	—	4	—	dB
		$F = F_0 - 1$ MHz	—	3	—	dB
		$F = F_0 + 2$ MHz	—	-21	—	dB
		$F = F_0 - 2$ MHz	—	-22	—	dB
		$F = F_0 + 3$ MHz	—	-28	—	dB
		$F = F_0 - 3$ MHz	—	-36	—	dB
		$F \geq F_0 + 4$ MHz	—	-27	—	dB
		$F \leq F_0 - 4$ MHz	—	-36	—	dB
	Image frequency	—	—	-26	—	dB
Out-of-band blocking performance	Adjacent channel to image frequency	$F = F_{image} + 1$ MHz	—	-29	—	dB
		$F = F_{image} - 1$ MHz	—	-28	—	dB
		30 MHz ~ 2000 MHz	—	-16	—	dBm
		2003 MHz ~ 2399 MHz	—	-24	—	dBm
		2484 MHz ~ 2997 MHz	—	-16	—	dBm
		3000 MHz ~ 12.75 GHz	—	-1	—	dBm
Intermodulation		—	—	-27	—	dBm

Table 7-13. Bluetooth LE - Receiver Characteristics - 2 Mbps

Parameter		Description	Min	Typ	Max	Unit
Sensitivity @30.8% PER		—	—	-95.0	—	dBm
Maximum received signal @30.8% PER		—	—	8	—	dBm
C/I and receiver selectivity performance	Co-channel	$F = F_0$ MHz	—	8	—	dB
	Adjacent channel	$F = F_0 + 2$ MHz	—	3	—	dB
		$F = F_0 - 2$ MHz	—	2	—	dB
		$F = F_0 + 4$ MHz	—	-23	—	dB
		$F = F_0 - 4$ MHz	—	-25	—	dB
		$F = F_0 + 6$ MHz	—	-31	—	dB
		$F = F_0 - 6$ MHz	—	-35	—	dB
		$F \geq F_0 + 8$ MHz	—	-36	—	dB
		$F \leq F_0 - 8$ MHz	—	-36	—	dB
	Image frequency	—	—	-23	—	dB
Out-of-band blocking performance	Adjacent channel to image frequency	$F = F_{image} + 2$ MHz	—	-30	—	dB
		$F = F_{image} - 2$ MHz	—	3	—	dB
		30 MHz ~ 2000 MHz	—	-18	—	dBm
		2003 MHz ~ 2399 MHz	—	-28	—	dBm
		2484 MHz ~ 2997 MHz	—	-16	—	dBm
		3000 MHz ~ 12.75 GHz	—	-1	—	dBm
Intermodulation		—	—	-29	—	dBm

Table 7-14. Bluetooth LE - Receiver Characteristics - 125 Kbps

Parameter		Description	Min	Typ	Max	Unit
Sensitivity @30.8% PER		—	—	-105.5	—	dBm
Maximum received signal @30.8% PER		—	—	8	—	dBm
C/I and receiver selectivity performance	Co-channel	$F = F_0 \text{ MHz}$	—	2	—	dB
	Adjacent channel	$F = F_0 + 1 \text{ MHz}$	—	-1	—	dB
		$F = F_0 - 1 \text{ MHz}$	—	-3	—	dB
		$F = F_0 + 2 \text{ MHz}$	—	-31	—	dB
		$F = F_0 - 2 \text{ MHz}$	—	-27	—	dB
		$F = F_0 + 3 \text{ MHz}$	—	-33	—	dB
		$F = F_0 - 3 \text{ MHz}$	—	-42	—	dB
		$F \geq F_0 + 4 \text{ MHz}$	—	-31	—	dB
		$F \leq F_0 - 4 \text{ MHz}$	—	-48	—	dB
	Image frequency	—	—	-31	—	dB
	Adjacent channel to image frequency	$F = F_{image} + 1 \text{ MHz}$	—	-36	—	dB
		$F = F_{image} - 1 \text{ MHz}$	—	-33	—	dB

Table 7-15. Bluetooth LE - Receiver Characteristics - 500 Kbps

Parameter		Description	Min	Typ	Max	Unit
Sensitivity @30.8% PER		—	—	-101.5	—	dBm
Maximum received signal @30.8% PER		—	—	8	—	dBm
C/I and receiver selectivity performance	Co-channel	$F = F_0 \text{ MHz}$	—	4	—	dB
	Adjacent channel	$F = F_0 + 1 \text{ MHz}$	—	1	—	dB
		$F = F_0 - 1 \text{ MHz}$	—	-1	—	dB
		$F = F_0 + 2 \text{ MHz}$	—	-23	—	dB
		$F = F_0 - 2 \text{ MHz}$	—	-24	—	dB
		$F = F_0 + 3 \text{ MHz}$	—	-33	—	dB
		$F = F_0 - 3 \text{ MHz}$	—	-41	—	dB
		$F \geq F_0 + 4 \text{ MHz}$	—	-31	—	dB
		$F \leq F_0 - 4 \text{ MHz}$	—	-41	—	dB
	Image frequency	—	—	-30	—	dB
	Adjacent channel to image frequency	$F = F_{image} + 1 \text{ MHz}$	—	-35	—	dB
		$F = F_{image} - 1 \text{ MHz}$	—	-27	—	dB

## 7.3 802.15.4 Radio

Table 7-16. 802.15.4 RF Characteristics

Name	Description
Center frequency range of operating channel	2405 ~ 2480 MHz

<sup>1</sup> Zigbee in the 2.4 GHz range supports 16 channels at 5 MHz spacing from channel 11 to channel 26.

### 7.3.1 802.15.4 RF Transmitter (TX) Characteristics

Table 7-17. 802.15.4 Transmitter Characteristics - 250 Kbps

Parameter	Min	Typ	Max	Unit
RF transmit power range	-16.0	—	19.0	dBm
EVM	—	13%	—	—

### 7.3.2 802.15.4 RF Receiver (RX) Characteristics

Table 7-18. 802.15.4 Receiver Characteristics - 250 Kbps

Parameter		Description	Min	Typ	Max	Unit
Sensitivity @1% PER		—	—	-104.0	—	dBm
Maximum received signal @1% PER		—	—	8	—	dBm
Relative jamming level	Adjacent channel	$F = F_0 + 5 \text{ MHz}$	—	27	—	dB
		$F = F_0 - 5 \text{ MHz}$	—	32	—	dB
	Alternate channel	$F = F_0 + 10 \text{ MHz}$	—	47	—	dB
		$F = F_0 - 10 \text{ MHz}$	—	50	—	dB

## 8 Module Schematics

This is the reference design of the module.

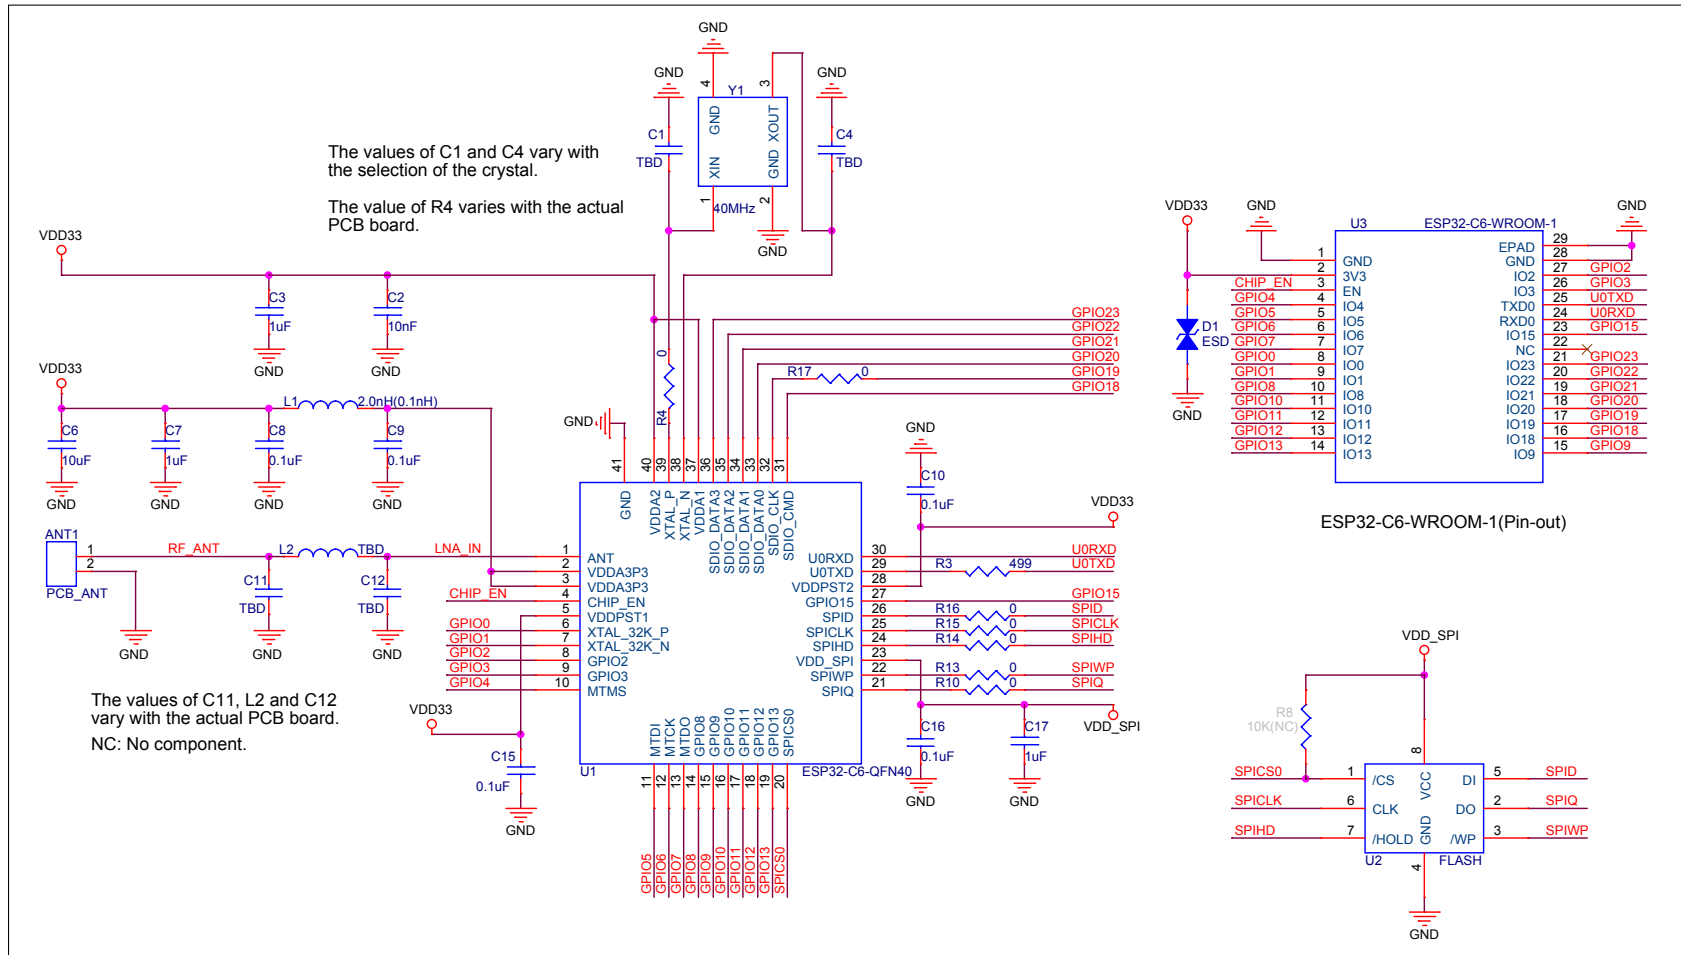


Figure 8-1. ESP32-C6-WROOM-1 Schematics

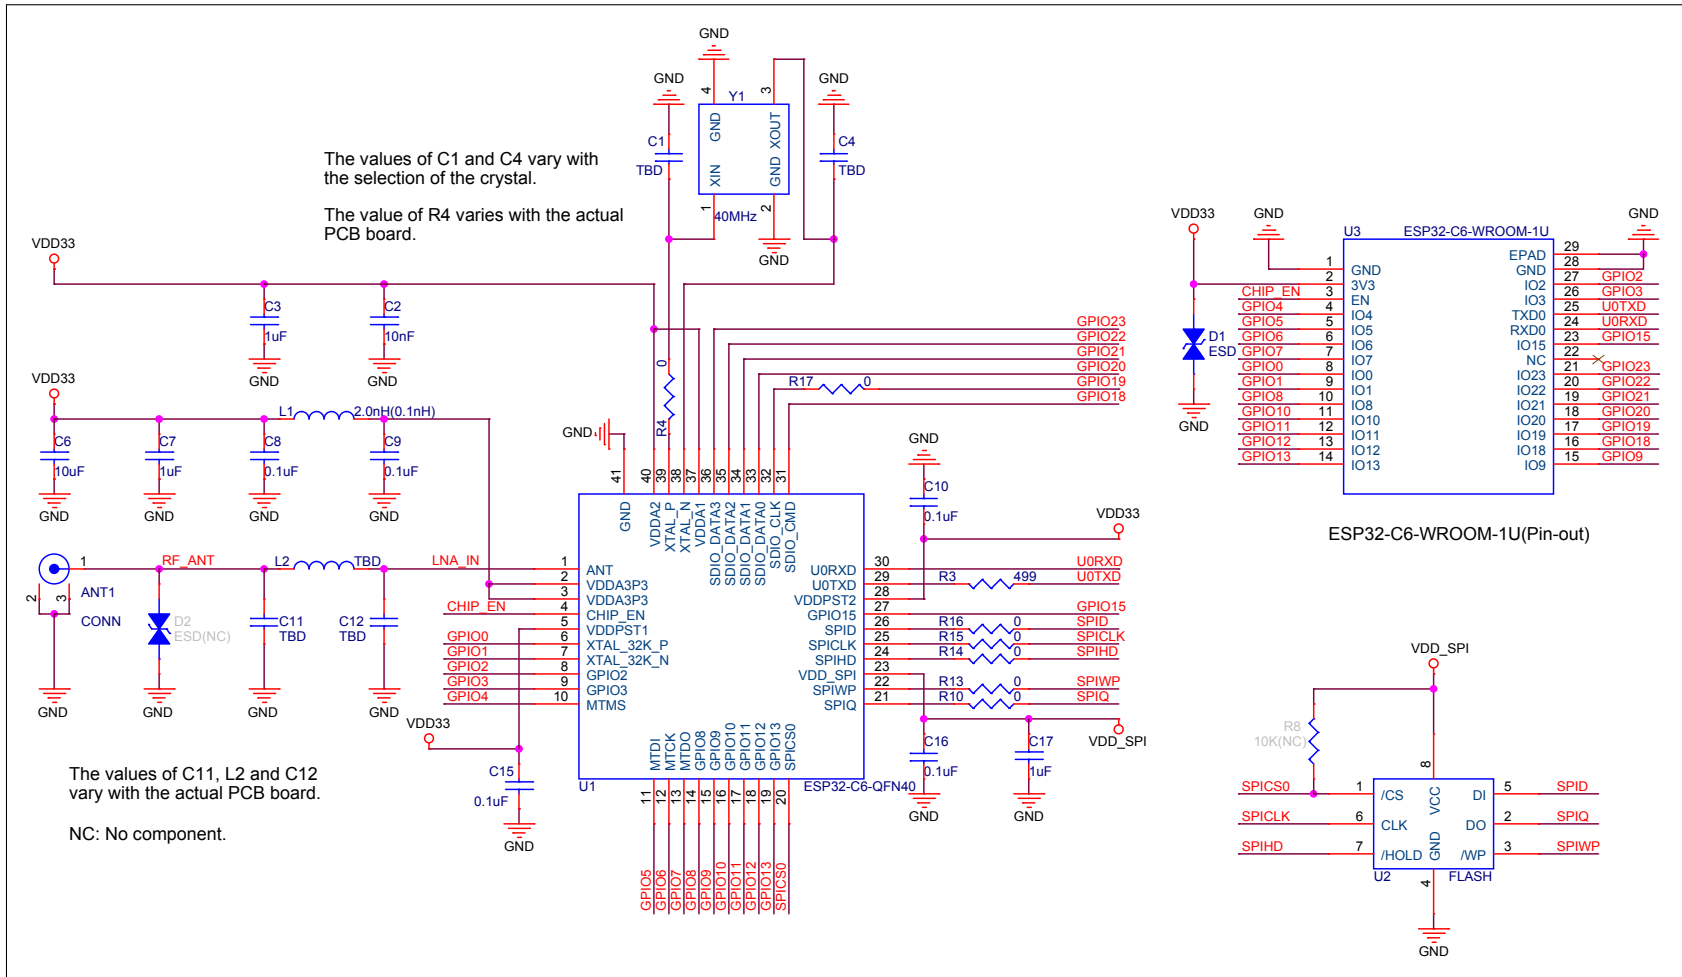


Figure 8-2. ESP32-C6-WROOM-1U Schematics

## 9 Peripheral Schematics

This is the typical application circuit of the module connected with peripheral components (for example, power supply, antenna, reset button, JTAG interface, and UART interface).

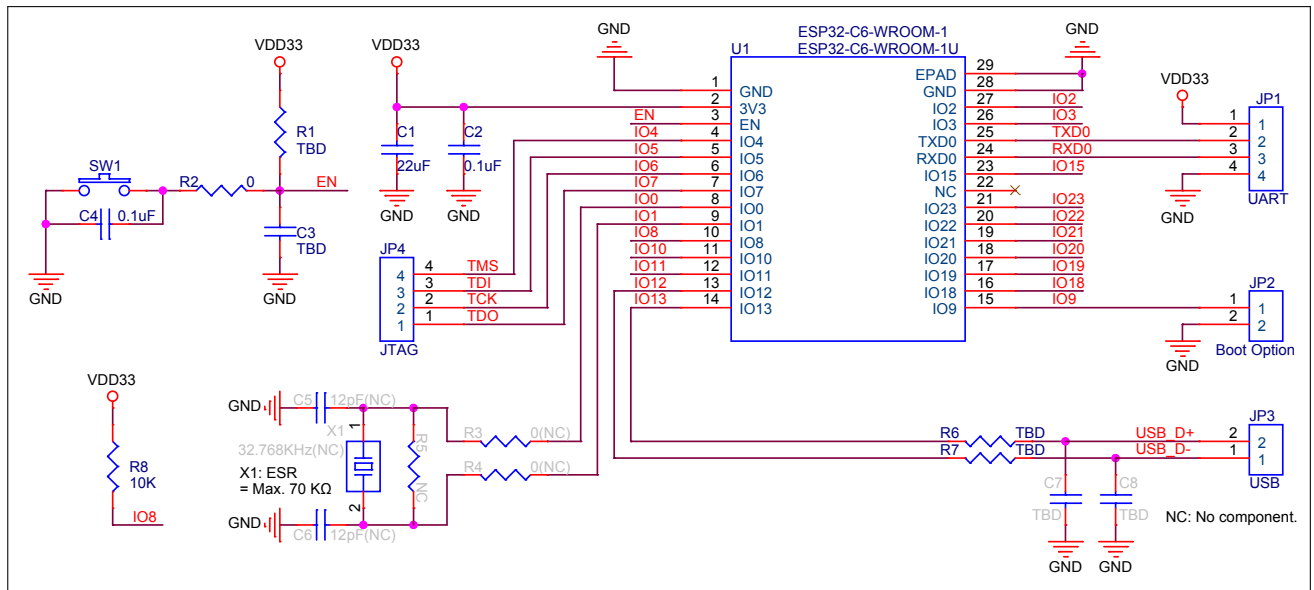


Figure 9-1. Peripheral Schematics

- Soldering the EPAD to the ground of the base board is not a must, however, it can optimize thermal performance. If you choose to solder it, please apply the correct amount of soldering paste. Too much soldering paste may increase the gap between the module and the baseboard. As a result, the adhesion between other pins and the baseboard may be poor.
- To ensure that the power supply to the ESP32-C6 chip is stable during power-up, it is advised to add an RC delay circuit at the EN pin. The recommended setting for the RC delay circuit is usually  $R = 10\text{ k}\Omega$  and  $C = 1\text{ }\mu\text{F}$ . However, specific parameters should be adjusted based on the power-up timing of the module and the power-up and reset sequence timing of the chip. For ESP32-C6's power-up and reset sequence timing diagram, please refer Section [4.5 Chip Power-up and Reset](#).



## 10 Physical Dimensions

### 10.1 Physical Dimensions

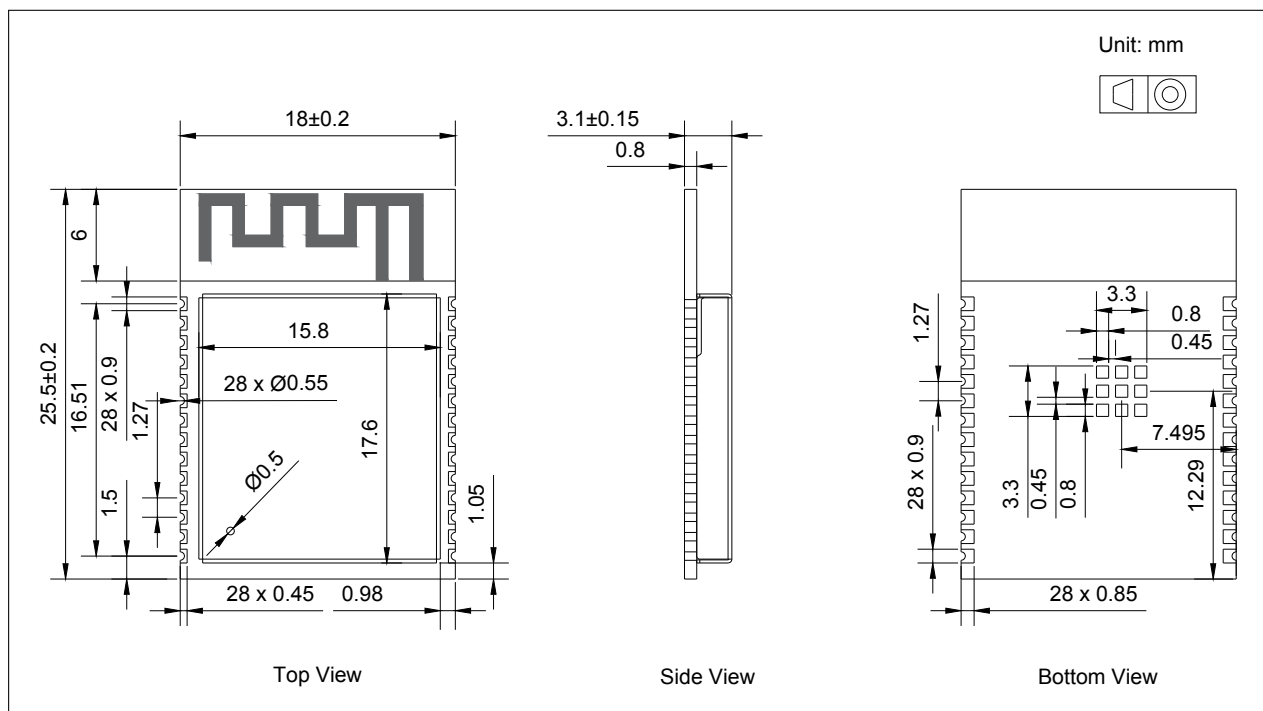


Figure 10-1. ESP32-C6-WROOM-1 Physical Dimensions

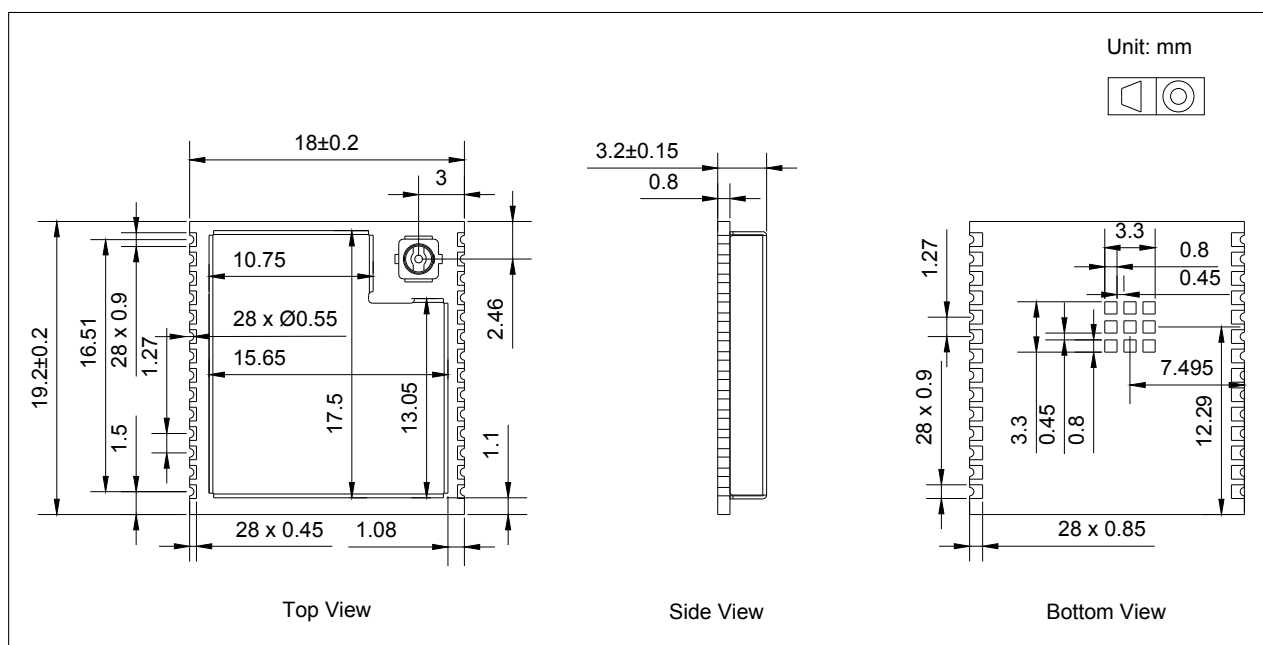


Figure 10-2. ESP32-C6-WROOM-1U Physical Dimensions

**Note:**

For information about tape, reel, and product marking, please refer to [ESP32-C6 Module Packaging Information](#).

## 10.2 Dimensions of External Antenna Connector

ESP32-C6-WROOM-1U uses the first generation external antenna connector as shown in Figure 10-3 *Dimensions of External Antenna Connector*. This connector is compatible with the following connectors:

- U.FL Series connector from Hirose
- MHF I connector from I-PEX
- AMC connector from Amphenol

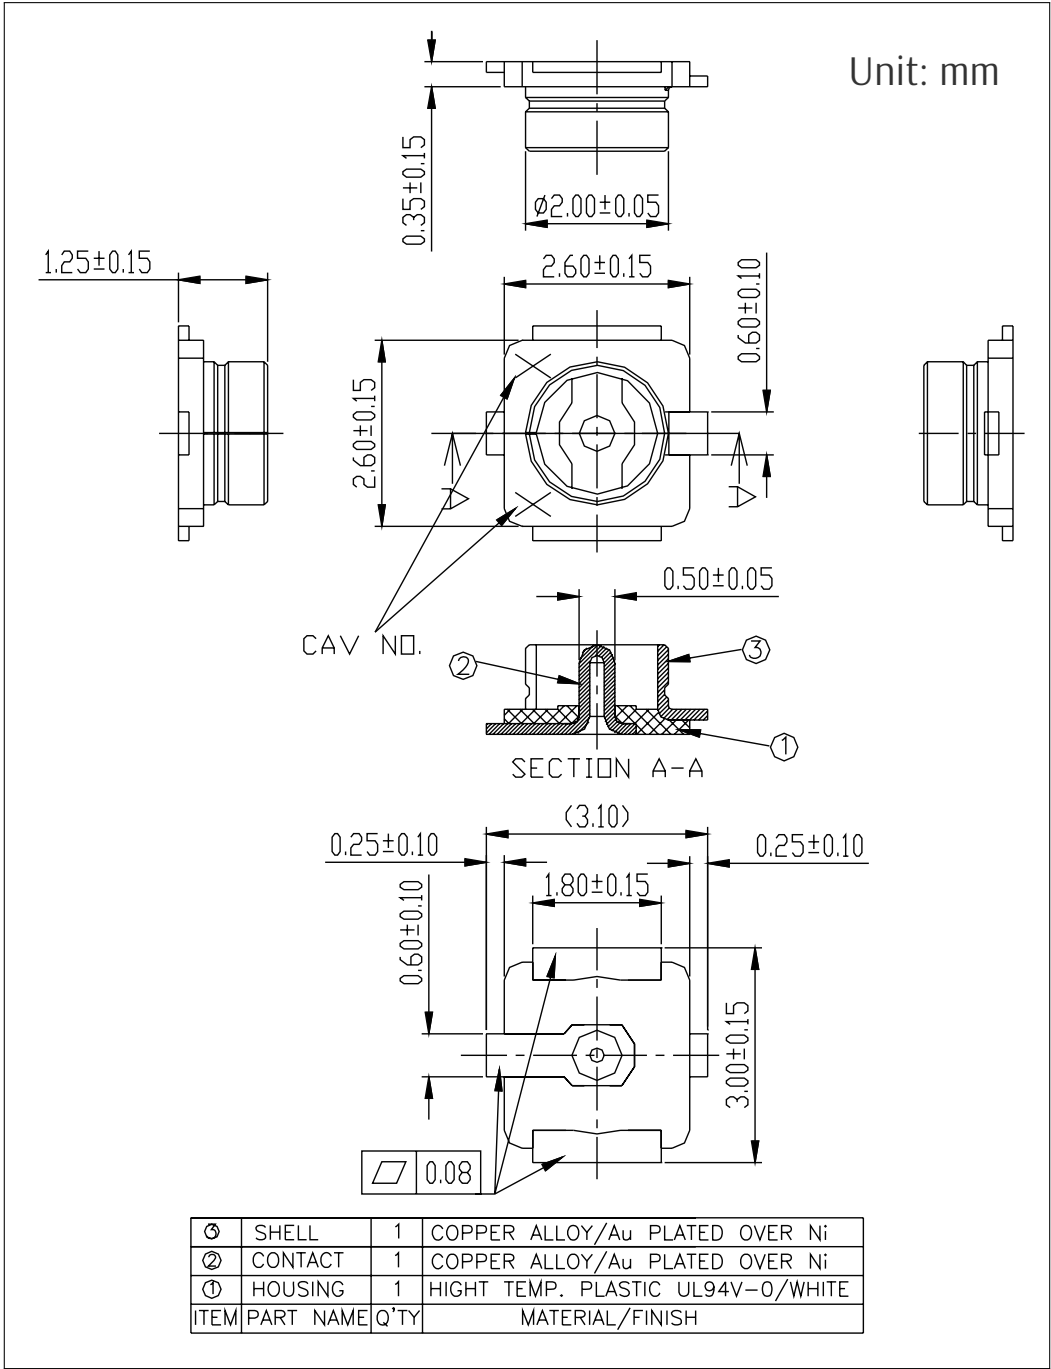


Figure 10-3. Dimensions of External Antenna Connector

The external antenna used for ESP32-C6-WROOM-1U during certification testing is the first generation monopole antenna, with material code TFPD05H08750011.

The module does not include an external antenna upon shipment. If needed, select a suitable external antenna based on the product's usage environment and performance requirements.

It is recommended to select an antenna that meets the following requirements:

- 2.4 GHz band
- 50  $\Omega$  impedance
- The maximum gain does not exceed 2.33 dBi, the gain of the antenna used for certification
- The connector matches the specifications shown in Figure [10-3 Dimensions of External Antenna Connector](#)

**Note:**

If you use an external antenna of a different type or gain, additional testing, such as EMC, may be required beyond the existing antenna test reports for Espressif modules. Specific requirements depend on the certification type.

## 11 PCB Layout Recommendations

### 11.1 PCB Land Pattern

This section provides the following resources for your reference:

- Figures for recommended PCB land patterns with all the dimensions needed for PCB design. See Figure 11-1 *ESP32-C6-WROOM-1 Recommended PCB Land Pattern* and Figure 11-2 *ESP32-C6-WROOM-1U Recommended PCB Land Pattern*.
- Source files of recommended PCB land patterns to measure dimensions not covered in Figure 11-1 and Figure 11-2. You can view the source files for [ESP32-C6-WROOM-1](#) and [ESP32-C6-WROOM-1U](#) with [Autodesk Viewer](#).
- 3D models of [ESP32-C6-WROOM-1](#) and [ESP32-C6-WROOM-1U](#). Please make sure that you download the 3D model file in .STEP format (beware that some browsers might add .txt).

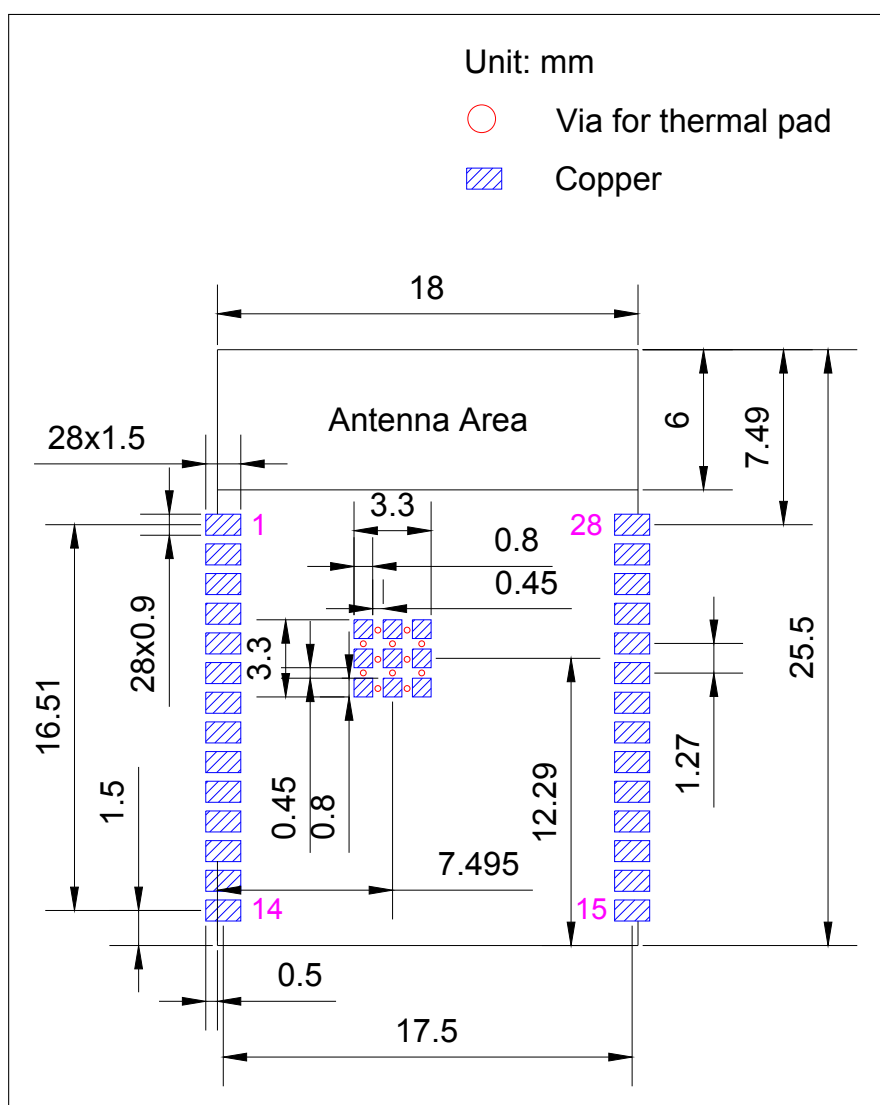


Figure 11-1. ESP32-C6-WROOM-1 Recommended PCB Land Pattern

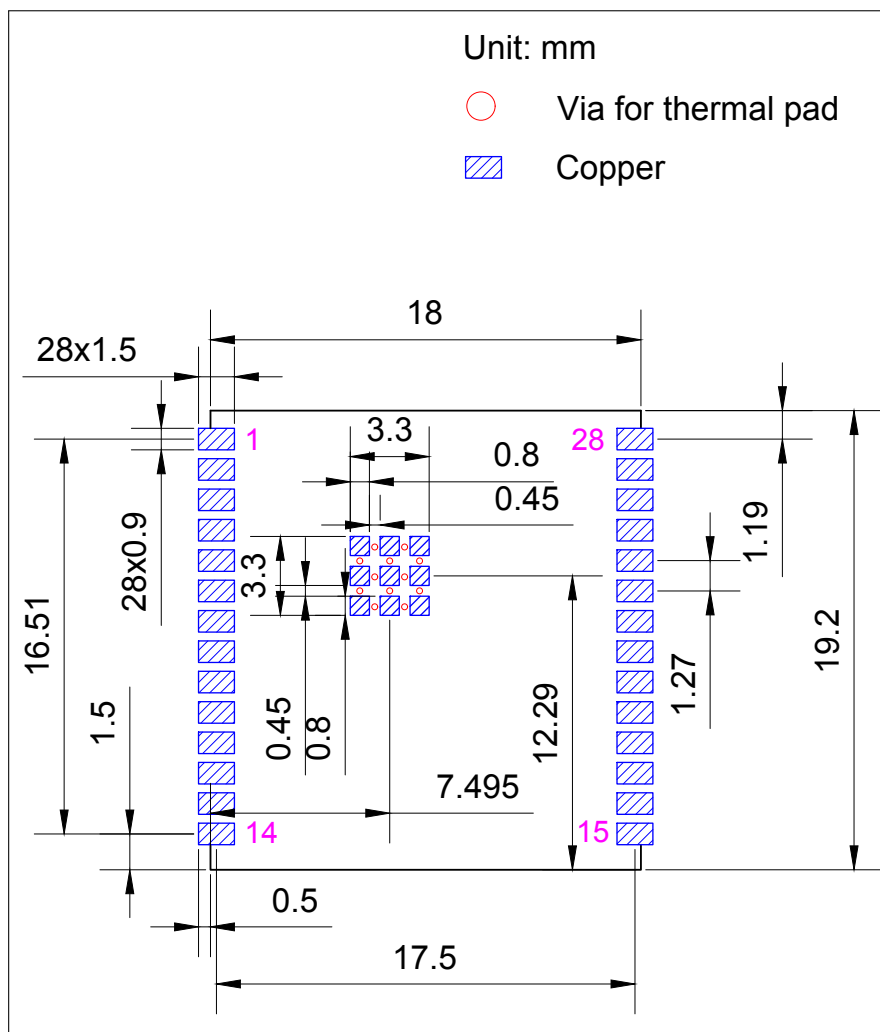


Figure 11-2. ESP32-C6-WROOM-1U Recommended PCB Land Pattern

## 11.2 Module Placement for PCB Design

If module-on-board design is adopted, attention should be paid while positioning the module on the base board. The interference of the base board on the module's antenna performance should be minimized.

For details about module placement for PCB design, please refer to [ESP32-C6 Hardware Design Guidelines](#) > Section *Positioning a Module on a Base Board*.

## 12 Product Handling

### 12.1 Storage Conditions

The products sealed in moisture barrier bags (MBB) should be stored in a non-condensing atmospheric environment of  $< 40\text{ }^{\circ}\text{C}$  and 90%RH. The module is rated at the moisture sensitivity level (MSL) of 3.

After unpacking, the module must be soldered within 168 hours with the factory conditions  $25\pm 5\text{ }^{\circ}\text{C}$  and 60%RH. If the above conditions are not met, the module needs to be baked.

### 12.2 Electrostatic Discharge (ESD)

- Human body model (HBM):  $\pm 2000\text{ V}$
- Charged-device model (CDM):  $\pm 500\text{ V}$

### 12.3 Reflow Profile

Solder the module in a single reflow.

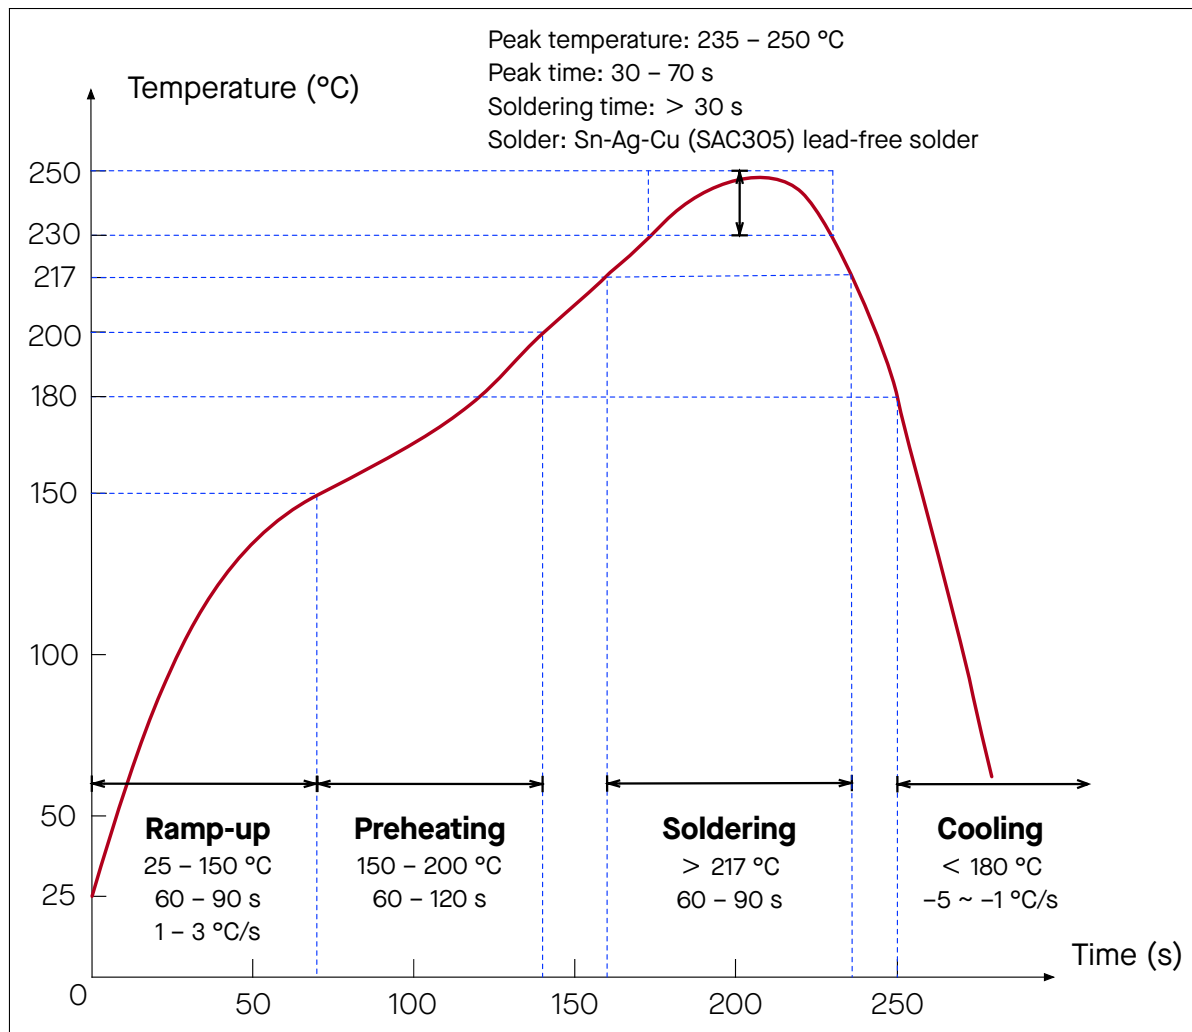


Figure 12-1. Reflow Profile

## 12.4 Ultrasonic Vibration

Avoid exposing Espressif modules to vibration from ultrasonic equipment, such as ultrasonic welders or ultrasonic cleaners. This vibration may induce resonance in the in-module crystal and lead to its malfunction or even failure. As a consequence, **the module may stop working or its performance may deteriorate.**

## Datasheet Versioning

Datasheet Version	Status	Watermark	Definition
v0.1 ~ v0.5 (excluding v0.5)	Draft	Confidential	This datasheet is under development for products in the design stage. Specifications may change without prior notice.
v0.5 ~ v1.0 (excluding v1.0)	Preliminary release	Preliminary	This datasheet is actively updated for products in the verification stage. Specifications may change before mass production, and the changes will be documented in the datasheet's Revision History.
v1.0 and higher	Official release	—	This datasheet is publicly released for products in mass production. Specifications are finalized, and major changes will be communicated via <a href="#">Product Change Notifications (PCN)</a> .
Any version	—	Not Recommended for New Design (NRND) <sup>1</sup>	This datasheet is updated less frequently for products not recommended for new designs.
Any version	—	End of Life (EOL) <sup>2</sup>	This datasheet is no longer maintained for products that have reached end of life.

<sup>1</sup> Watermark will be added to the datasheet title page only when all the product variants covered by this datasheet are not recommended for new designs.

<sup>2</sup> Watermark will be added to the datasheet title page only when all the product variants covered by this datasheet have reached end of life.



## Related Documentation and Resources

### Related Documentation

- [ESP32-C6 Series Datasheet](#) – Specifications of the ESP32-C6 hardware.
- [ESP32-C6 Technical Reference Manual](#) – Detailed information on how to use the ESP32-C6 memory and peripherals.
- [ESP32-C6 Hardware Design Guidelines](#) – Guidelines on how to integrate the ESP32-C6 into your hardware product.
- [ESP32-C6 Series SoC Errata](#) – Descriptions of known errors in ESP32-C6 series of SoCs.
- *Certificates*  
<https://espressif.com/en/support/documents/certificates>
- *ESP32-C6 Product/Process Change Notifications (PCN)*  
<https://espressif.com/en/support/documents/pcns?keys=ESP32-C6>
- *Documentation Updates and Update Notification Subscription*  
<https://espressif.com/en/support/download/documents>

### Developer Zone

- [ESP-IDF Programming Guide for ESP32-C6](#) – Extensive documentation for the ESP-IDF development framework.
- *ESP-IDF* and other development frameworks on GitHub.  
<https://github.com/espressif>
- *ESP32 BBS Forum* – Engineer-to-Engineer (E2E) Community for Espressif products where you can post questions, share knowledge, explore ideas, and help solve problems with fellow engineers.  
<https://esp32.com/>
- *ESP-FAQ* – A summary document of frequently asked questions released by Espressif.  
<https://espressif.com/projects/esp-faq/en/latest/index.html>
- *The ESP Journal* – Best Practices, Articles, and Notes from Espressif folks.  
<https://blog.espressif.com/>
- See the tabs *SDKs and Demos*, *Apps*, *Tools*, *AT Firmware*.  
<https://espressif.com/en/support/download/sdks-demos>

### Products

- *ESP32-C6 Series SoCs* – Browse through all ESP32-C6 SoCs.  
<https://espressif.com/en/products/socs?id=ESP32-C6>
- *ESP32-C6 Series Modules* – Browse through all ESP32-C6-based modules.  
<https://espressif.com/en/products/modules?id=ESP32-C6>
- *ESP32-C6 Series DevKits* – Browse through all ESP32-C6-based devkits.  
<https://espressif.com/en/products/devkits?id=ESP32-C6>
- *ESP Product Selector* – Find an Espressif hardware product suitable for your needs by comparing or applying filters.  
<https://products.espressif.com/#/product-selector?language=en>

### Contact Us

- See the tabs *Sales Questions*, *Technical Enquiries*, *Circuit Schematic & PCB Design Review*, *Get Samples* (Online stores), *Become Our Supplier*, *Comments & Suggestions*.  
<https://espressif.com/en/contact-us/sales-questions>

## Revision History

Date	Version	Release notes
2025-12-10	v1.4	<p>In Section <a href="#">1.2 Series Comparison</a>:</p> <ul style="list-style-type: none"> <li>Updated "Ordering Code" to "Part Number"</li> <li>Added information about ESP32-C6-WROOM-1-N16 and ESP32-C6-WROOM-1U-N16</li> </ul>
2025-07-17	v1.3	<ul style="list-style-type: none"> <li>In Chapter <a href="#">2 Block Diagram</a>, added a note about pin mapping between the chip and the in-package flash</li> <li>In Chapter <a href="#">10.2 Dimensions of External Antenna Connector</a>, added the external antenna information for certification</li> <li>Added Sections <a href="#">4.5 Chip Power-up and Reset</a>, <a href="#">6.5 Memory Specifications</a> and <a href="#">Datasheet Versioning</a></li> </ul>
2025-03-21	v1.2	<ul style="list-style-type: none"> <li>In Chapter <a href="#">1 Module Overview</a>, renamed Section 1.2 <i>Description</i> to <a href="#">1.2 Series Comparison</a>, and added a table note about the maximum clock frequency supported by SPI flash</li> <li>In Table <a href="#">6-1 Absolute Maximum Ratings</a> of Section <a href="#">6 Electrical Characteristics</a>, updated the maximum storage temperature from 85°C to 105°C</li> <li>Improved the structure, formatting, and wording in: <ul style="list-style-type: none"> <li>Chapter <a href="#">4 Boot Configurations</a> (used to be Section 3.3 <i>Strapping Pins</i>)</li> <li>Chapter <a href="#">5 Peripherals</a> (used to be Chapter 4 <i>Peripherals</i>)</li> <li>Chapter <a href="#">10 Physical Dimensions</a> and Chapter <a href="#">11 PCB Layout Recommendations</a> (used to be Chapter 9 <i>Physical Dimensions and PCB Land Pattern</i>)</li> </ul> </li> <li>Added Section <a href="#">11.2 Module Placement for PCB Design</a></li> </ul>
2024-01-19	v1.1	<ul style="list-style-type: none"> <li>In Section <a href="#">1.1 Features</a>, added information about certification and test</li> <li>In Section <a href="#">1.2 Series Comparison</a>, the minimum RF transmit power for Bluetooth LE and 802.15.4 in active mode was updated from -24 dBm to -16 dBm, and the maximum power was updated from 20 dBm to 19 dBm</li> <li>In Chapter <a href="#">7 RF Characteristics</a>, the RF transmit power range for Bluetooth LE and 802.15.4 was updated from -24 ~ 20 dBm to -16 ~ 19 dBm</li> <li>In Section <a href="#">11 PCB Layout Recommendations</a>, added information about the recommended PCB land pattern of ESP32-C6-WROOM-1U module, and 3D models of ESP32-C6-WROOM-1 and ESP32-C6-WROOM-1U modules</li> </ul>

Cont'd on next page

## Cont'd from previous page

Date	Version	Release notes
2023-07-04	v1.0	<ul style="list-style-type: none"><li>• Updated the vector picture of ESP32-C6-WROOM-1U on the titlepage to remove the castellated pins at the bottom</li><li>• In Section <a href="#">1.2 Series Comparison</a>, removed peripheral-related information and information on ESP32-C6-WROOM-1-H4, ESP32-C6-WROOM-1-N16, ESP32-C6-WROOM-1U-H4, and ESP32-C6-WROOM-1U-N16, and added a note about module customization</li><li>• Added Chapter <a href="#">5 Peripherals</a></li><li>• Updated Figure <a href="#">10-1 ESP32-C6-WROOM-1 Physical Dimensions</a> and Figure <a href="#">10-2 ESP32-C6-WROOM-1U Physical Dimensions</a> to change the tolerance in the top view from 0.25 to 0.2</li></ul>
2023-04-17	v0.6	Added information about ESP32-C6-WROOM-1U module
2023-02-16	v0.5	Preliminary release



## Disclaimer and Copyright Notice

Information in this document, including URL references, is subject to change without notice.

ALL THIRD PARTY'S INFORMATION IN THIS DOCUMENT IS PROVIDED AS IS WITH NO WARRANTIES TO ITS AUTHENTICITY AND ACCURACY.

NO WARRANTY IS PROVIDED TO THIS DOCUMENT FOR ITS MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, NOR DOES ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION OR SAMPLE.

All liability, including liability for infringement of any proprietary rights, relating to use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

The Wi-Fi Alliance Member logo is a trademark of the Wi-Fi Alliance. The Bluetooth logo is a registered trademark of Bluetooth SIG.

All trade names, trademarks and registered trademarks mentioned in this document are property of their respective owners, and are hereby acknowledged.

Copyright © 2025 Espressif Systems (Shanghai) Co., Ltd. All rights reserved.

[www.espressif.com](http://www.espressif.com)