

Rooms Report

TryHackMe – Introduction to Networking

Rooms covered: What is Networking • Intro to LAN

Prepared by: Tejas Somkuwar

September 2026

Table of Contents

Table of Contents.....	2
Introduction	4
Overview of Assigned Rooms.....	4
Room 1 — What is Networking?.....	5
Task 1: What is Networking?	5
Objective.....	5
Information Covered.....	5
Communication Between Devices	5
Importance of Networking.....	5
Task 2: What is the Internet?.....	6
Explanation of the Example	6
How this relates to the Internet	6
Task 3: Identifying Devices on a Network.....	7
1. IP Address	7
2. MAC Address.....	8
IP Address vs MAC Address.....	8
Questions.....	8
Task 4: Ping (ICMP)	9
1. What is Ping?	9
2–4. ICMP, Echo Request & Echo Reply.....	9
5–6. Reading a Ping Result.....	9
7. Ping Syntax.....	10
8. Why Ping Matters in Cybersecurity	10
Task 5: Putting It Together.....	10
Que. Explain how two computers communicate on a network	11
Que. Real-world example	11
Room 2 — Intro to LAN.....	12
Task 1: Introducing LAN Topologies.....	12
Star Topology	12
Ring Topology	13
Bus Topology.....	13
Switches vs Routers	14
Topology Comparison	14

Practical Questions	15
Task 2: A Primer of Subnetting	15
Core Concepts	16
Why Subnet?	16
Practical Questions	17
Task 3: ARP (Address Resolution Protocol)	17
Practical Questions	18
Task 4: DHCP	18
Practical Questions	19
Task 5: OSI Model	19

Introduction

Define computer networking in your own words.

Ans:- A Computer Network is a Digital Communication Network which helps to share resources with all connected nodes.

Explain why networking knowledge is important in cybersecurity.


Ans:- Networking knowledge is important in cybersecurity because **most cyberattacks happen through networks**. A cybersecurity professional needs to understand how devices communicate in order to identify, prevent, and investigate attacks:

- **Understand how attacks happen** – IP addresses, ports, protocols, and packets help identify attacks such as port scanning, DoS, and man-in-the-middle.
- **Monitor network traffic** – SOC analysts use traffic patterns to detect suspicious or unauthorized activity.
- **Configure security devices** – firewalls, IDS/IPS, VPNs, routers, and switches all rely on networking knowledge.
- **Identify vulnerabilities** – exposed ports, insecure services, and misconfigured devices.
- **Incident response** – tracing the source of an attack and how it moved through the network.
- **Use tools effectively** – Wireshark, Nmap, and tcpdump all require basic networking concepts.

Overview of Assigned Rooms

Two TryHackMe rooms were completed for this report: **What is Networking?** and **Intro to LAN**. The first introduces core networking concepts and how devices communicate; the second builds on this with LAN topologies, subnetting, ARP, and DHCP.

- **Network:** a group of connected devices that can communicate and share information.
- **IP Address:** a logical address used to identify a device on a network.
- **MAC Address:** a unique hardware address associated with a network interface.
- **Packets:** data is divided into small units called packets before transmission.
- **Protocols:** rules that define how devices communicate, e.g. **TCP, UDP, HTTP, DNS**.
- **Ports:** logical endpoints used by services – **HTTP uses port 80, HTTPS uses port 443**.
- **Router:** a device that forwards data between different networks.
- **Ping:** a command used to check whether another device is reachable.

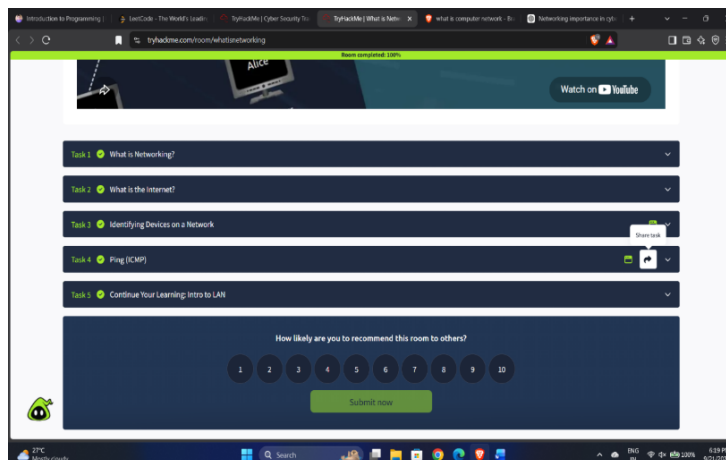

Room 1 — What is Networking?

Task 1: What is Networking?

Objective

To understand the **basic concept of networking** and how different devices are connected and communicate with each other.

Information Covered


A **network** is a group of connected things – in everyday life this includes transport systems, electricity grids, postal systems, and connections between people. In **computer networking**, a network forms when two or more devices connect and communicate. This can include computers, laptops, mobile phones, security cameras, traffic lights, servers, IoT devices, and other network-enabled devices – from just two devices up to billions.


Communication Between Devices

The main purpose of a computer network is to allow devices to **communicate and exchange information**. In the TryHackMe diagram, **Alice, Bob, and Jim** are connected and exchange information; the arrows represent the flow of communication between them.

Importance of Networking

Networking underpins modern technology – internet communication, weather data collection, electricity distribution, smart/IoT devices, security systems, and transportation systems. Because networks carry so much important information, **networking knowledge is essential in cybersecurity** for spotting suspicious activity, unauthorized connections, and potential attacks.

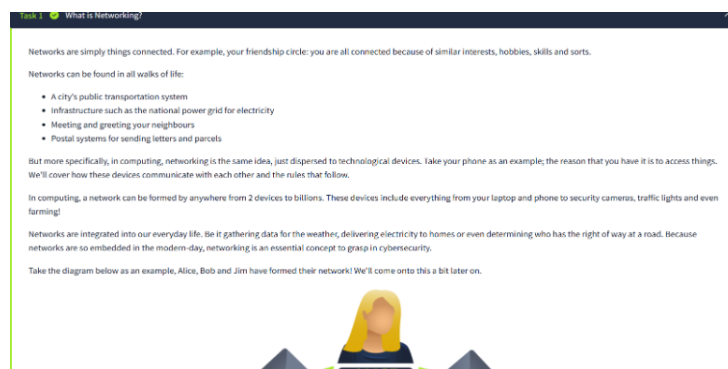


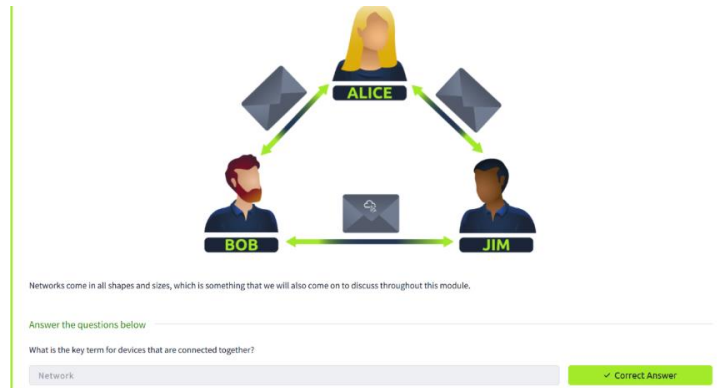

Q1. What is the key term for devices that are connected together?

Ans:- Network

Task 2: What is the Internet?

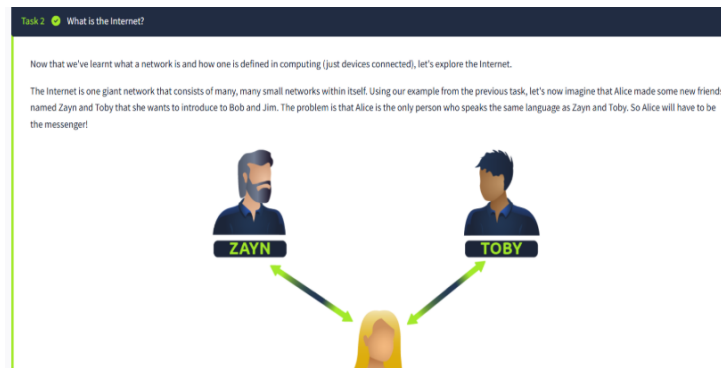

TryHackMe diagram – networks connected together

According to the image, **the Internet is one huge network made up of many smaller networks connected together**, illustrated using an example of people communicating across networks.

Explanation of the Example


- **Zayn and Toby** represent devices/users on one network.
- **Bob and Jim** represent devices/users on another network.
- **Alice** connects to both sides and acts as a **messenger/connection** between the two networks – she is the only one who can reach both groups, so information travels through her.

How this relates to the Internet

In real networks, different networks connect using **networking devices such as routers**, which forward data from one network to another:

Network A → Router → Internet → Router → Network B


The Internet is therefore not one single physical network – it is a **global network of interconnected networks**.



Because Alice can speak both languages, they can communicate to one another through Alice – forming a new network.

The first iteration of the Internet was within the ARPANET project in the late 1960s. This project was funded by the United States Defence Department and was the first documented network in action. However, it wasn't until 1989 when the Internet as we know it was invented by Tim Berners-Lee by the creation of the **World Wide Web (WWW)**. It wasn't until this point that the Internet started to be used as a repository for storing and sharing information, just like it is today.

Let's relate Alice's network of friends to computing devices. The Internet looks like a much larger version of this sort of diagram:

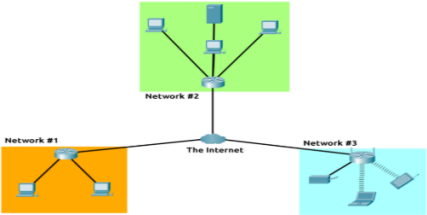

As previously stated, the Internet is made up of many small networks all joined together. These small networks are called **private networks**, where networks connecting these small networks are called **public networks** – or the Internet! So, to recap, a network can be one of two types:

- A private network
- A public network

Devices will use a set of labels to identify themselves on a network, which we will come onto in the task below.

Answer the questions below

Who invented the World Wide Web?

Tim Berners-Lee

✓ Correct Answer 2

Q2. Who invented the World Wide Web?

Ans:- Tim Berners-Lee

Task 3: Identifying Devices on a Network

Task 3: Identifying Devices on a Network

To communicate and maintain order, devices must be both identifying and identifiable on a network. What use is it if you don't know whom you're talking to at the end of the day?

Devices on a network are very similar to humans in the fact that we have two ways of being identified:

- Our Name
- Our Fingerprints

Now we can change our name through a dead poll, but we can't, however, change our fingerprints. Every human has an individual set of fingerprints which means that even if they change their name, there is still an identity behind it. Devices have the same thing: two means of identification, with one being permutable. These are:

- An IP Address
- A Media Access Control (MAC) Address – think of this as being similar to a serial number.

IP Addresses

Briefly, an IP address (or Internet Protocol) address can be used as a way of identifying a host on a network for a period of time, where that IP address can then be associated with another device without the IP address changing. First, let's split up precisely what an IP address is in the diagram below:



Devices on a network need to be **identified and identifiable** so they can communicate with the correct devices – similar to how a person is identified by their **name** and **fingerprint**. A network device has two forms of identification: **IP Address** and **MAC Address**.

1. IP Address

An **IP (Internet Protocol) address** is a logical address used to identify a device/host on a network for a period of time, e.g. **192.168.1.1**. An IPv4 address has **four octets** separated by dots, each ranging **0–255**:

Octet	Value
Octet 1	192
Octet 2	168

Octet 3	1
Octet 4	1

An IP address can be reassigned to another device depending on the network configuration.

2. MAC Address

A **MAC (Media Access Control) address** is another way of identifying a network interface – compared in the room to a **serial number**. Unlike an IP address (a logical address), a MAC address is tied to the device's network interface and is mainly used for local-network communication. Example:

00:1A:2B:3C:4D:5E.

IP Address vs MAC Address

IP Address	MAC Address
Logical address	Hardware/interface address
Identifies a host on a network	Identifies a network interface
Can change with network config	Normally fixed to the interface
Example: 192.168.1.1	Example: 00:1A:2B:3C:4D:5E

Practice what you learn, connect devices, and monitor your own work. Address control system using IPsec. Connect to a remote host via a remote connection for a price if you are willing to pay the fee per device. The interactive lab attached to this task has been made to replicate this scenario!

Practical

The interactive labs simulate a hotel Wi-Fi network where you have to pay for the service. You'll note that the router is not allowing Bob's packets (blue) to the TryHackMe website and is placing them in the bin, but Alice's packets (green) are going through fine because she has paid for Wi-Fi. Try changing Bob's MAC address to the same as Alice's to see what happens. Deploy the interactive lab and proceed to answer the following questions below.

Answer the questions below

What does the term "IP" stand for?

Internet Protocol ✓ Correct Answer

What is each section of an IP address called?

Octet ✓ Correct Answer

How many sections (in digits) does an IPv4 address have?

4 ✓ Correct Answer

What does the term "MAC" stand for?

Media Access Control ✓ Correct Answer

Deploy the interactive lab using the "View Site" button and spoof your MAC address to access the site. What is the flag?

THM{YOU_GOT_ON_TRYHACKME} ✓ Correct Answer

Practical – MAC spoofing lab

Questions

Q1. What does the term "IP" stand for?

Ans:- Internet Protocol

Q2. What is each section of an IP address called?

Ans:- Octet

Q3. How many sections (in digits) does an IPv4 address have?


Ans:- 4

Q4. What does the term "MAC" stand for?

Ans:- Media Access Control

Q5. Deploy the interactive lab and spoof your MAC address to access the site. What is the flag?

Ans:- THM{YOU_GOT_ON_TRYHACKME}

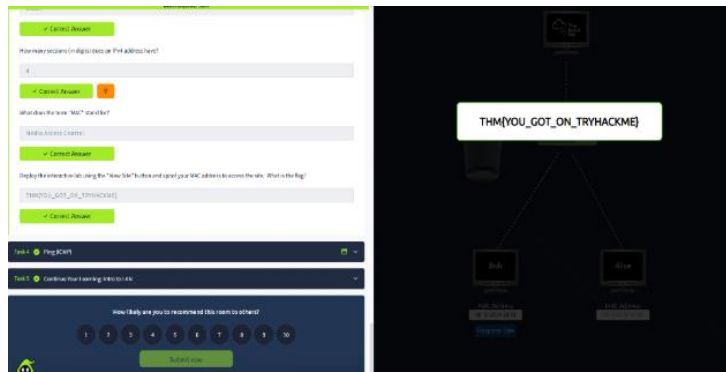

Task 4: Ping (ICMP)

Ping is one of the most basic and useful network troubleshooting tools. It checks whether a device can communicate with another over a network and measures the response time.

1. What is Ping?

Ping is a command-line utility that checks whether a target device is reachable, e.g. **ping 192.168.1.254** – the computer sends packets to that address and waits for a response. Ping can show whether a device is reachable, whether the connection is working, how quickly it responds, and whether packets are being lost.

2–4. ICMP, Echo Request & Echo Reply

ICMP (Internet Control Message Protocol) is what ping uses to test communication between devices:

Your Computer → **ICMP Echo Request** → Target Device → **ICMP Echo Reply** → Your Computer

An Echo Request asks “Are you reachable, and can you respond?”; if configured to respond, the target replies with an Echo Reply. The time between request and reply is the **round-trip time (RTT)**.

5–6. Reading a Ping Result

Running **ping 192.168.1.254** produces output such as **64 bytes from 192.168.1.254, time=2.18 ms**, meaning the target responded successfully. Key fields:

Field	Meaning
64 bytes	Size of the ICMP response
icmp_seq	Sequence number identifying each request/response
ttl	Time To Live – max network hops before the packet is discarded
time	Approximate round-trip time (lower = faster)


A summary line such as **6 packets transmitted, 6 received, 0% packet loss** confirms all 6 ICMP requests got replies, with an average RTT of roughly **4.16 ms**.

7. Ping Syntax

Basic syntax: **ping IP_address**, e.g. **ping 192.168.1.254**. You can also ping a domain name, e.g. **ping google.com** – the OS resolves the domain to an IP address first, then sends the ICMP requests.

8. Why Ping Matters in Cybersecurity

Ping helps a security professional check whether a host is responding, troubleshoot connectivity, measure response time, identify packet loss, and test communication between devices. Note: a failed ping doesn't always mean a device is offline – a firewall or network configuration may simply be blocking ICMP.

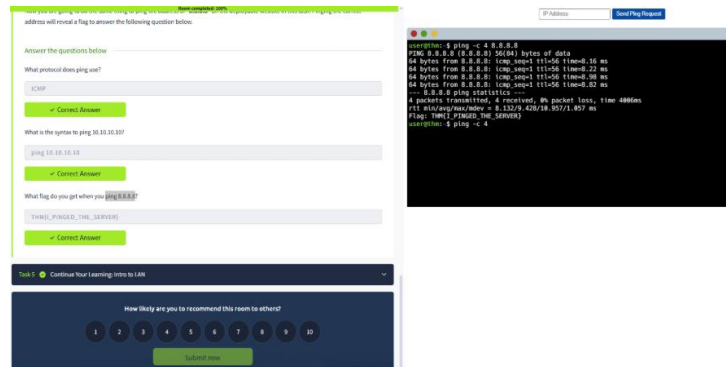

Q1. What protocol does ping use?


Ans:- ICMP

Q2. What is the syntax to ping 10.10.10.10?

Ans:- ping 10.10.10.10

Q3. What flag do you get when you ping 8.8.8.8?

Ans:- THM{I_PINGED_THE_SERVER}

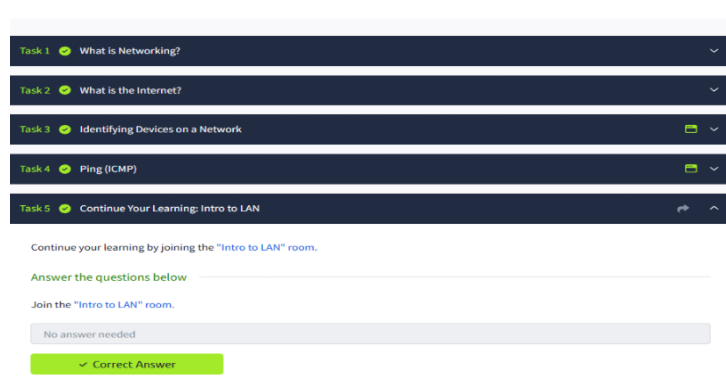

Task 5: Putting It Together

Que. Explain network, client, server, packet, IP address, MAC address, and ping.

Ans:-

Term	Short Explanation
Network	A group of connected devices that communicate and share data.

Client	A device or application that requests services or data.
Server	A system that provides services or data to clients.
Packet	A small unit of data sent over a network.
IP Address	Logical address identifying a device. Example: 192.168.1.10
MAC Address	Link-layer address of a network interface. Example: 00:1A:2B:3C:4D:5E
Ping	Checks reachability and measures response time. Example: ping 8.8.8.8


Que. Explain how two computers communicate on a network

Ans:- When two computers communicate, they use a combination of **IP addresses, MAC addresses, protocols, packets, and network devices** to send and receive data:

- **Connect to the network** – e.g. Computer A = 192.168.1.10, Computer B = 192.168.1.20 (via Ethernet or Wi-Fi).
- **Computer A addresses the destination** – it needs Computer B's IP (192.168.1.20), and determines it's on the local network.
- **Find the MAC address** – Computer A uses **ARP** ("Who has 192.168.1.20?") to learn Computer B's MAC address.
- **Data is split into packets** – each carrying source/destination IP, MAC info, protocol data, and the payload.
- **Data travels the network** – a switch forwards Ethernet frames between A and B using MAC addresses.
- **Computer B receives and reassembles** the packets/frames for the correct application.
- **Computer B replies** – communication is normally two-way, following the same path back.

Simple example: Computer A (192.168.1.10) sends "Hello" through the network to Computer B (192.168.1.20), carried via network protocols as network data.

Que. Real-world example

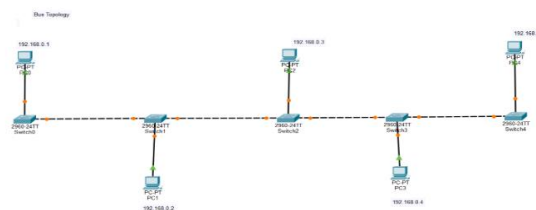

Cisco Packet Tracer – five PCs connected via Cisco 2960 switches

The topology shows a **Cisco Packet Tracer network** with five PCs connected through Cisco 2960 switches. For example, **PC0 (192.168.0.1)** communicating with **PC1 (192.168.0.2)**: PC0 creates and packetizes the data → sends it to **Switch0** → switches forward it toward PC1 → PC1 receives and processes it → PC1 can respond. Connectivity can be tested with **ping 192.168.0.2**.

Real-world parallel: a computer lab uses a similar network – when one student's computer sends a file to another's, the data travels through the network switches to reach its destination.

Flow: PC0 (192.168.0.1) → Switch0 → Switch1 → PC1 (192.168.0.2)

Room 2 — Intro to LAN

This room builds on Room 1, covering **LAN topologies, subnetting, ARP, and DHCP**, plus an introduction to the **OSI model**.

- **LAN Topologies** – how computers are connected: Star, Bus, Ring, Mesh.
- **Subnetting** – dividing an IP network into smaller networks using an IP address, subnet mask, and CIDR (e.g. /24).
- **ARP** – resolves an IP address to a MAC address so devices can find each other on the LAN.
- **DHCP** – automatically assigns IP, subnet mask, gateway, and DNS. Remember **DORA**: Discover → Offer → Request → Acknowledge.
- **OSI Model** – 7 layers: Physical → Data Link → Network → Transport → Session → Presentation → Application.



Task 1: Introducing LAN Topologies

LAN (Local Area Network): a network connecting devices within a limited geographical area – e.g. a home, office, school, or computer lab. A LAN can contain computers, laptops, printers, servers, switches, routers, access points, and other network-capable devices, e.g. **PC1–PC4 connected through a central switch**.

Network Topology describes how devices and connections are arranged. Different topologies trade off cost, performance, reliability, scalability, and failure points. The three covered are **Star, Ring, and Bus**, along with the roles of **switches and routers**.

Star Topology

Devices connect individually to a central device (switch/hub). If PC1 sends data to PC3, it travels **PC1 → Switch → PC3** – the central device manages and forwards traffic.

Feature	Star
Center	Switch / Hub
Cabling	More
Cost	Higher

Expansion	Easy – just connect a new device to the switch
Troubleshooting	Relatively easy
Scalability	Good
Main failure point	Central device
Common today	Yes

Advantages: easy to expand (scalability); one failed cable usually doesn't affect other devices.

Disadvantages: more cabling and cost (a dedicated run per device); the central device is a dependency – if it fails, connected devices lose communication through it.

Ring Topology

Devices connect in a loop, with the last device connecting back to the first. Data travels around the loop (e.g. **PC1 → PC2 → PC3 → PC4**) until it reaches its destination, normally in one direction.

Feature	Ring
Structure	Loop
Central device	No
Cabling	Less than Star in some designs
Data path	Around the ring
Bottleneck	Less prone than Bus in this design
Troubleshooting	Relatively straightforward – one direction of travel
Main weakness	A break in the ring can disrupt the network
Efficiency	Can be lower if data passes through many devices

Bus Topology

All devices share a single main cable, the **backbone**. Data from any device travels along this shared backbone to reach its destination.

Feature	Bus
Main connection	Backbone cable
Cost	Low
Setup	Easy
Cabling	Less
Scalability	Poor
Bottleneck	High possibility – all traffic shares one cable
Troubleshooting	Difficult – hard to isolate which device is at fault

Main failure point	Backbone cable (single point of failure)
--------------------	--

Switches vs Routers

A **switch** connects multiple devices within a LAN and learns which device is on which port, forwarding frames only to the intended destination (unlike a **hub**, which repeats traffic out every port). Switches commonly come in 4/8/16/24/32/64-port models and are used in businesses, schools, and data centers.

A **router** connects different networks and passes data between them – e.g. a Home LAN → Router → Internet. **Routing** is the process of determining and using a path for data between networks; multiple possible paths give **redundancy**, so if one fails, traffic can still get through – at the cost of more equipment, complexity, and sometimes longer routes. In a typical LAN, **Switch = local connectivity**, **Router = connectivity between networks** (e.g. PC1 → Switch → PC2 stays local, but PC1 → Switch → Router → Other Network leaves the LAN).


Topology Comparison

Feature	Star	Ring	Bus
Central switch	Yes	No	No
Data path	Through center	Around ring	Shared cable
Cost	Higher	Moderate	Lower
Expansion	Easy	More difficult	Limited
Scalability	Good	Limited/moderate	Poor
Troubleshooting	Relatively easy	Relatively straightforward	Difficult
Failure concern	Central device	Ring break	Backbone failure
Modern LAN usage	Common	Less common	Mostly legacy

Task 1: Introducing LAN Topologies

Local Area Network (LAN) Topologies

Over the years, there has been experimentation and implementation of various network designs. In reference to networking, when we refer to the term "topology", we are actually referring to the design or look of the network at hand. Let's discuss the advantages and disadvantages of these topologies below.



Star Topology

The main premise of a star topology is that devices are individually connected via a central networking device such as a switch or hub. This topology is the most commonly found today because of its reliability and scalability - despite the cost.

Any information sent to a device in this topology is sent via the central device to which it connects. Let's explore some of these advantages and disadvantages of this topology below:

Because more cabling and the purchase of dedicated networking equipment is required for this topology, it is more expensive than any of the other topologies. However, despite the added cost, this does provide some significant advantages. For example, this topology is much more scalable in nature, which means that it is very easy to add more devices as the demand for the network increases.

TryHackMe – topology comparison


Ring Topology

The ring topology (also known as token topology) boasts some similarities. Devices such as computers are connected directly to each other to form a loop, meaning that there is little cabling required and less dependence on dedicated hardware such as within a star topology.

A ring topology works by sending data across the loop until it reaches the destined device, using other devices along the loop to forward the data. Interestingly, a device will only send received data from another device in this topology if it does not have any to send itself. If the device happens to have data to send, it will send its own data first before sending data from another device.

Because there is only one direction for data to travel across this topology, it is fairly easy to troubleshoot any faults that arise. However, this is a double-edged sword because it isn't an efficient way of data travelling across a network, as it may have to visit many multiple devices first before reaching the intended device.

Lastly, ring topologies are less prone to bottlenecks, such as within a bus topology, as large amounts of traffic are not travelling across the network at any one time. The design of this topology does, however, mean that a fault such as cut cable, or broken device will result in the entire networking breaking.



What is a Switch?

Switches are dedicated devices within a network that are designed to aggregate multiple other devices such as computers, printers, or any other networking-capable device using ethernet. These various devices plug into a switch's port. Switches are usually found in larger networks such as businesses, schools, or similar-sized networks, where there are many devices to connect to the network. Switches can connect a large number of devices by having ports of 4, 8, 16, 24, 32, and 64 for devices to plug into.

Practical Questions

Q1. What does LAN stand for?

Ans:- Local Area Network

Q2. What is the verb given to the job that Routers perform?

Ans:- Routing

Q3. What device is used to centrally connect multiple devices on the local network and transmit data to the correct location?

Ans:- Switch

Q4. What topology is cost-efficient to set up?


Ans:- Bus Topology

Q5. What topology is expensive to set up and maintain?

Ans:- Star Topology

Q6. Complete the interactive lab attached to this task. What is the flag given at the end?

Ans:- THM{TOPOLOGY_FLAWS}

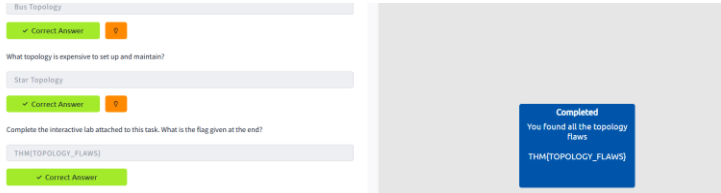

Task 2: A Primer of Subnetting

Subnetting means dividing one larger network into smaller networks called **subnets** – like slicing a cake into departments (HR, IT, Finance). A small home network may only need one subnet (rarely more than 254 devices), but businesses with many PCs, printers, cameras, sensors, and servers benefit from splitting into smaller networks for **efficiency, security, and full control**.

Example – a café: an internal network for staff and registers is kept separate from the public Wi-Fi network for customers. A public Wi-Fi user shouldn't automatically get the same access as an internal employee device – this kind of **network segmentation** is an important cybersecurity practice.

Core Concepts

An **IPv4 address** (e.g. 192.168.1.1) has four **octets**, each 8 bits, each ranging 0–255 – so IPv4 addresses are **32 bits** long (4×8). A **subnet mask** (e.g. 255.255.255.0) is also a 32-bit, four-octet value that defines which part of an address identifies the **network** and which identifies the **host**.

Term	Meaning	Example
Network Address	Identifies the network itself	192.168.1.0
Host Address	Identifies a specific device in the network	192.168.1.100
Default Gateway	Router/address used to reach outside the local network	192.168.1.254
Broadcast Address	Last address in the range, reserved	192.168.1.255

A **/24** IPv4 subnet has 256 total addresses, traditionally **254 usable host addresses** (the first is the network address, the last is the broadcast address). When a PC (e.g. 192.168.1.100) needs to reach a destination outside the local network (e.g. 8.8.8.8), it sends the traffic to its **default gateway**, usually a router, which forwards it onward.

Why Subnet?

- **Efficiency** – organized, appropriately sized networks instead of one flat network.
- **Security** – separate groups (e.g. Guest Wi-Fi vs. Employee PCs) into different subnets and control access between them, e.g. 192.168.10.0/24 (Employees), .20.0/24 (Finance), .30.0/24 (HR), .40.0/24 (Guests).
- **Full control** – administrators decide exactly how the network is divided and assigned, e.g. by department.



Now, in small networks such as at home, you will be on one subnet as there is an unlikely chance that you need more than 254 devices connected at one time.

However, places such as businesses and offices will have much more of these devices (PCs, printers, cameras and sensors), where subnetting takes place.

Subnetting provides a range of benefits, including:

- Efficiency
- Security
- Full control

We'll come on to explore exactly how subnetting provides these benefits at a later date; however, for now, all we need to understand is the security element to it. Let's take the typical café on the street. This café will have two networks:

1. One for employees, cash registers, and other devices for the facility
2. One for the general public to use as a hotspot

Subnetting allows you to separate these two use cases from each other whilst having the benefits of a connection to larger networks such as the Internet.

Answer the questions below

What is the technical term for dividing a network up into smaller pieces?

Subnetting ✓ Correct Answer

How many bits are in a subnet mask?

32 ✓ Correct Answer 9

What is the range of a section (octet) of a subnet mask?

0-255 ✓ Correct Answer 9

What address is used to identify the start of a network?

Network Address ✓ Correct Answer 9

What address is used to identify devices within a network?

Host Address ✓ Correct Answer 9

What is the name used to identify the device responsible for sending data to another network?

Default Gateway ✓ Correct Answer

Practical Questions

Q1. What is the technical term for dividing a network up into smaller pieces?

Ans:- Subnetting

Q2. How many bits are in a subnet mask?

Ans:- 32

Q3. What is the range of a section (octet) of a subnet mask?

Ans:- 0-255

Q4. What address is used to identify the start of a network?

Ans:- Network Address

Q5. What address is used to identify devices within a network?

Ans:- Host Address

Q6. What is the name used to identify the device responsible for sending data to another network?

Ans:- Default Gateway

As we can recall, an IP address is made up of four sections called octets. The same goes for a subnet mask which is also represented as a number of four bytes (32 bits), ranging from 0 to 255 (0-255).

Subnets use IP addresses in three different ways:


- Identify the network address
- Identify the host address
- Identify the default gateway

Task 3: ARP (Address Resolution Protocol)

ARP finds the MAC address of a device when its IP address is already known – used mainly within the LAN to deliver Ethernet frames to the correct device.

- **ARP Request** – a device broadcasts: “Who has IP address 192.168.1.10?”
- **ARP Reply** – the owning device responds: “I have 192.168.1.10, my MAC is XX:XX:XX:XX:XX:XX.”
- The requesting device saves this **IP → MAC** mapping in its **ARP cache** for future use.

Remember: **ARP = IP address → MAC address.**

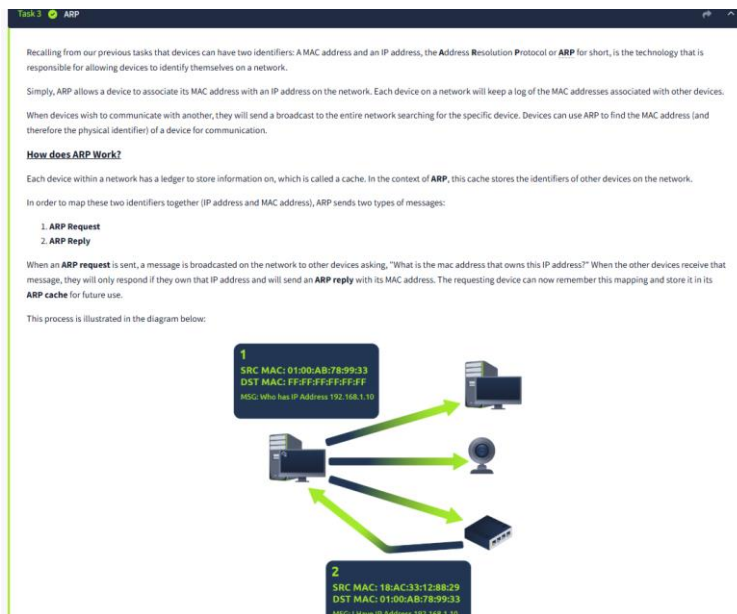

Practical – ARP lab

Practical Questions

Q1. What does ARP stand for?

Ans:- Address Resolution Protocol

Q2. What category of ARP Packet asks a device whether or not it has a specific IP address?

Ans:- Request


Q3. What address is used as a physical identifier for a device on a network?

Ans:- MAC Address

Q4. What address is used as a logical identifier for a device on a network?

Ans:- IP Address

Task 4: DHCP

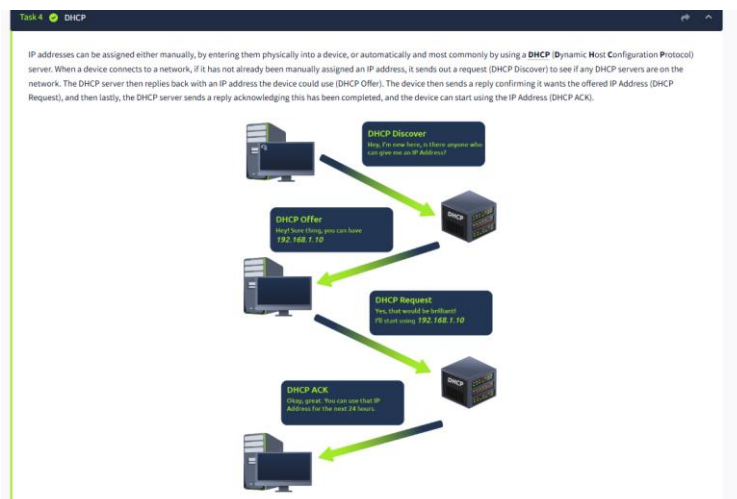

DHCP (Dynamic Host Configuration Protocol) automatically gives a device an IP address when it joins a network, using four steps – **DORA**:

- **Discover** – device asks: “Can I get an IP address?”
- **Offer** – server offers an IP, e.g. 192.168.1.10
- **Request** – device requests that offered IP
- **ACK** – server confirms the IP can be used

Remember: **DHCP = automatically assigns IP addresses to devices.**

Practical Questions

Q1. What type of DHCP packet is used by a device to retrieve an IP address?

Ans:- DHCP Discover

Q2. What type of DHCP packet does a device send once it has been offered an IP address by the DHCP server?

Ans:- DHCP Request

Q3. Finally, what is the last DHCP packet that is sent to a device from a DHCP server?

Ans:- DHCP ACK

Task 5: OSI Model

This task introduces the **7-layer OSI model** (Physical → Data Link → Network → Transport → Session → Presentation → Application). At the time of writing, this task had not yet been completed in TryHackMe – add the write-up here once finished.

