LET'S MAKE OUR WORLD BEAUTIFUL

SWITCH TO A BETTER WORLD

FACADE
LIGHTING
COLLECTION
AUG 2023

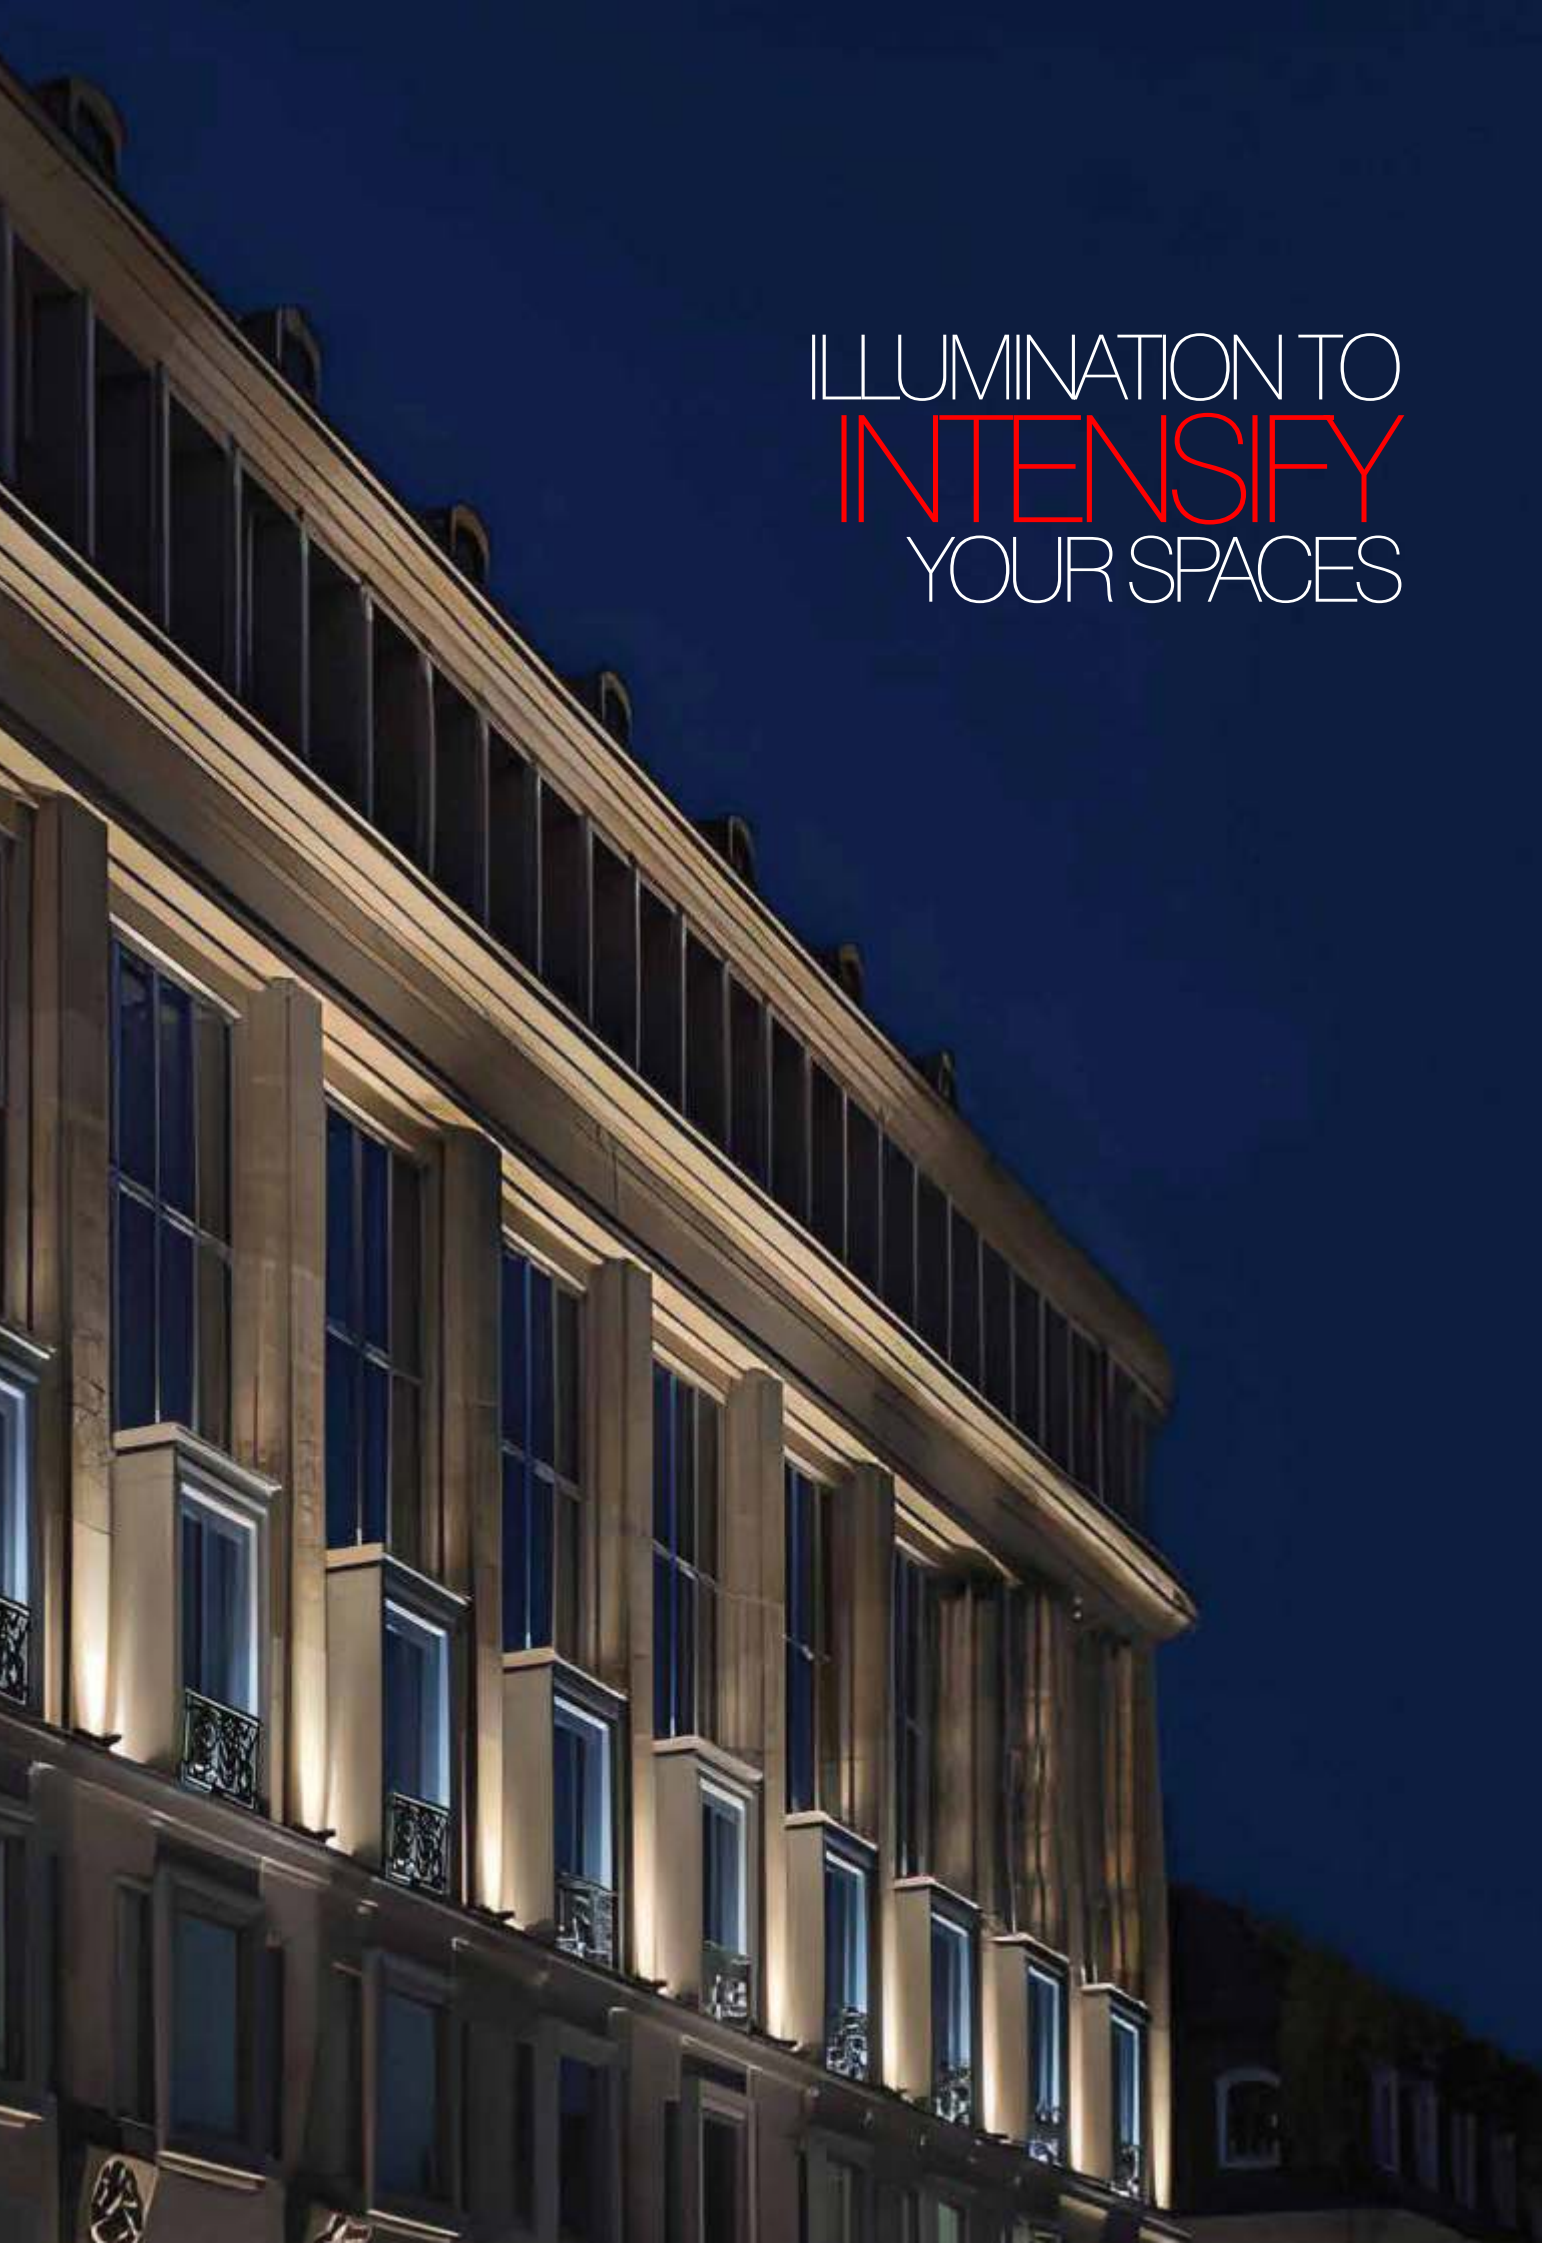
ILLUMINATION TO
INTENSIFY
YOUR SPACES

IDEAS
THAT REINCARNATE
THE SPACES

RELISH
THE LUXURY IT CONCLUDES

BEING AN INTEGRAL PART OF GM, I CAN ASSURE YOU OF ITS HIGH-QUALITY STANDARDS AND ITS DEDICATION TO SERVE YOU. GM'S NEWEST PRODUCTS IN THE CATEGORY OF FACADE LIGHTING HAVE A PROFOUND POTENTIAL OF FULLY AUGMENTING YOUR LIVING EXPERIENCES. I, THEREFORE, INSIST ON MAKING THE ELITE CHOICE IN TECHNOLOGICAL INNOVATIONS FOR YOUR CHERISHED SPACES AND EMPOWER YOU TO RELISH THE LUXURY IT CONCLUDES.

GM

SWITCH TO A BETTER WORLD

Contents

03 PIXEL DOT/ BAR LIGHTS

15 LED SCREEN

19 WALL WASHER LIGHTS

37 BAR LIGHT

41 WALL LIGHTS

47 GOBO LIGHTS

57 INTERACTIVE PROJECTORS

63 FAN PROJECTION LIGHTS

71 INGROUND LIGHTS

79 FOUNTAIN LIGHTS

95 POOL LIGHTS



105 GLOW GARDEN LIGHT

109 SOLAR POLE LIGHTS

119 SOLAR STREET LIGHTS

123 SMART POLE LIGHT



127 POLE LIGHTS

PIXEL DOT/ BAR LIGHTS

The GM Pixel Dot Lights and Bar Lights incredibly highlight the best aspects of the buildings and other monumental structures. The illuminated exterior not only adds to the beauty but also aids in making the space well-lit and safe.

GM

SWITCH TO A BETTER WORLD

Starry Night at Every Turn

Product Specification	
Product Code	GM-FC-PB-12-BLK-RGB
	GM-FC-PB-12-BLK-RGBW
Wattage	20W
LED Type	SMD5050 Epistar Brand
CCT	RGB
Power Input	DC 12V
Beam Angle	120°
CRI	70
Signal	SPI (WS2811 SM16703P)
IC Type	SPI WS2812B/SK6812
LEDs/m	48LEDs/16pixels/M
Mode of connector	33 Pins Connector
Protection Rating	IP66
Working Temperature	-20℃～+60℃

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

SWITCH TO A BETTER WORLD

Spill Some Magic

Pebble

Pebble

Diamond

Product Specification		
Product Code	GM-FC-PD-0.35-PEB-WH-RGBW	
LED Type	SMD 5050	
CCT	RGB / RGBW	
Grey Scale	16 bits, 65, 536	
Led Quantity	1	2
Beam Angle	180 degree	360 degree
Grust Material	Polycarbonate	
Protection Rating	IP66, Outdoor use	
Working Temperature	-25 to +60°C	
Input Voltage	12V DC	
Current	0.028 Amps	
Power	0.35 W	
Wire Type	3x20# AWG, UV PROTECTED	
Max Distance Before Power Injection	Approx 30 Meters	
Inline Power Injection	Via Power T & 12V Power Supply	
Control System		
Supported Controller	NEC&NDB/WEC/WEC Boss/Other Controllers	
Protocol	SPI/TTL	

Product Specification	
Product Code	GM-FC-PD-0.6-PEB-WH-RGBW
LED Type	SMD3535 / SMD5050
CCT	RGB/RGBW
Grey Scale	16 bits, 65M536 dimming levels*
Led Quantity	4PCS / pixel
Beam Angle	360 degree
Grust Material	Polycarbonate
Protection Rating	IP66, Outdoor use
Working Temperature	-25 to +60°C
Input Voltage	24V DC
Current	0.026 Amps
Power	0.6 W
Wire Type	20AWG, UV Protected
Max Distance Before Power Injection	Approx. 60 Meter
Inline Power Injection	Via Power T+'s & RGB+4A-24V
Control System	
Supported controllers	NEC&NDB/WEC/WEC BOSS/ Other Controls
Protocol	SPI / TTL

Product Specification	
Product Code	GM-FC-PD-0.35-DIA-WH-RGBW
LED Type	SMD 3535
CCT	RGB
Grey Scale	16 bits, 65,536
Led Quantity	2
Beam Angle	360 degree
Grust Material	Polycarbonate
Protection Rating	IP20 / IP66 (Option)
Working Temperature	-25 to +60°C
Input Voltage	12V DC
Current	0.028 Amps
Power	0.35 W
Wire Type	20 AWG, UV protected
Max Distance Before Power Injection	Approx. 60 Meter
Inline Power Injection	Via Power T & 12V Power Supply
Control System	
Supported controllers	NEC&NDB/WEC/WEC-BOSS/Other controls
Protocol	SPI/TTL

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Extravagant Illumination

Pearl Light

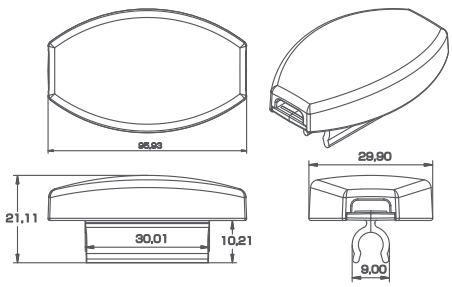

Product Specification	
Product Code	GM-FC-PD-0.6-PRL-WH-RGBW
LED Type	SMD 3535
CCT	RGB
Grey Scale	16 bits, 65,536
Led Quantity	3
Beam Angle	180 degree
Grust Material	Polycarbonate
Protection Rating	IP66
Working Temperature	-25 to +60°C
Input Voltage	12V DC
Current	0.028 Amps
Power	0.6W
Wire Type	20 AWG, UV Protected
Max Distance Before Power Injection	Approx. 225 feet
Inline Power Injection	Via Power T & 12V Power Supply
Control System	
Supported Controllers	NEC&NDB/WEC/WEC-BOSS/Other controls
Protocol	SPI/TTL

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

SWITCH TO A BETTER WORLD

Glowing Pearls Adorning Facades

Product Specification	
Product Code	GM-FC-PD-1.4-RD-BLK-RGBW
Product size	Ø42mm
Single power	1.4W
CCT	RGB/RGBW
Input voltage	DC24V
Lamp chip	3535 Epistar*6
Light-emitting angle	≥120 degree
Control method	SPI/TTL/DMX
Working temperature	-25 to+ 60°C
Waterproof process	all-round glue filling
Protection level	IP67
Lamp spacing	100 MM, head and tail male and female M16D connectors 150MM long, 30 pieces in a string
Material	core 2*0.75㎡+3*0.3㎡ double-layer sheathed wire, engineering plastic+PC, high and low temperature resistance, UV resistance, flame retardanti material 94-V0

Product Specification	
Product Code	GM-FC-PD-2.4-RD-WH-RGBW
Product size	Ø65mm
Single power	2.4W
CCT	RGB/RGBW
Input voltage	DC24V
Lamp chip	3535 Epistar*12
Light-emitting angle	≥120 degree
Control method	SPI/TTL/DMX
Working temperature	-25 to+ 60°C
Waterproof process	all-round glue filling
Protection level	IP67
Lamp spacing	150 MM, head and tail male and female M16D connectors 150MM long, 30 pieces in a string
Material	core 2*0.75㎡+3*0.3㎡ double-layer sheathed wire, engineering plastic+PC, high and low temperature resistance, UV resistance, flame retardanti material 94-V0

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

SWITCH TO A BETTER WORLD

In a Bright Harmony

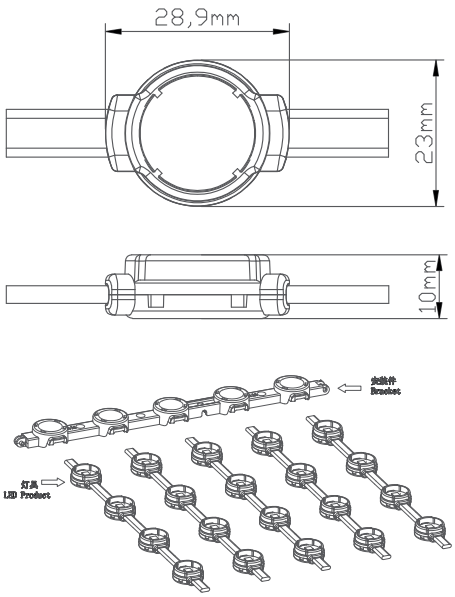

Product Specification	
Product Code	GM-FC-PD-0.3-GRD-BLK-RGBW
Product Size	Grid Pixel Light
Single Power	0.3 W
CCT	RGB/RGBW
Input Voltage	12V DC
Lamp Chip	SMD 3535
Light-emitting angle	180 degree
Control Method	SPI/TTL/DMX
Working Temperature	-25 to+ 60°C
Waterproof Process	All-Round Glue Filling
Protection Level	IP66, Outdoor use
Max lights before power injection	approx 125 Lights
Max Distance before injection	approx 30 Meters
Inline power injection	via Power T& 12V power supply
Material	Polycarbonate

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

LED SCREEN

A powerful cluster of small LEDs joined together brings a bigger picture to life. The vibrant colours and harmonious design make projecting life-size images and animations easy and attractive.

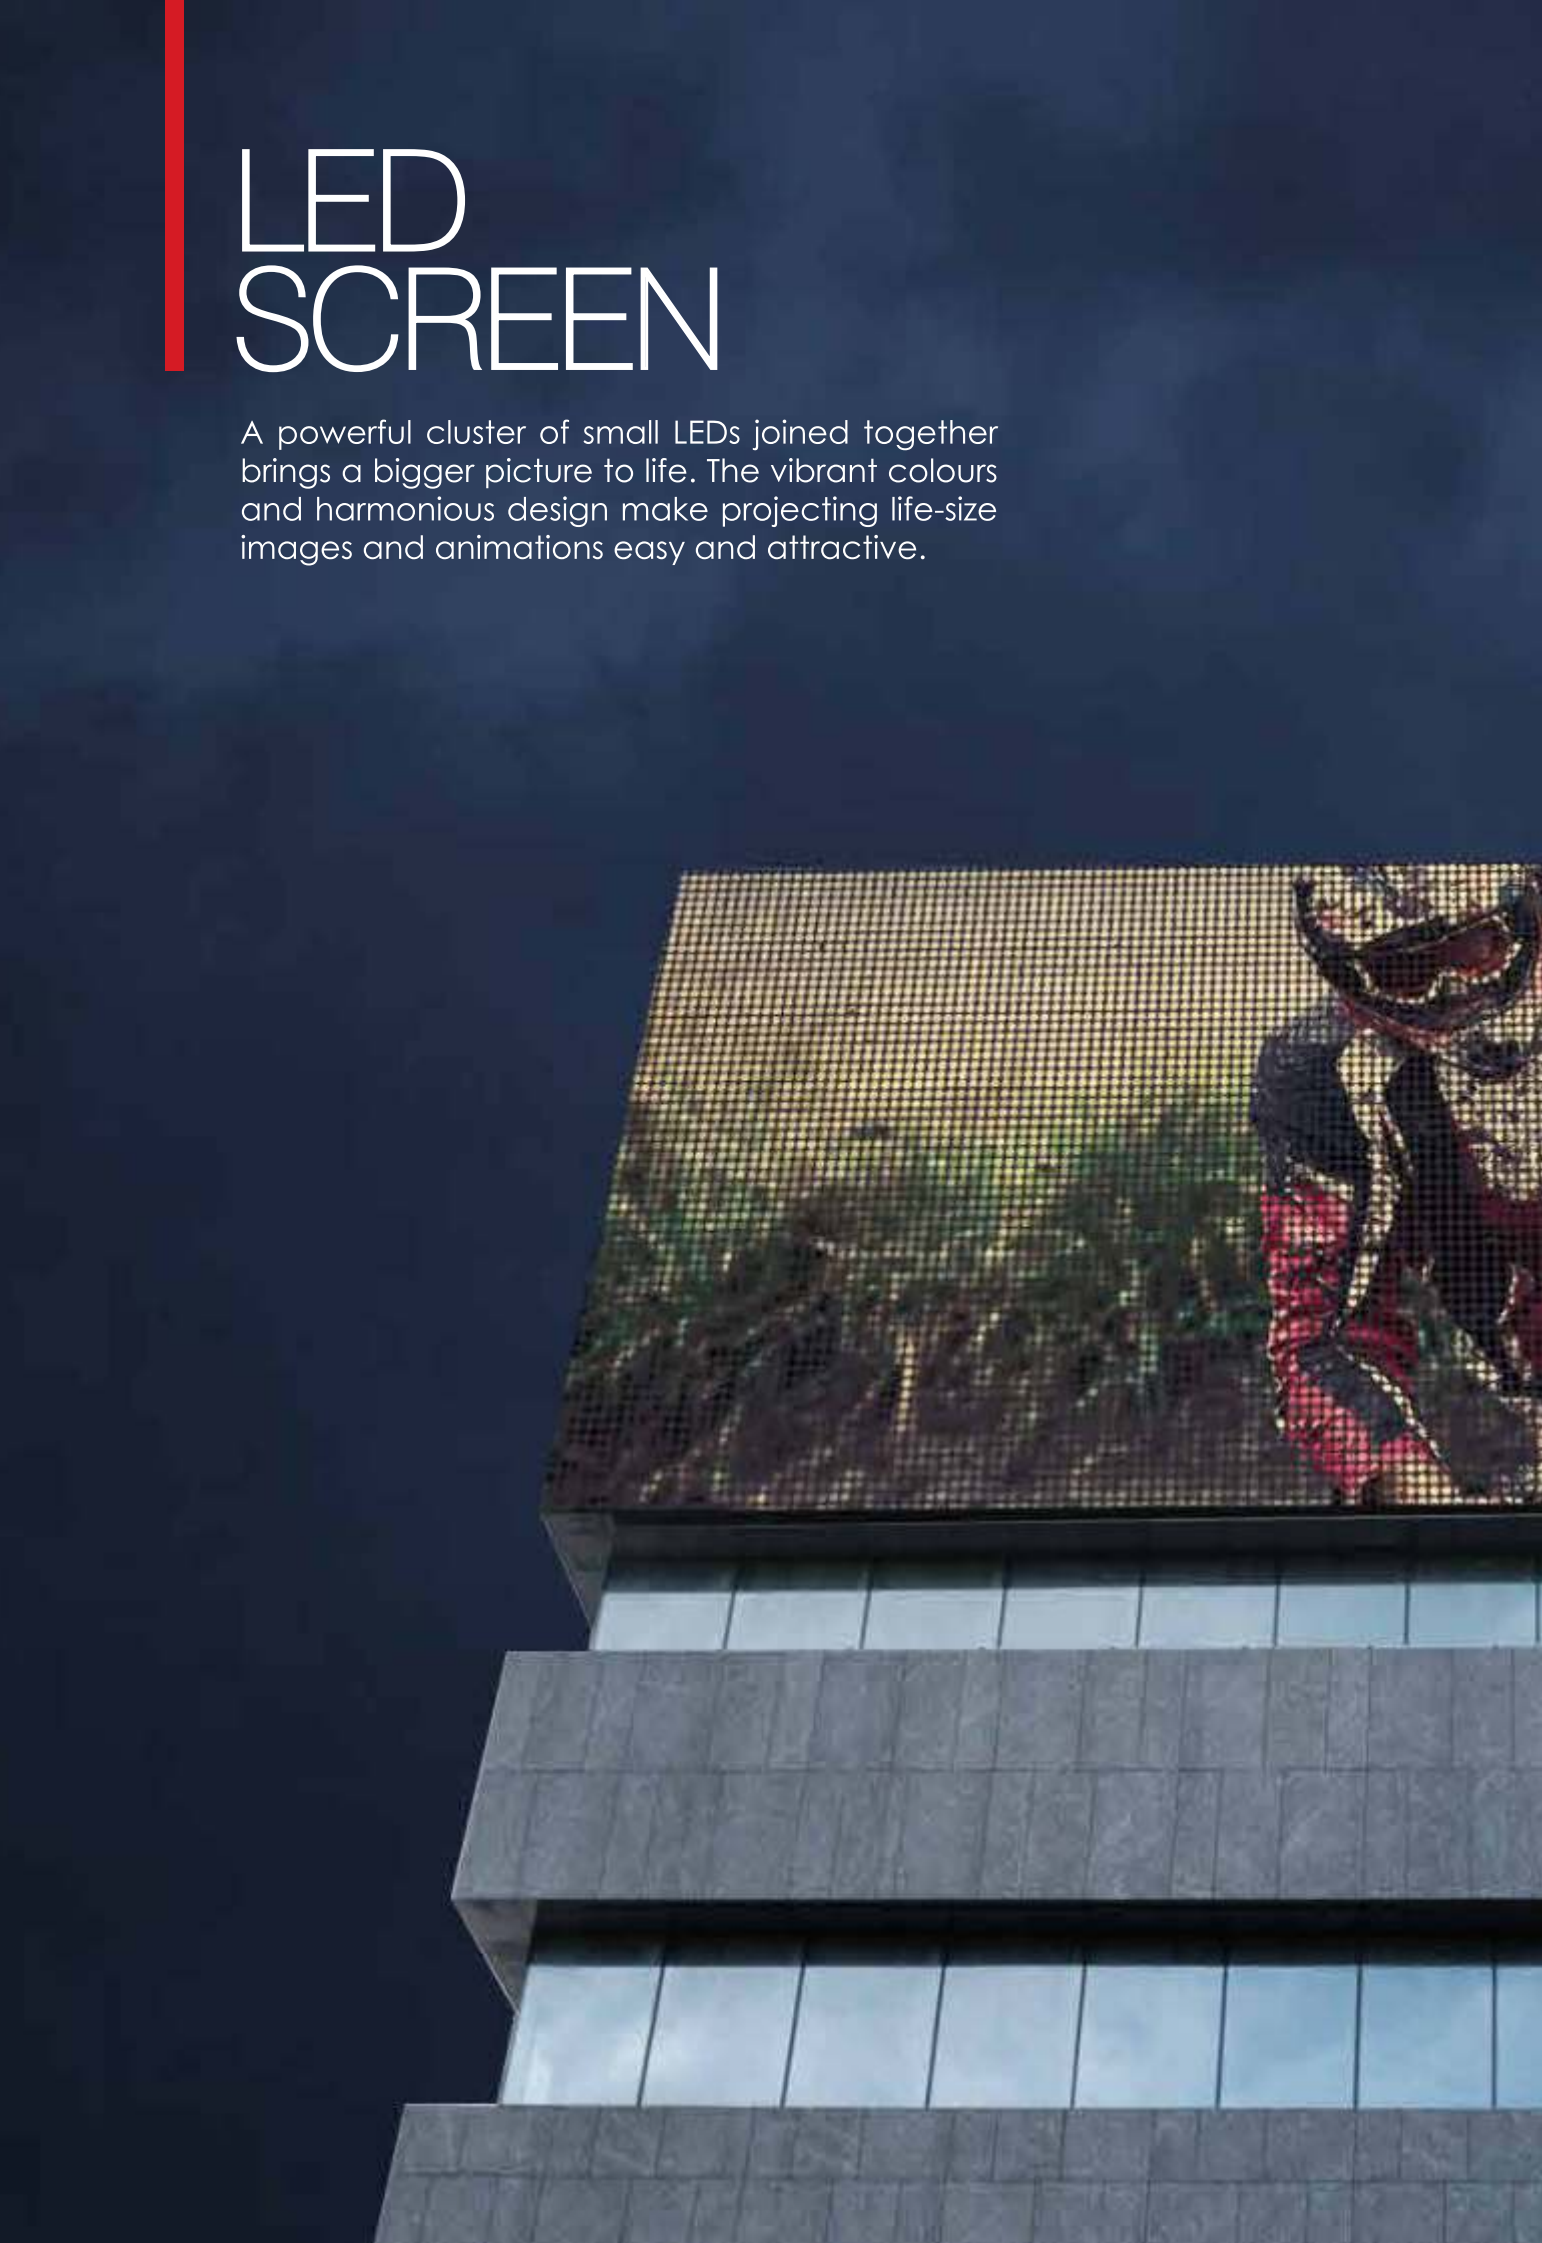

FOURFIVE
FOURFIVE

Give Your Ideas a Colourful Expression

Product Specification		
Frame Size	500x500x71	500x500x71
LED Type	SMD 2020	SMD 1921
Brightness (nits)	5500	1000
Pixel pitch/mm	2.604	3.91
Module Resolution	96x96 pixel	64x64 pixel
Frame Material	Dia Cast Aluminium	Dia Cast Aluminium
Protection level	IP20	IP65
Average Input Power	≈300 W/m²	≈300 W/m²
Power Frequency	50/60 Hz	50/60 Hz
Life pan	1,00,000 H	1,00,000 H

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

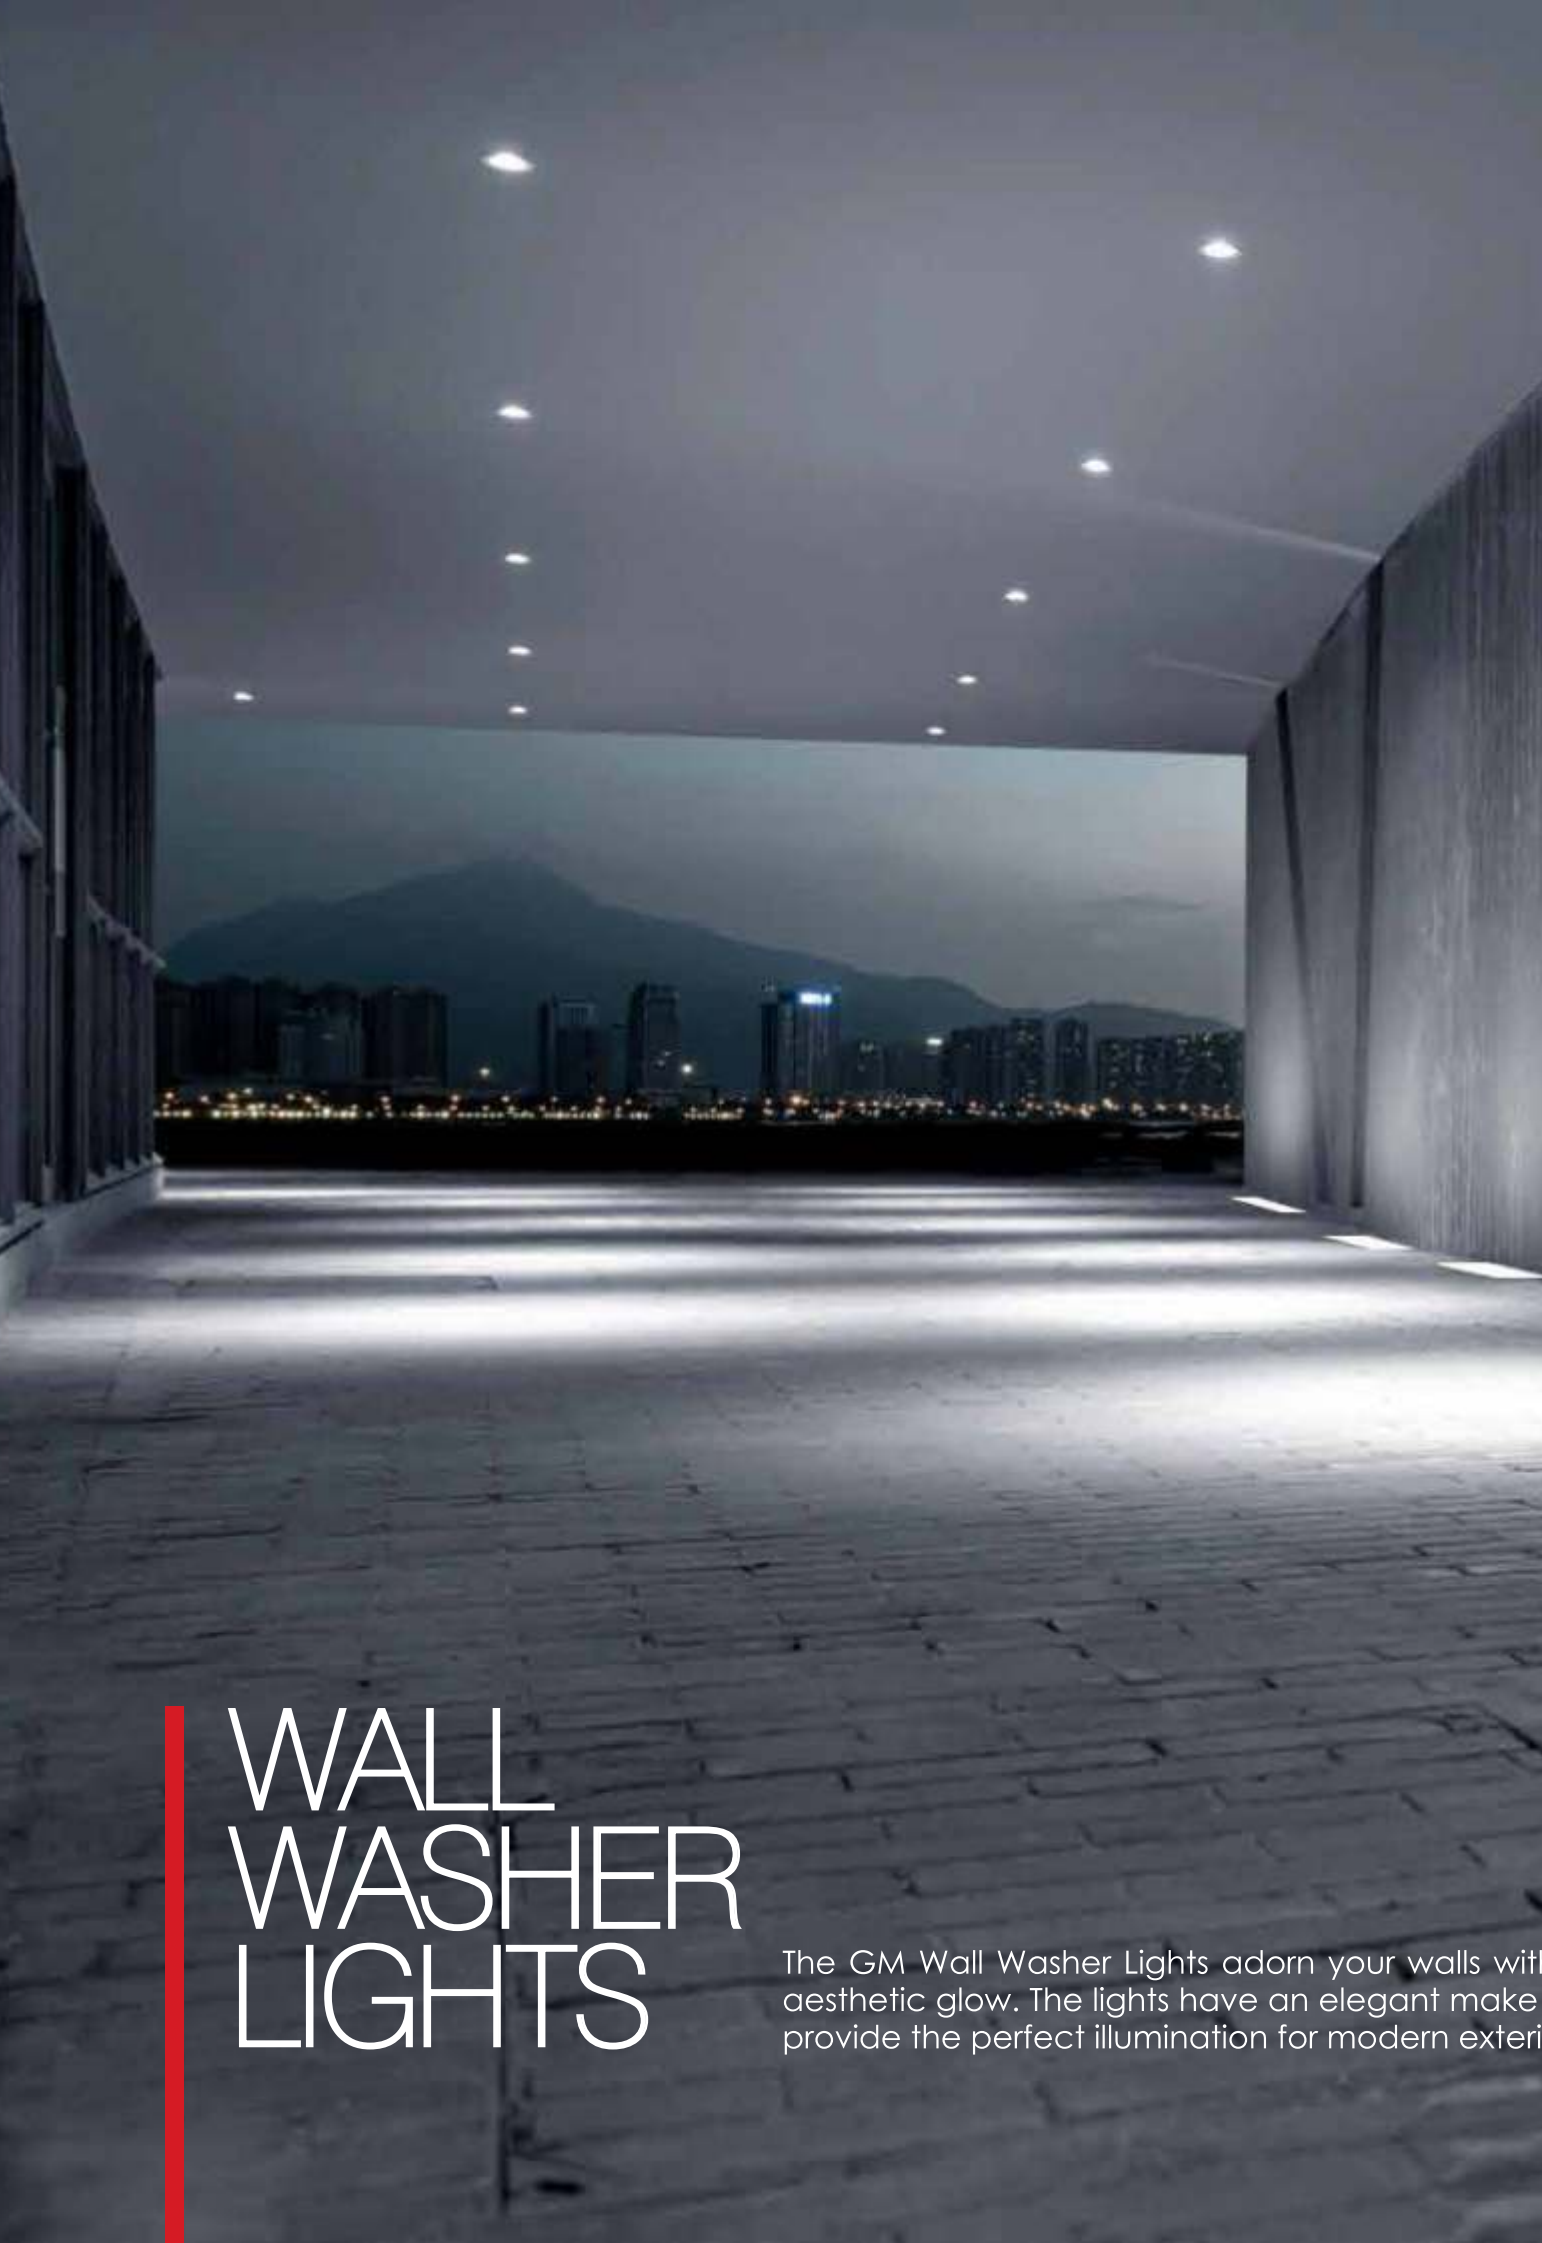

WALL WASHER LIGHTS

The GM Wall Washer Lights adorn your walls wit
aesthetic glow. The lights have an elegant make
provide the perfect illumination for modern exteri

Beaming Exteriors Make Brighter Evenings

Wall Graze Series LED-based luminaires are designed with custom optics to achieve different spread from narrow to wide beam options. Linear fixtures with beautified aesthetics deliver an excellent grazing effect and offer a wide range of selection of colour temperatures, beam spread options for lighting up your venue. The fixtures can be customised in length from 300mm to 1200mm. Their availability in RAL options ensures the light-bodied fixture blends perfectly with the background.

Product Specification	
Product Code	GM-FC-WH-XX-BLK/XXXX
Wattage	20W/ 30W/40W/60W/80W
CCT	2200K- 6000K/ RGBW
Protection Rating	IP65
Beam Angle	15°-60°
CRI	70-80
Control	DMX / AUTO
Power Input	AC 110V-240V, 50 Hz
Body Colour	Black/ White
Housing	Extruded Die-Casting Aluminium

WATTAGE:XX
CCT: XXXX

HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

Painting Your Facades with Radiance

Installation Accessories

Product Specification	
Product Code	GM-FC-FWSH-15-GRY-XXXX
Wattage	15W/meter
CCT	3000K / 4000K / 6000K / RGBW
LED Type	SMD3030
LED Qty.	24 Pcs.
Beam Angle	15°/ 25°/ 30°/ 45°
Light Output Ratio (LOR)	75%
Input Voltage	DC24V
Body Material	Silicon
Protection Rating	IP65
Working Temperature -20 TO +60°C	-20 TO +60°C

CCT: XXXX

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Travel Through Space and Light

Direct cable output

Bottom cable output

Product Specification	
Product Code	GM-FC-NFX-9.6-XXXX
Wattage	9.6W/meter
CCT	3000K / RGB
LED Type	SMD5050
Greyscale	8-bit 256
LED Qty.	60Pcs. / meter
Beam Angle	270°
Protection Rating	IP65
Input Voltage Current	24V DC
Product Size	Ø 25mm
Working Temperature -20 TO +60°C	-20 TO +60°C

Product Specification	
Product Code	GM-FC-NFX-5-XXXX
Wattage	5W/meter
CCT	3000K / RGB
LED Type	SMD 5050
Greyscale	16-bit 256
LED Qty.	60Pcs. / meter
Beam Angle	120°
Protection Rating	IP66
Input Voltage Current	24V DC
Product Size	10mm x 23mm
Working Temperature	-20 TO +60°C

CCT: XXXX

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

FLORA

Beam of Brilliance

Product Specification	
Wattage	15W / 25W
CCT	2200K / 3000K / 4000K
Protection Rating	IP65
Power Input	AC 110V-240V, 50 Hz
Beam Angle	120°
CRI	80
Housing	Extruded/Aluminium De-Casted
Power Factor	>0.90
Body Colour	Silver/Black Anodizing
Product Code	GM-FC-RGD-15-2200K
	GM-FC-RGD-15-3000K
	GM-FC-RGD-15-4000K
	GM-FC-RGD-25-2200K
	GM-FC-RGD-25-3000K
	GM-FC-RGD-25-4000K

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

SWITCH TO A BETTER WORLD

Radiate to Dazzle and Impress

Product Specification	
Wattage	4W~6W
CCT	2200K~6500K
Protection Rating	IP65
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°, 20° , 30°
Power Factor	>0.90
CRI	80
Housing	Extruded/Aluminium Die-Casted
Body Colour	Silver/Black Anodizing
Product Code	GM-FC-PH-4-3000K / RGBW
	GM-FC-PH-4-4000K / RGBW
	GM-FC-PH-6-3000K / RGBW
	GM-FC-PH-6-4000K / RGBW

Product Specification	
Wattage	10W~15W
CCT	2200K~6500K
Protection Rating	IP65
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°, 20° , 30°
Power Factor	>0.90
CRI	80
Housing	Extruded/Aluminium Die-Casted
Body Colour	Silver/Black Anodizing
Product Code	GM-FC-PH-10-3000K / RGBW
	GM-FC-PH-10-4000K / RGBW
	GM-FC-PH-15-3000K / RGBW
	GM-FC-PH-15-4000K / RGBW

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

SWITCH TO A BETTER WORLD

Highlighting the Exterior Like No Other

Product Specification	
Wattage	9W / 12W / 20W / 30W
CCT	2200K- 6000K/ RGBW
Protection Rating	IP65
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°-60°
Control	DMX / Auto
CRI	70 - 80
Housing	Extruded/Aluminium Die-Casted
Body Colour	Black / White
Product Code	GM-FC-FL-9-RD-3000K/4000K/RGB/RGBW
	GM-FC-FL-12-RD-3000K/4000K/RGB/RGBW
	GM-FC-FL-20-RD-3000K/4000K/RGB/RGBW
	GM-FC-FL-30-RD-3000K/4000K/RGB/RGBW

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

Glittering Hues for Glowing Nights

Exterior-grade, energy efficient, and compact architectural spot luminaires designed to deliver and highlight structures like pillars and walls. These fixtures have a wide range of colour temperatures, beam spread, and aesthetic colours. The range has been tested for extreme outdoor weather conditions to deliver consistent output. The fixtures are ideal to use for facades, landmarks, parks, landscapes, and bridges. The fixtures have a DC24V shockproof design with required IK protections.

Product Specification	
Wattage	50W / 100W / 150W
CCT	2200K- 6000K/ RGBW
Protection Rating	IP65
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°-60°
Control	DMX / Auto
CRI	70 - 80
Housing	Extruded/Aluminium Die-Casted
Body Colour	Black / White
Product Code	GM-FC-FL-50-RD-3000K/4000K/RGB/RGBW
	GM-FC-FL-100-RD-3000K/4000K/RGB/RGBW
	GM-FC-FL-150-RD-3000K/4000K/RGB/RGBW

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Lighting Up to Mesmerise

Product Specification	
Wattage	50W / 100W / 150W / 200W
CCT	2200K- 6000K/ RGBW
Protection Rating	IP65
Power Input	AC 110V-240V, 50 Hz
Beam Angle	15°-60°
Control	DMX / Auto
CRI	70 - 80
Housing	Extruded/Aluminium Die-Casted
Body Colour	Black / White
Product Code	GM-FC-FL-50-REC-3000K/4000K/RGB/RGBW
	GM-FC-FL-100-REC-3000K/4000K/RGB/RGBW
	GM-FC-FL-150-REC-3000K/4000K/RGB/RGBW
	GM-FC-FL-200-REC-3000K/4000K/RGB/RGBW

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

BAR LIGHT

The GM Bar Light is sleek and absolutely gorgeous light that outlines and accentuates every edge of the structure. Its minimalistic design blends seamlessly with the facade and creates an enthralling experience.

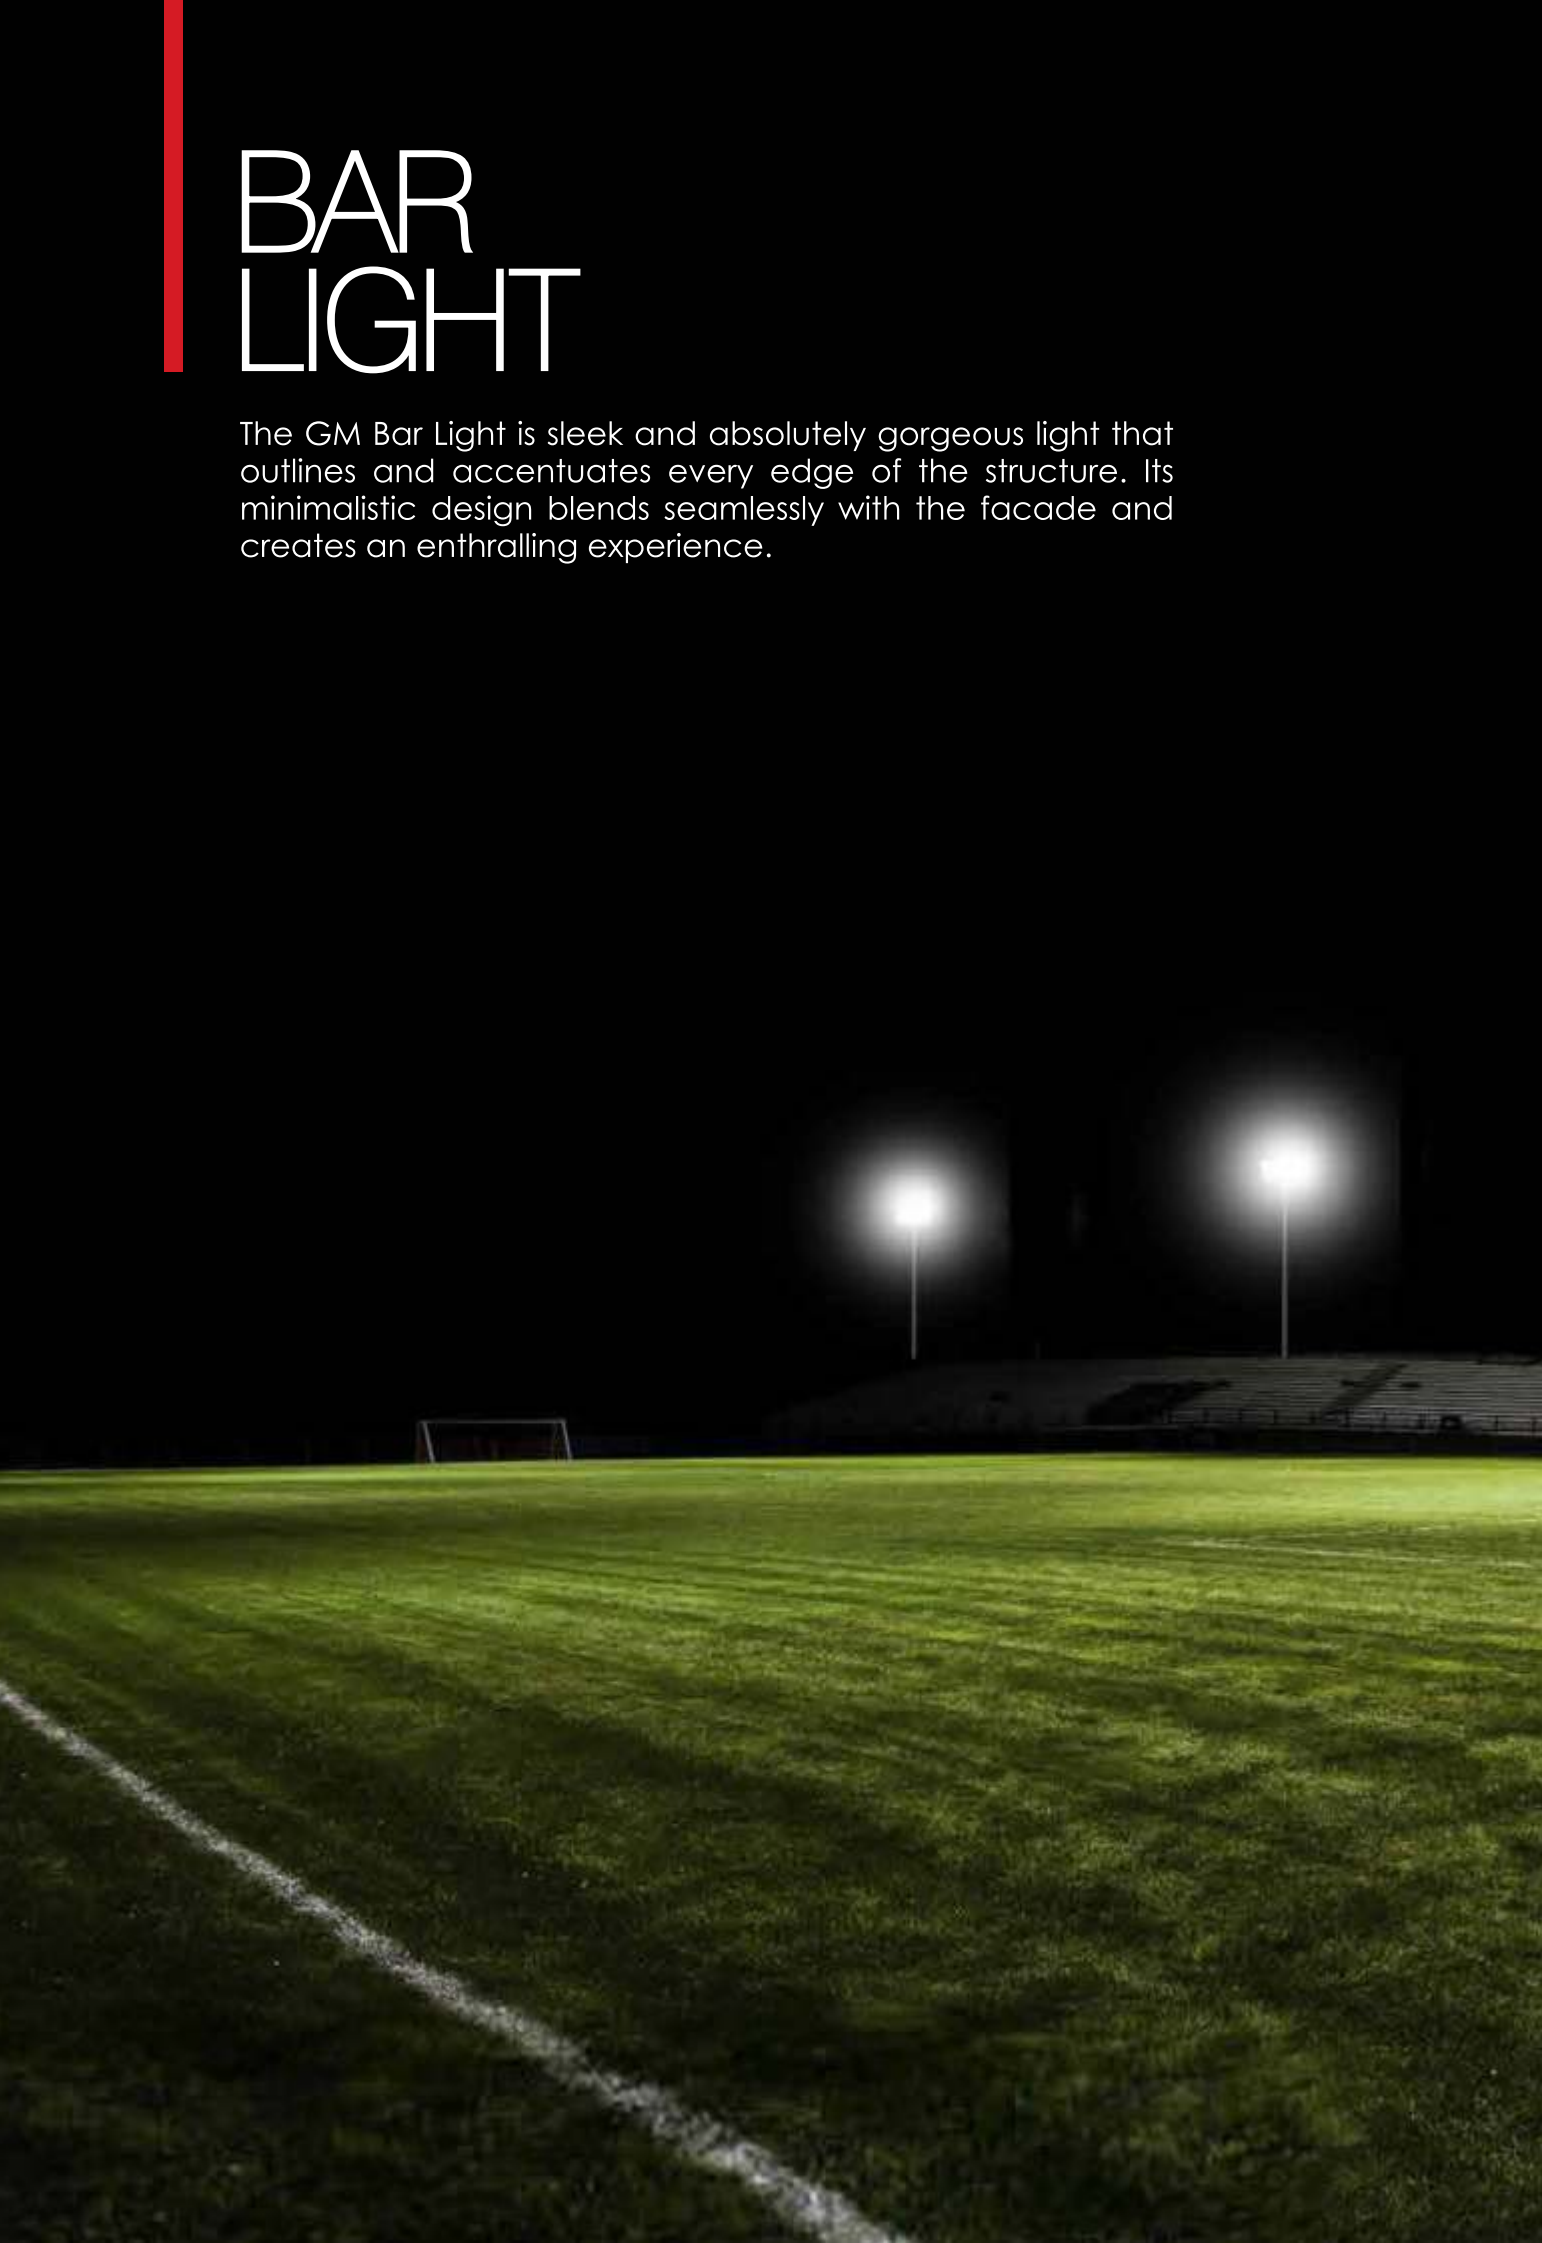

SWITCH TO A BETTER WORLD

The Light of Magnificence

Product Specification	
Wattage	50W-100W
CCT	3000K/4000K/6000K
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	30°, 60° , 90°
Power Factor	>0.90
CRI	80
Housing	Extruded/Aluminium Die-Casted
Body Colour	Silver/Black Anodizing
Product Code	GM-FC-BR-50-2200K / GM-FC-BR-100-2200K
	GM-FC-BR-50-6000K / GM-FC-BR-100-6000K
	GM-FC-BR-50-RGB / GM-FC-BR-100-RGB

Product Specification	
Wattage	150W-200W
CCT	3000K/4000K/6000K
Protection Rating	IP66
Power Input	AC 110V-240V, 50 Hz
Beam Angle	30°, 60° , 90°
Power Factor	>0.90
CRI	80
Housing	Extruded/Aluminium Die-Casted
Body Colour	Black Anodizing
Product Code	GM-FC-BR-150-2200K / GM-FC-BR-200-2200K
	GM-FC-BR-150-6000K / GM-FC-BR-200-2200K
	GM-FC-BR-150-RGB / GM-FC-BR-200-RGB

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

WALL LIGHTS

The GM Wall Lights are an artistic way of lighting up walls and passages which leave a lasting impression on people with their impressive illumination style.

Illusion and Illumination

Product Specification	
Wattage	10W / 15W
CCT	3000-6500K
Protection Rating	IP66
Power Factor	>0.90
CRI	80
Beam Angle	5° x 360°
Power Input	DC 24V
Housing	Aluminium die casted
Ambient Temp	-20°C to +45°C
Body Colour	White / Grey
Product Code	GM-FC-FR-10-4WY-3000K / 6500K
	GM-FC-FR-15-4WY-3000K / 6500K

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

Linear Luminosity

Product Specification	
Wattage	7W / 20W
CCT	3000-6000K
Protection Rating	IP66
Power Factor	>0.90
CRI	80
Beam Angle	20° x 100°
Power Input	DC 24V
Housing	Aluminium die casted
Ambient Temp	-20°C to +45°C
Body Colour	White / Grey
Product Code	GM-FC-FR-7-2WY-3000K / 6000K
	GM-FC-FR-20-2WY-3000K / 6000K

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

GOBO LIGHTS

The GM GOBO Lights are one-of-a-kind and add a beautiful shine to the sky with their powerful illumination. A stylish and convenient choice to light up a facade, these lights impart an artistic glow to the outdoors.

SWITCH TO A BETTER WORLD

Your Ideas through Light

Product Specification	
Product Code	GM-FC-GP-ST-400-7500K
Wattage	400W
CCT	7500K
Protection Rating	IP67
Control	DMX 512
Beam Angle	9°～46°
Gobo Holders	4 Holders
Housing	Aluminium die casted
Power Input	DC 24V
Lamp Life	>40,000 Hours
Body Colour	Black
Ambient Temp	-20°C to +45°C
Connectors	Power & DMX
Size	L405xW285xH382mm

Focus : Zoom In / Zoom Out
Effect : Overlap /Active Flow / Waving effect
Remote : Focusing / Rotate / Static
Gobo : Full Colour Lens

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

The Illumination that Defines the Occasion

Product Specification	
Product Code	GM-FC-GP-RG-XX-7500K
Wattage	35W & 60W / 100W
CCT	7500K
Protection Rating	IP44 / IP 67
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°, 20°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz

Product Specification	
Product Code	GM-FC-GP-DY-XX-7500K
Wattage	35W / 50W
CCT	7500K
Protection Rating	IP67
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°, 20°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz

WATTAGE:XX

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Beautiful Pathways for Beautiful Journeys

DYNAMIC PROJECTOR

DYNAMIC & STATIC
COMBINATION PROJECTOR

4 GRAPHS CYCLE ROTATING &
DYNAMIC PROJECTOR

Product Specification	
Product Code	GM-FC-GP-DY1-XX-7500K
Wattage	100W/150W/200W
CCT	7500K
Protection Rating	IP65
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz

Product Specification	
Product Code	GM-FC-GP-DV2-XX-7500K
Wattage	100W/150W
CCT	7500K
Protection Rating	IP67
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz

Product Specification	
Product Code	GM-FC-GP-DY3-XX-7500K
Wattage	100W/160W/200W/300W
CCT	7500K
Protection Rating	IP67
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°, 20°, 25°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz

WATTAGE:XX

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Walk through a Wave of Watery Illusion

WATER PATTERN
PROJECTOR

Product Specification	
Product Code	GM-FC-GP-WV-XX-7500K
Wattage	100W/150W/200W
CCT	7500K
Protection Rating	IP67 / IP65
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz

Product Specification	
Product Code	GM-FC-GP-WV1-XX-7500K
Wattage	100W/150W/200W
CCT	7500K
Protection Rating	IP67 / IP65
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz

Product Specification	
Product Code	GM-FC-GP-WV2-XX-7500K
Wattage	100W/150W/200W
CCT	7500K
Protection Rating	IP67 / IP65
Lumen	110 lm/w
Control	ON/OFF
Projection Lens	15°
Housing	Aluminium
Lens Type	Ultra-clear full coating lens
Power Input	AC 110V-240V, 50 Hz

WATTAGE:XX

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

INTERACTIVE PROJECTORS

The Interactive Projectors are a creative choice to bring your ideas alive and project them on a facade.

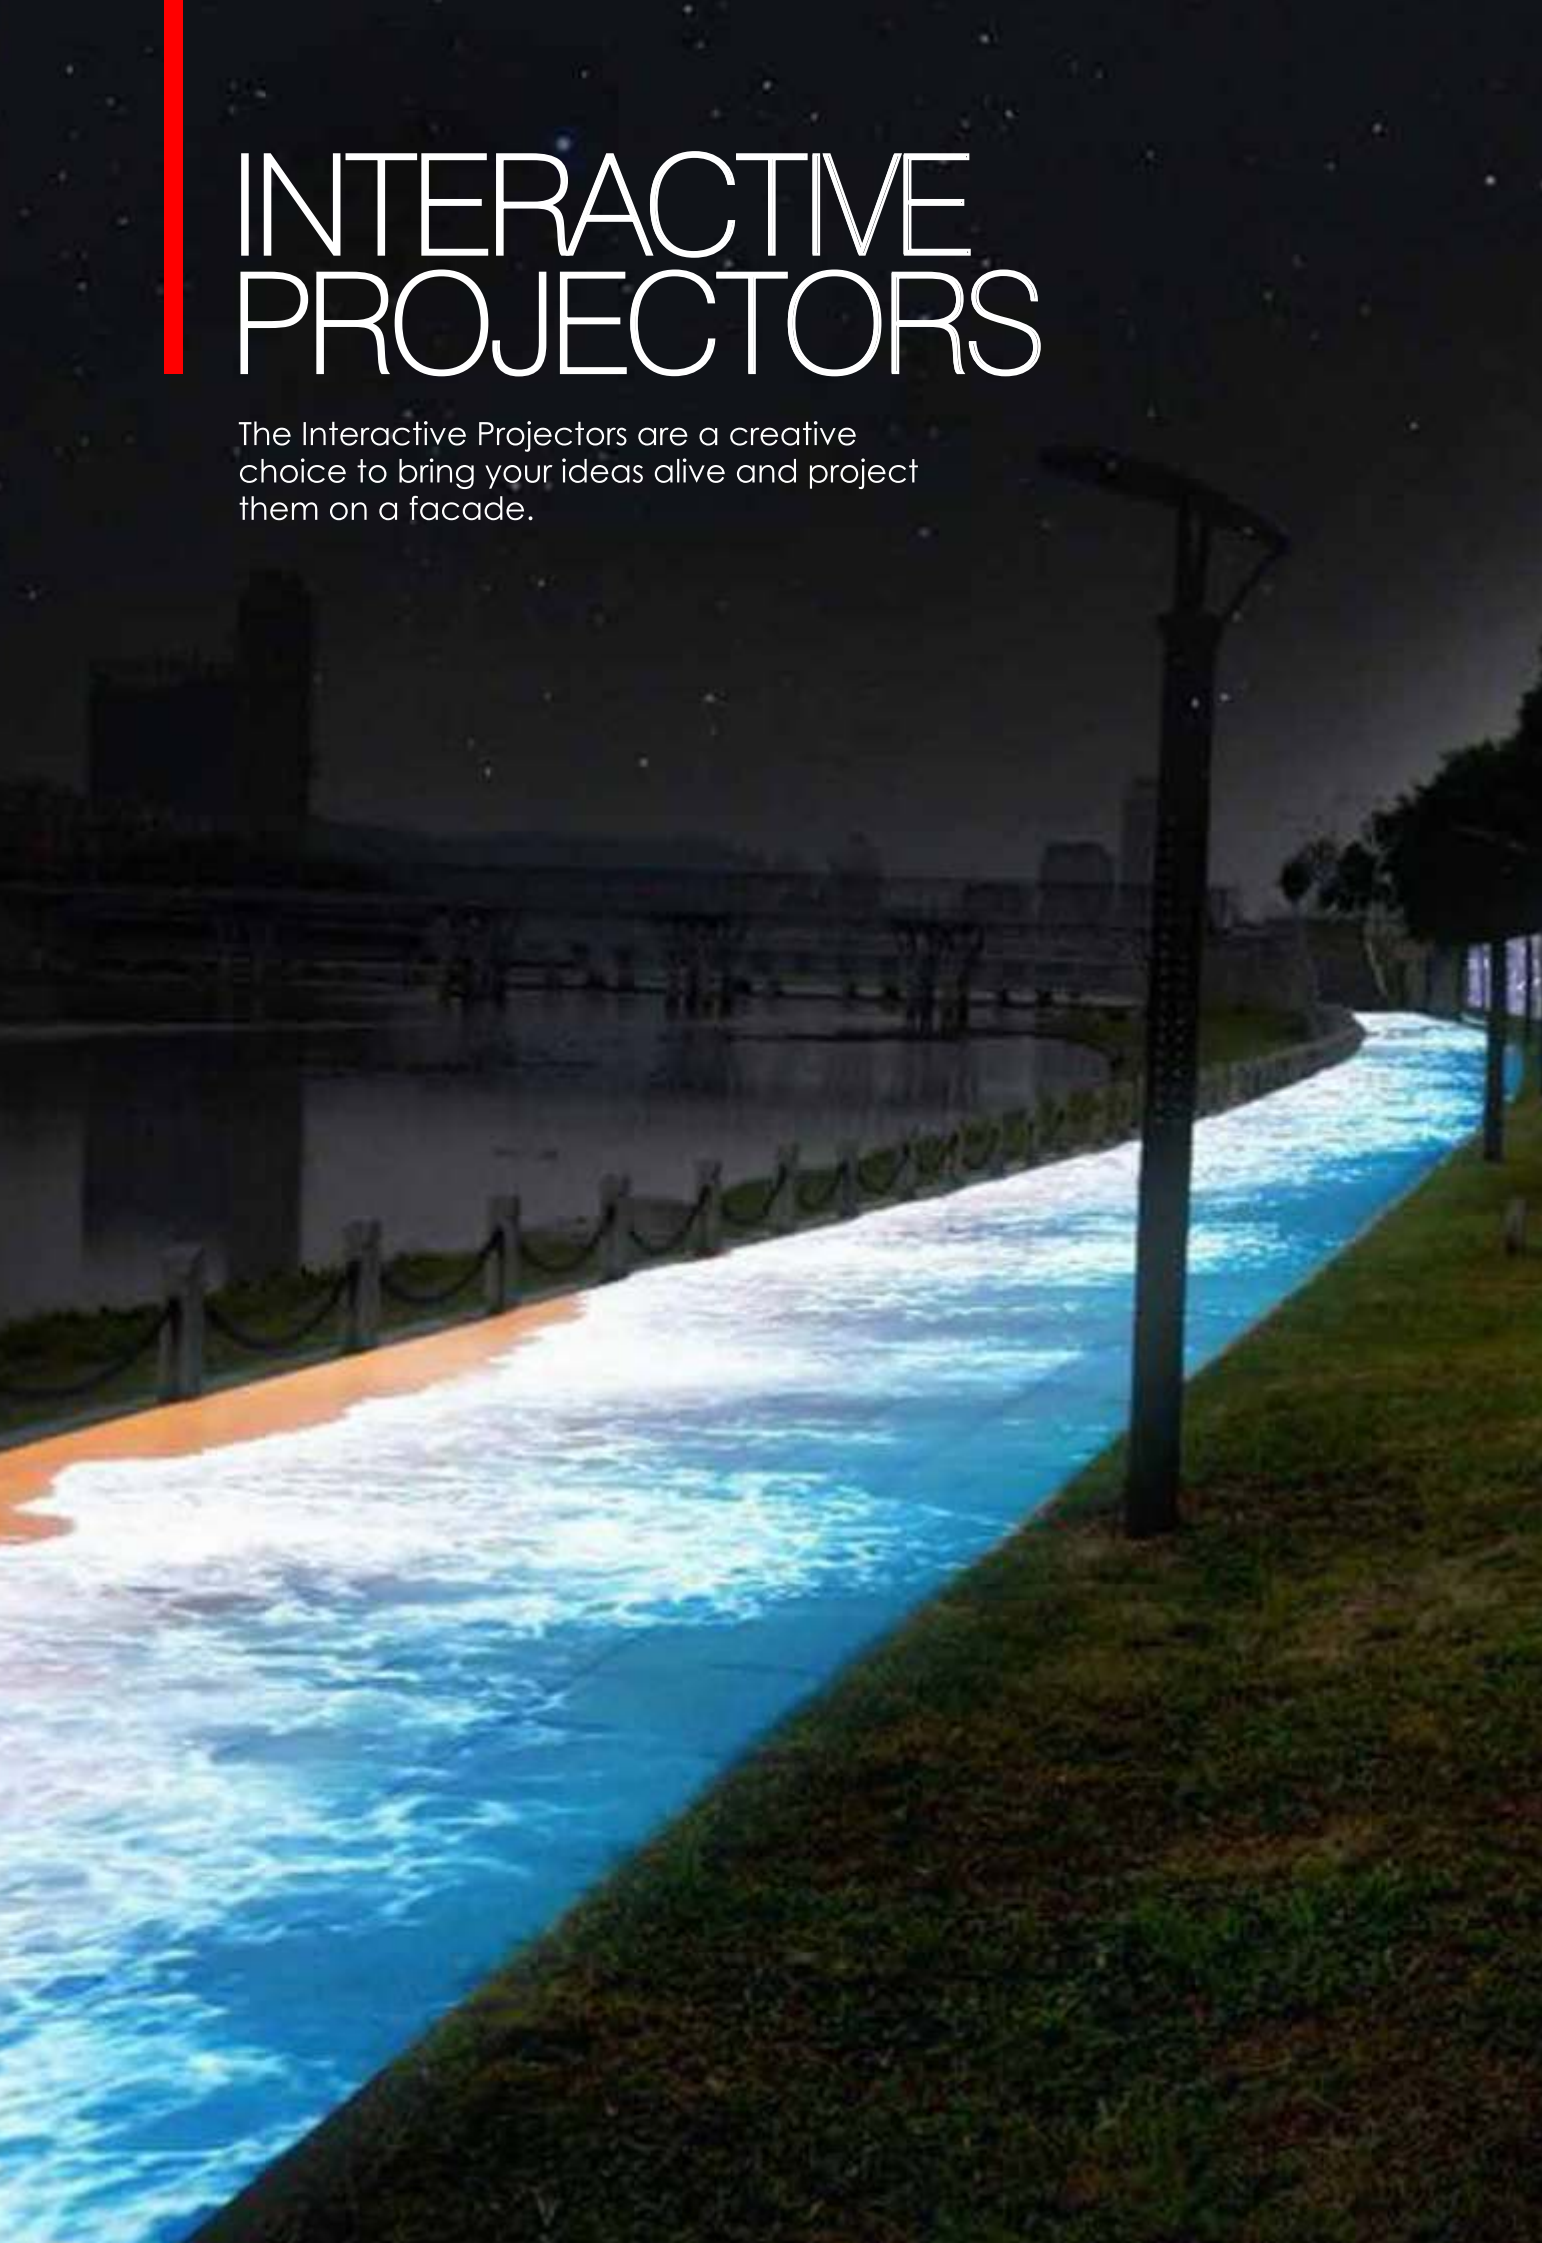

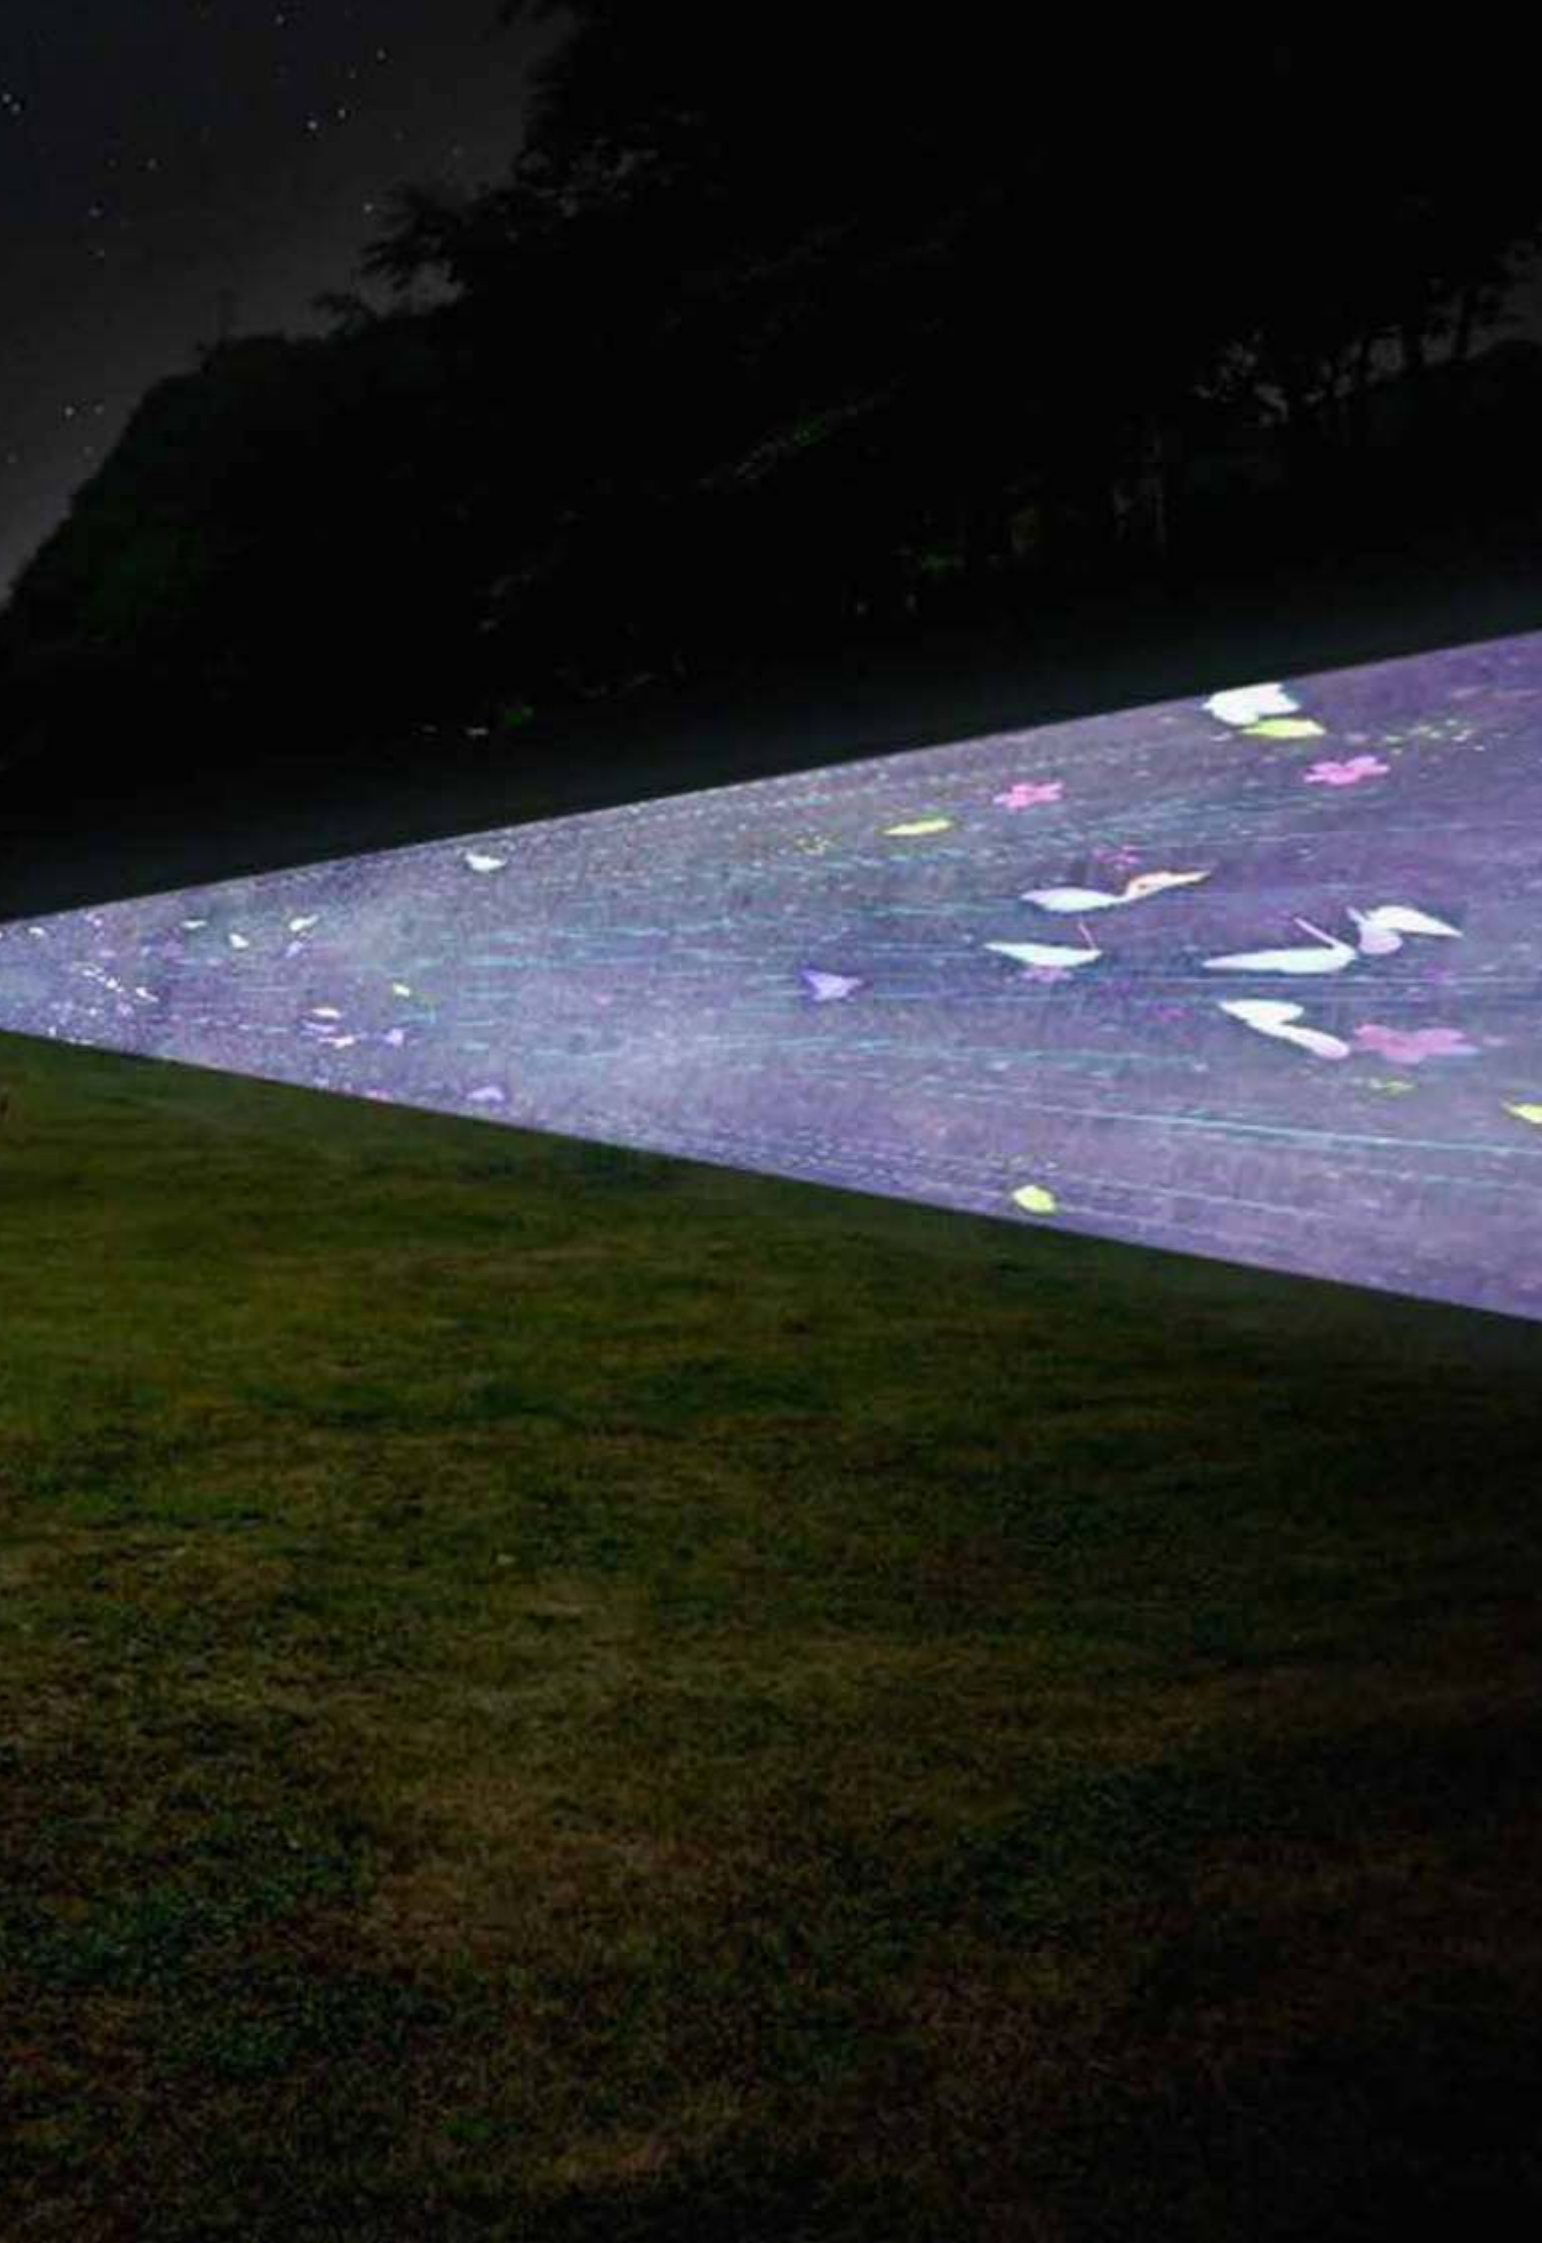

Project What's on Your Mind

The Ground Interactive Projection System uses dynamic projection to facilitate real time interaction between the participants and the images on the ground, thereby allowing multiple participants to blend into the scene and participate in the game at the same time. The physical movements of the audience control the projection on the ground through the sensing equipment. The projection equipment suspended on the top is used to project the image effect to the ground. When the visitor walks to the projection area, it is recognised by the system. Participants can directly use their feet to interact with the virtual scene on the screen, and various interactive effects change according to the steps.

Product Specification

Product Code: GM-FC-IPRJ-BLK

Normal Floor Projection		Interactive Floor Projection Advantage	
Less content	✗	80 interactive game themse with rich scenes	✓
Limited projection screen size	✗	Combined screen projection, you can spell it any way	✓
Supports up to dual radar	✗	The only company in the industry that can detect with 8 cameras	✓
Interactive effects speed are slow	✗	Point-to-point docking, virtual simulation technology	✓
Copy idea	✗	The founder of multi-channel ground interaction	✓
Lack of core technology	✗	The developer of ground interactive projection High	✓
1080P Capped	✗	precision, true 4K	✓
Mixed games of varying quality	✗	Support both projector and LED hardware	✓
Only support projection devices	✗	Can be connected to LED sensor interface	✓
Does not support multiple LED	✗	Perfect after-sales service and installation instructions	✓
interactive sensing interface docking	✗	Use the interactive screen developed by	
Unprofessional service guidance	✗	professional 3D game engine,	✓
use traditional 2DFLASH game effect	✗	fantastic and dynamic	

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Blooming Projections Made Beautiful

Product Specification				
Product Code: GM-FC-IPRJ-WH				
Floor Projection Advantage				
	Less content	✗		80 interactive game themse with rich scenes ✓
	Limited projection screen size	✗		Combined screen projection, you can spell it any way ✓
	Supports up to dual radar	✗		The only company in the industry that can detect with 8 cameras ✓
	Interactive effects speed are slow	✗		Point-to-point docking, virtual simulation technology ✓
	Copy idea	✗		The founder of multi-channel ground interaction ✓
	Lack of core technology	✗		The developer of ground interactive projection ✓
	4K Capped	✗		High precision, true 8K ✓
	Mixed games of varying quality	✗		Support both projector and LED hardware ✓
	Only support projection devices	✗		Can be connected to LED sensor interface ✓
	Does not support multiple LED	✗		Perfect after-sales service and installation instructions ✓
	interactive sensing interface docking	✗		Use the interactive screen developed by
	Unprofessional service guidance	✗		professional 3D game engine, ✓
	use traditional 2DFLASH game effect	✗		fantastic and dynamic

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

FAN PROJECTION LIGHTS

The GM Fan Projection Light are a futuristic feat in creating lifelike holograms through simple yet mesmerising lighting technique. The projection luminaire can be used for educational and commercial purposes.

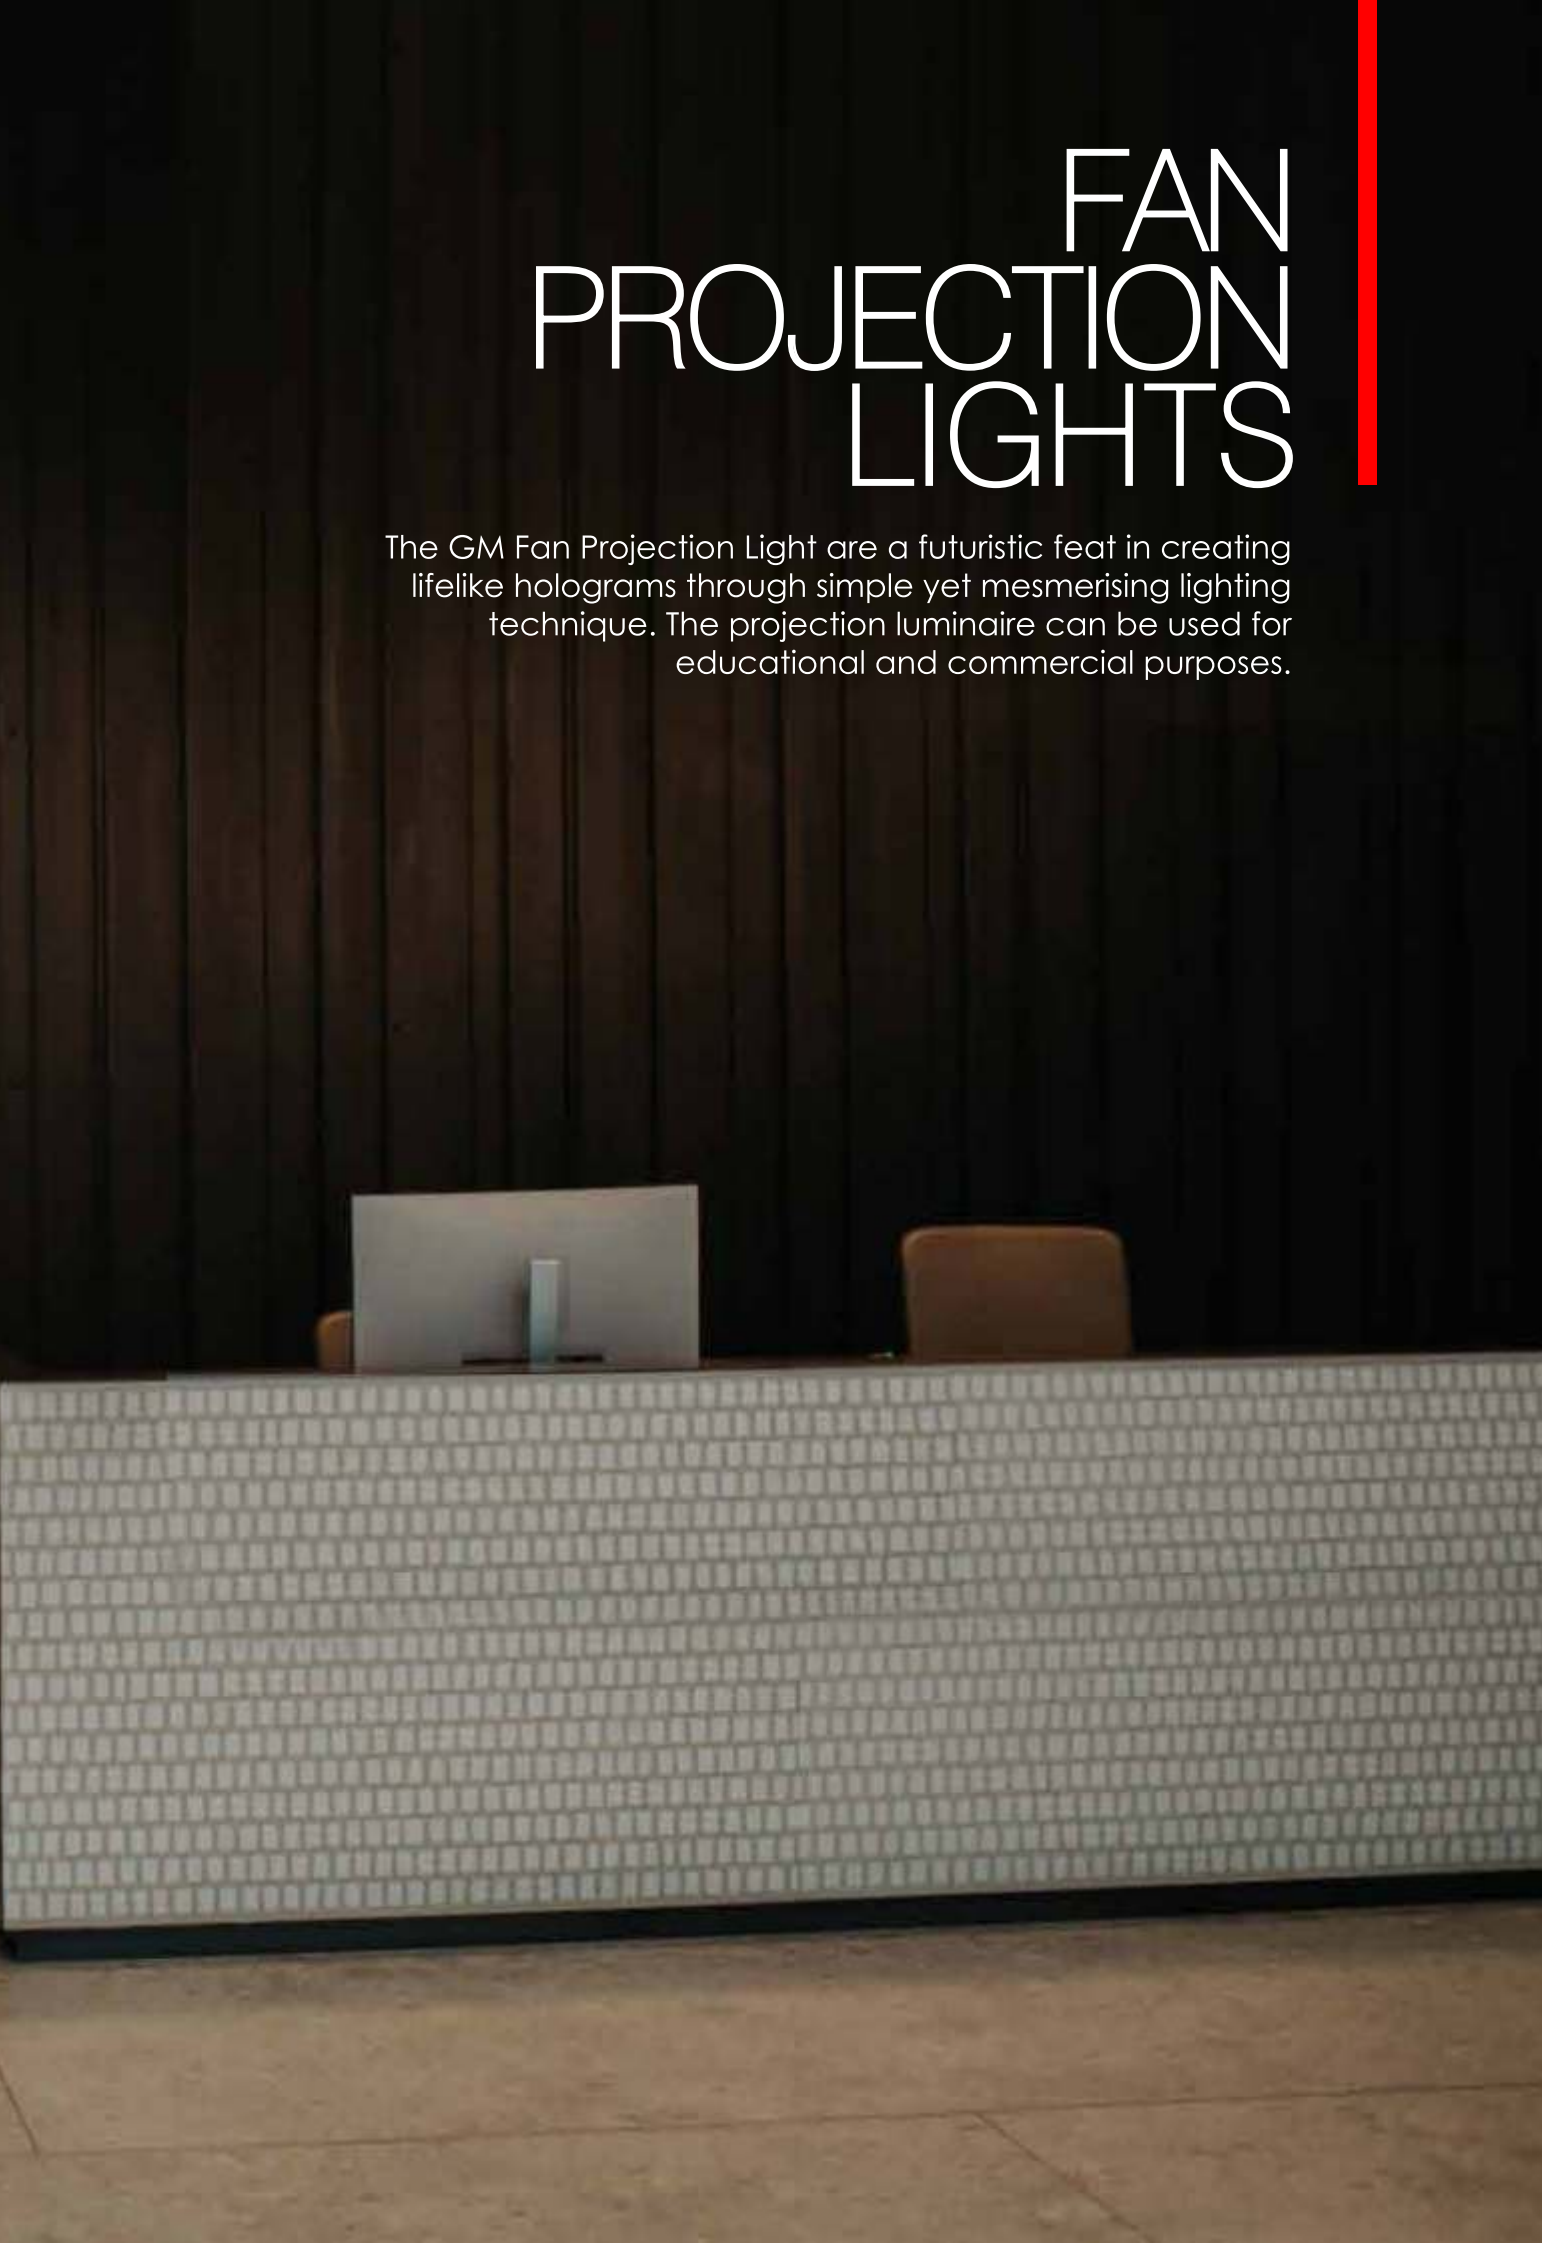

Watch Playful Projections Come Alive

Product Specification	
Product Code	GM-FC-FN-56-RGB
Size	56cm
Colour	RGB
Brightness	1600 CD
Control	Remote / Wifi
Native Resolution	1600x672
Memory Size	8GB
Power Input	AC 110V-240V, 50 Hz
Lamp Life	50000 Hours
Colour	Black
Connectors	Power In-Out

3D Content Library

Accessories For Outdoor / Indoor

Projecting Mesmerising Magic

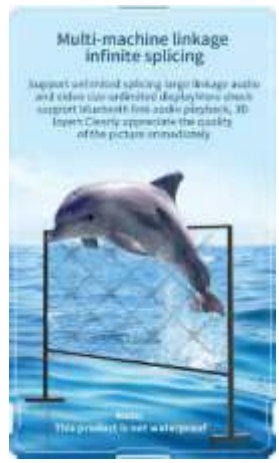

Product Specification	
Product Code	GM-FC-FN-65-RGB
Size	65cm
Colour	RGB
Brightness	1600 CD
Control	Remote / Wifi
Native Resolution	1600x720
Memory Size	8GB
Power Input	AC 110V-240, 50 Hz
Lamp Life	50000 Hours
Colour	Black
Connectors	Power In-Out

3D Content Library

Accessories For Outdoor / Indoor

HIGH CRI

HIGH VISUAL COMFORT

SURGE PROTECTION

Projecting Your Imagination

The device allows clear imaging at 100 cm. The projector's HD-precision warm-colour LED Imap beads project real, clear, and bright colors. Equipped with up to 2K quality screen, it makes the display screen bigger and stronger.

Product Specification	
Product Code	GM-FC-FN-100-RGB
Size	100cm
Colour	RGB
Brightness	1600 CD
Control	Remote / Wifi
Native Resolution	1600x720
Memory Size	8GB
Power Input	AC 110V-240, 50 Hz
Lamp Life	50000 Hours
Colour	Black
Connectors	Power In-Out

3D Content Library

Accessories For Outdoor / Indoor

INGROUND LIGHTS

The GM Inground Lights are sturdy in
exceptional in their quality to illuminate
and outdoors. With a cluster of powerf
the ability to withstand all weather co
light is perfect to light up spaces beaut

sign and
e facade
LEDs and
tions, this
ly.

Bright and Beaming

The fixture has a stainless steel body and surface, and is covered with tempered glass. Additionally, the ABS underground plastic case (optional) is suitable for swimming pools, parks, pedestrian streets, statues, etc. Control Mode: Single Control/-Multicolour External Control/DMX512 Internal Control.

Product Specification	
Product Code	GM-FC-ING-XX-XXXX
Wattage	1x1W
CCT	3000K
Beam Angle	35°
CRI	80
Protection Rating	IP68
Voltage	DC12/24V

Product Specification	
Product Code	GM-FC-ING-XX-XXXX
Wattage	3x1W / 3x1W RGB
CCT	3000K/RGB
Beam Angle	35°
CRI	80
Protection Rating	IP68
Voltage	DC12/24V

Product Specification	
Product Code	GM-FC-ING-XX-XXXX
Wattage	5x1W
CCT	3000K
Beam Angle	35°
CRI	80
Protection Rating	IP68
Voltage	DC12/24V

Product Specification	
Product Code	GM-FC-ING-XX-XXXX
Wattage	6x1W / 6x1W 2R 2G 2B
CCT	3000/RGB
Beam Angle	35°
CRI	80
Protection Rating	IP68
Voltage	DC12/24V

Wattage: XX
CCT: XXXX

SWITCH TO A BETTER WORLD

Lights that are Simply Vibrant









Product Specification	
Product Code	GM-FC-ING-XX-XXXX
Wattage: 9x1W	Wattage: 9x1W 3R 3G 3B
CCT: 3000K	RGB
Beam Angle: 35°	Beam Angle: 35°
CRI: 80	CRI: 80
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code	GM-FC-ING-XX-XXXX
Wattage: 12x1W	Wattage: 12x1W 4R 4G 4B
CCT: 3000K	RGB
Beam Angle: 35°	Beam Angle: 35°
CRI: 80	CRI: 80
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code	GM-FC-ING-XX-XXXX
Wattage: 15x1W	Wattage: 15x1W 5R 5G 5B
CCT: 3000K	RGB
Beam Angle: 35°	Beam Angle: 35°
CRI: 80	CRI: 80
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code	GM-FC-ING-XX-XXXX
Wattage: 18x1W	Wattage: 18x1W 6R 6G 6B
CCT: 3000K	RGB
Beam Angle: 35°	Beam Angle: 35°
CRI: 80	CRI: 80
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

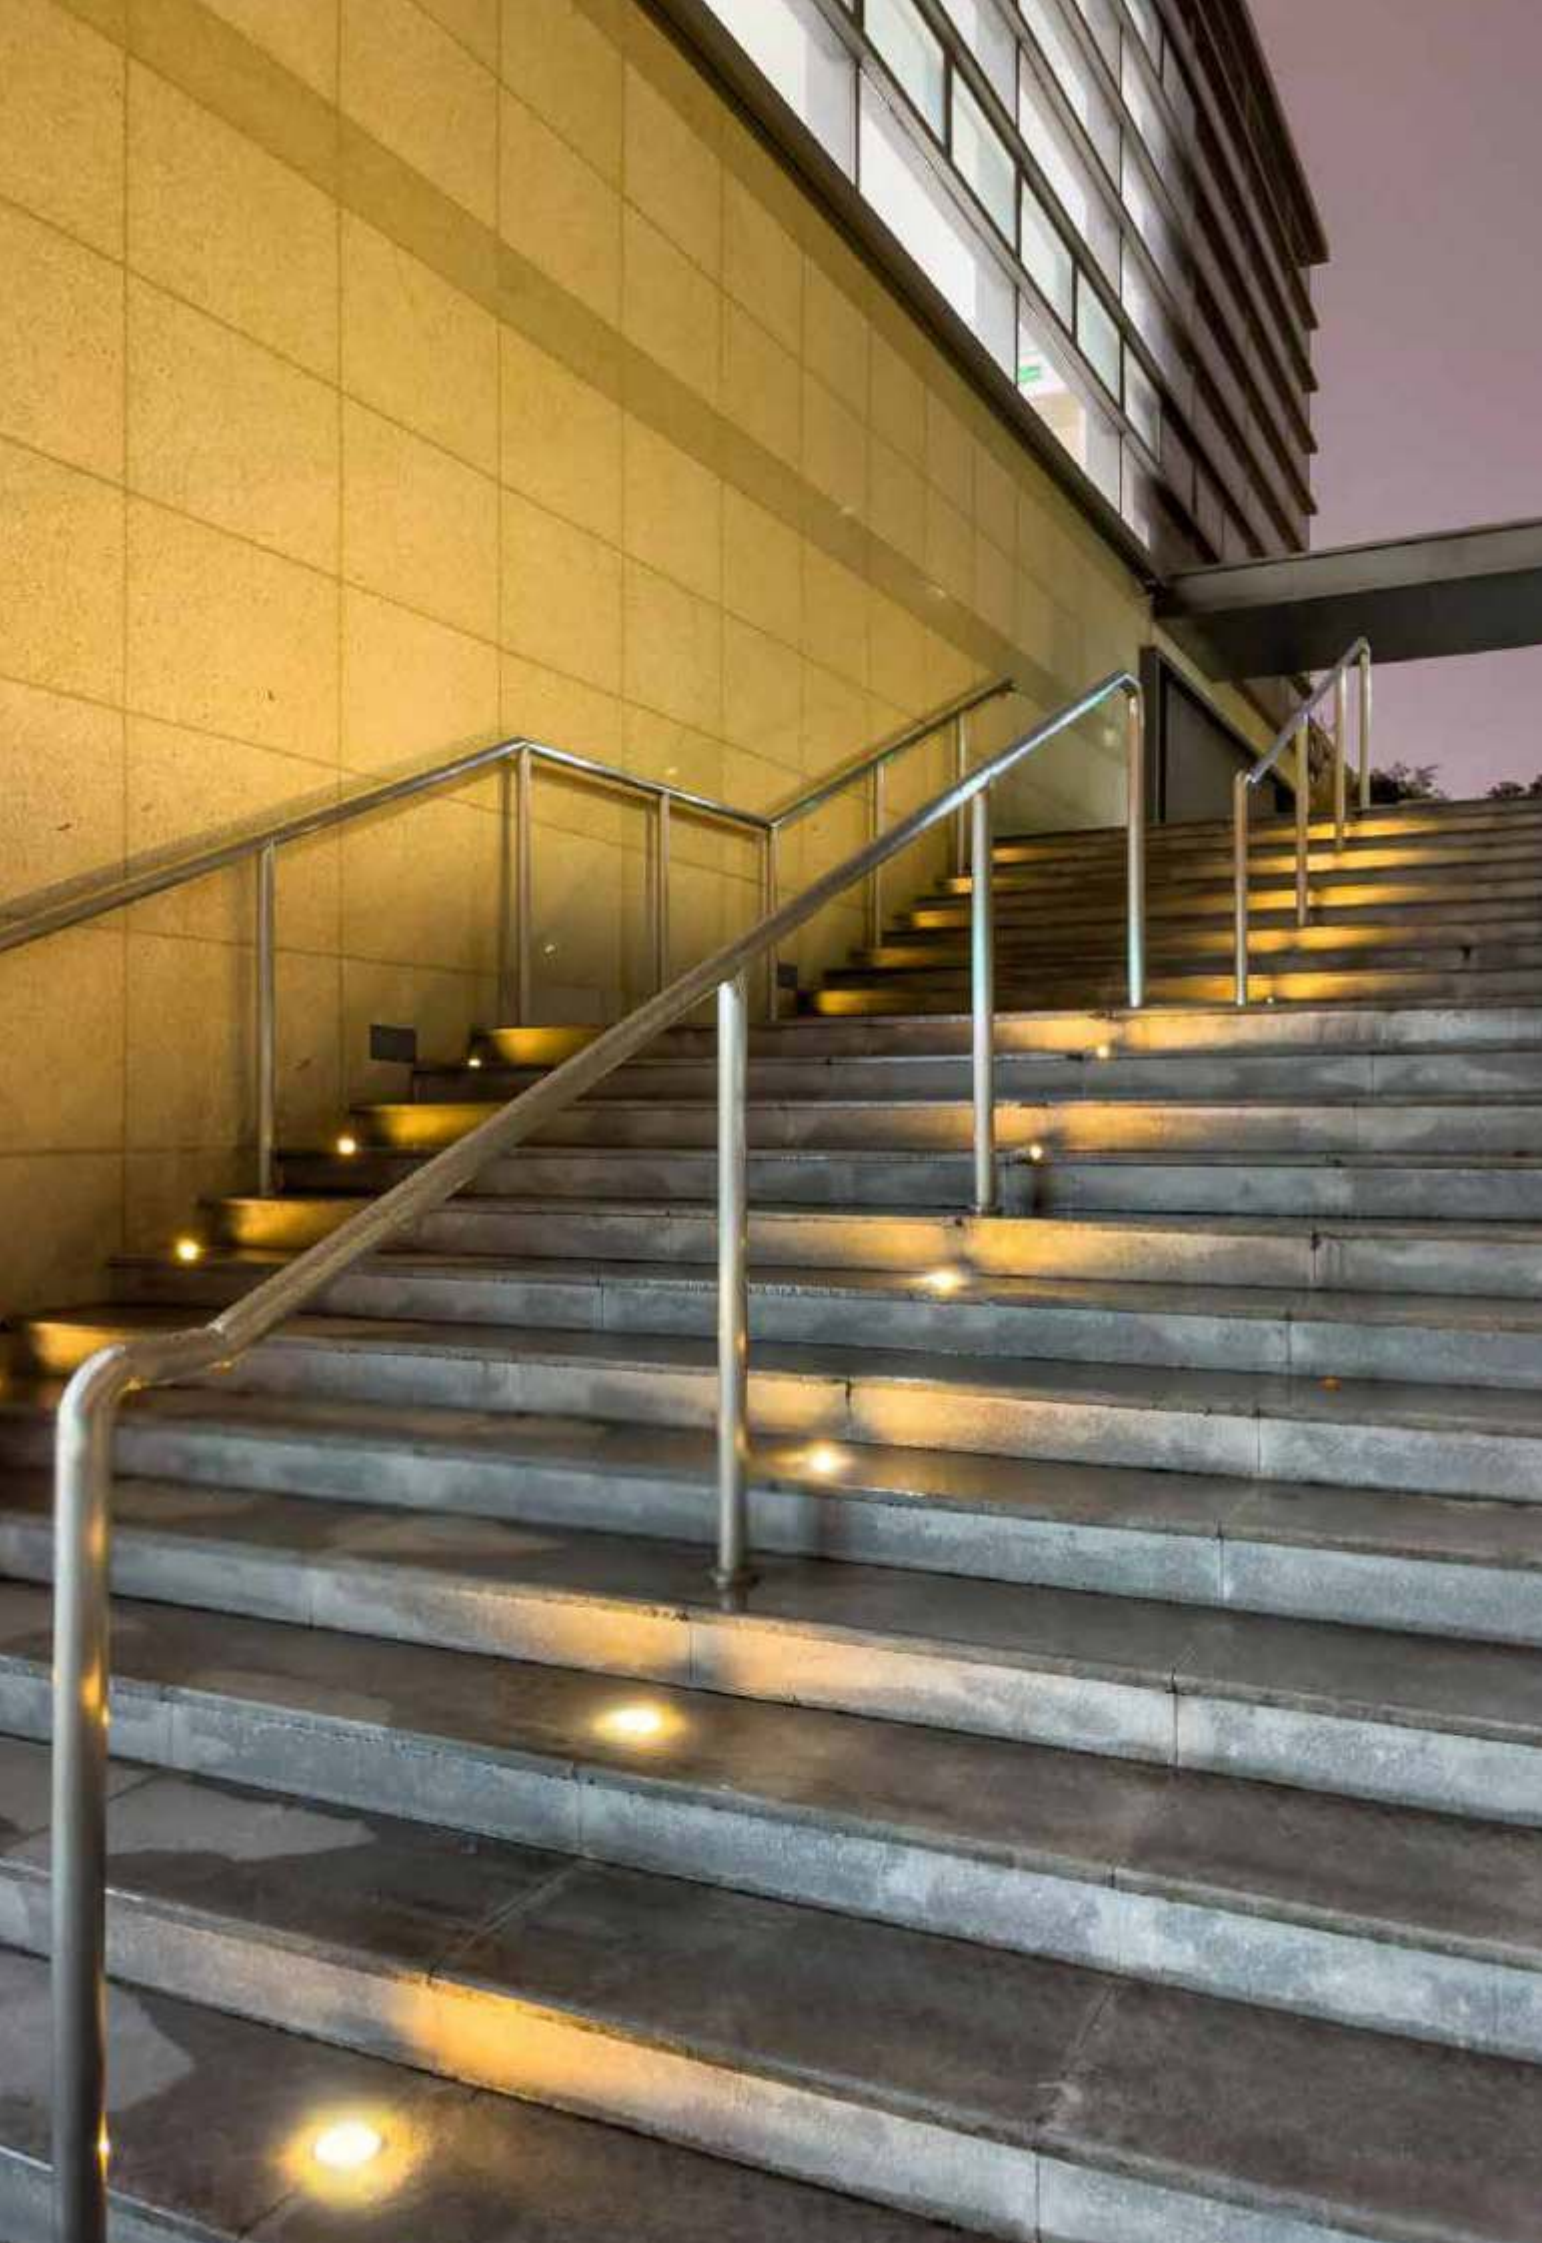

In Sync with the Night





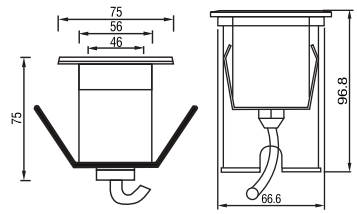

Product Specification	
Product Code	GM-FC-ING1-1-3000K
Wattage	1x1W
CCT	3000K
Beam Angle	35°
CRI	80
IP	68
Voltage	DC12/24V

Product Specification	
Product Code: GM-FC-ING1-3-3000K	Product Code: GM-FC-ING1-3-RGB
Wattage: 1x3W	Wattage: 1x3W (RGB)
CCT: 3000K	RGB
Beam Angle: 35°	Beam Angle: 35°
CRI: 80	CRI: 80
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code: GM-FC-ING2-3-3000K	Product Code: GM-FC-ING2-3-RGB
Wattage: 3x1W	Wattage: 3x1W (DMX)
CCT: 3000K	RGB
Beam Angle: 35°	Beam Angle: 35°
CRI: 80	CRI: 80
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

FOUNTAIN LIGHTS

The GM Fountain Lights add a colourful magic to water sprouts that make them an attractive sight to behold and appreciate.

The Art of Fluid Lighting

Product Specification	
Product Code	GM-FC-NZ-TY-1
Nozzle Type	Black foam jet with ball joint
Power	As Per Pump (Pressure) Flow
Protection Rating	IP66
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plated
List Price	

Product Specification	
Product Code	GM-FC-NZ-TY-2
Nozzle Type	Cascade jet nozzle
Power	As Per Pump (Pressure) Flow
Protection Rating	IP66
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plated
List Price	

Product Specification	
Product Code	GM-FC-NZ-TY-3
Nozzle Type	Umbrella nozzle (mushroom/ bell)
Power	As Per Pump (Pressure) Flow
Protection Rating	IP66
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plated
List Price	

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

Varied Styles of Fluidity

Product Specification	
Product Code	GM-FC-NZ-TY-4
Nozzle Type	Black foam jet with ball joint
Power	As Per Pump (Pressure) Flow
Protection Rating	IP66
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plated
Size	XXXX
List Price	XXXX

Product Specification	
Product Code	GM-FC-NZ-TY-5
Nozzle Type	Cascade jet nozzle
Power	As Per Pump (Pressure) Flow
Protection Rating	IP66
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plated
Size	
List Price	

Product Specification	
Product Code	GM-FC-NZ-TY-6
Nozzle Type	Umbrella nozzle (mushroom/ bell)
Power	As Per Pump (Pressure) Flow
Protection Rating	IP66
Control Channels	DMX512/ON-OFF
Housing	Brass with chrome plated
Size	
List Price	

Sprout of Magical Lights

The cover has a PC material integrated lens, and the back has a 304 stainless steel lamp housing with rubber sealing. Suitable for water fixtures, fountain lights, pools and other underwater lighting. Control Mode: Single Control/Multicolour External Control/DMX512 Internal Control.

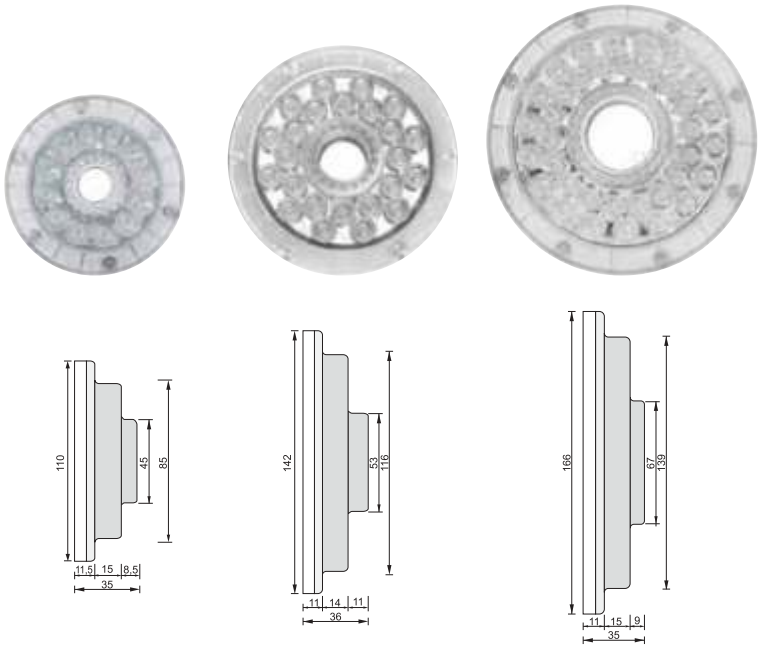

Product Code	Joint	Voltage	Wattage	Lamp Beads	Colour	Line Length	Size	IP	List Price
GM-FC-NZ-3-XXXX	3/4"	DC12V / DC24V	3W	12	WW/RGB/RGBW	50CM	Ø 110x35mm	68	
GM-FC-NZ-6-XXXX	1"	DC12V / DC24V	6W	24	WW/RGB/RGBW	50CM	Ø 142x35mm	68	
GM-FC-NZ-9-XXXX	1½"	DC12V / DC24	9W	36	WW/RGB/RGBW	50CM	Ø 166x35mm	68	

CCT: XXXX

Voltage	220/240V	220/240V	220/240V
Frequency	50/60Hz	50/60Hz	50/60Hz
Output	167mA	630mA	830mA

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

More Hues than Just Blues

Comes with a stainless steel body, silica gel sealing, and tempered glass. Suitable for water fixtures, dry fountain lights, pools and other underwater lighting. Control Mode: Single Control/Multicolour External Control/DMX512 Internal Control.





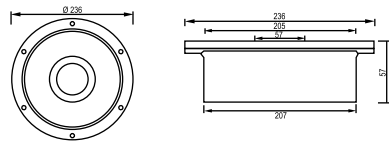

Product Specification		
GM-FC-NZ-9-BLK-XXXX	GM-FC-NZ-9-BLK-RGB	GM-FC-NZ-12-BLK-RGB
Wattage: 9x1W	Wattage:9x1W (3R 3G 3B)	Wattage: 12x1W (4R 4G 4B)
Beam Angle: 35°	Beam Angle: 35°	Beam Angle: 35°
IP: 68	IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V	Voltage: DC12/24V
Size: Ø145x47mm	Size: Ø145x47mm	Size: Ø145x47mm

Product Specification		
GM-FC-NZ-12-BLK-3000K	GM-FC-NZ1-12-BLK-RGB	GM-FC-NZ-15-BLK-RGB
Wattage: 12x1W	Wattage:12x1W (4R 4G 4B)	Wattage: 15x1W (5R 5G 5B)
Beam Angle: 35°	Beam Angle: 35°	Beam Angle: 35°
IP: 68	IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V	Voltage: DC12/24V
Size: Ø193x52mm	Size: Ø193x52mm	Size: Ø193x52mm

Product Specification		
GM-FC-NZ-15-BLK-3000K	GM-FC-NZ1-15-BLK-RGB	GM-FC-NZ-18-BLK-RGB
Wattage: 15x1W	Wattage:15x1W (5R 5G 5B)	Wattage: 18x1W (6R 6G 6B)
Beam Angle: 35°	Beam Angle: 35°	Beam Angle: 35°
IP: 68	IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V	Voltage: DC12/24V
Size: Ø232x57mm	Size: Ø232x57mm	Size: Ø232x57mm

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Beautiful Nights with Prettier Lights



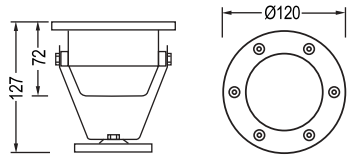

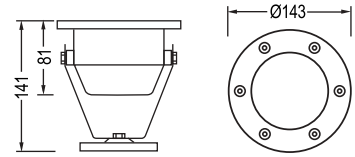

Product Specification	
Product Code: GM-FC-FT-P1-3-3000K	Product Code: GM-FC-FT-P1-3-RGB
Wattage: 3x1W	Wattage: 3x1W (1R 1G 1B)
CCT: 3000K	RGB
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code	GM-FC-FT-P1-5-3000K
Wattage	5x1W
CCT	3000K
Beam Angle	35°
Housing	SS
IP	68
Voltage	DC12/24V

Product Specification	
Product Code: GM-FC-FT-P1-6-3000K	Product Code: GM-FC-FT-P1-6-RGB
Wattage: 6x1W	Wattage: 6x1W (2R 2G 2B)
CCT: 3000K	CCT: RGB
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

SWITCH TO A BETTER WORLD

Lighting That's Absolutely Majestic

Unique high-efficiency current technology to ensure stable operation of each LED. Lamp cup uses high-quality stainless steel housings for good heat dissipation, high water resistance, and protection class IP68. The light fixture offers energy-saving, environmental protection, low voltage, easy control, long life, along with high-quality waterproof connectors and other absolute advantages.









Product Specification	
Product Code: GM-FC-FT-P1-9-3000K	Product Code: GM-FC-FT-P1-9-RGB
Wattage: 9x1W	Wattage : 9x1W (3R 3G 3B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code: GM-FC-FT-P1-12-3000K	Product Code: GM-FC-FT-P1-12-RGB
Wattage: 12x1W	Wattage : 12x1 W (4R 4G 4B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code: GM-FC-FT-P1-15-3000K	Product Code: GM-FC-FT-P1-15-RGB
Wattage: 15x1W	Wattage : 15x1 W (5R 5G 5B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code: GM-FC-FT-P1-18-3000K	Product Code: GM-FC-FT-P1-18-RGB
Wattage: 18x1W	Wattage : 18x1 W (6R 6G 6B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Command Scenic Lighting

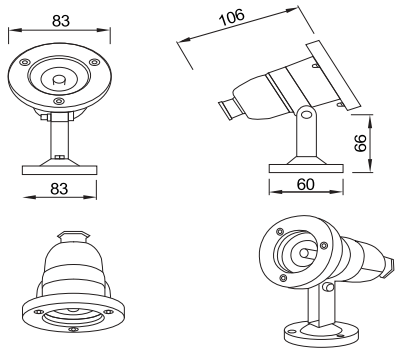

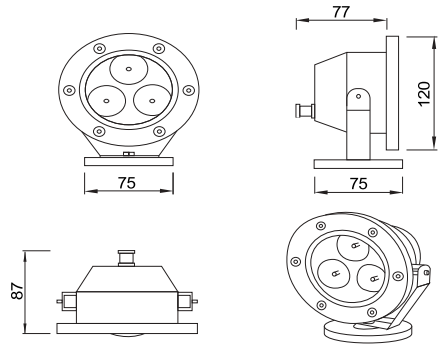

Product Specification	
Product Code: GM-FC-FT1-P1-3-3000K	Product Code: GM-FC-FT1-P1-3-RGB
Wattage: 3x1W	Wattage: 3x1W (1R 1G 1B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

Product Specification	
Product Code: GM-FC-FT1-P1-6-3000K	Product Code: GM-FC-FT1-P1-6-RGB
Wattage: 6x1W	Wattage: 6x1W (2R 2G 2B)
Beam Angle: 35°	Beam Angle: 35°
Housing: SS	Housing: SS
IP: 68	IP: 68
Voltage: DC12/24V	Voltage: DC12/24V

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

POOL LIGHTS

The GM Pool Lights are an amazing way of lighting the pools and its surroundings to make pools look beautiful and swimming a leisure activity after the sun sets.

SWITCH TO A BETTER WORLD

It is Bright Even under Water

Product Specification	
Product Code	GM-FC-PL-P1-12-XXXX
Wattage	12W
CCT	2200K-6000K / RGB
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High Speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20° C to +45° C
Cable/ Connectors	Power and DMX

Product Specification	
Product Code	GM-FC-PL-P1-18-XXXX
Wattage	18W
CCT	2200K-6000K / RGB
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High Speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20° C to +45° C
Cable/ Connectors	Power and DMX

Product Specification	
Product Code	GM-FC-PL-P1-27-XXXX
Wattage	27W
CCT	2200K-6000K / RGB
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High Speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20° C to +45° C
Cable/ Connectors	Power and DMX

Product Specification	
Product Code	GM-FC-PL-P1-36-XXXX
Wattage	36W
CCT	2200K-6000K / RGB
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High Speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20° C to +45° C
Cable/ Connectors	Power and DMX

CCT:XXXX

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

SWITCH TO A BETTER WORLD

Brighten Up Your Leisure Time

Product Specification	
Product Code	GM-FC-PL-P2-12-XXXX
Wattage	12W
CCT	2200K-6000K / RGB
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High Speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20° C to +45° C
Cable/ Connectors	Power and DMX

Product Specification	
Product Code	GM-FC-PL-P2-18-XXXX
Wattage	18W
CCT	2200K-6000K / RGB
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High Speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20° C to +45° C
Cable/ Connectors	Power and DMX

Product Specification	
Product Code	GM-FC-PL-P2-27-XXXX
Wattage	27W
CCT	2200K-6000K / RGB
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High Speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20° C to +45° C
Cable/ Connectors	Power and DMX

Product Specification	
Product Code	GM-FC-PL-P2-36-XXXX
Wattage	36W
CCT	2200K-6000K / RGB
Mode	Sound Active / Auto / DMX Laser
Patterns	More than 128 Patterns
Scanner	High Speed Optical Scanner
System Port	ILDA DB Standard Port
Cooling	Air Cooling
Housing	ABC Body (PVC)
Input	DC100V-240V 50-60Hz
Colour	White Ceramic
Temp.	-20° C to +45° C
Cable/ Connectors	Power and DMX

CCT:XXXX

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Blue and Beautiful

Product Specification	
Product Code	GM-FC-PL-P3-3-XXXX
Wattage	3W
CCT	2200K- 6000K/ RGB
Protection Rating	IP65
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body

Product Specification	
Product Code	GM-FC-PL-P3-6-XXXX
Wattage	6W
CCT	2200K- 6000K/ RGB
Protection Rating	IP65
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body

Product Specification	
Product Code	GM-FC-PL-P3-9-XXXX
Wattage	9W
CCT	2200K- 6000K/ RGB
Protection Rating	IP65
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body

CCT:XXXX

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

SWITCH TO A BETTER WORLD

Pearls for Your Pools

Product Specification	
Product Code	GM-FC-PL-P4-12-XXXX
Wattage	12W
CCT	2200K- 6000K/ RGB
Protection Rating	IP65
Beam Angle	15°, 20°, 25°
CRI	80
Power Factor	>0.90
Power Input	AC 110V-240V, 50 Hz
Body Colour	White Ceramic
Housing	ABS Body (PVC)

Product Specification	
Wattage	GM-FC-PL-P4-18-XXXX
CCT	18W
Protection Rating	2200K- 6000K/ RGB
Beam Angle	IP65
CRI	15°, 20°, 25°
Power Factor	80
Power Input	>0.90
Body Colour	AC 110V-240V, 50 Hz
Housing	White Ceramic
Model	ABS Body (PVC)

Product Specification	
Wattage	GM-FC-PL-P4-36-XXXX
CCT	36W
Protection Rating	2200K- 6000K/ RGB
Beam Angle	IP65
CRI	15°, 20°,25°
Power Factor	80
Power Input	>0.90
Body Colour	AC 110V-240V, 50 Hz
Housing	White Ceramic
Model	ABS Body (PVC)

CCT:XXXX

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

GLOW GARDEN LIGHT

The GM Glow Garden Lights are an amazing way of lighting the parks and its surroundings. Enhancing the look of parks, the lights make taking a stroll or relaxing in a garden a much more beautiful experience during the evenings and nights.

Naturally Lighting Up Nature

Product Specification	
	3000K, 6000K, RGB
Protection Rating	IP65
Voltage	DC 12 / DC 24
Material	PE + Hardware
	3000mm / 4000mm

Product Specification	
CCT	3000K, 6000K, RGB
Protection Rating	IP65
Voltage	DC 12 / DC 24
Material	PE + Hardware
Size	3000mm / 4000mm

Product Specification	
CCT	3000K, 6000K, RGB
Protection Rating	IP65
Voltage	DC 12 / DC 24
Material	PE + Hardware
Size	520mm x 300mm x 900mm

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

SOLAR POLE LIGHTS

The GM Solar Pole Lights illuminate the pathways and make treading down a road easier and safer. These versatile solar pole lights serve the dual purpose of illumination and safe travels.

Store Energy to Light-up the Nights

SOLAR

ACCU

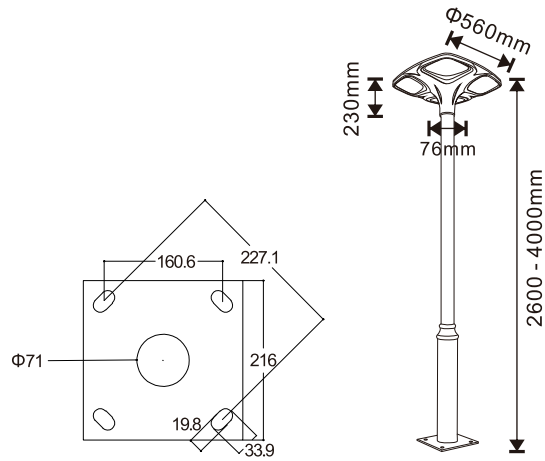

Optical sensing



2835LED

A

incl.

3.2V~

160PCS

Product Specification	
Product Code	GM-FC-SO-PT-32-3000K / 6000K
Wattage	32W
Solar panels	5V/32W
Battery	3.2V/45000mAh
Colour Temperature	3000-6000K
Charge time	3-5H
Water proof grade	IP65
Material quality	Aluminium
Size	560x560xH230mm

HIGH CRI

HIGH VISUAL COMFORT

SURGE PROTECTION

For a Memorable Journey

SOLAR

ACCU



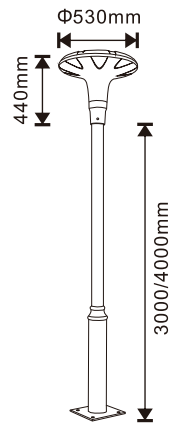

Product Specification	
Product Code	GM-FC-SO-PT-25-3000K / 6000K
Wattage	25W
Solar panels	5V/25W
Battery	3.2V/30000mAh
Colour Temperature	3000-6500K
Charge Time	3-5H
Water proof grade	IP65
Material Quality	Aluminium
Size	Ø530xH440mm





HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

Let There Never Be a Dark Turn

SOLAR

ACCU

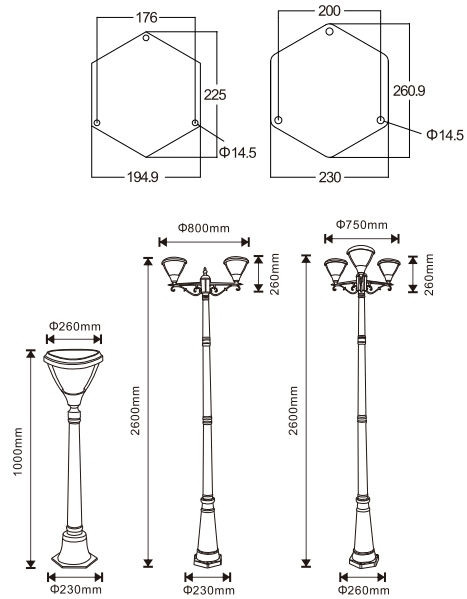

Product Specification			
Product Code	GM-FC-SO-PT-4.5-XXXX	GM-FC-SO-PT-4.5x2-XXXX	GM-FC-SO-PT-4.5x3-XXXX
Wattages	4.5W / 5V	4.5W x 2 / 5V	4.5W x 3 / 5V
CCT	3000-6500K	3000-6500K	3000-6500K
Battery	3.2V/8000mAh	3.2V/16000mAh	3.2V/24000mAh
Charge time	3-5H	3-5H	3-5H
Water proof grade	IP65	IP65	IP65
Material quality	Aluminium	Aluminium	Aluminium
Size	Ø260xH1000mm	Ø800xH2600mm	Ø750xH2600mm

Optical sensing

2835LED

incl.

3.2V~

30PCS*1

CCT: XXXX

HIGH CRI

HIGH VISUAL COMFORT

SURGE PROTECTION

SWITCH TO A BETTER WORLD

Light Up to Bright Up

SOLAR

ACCU

Product Specification			
Product Code	GM-FC-SO-PT-12-6000K	GM-FC-SO-PT-18-6000K	GM-FC-SO-PT-22-6000K
Wattages	12W / 6V	18 / 6V	22 / 6V
CCT	6000K	6000K	6000K
Battery	12Ah/3.2V	14Ah/3.2V	18Ah/3.2V
Charge time	3-5H	3-5H	3-5H
Water proof grade	IP65	IP65	IP65
Material quality	Aluminium	Aluminium	Aluminium
Size	Ø437x123mm	Ø410x122mm	Ø572x123mm





HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

SOLAR STREET LIGHT

The GM Solar Street Light is an environment-friendly and energy-efficient option for lighting up streets at night time.

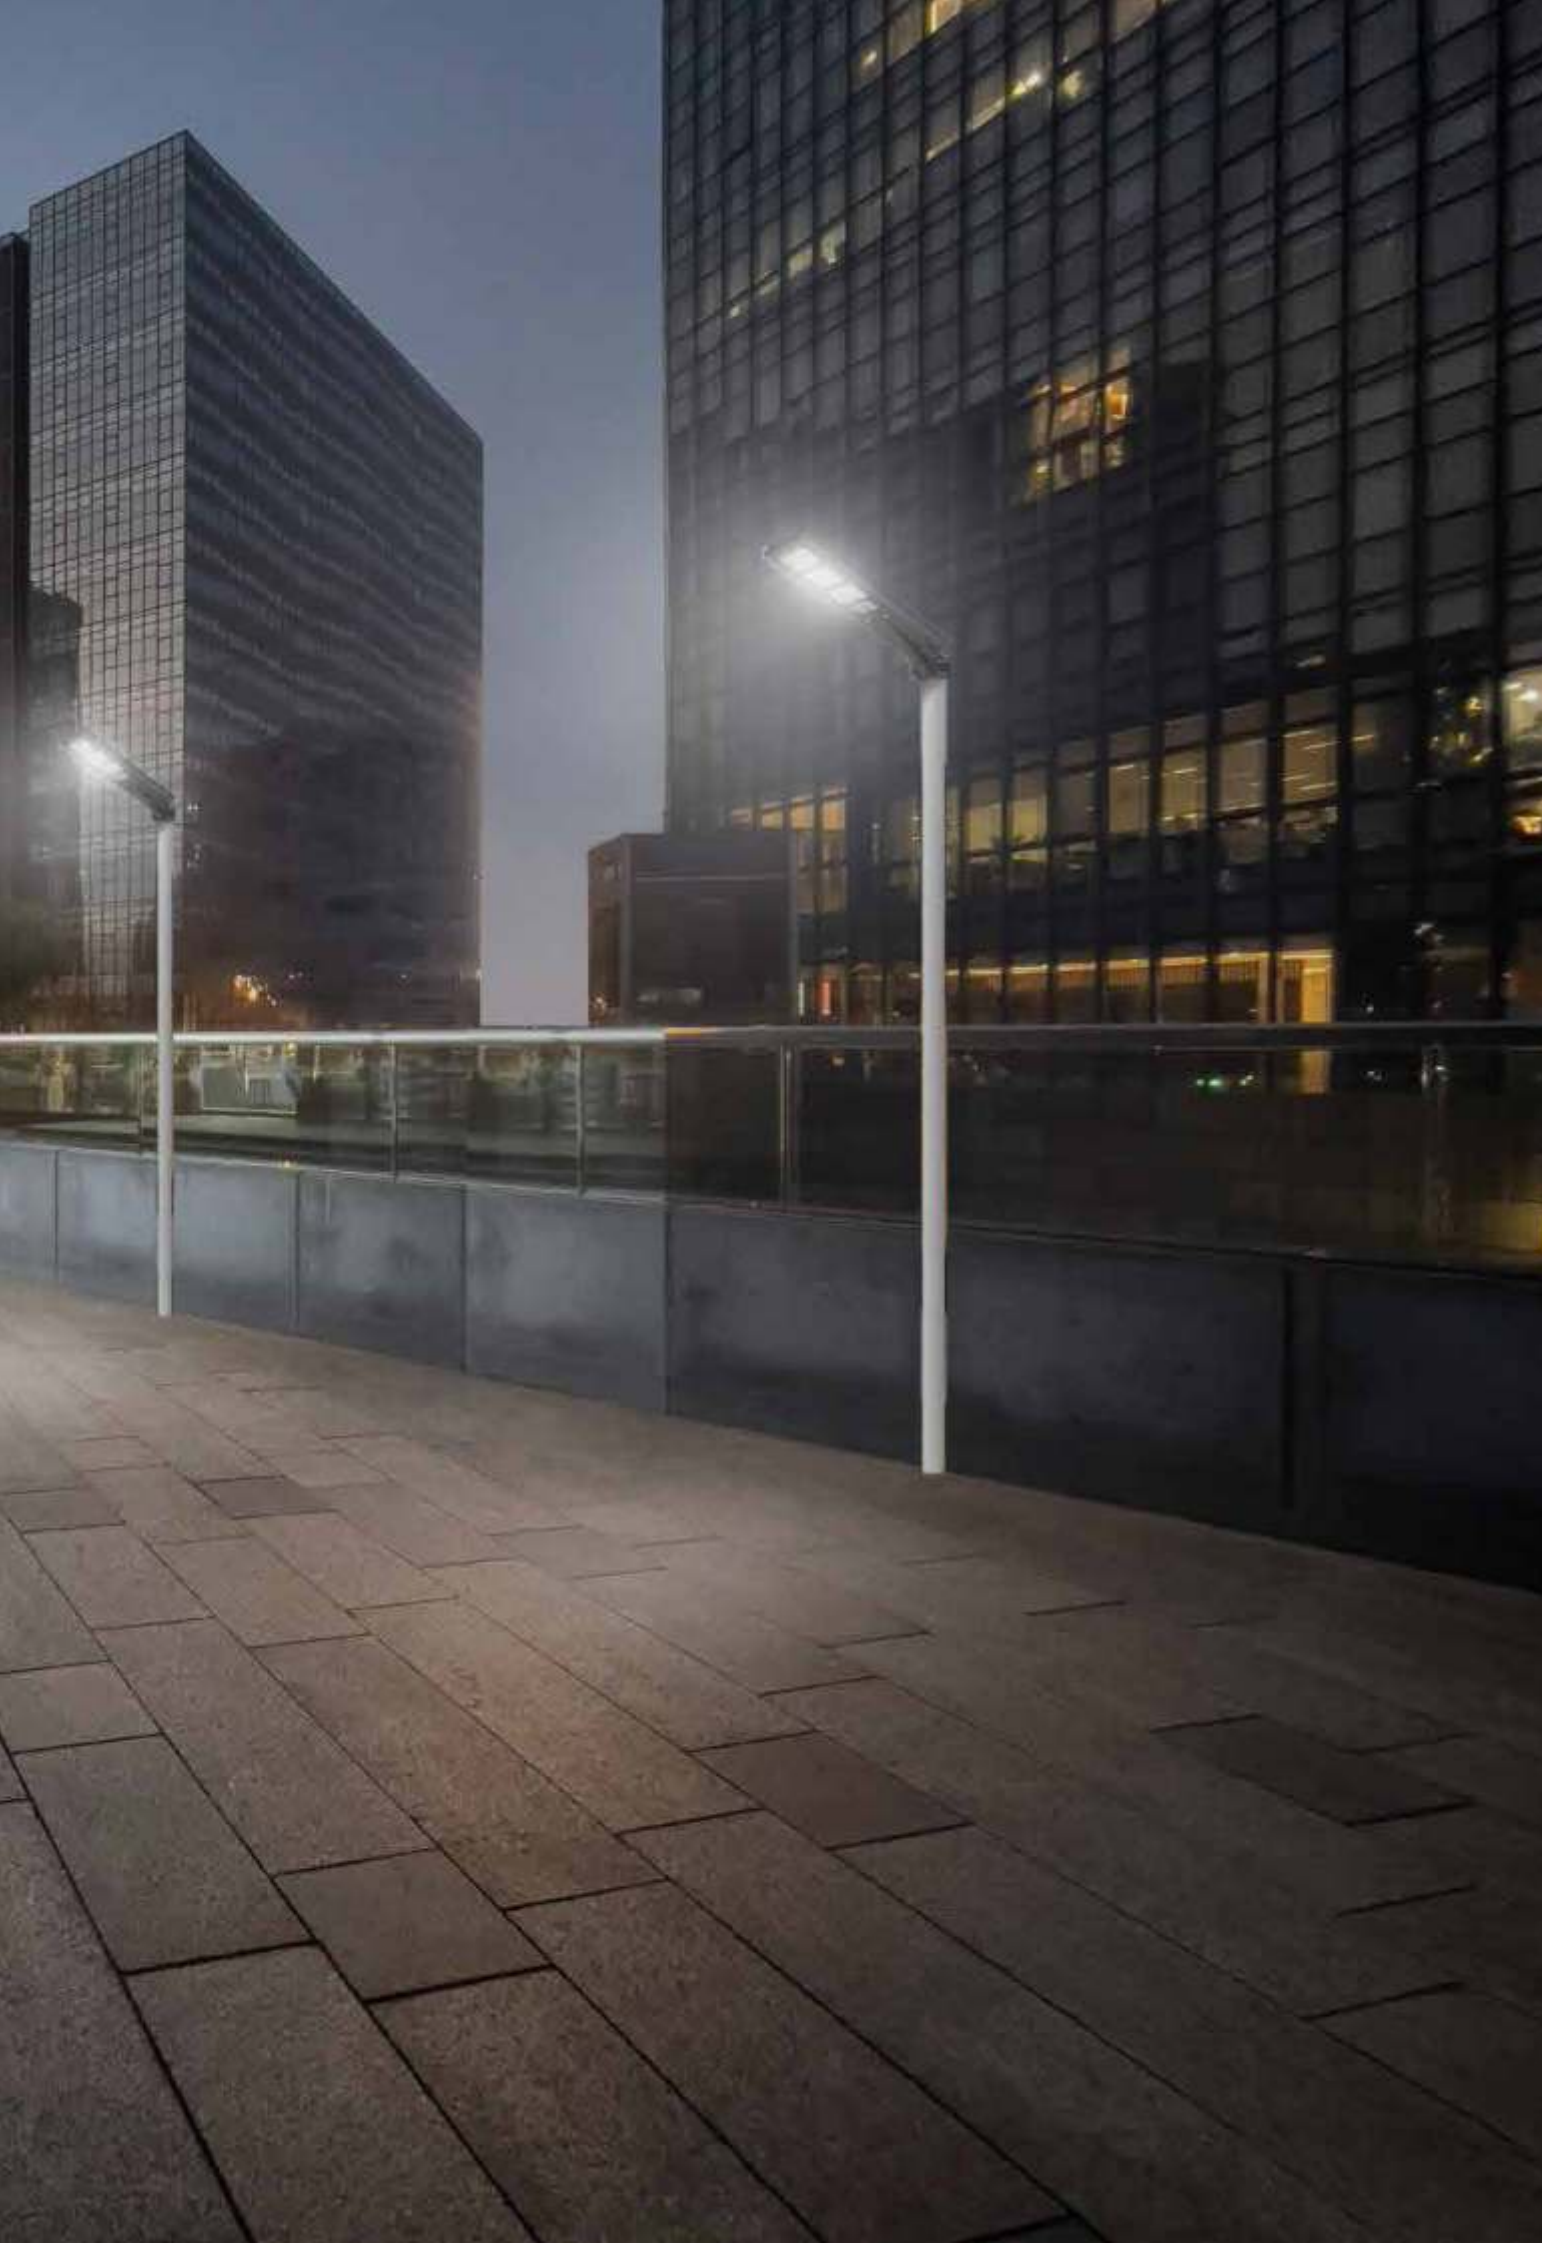

SWITCH TO A BETTER WORLD

Nights are Now Safer

30W



50W

70W

100W

Mono panel

Chip

sensor switch

Wall/Pole install

Pro-Double-MPPT









Product Code	GM-FC-SO-30-6000K	GM-FC-SO-50-6000K	GM-FC-SO-70-6000K	GM-FC-SO-100-6000K
Power(W)	30W	50W	70W	100W
Solar Panel	10W 6V	15W6V	20W 6V	25W 6V
Battery	6AH 3.2V	12AH3.2V	18AH3.2V	24AH3.2V
LED QTY	30pcs	60pcs	90pcs	150pcs
Dimension(mm)	580*215*140	675*190*140	715*190*140	870*190*140
CCT(K)	6000K			
Beam Angle	120°			
IP rating	IP65			
Material	Aluminum			
Warranty	3 years			
Application	Villa, School, Countryside, Rural Area, Community, Villages and Towns			
Specification	1. With mono solar panel in high working efficiency >21% 2. PRO-Double MPPT advanced charge controller, 40%-50% conversion efficiency than normal PWM3. Guarantee 365 days light			

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

SMART POLE LIGHT

The GM Smart Pole Light is an intelligent choice to keep streets safe and illuminated throughout the night.

Sensible Nighttime Illumination

The smart lighting system is designed to solve the problems of switching, inaccurate lighting times, inspection & fault handling difficulties, and uncontrollable lighting rates in traditional urban street lights.

Product Specification
Smart Lighting Controlling System Remotely control (ON/OFF, dimming, data collecting, alarm etc.) in real time by computer, mobile phone, PC, PAD, support communication modes like NB-IoT, LoRa, Zigbee etc.
Weather Station System Collect and send data to monitoring center by concentrator, such as weather, temperature, humidity, lighting, PM2.5, noise rainfall, wind speed, etc.
Emergency Call System Connect directly to command center, respond quickly to emergency public security affair and position it.
Mini Basestation
Wireless AP System Support WIFI hotspot in city.
Cameras & Surveillance System Monitor traffic, security lighting, public equipments through cameras & surveillance system on the pole.
Information Publishing System Display the advertisement, public information in words, pictures, videos by remote uploading, high efficient and convenient.
AC Charge Pile Offer more charging stations for new energy vehicles, make it easier for people travelling and speed up the popularization of new energy vehicles.

HIGH CRI · HIGH VISUAL COMFORT · SURGE PROTECTION

POLE LIGHTS

The GM Pole Lights are designed to add a safety quotient to outdoors, roads and highways coupled with impressive looks and exceptional functionality.

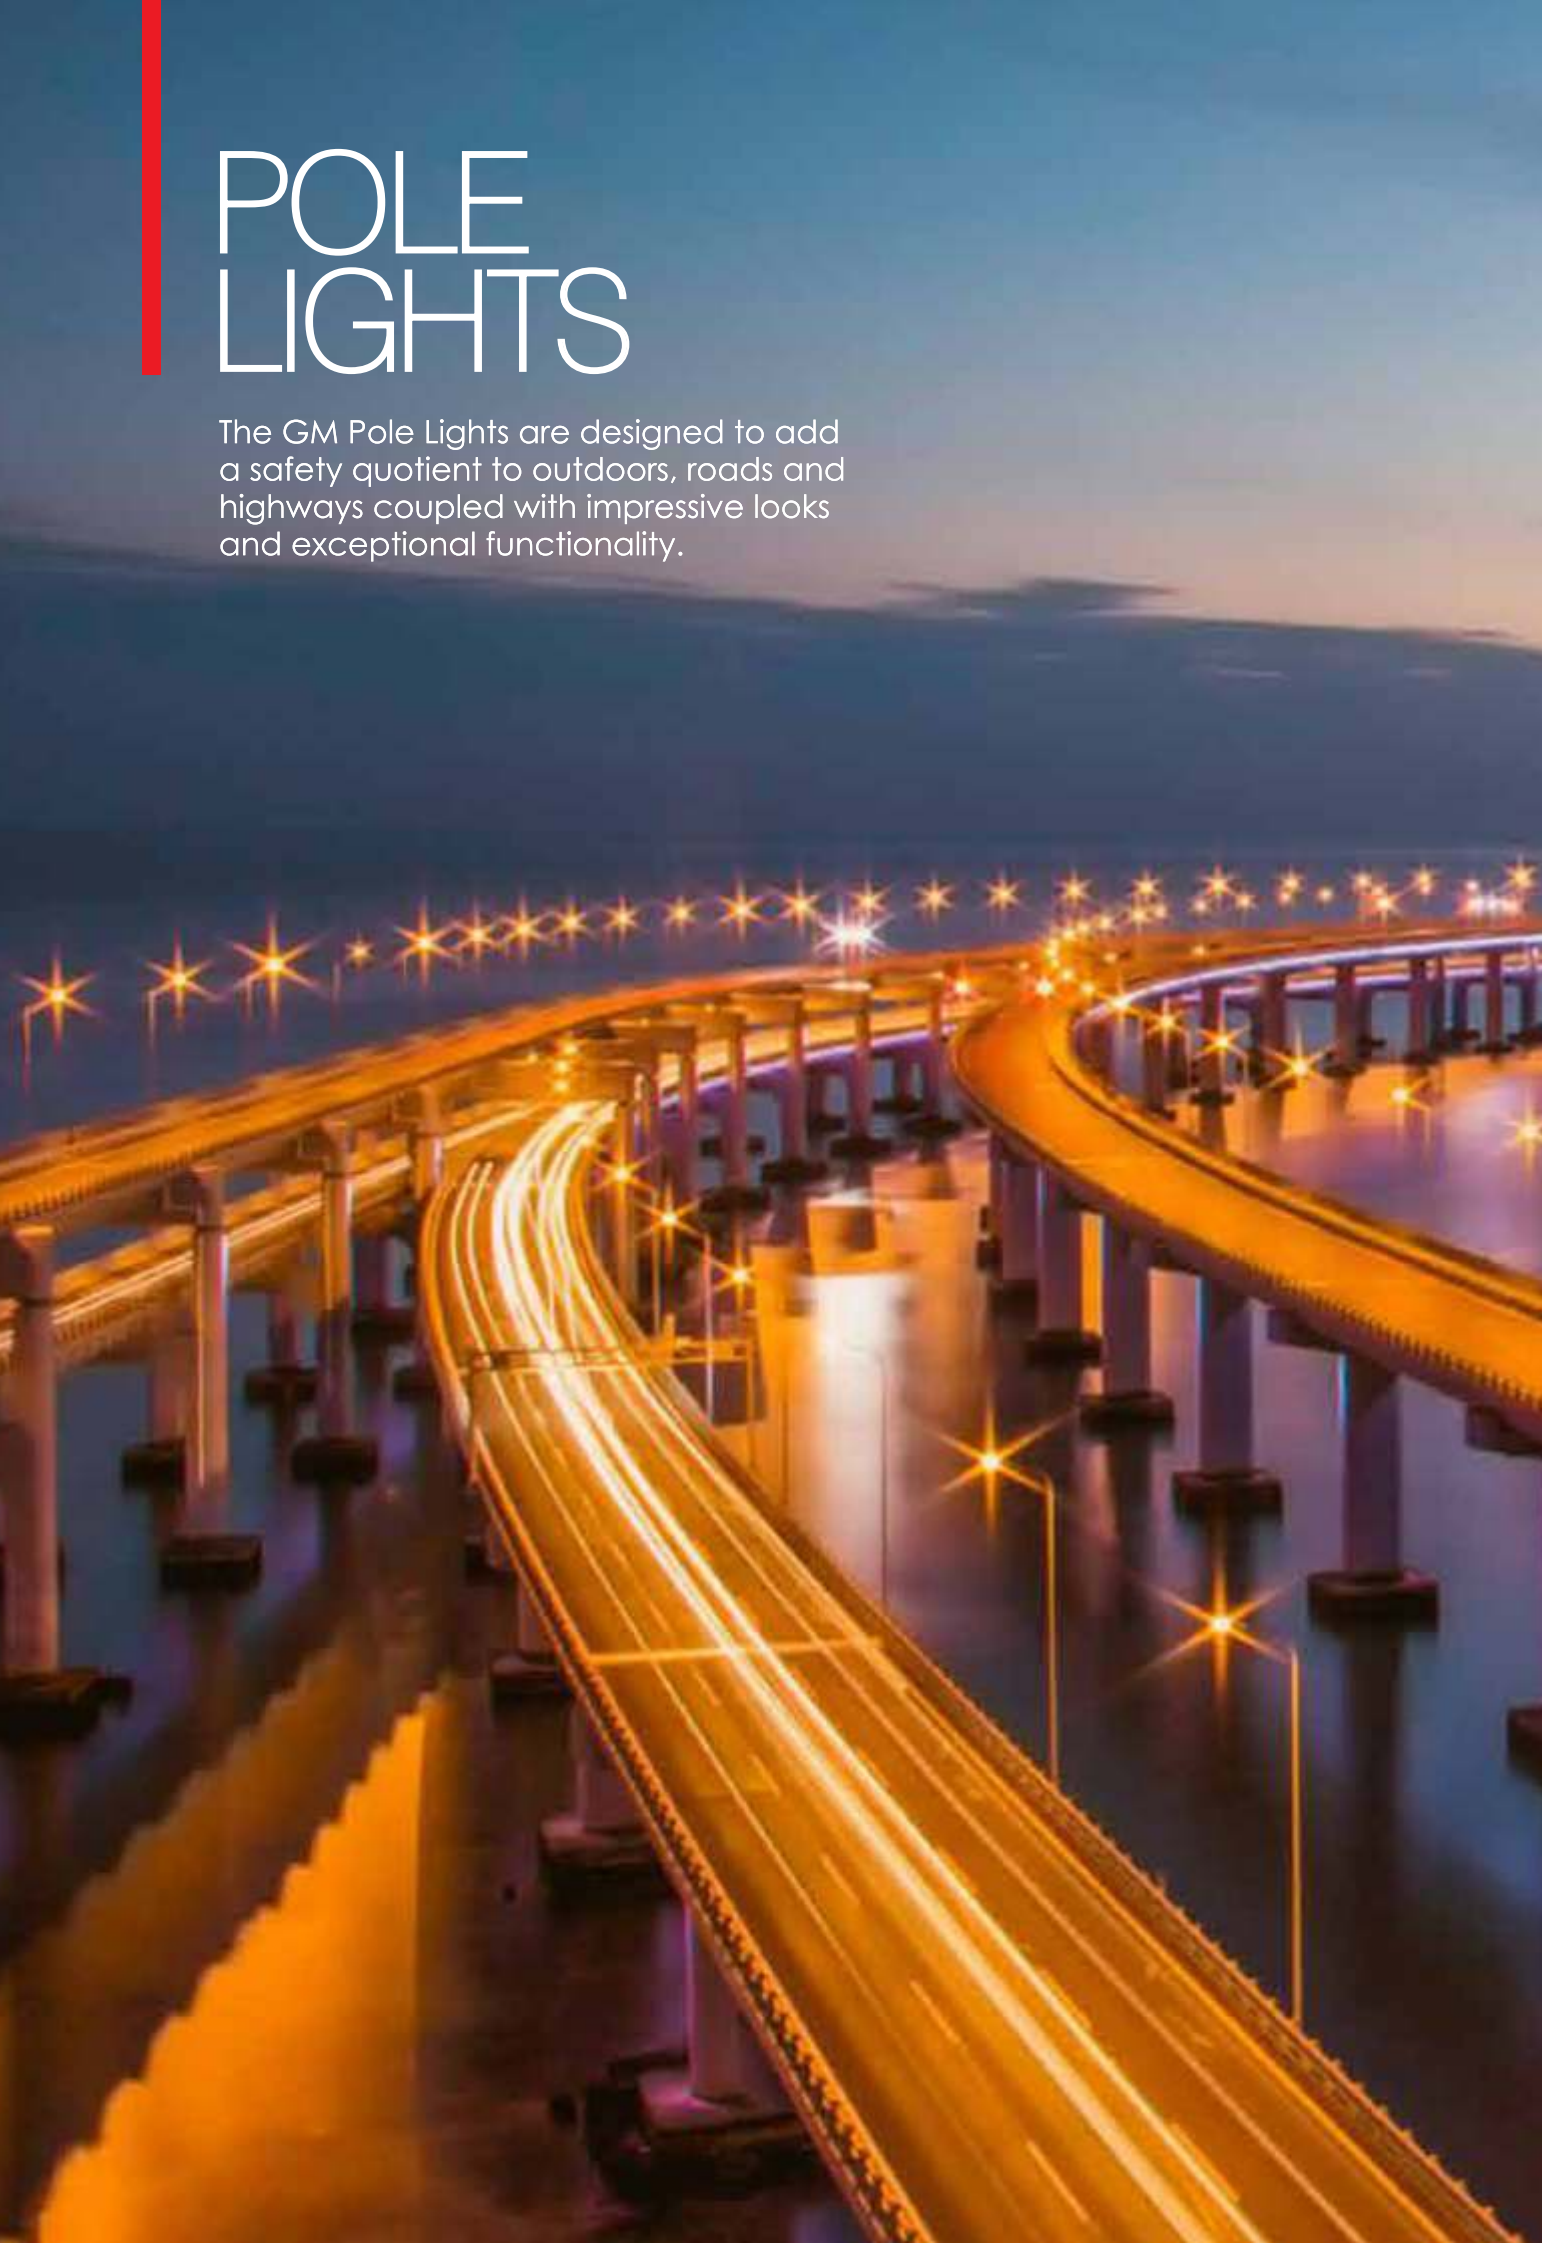

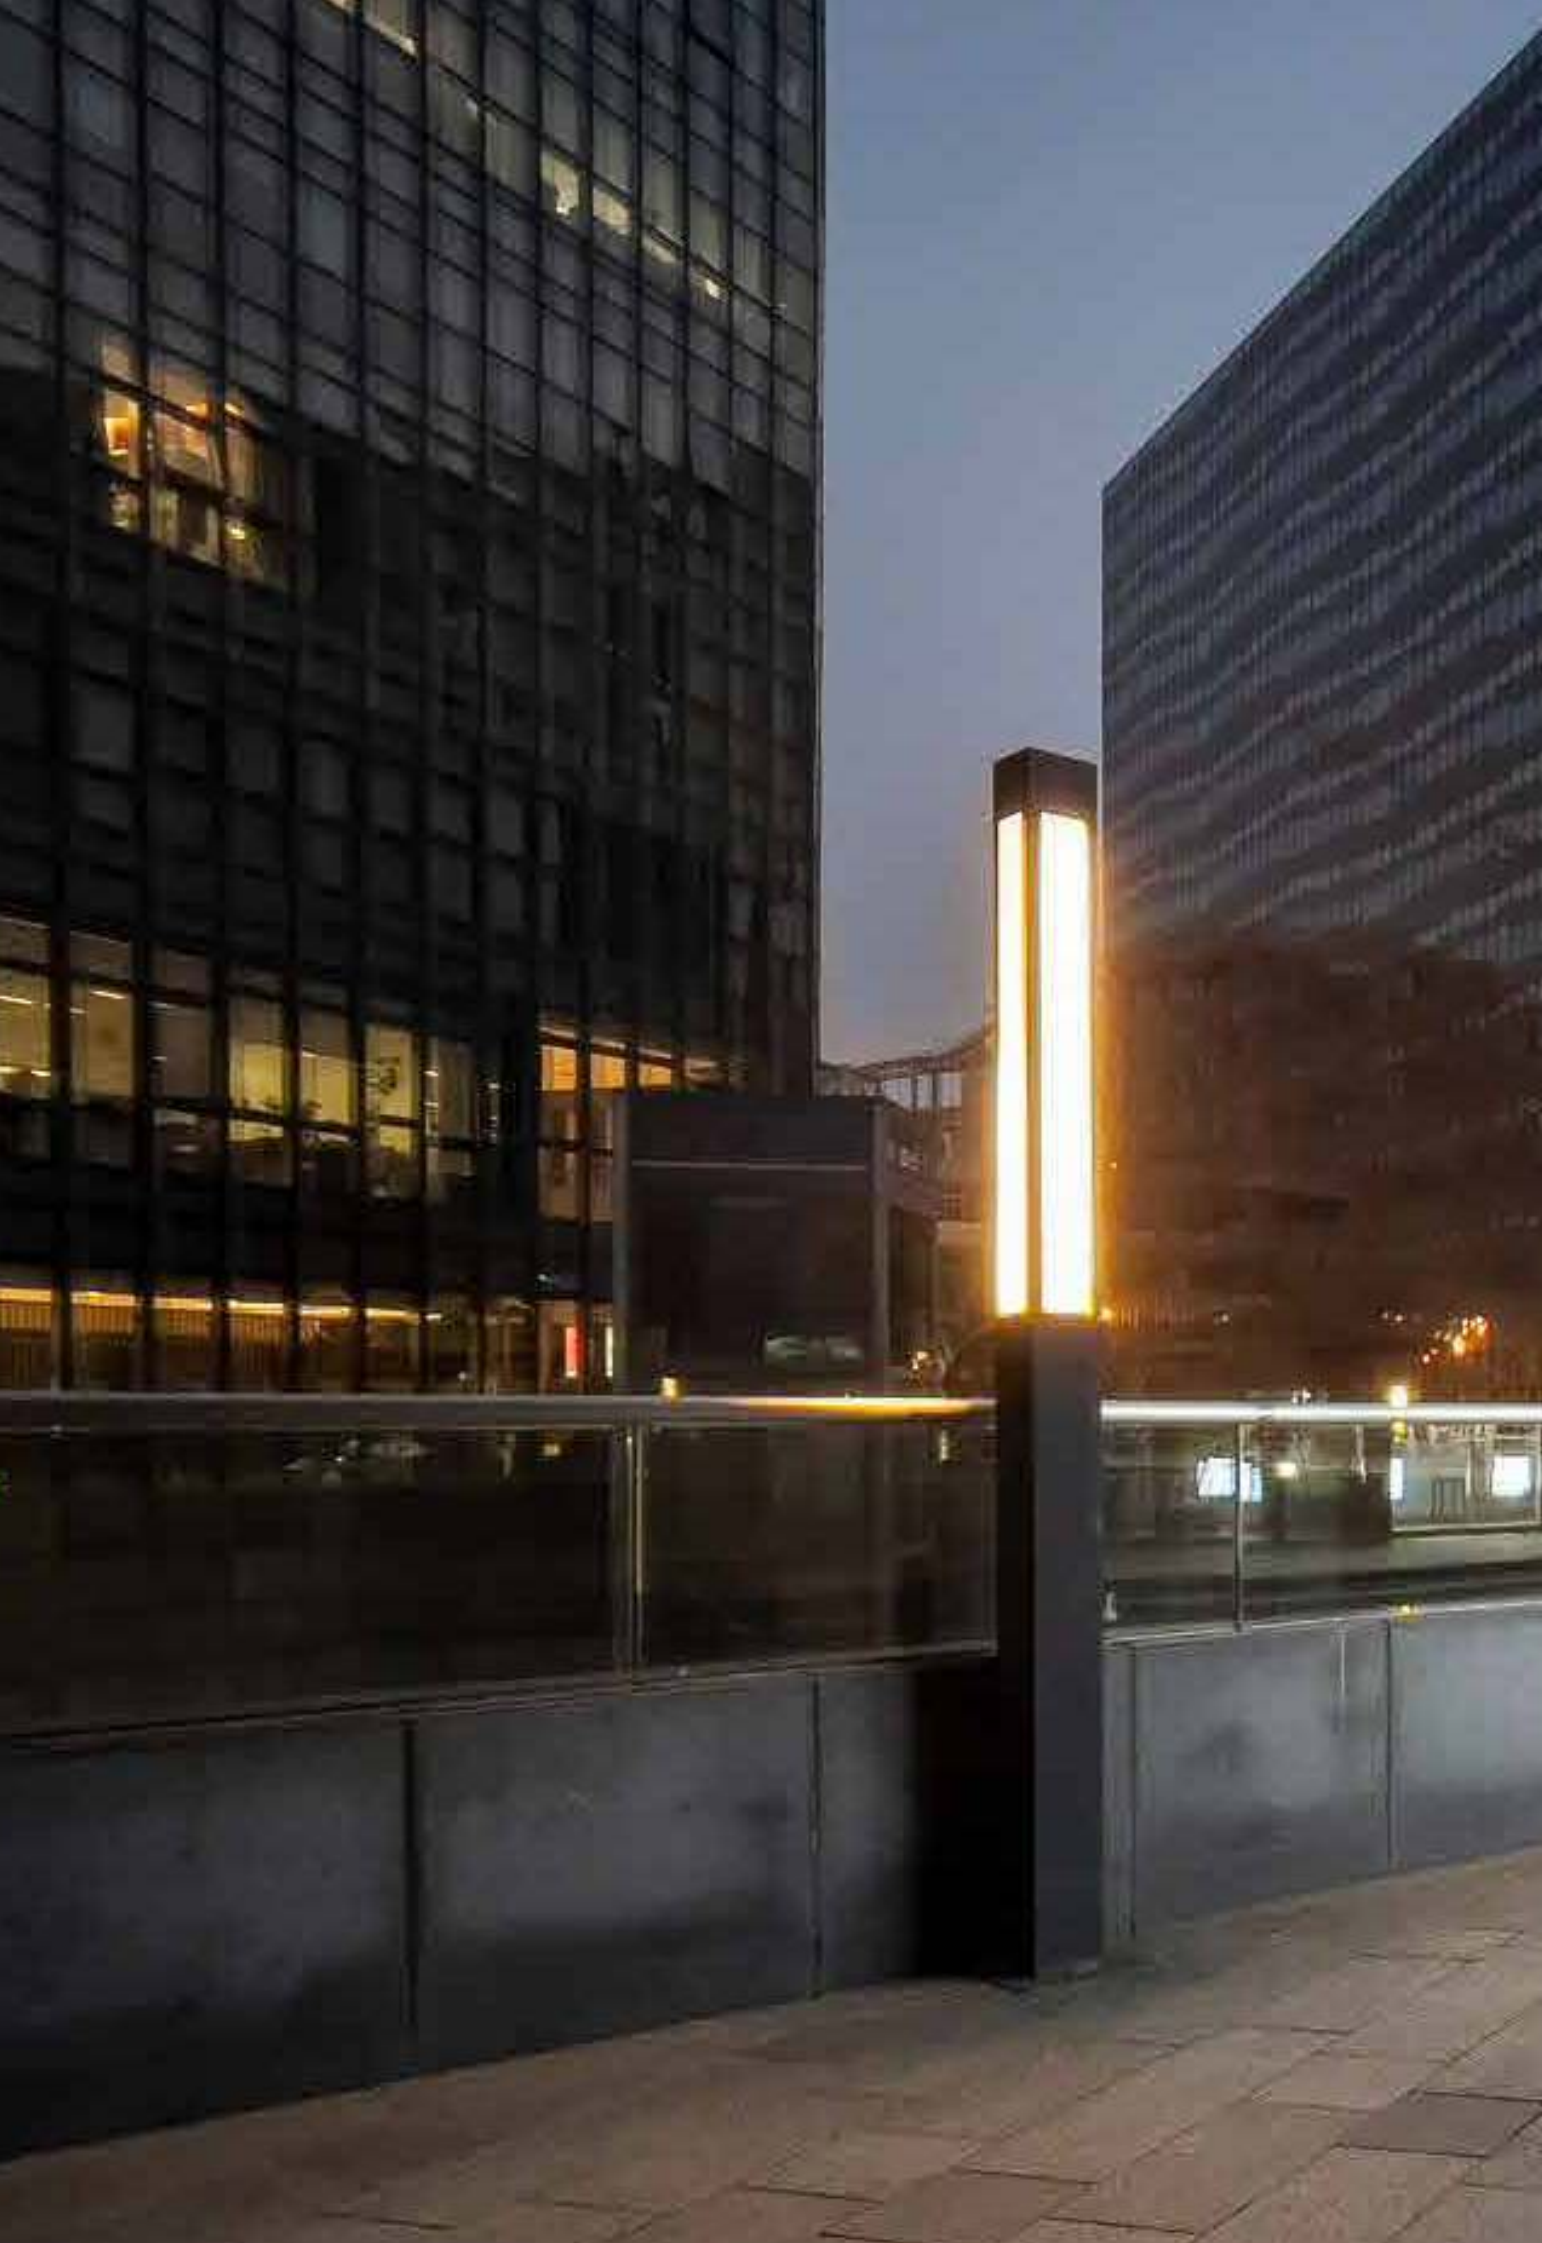

Lights to Light-up Your Surroundings

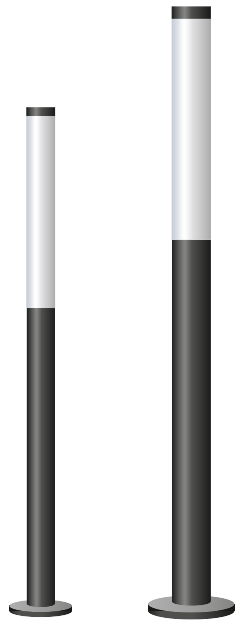

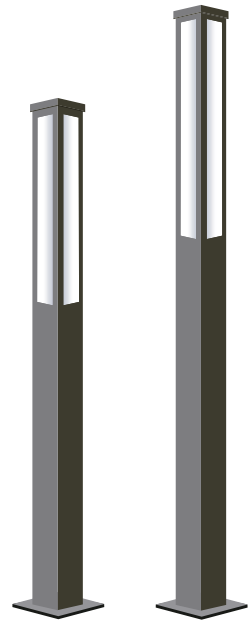

Product Specification		
Product Code	GM-FC-PO-XX-XXXX	
Wattage	12W-36W	24W-50W
Power Input	AC 110V-240V, 50 Hz	
CCT	3000K-6500K	
Beam Angle	120°	
CRI	80°	
Protection Rating	IP66	
Diameter	Ø75	Ø100
Acrylic Height (L)	300/600/900	600/900
Pole Height (P)	1200/1800/2400	1800/2400/3000

Product Specification		
Product Code	GM-FC-PO1-XX-XXXX	
Wattage	24W	50W
Power Input	AC 110V-240V, 50 Hz	
CCT	3000K-6500K	
Beam Angle	120°	
CRI	80°	
Protection Rating	IP66	
Diameter	Ø100	
Acrylic Height (L)	600/900/1200	
Pole Height (P)	1800/2400/3000	

Product Specification	
Product Code	GM-FC-PO2-XX-XXXX
Wattage	24W-50W
Power Input	AC 110V-240V, 50 Hz
CCT	3000K-6500K
Beam Angle	120°
CRI	80°
Protection Rating	IP66
Diameter	Ø100
Pole Height (P)	1800/2400/3000

WATTAGE:XX
CCT: XXXX

HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

Angelic Glow of Light

Product Specification	
Product Code	GM-FC-PO3-XX-XXXX
Wattage	45W / 60W
Power Input	AC 110V-240V, 50 Hz
CCT	3000~6500K
Beam Angle	120°
CRI	80
Protection Rating	IP65
Diameter	Ø410
Pole Height	3000 mm / 4000mm
Base Plate	200x200x12

WATTAGE:XX
CCT: XXXX

HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

Illuminating the Darkness

Product Specification	
Wattage	10W / 30W / 50W / 60W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP65
Pole Height	3000MM / 4000mm
PCD	200MM / 225mm
Product Code	GM-FC-PO4-XX-XXXX
	GM-FC-PO5-XX-XXXX

WATTAGE:XX
CCT: XXXX

HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

The Perfect Night Glow

Product Specification	
Wattage	15W / 30W / 50W / 65W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP65
Pole Height	3000MM / 4000mm
PCD	200MM / 225mm
Product Code	GM-FC-PO6-XX-XXXX
	GM-FC-PO7-XX-XXXX
	GM-FC-PO8-XX-XXXX
	GM-FC-PO9-XX-XXXX

WATTAGE:XX
CCT: XXXX

HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

SWITCH TO A BETTER WORLD

Dependable Lighting Choice

Product Specification	
Product Code	GM-FC-PO10-XX-XXXX
Wattage	15W / 30W / 50W / 65W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP65
Pole Height	3000MM / 4000mm
PCD	200MM / 225mm

WATTAGE:XX
CCT: XXXX

HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

Vintage Beauty Illuminating Pathways

Product Specification	
Product Code	GM-FC-PO11-XX-XXXX
	GM-FC-PO12-XX-XXXX
	GM-FC-PO13-XX-XXXX
	GM-FC-PO14-XX-XXXX
Wattage	15W / 30W / 50W / 65W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP65
Pole Height	3000MM / 4000mm
PCD	200MM / 225mm

WATTAGE:XX
CCT: XXXX

It Lights Up from Tip to Toe

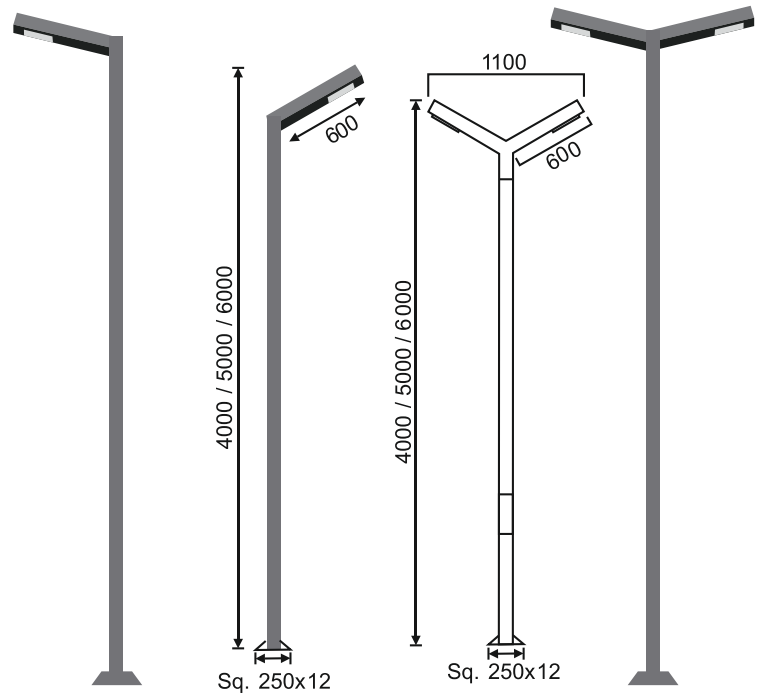

Product Specification	
Wattage	10W / 30W / 50W / 60W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP65
Pole Height	3000MM / 4000mm
PCD	200MM / 225mm
Product Code	GM-FC-PO15-XX-XXXX
	GM-FC-PO16-XX-XXXX
	GM-FC-PO17-XX-XXXX
	GM-FC-PO18-XX-XXXX

WATTAGE:XX
CCT: XXXX

HIGH CRI
HIGH VISUAL COMFORT
SURGE PROTECTION

Standing Tall by Your Side to Keep You Safe

Product Specification	
Product Code	GM-FC-PO19-30-XXXX
Wattage	30W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP65
Pole Height	3000MM / 4000mm
PCD	200MM / 225mm

CCT: XXXX

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

Journey Under a Spotlight

Product Specification	
Product Code	GM-FC-PO20-30x2-XXXX
Wattage	30W x 2
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000MM / 4000mm
Base Plate	12" x 12" x 10mm

CCT: XXXX

Brilliant Lighting and Stylish Looks

Product Specification	
Product Code	GM-FC-PO21-18-XXXX
Wattage	18W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm
Base Plate	10” x 10” x 10mm

CCT: XXXX

Butterfly Shaped
Beautiful Brilliance

Product Specification	
Product Code	GM-FC-PO22-20-XXXX
Wattage	20W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm
Base Plate	10” x 10” x 10mm

CCT: XXXX

HIGH CRI HIGH VISUAL COMFORT SURGE PROTECTION

Light-up the Lucky Way

Product Specification	
Product Code	GM-FC-PO23-10-XXXX
Wattage	10W
Power Input	AC 110V-240V, 50 Hz
CCT	3000-6500K
Beam Angle	120°
CRI	80
Protection Rating	IP66
Pole Height	3000mm
Base Plate	6" x 6" x 6mm

CCT: XXXX

Our Clientele

Take a look at our amazing collaborative partners who've been with us consistently and added to our prosperity.

GM
SWITCH TO A BETTER WORLD

And many more...

SWITCH TO A BETTER WORLD

Exclusive experience centres

Mumbai - Andheri
GM Luxury Lighting - Experience Centre
Unit No. 21, Q/G,
Laxmi Industrial Estate,
Next to Laxmi Chhaya Hotel,
New Link Road, Andheri (W),
Mumbai - 400 053, Maharashtra.
Email: info@gmmodular.com

Mumbai - Andheri
G-6, Laxmi Industrial Estate,
Opp. Laxmi Chhaya Hotel,
New Link Road, Andheri (W),
Mumbai - 400 053, Maharashtra.
Email: info@gmmodular.com
Contact: +91 88799 18221.

Mumbai - Lohar Chawl
Shop No.1 Plot No. 151/153,
Bhabha Building, Lohar Chawl,
Mumbai - 400 002, Maharashtra.
Email: info@gmmodular.com
Contact: 022 2206 6545

Ahmedabad
07, Ground Floor,
Times Square Grand,
Near Sattva Vikas School,
Sindhubhavan Main Road,
Thaltej, Ahmedabad - 380 059.
Email: info@gmmodular.com

Belagavi
Shop No. 571,
Bhati Tower, Patil Galli,
Belagavi - 590 001, Karnataka.
Email: info@gmmodular.com
Contact: +91 99453 33107

Bengaluru
460/20/1, 30th Cross,
8th B Main Road, 4th Block,
Beside Jain Temple, Jayanagar,
Bengaluru - 560 011, Karnataka.
Email: info@gmmodular.com
Contact: 080 4097 1188

Bhilwara
G-4, Govindram Commercial Hub,
Old RTO Road,
Bhilwara - 311 001, Rajasthan.
Email: info@gmmodular.com
Contact: +91 89550 48560

Bihar
Ambition Business Centre
Ground Floor, Block A
Jamal Road,
Patna -800 001.
Email: info@gmmodular.com

Calicut
GM Avenue, 2nd Floor,
Red Cross Road,
Calicut 673 032, Kerala.
Email: info@gmmodular.com
Contact: 049 5277 3500

Chennai - Egmore
Stall No: F50, F51 & F52,
1st Floor, Build HQ,
Raja Annamalai Building,
Rukmani Lakshmipathi Road,
Egmore, Chennai,
Tamil Nadu - 600 008.
Email: info@gmmodular.com

Chennai - Anna Salai
Prestige Zackria,
Metropolitan 200/1-8,
Anna Salai,
Chennai - 600 002.
Email: info@gmmodular.com

Coimbatore
22, Mill Road, Below ICICI Bank,
Coimbatore - 641 001,
Tamil Nadu.
Email: info@gmmodular.com
Contact: +91 99523 07025

Hyderabad
No. 5-5-84/87, Shop No. 2 & 3,
Kalpakunj Apartment, Jambaug,
Hyderabad - 500 012, Telangana.
Email: info@gmmodular.com
Contact: 040 2473 4545

Jalore
Near Kanchangiri Jain Temple,
Opp. Haridev Joshi Circle, Bagoda Rd.,
Jalore - 343 001, Rajasthan.
Email: info@gmmodular.com
Contact: 02973 - 222 288
+91 79769 79283

Kochi
Chidambaram Chambers,
Doraiswamy Iyer Road,
Kochi - 682 035.
Email: info@gmmodular.com

Kolkata
39/40, Ezra Street, Ground Floor,
Kolkata - 700 001, West Bengal.
Email: info@gmmodular.com
Contact: +91 33406 02048

Noida
C-161, Sector 63,
Near Hindustan Times Office,
Noida, Uttar Pradesh - 201 301.
Email: info@gmmodular.com
Contact: 0120-456 2087

Puducherry
No. 298, J. N. Street,
Opp. to Sony Centre Showroom,
Puducherry - 605 001.
Email: info@gmmodular.com
Contact: 0413-450 0222

Ranchi
Mahavir Chowk, Upper Bazar,
Ranchi - 834 001, Jharkhand.
Email: info@gmmodular.com
Contact: 065 1355 1309
+91 94715 55599

Surat
Nilkanth House, 29 to 32,
Ambica Industrial Society,
Opp. Gandhi Kutir, Bhatar,
Udhana Magdalla Road,
Surat- 395 007.
Email: info@gmmodular.com

Tirunelveli
48, Raja Building,
Tirunelveli - 627 001,
Tamil Nadu.
Email: info@gmmodular.com
Contact: +91 94431 51008

Vijayawada
Shop No. 17-18, Ground Floor,
KS Vyas Complex,
Opp IGM Stadium, MG Road,
Vijayawada - 520 010,
Andhra Pradesh.
Email: info@gmmodular.com
Contact: +91 74166 14545.

Vijayawada
Shop No: 1-10, Second Floor
KS Vyas Complex,
Opp. IGM Stadium, MG Road,
Vijayawada - 520 010,
Andhra Pradesh.
Email: info@gmmodular.com
Contact: +91 86624 99945.

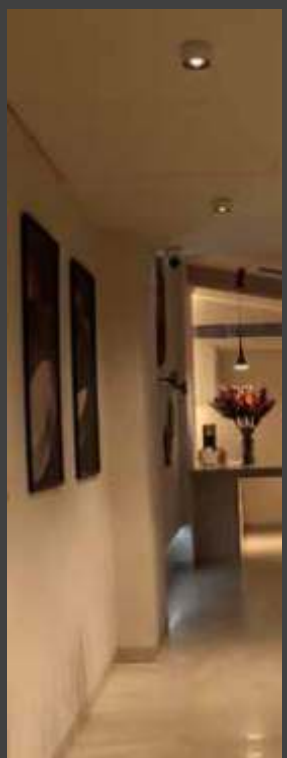

Concept, Design, Product Visualization GM Modular Pvt. Ltd.

Printing Mumbai, India. Possible colour variations in product images in the catalogue.

We reserve the right to make technical changes to the products as well as amendments to the content of this document at any time without prior notice. The agreed properties are definitive for any orders placed.

GM Modular Pvt. Ltd. shall not be for any consequences arising from the errors or incomplete information in this document. We reserve all rights in this document and in the subject matter and illustrations contained therein.

Reproduction, transfer to third parties or processing of the content including sections thereof, is not permitted without prior expressed written permission from GM Modular Pvt. Ltd.

Copyright © 2019 GM All rights reserved.

INTERNATIONAL

Bhutan
T. D. Enterprises
P.O. Box 1162,
Hongkong Market
Thimphu, Bhutan.

Botswana
Choppies
P.O.Box 00278, Plot No: 880,
Unit 4, Gaborone International
Commerce Park,
Gaborone, Botswana.

Dubai
GMM Electricals LLC
AL Tayer Warehouse #38,
Behind NICO International,
P.O. Box No. 132 456,
Al Quoz Industrial Area 1,
Dubai, U.A.E.
Contact No.: +971-4354 4036

Dubai
GMM Nexus LLC
Clover bay,
1711, 17th floor,
Dubai, U.A.E.

Ghana
Global Lighting Limited
Adj. Soromall, Baatsona,
Spintex, P.O.Box St 527,
Accra, Ghana.

Kenya
Ramco Limited
Nine Grove, Grevillea Grove,
Near Pkf, Brookside,
Westlands, P.O.Box 18833-00500
Nairobi, Kenya

Nepal
Delta Marketing Pvt. Ltd.
Lazimpat,
Kathmandu, 44600,
Nepal.

Russia
LLC Primtek,
Moscow Region, City - Noginsk,
Street - Ilicha Techno Park Zhilino,
Russia.

Spain
GMM Electric Europe S.A
Calle Valdeon 28, Fuenlabrada,
28947 Madrid, Spain
Contact No.: +34 677 62 09 45

NOTES

gmmodular.com

SWITCH TO A BETTER WORLD

GM MODULAR PVT. LTD.
203, Shalimar Morya Park,
New Link Road, Andheri (W),
Mumbai- 400 053, Maharashtra, India.
Customer Care No.:1800 209 1215
Email: info@gmmodular.com

FDCATAUG23