
Chapter 3: Processes





Chapter 3: Processes

- Process Concept
- Process Scheduling
- Operations on Processes
- Interprocess Communication
- Examples of IPC Systems
- Communication in Client-Server Systems



3.2



Objectives

- To introduce the notion of a process -- a program in execution, which forms the basis of all computation
- To describe the various features of processes, including scheduling, creation and termination, and communication
- To describe communication in client-server systems






Process Concept

- An operating system executes a variety of programs:
 - Batch system jobs
 - Time-shared systems user programs or tasks
- Textbook uses the terms job and process almost interchangeably
- Process a program in execution; process execution must progress in sequential fashion
- A process includes:
 - program counter
 - stack
 - data section





Process in Memory

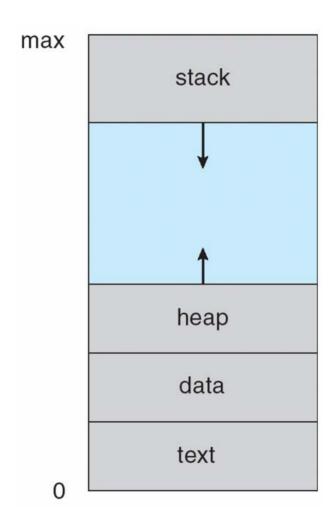






Process State


- As a process executes, it changes state
 - new: The process is being created
 - running: Instructions are being executed
 - waiting: The process is waiting for some event to occur
 - ready: The process is waiting to be assigned to a processor
 - terminated: The process has finished execution





Diagram of Process State

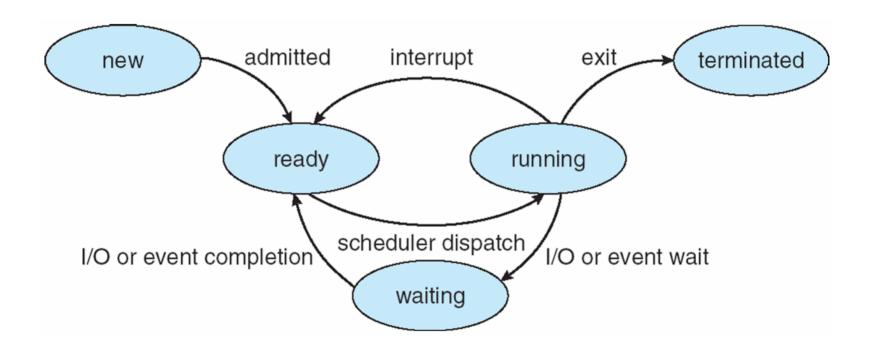





Process Control Block (PCB)

Information associated with each process

- Process state
- Program counter
- CPU registers
- CPU scheduling information
- Memory-management information
- Accounting information
- I/O status information





Process Control Block (PCB)

process state

process number

program counter

registers

memory limits


list of open files







CPU Switch From Process to Process

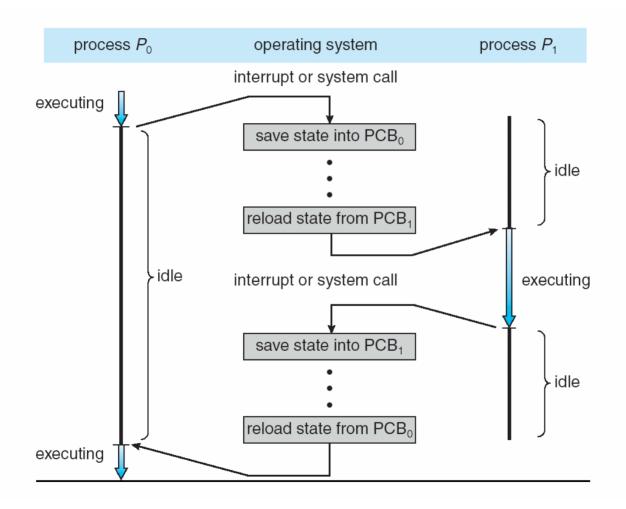






Process Scheduling Queues

- **Job queue** set of all processes in the system
- Ready queue set of all processes residing in main memory, ready and waiting to execute
- **Device queues** set of processes waiting for an I/O device
- Processes migrate among the various queues






Ready Queue And Various I/O Device Queues

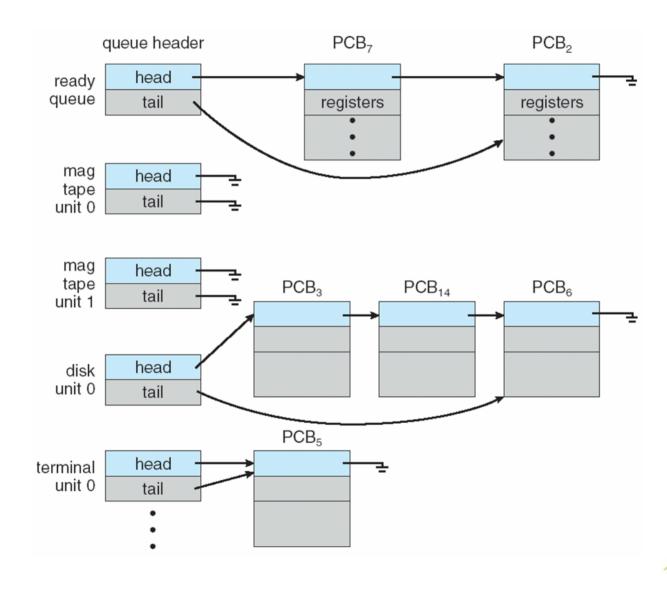





Representation of Process Scheduling

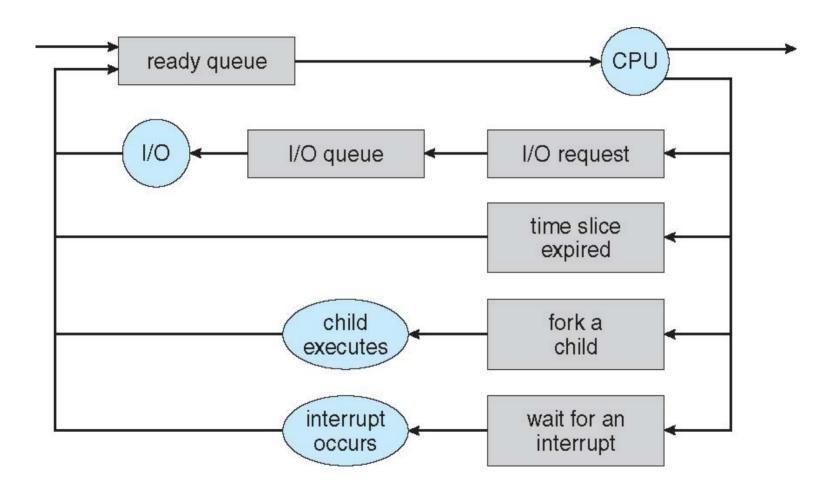






Schedulers


- Long-term scheduler (or job scheduler) selects which processes should be brought into the ready queue
- Short-term scheduler (or CPU scheduler) selects which process should be executed next and allocates CPU





Addition of Medium Term Scheduling

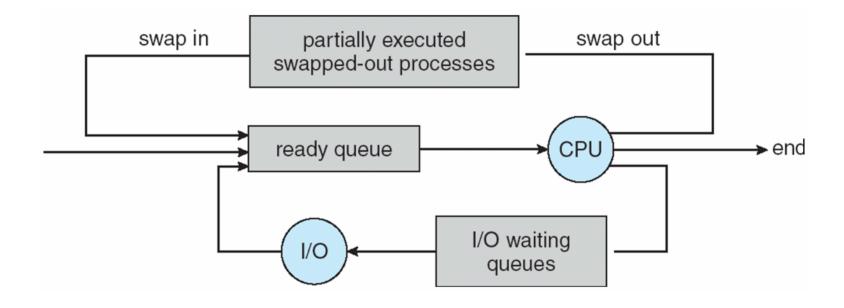






Schedulers (Cont.)

- Short-term scheduler is invoked very frequently (milliseconds) ⇒ (must be fast)
- Long-term scheduler is invoked very infrequently (seconds, minutes) ⇒ (may be slow)
- The long-term scheduler controls the degree of multiprogramming
- Processes can be described as either:
 - I/O-bound process spends more time doing I/O than computations, many short CPU bursts
 - CPU-bound process spends more time doing computations; few very long CPU bursts





Context Switch

- When CPU switches to another process, the system must save the state of the old process and load the saved state for the new process via a context switch.
- Context of a process represented in the PCB
- Context-switch time is overhead; the system does no useful work while switching
- Time dependent on hardware support





Process Creation

- Parent process create children processes, which, in turn create other processes, forming a tree of processes
- Generally, process identified and managed via a process identifier
 (pid)
- Resource sharing
 - Parent and children share all resources
 - Children share subset of parent's resources
 - Parent and child share no resources
- Execution
 - Parent and children execute concurrently
 - Parent waits until children terminate






Process Creation (Cont.)

- Address space
 - Child duplicate of parent
 - Child has a program loaded into it
- UNIX examples
 - fork system call creates new process
 - exec system call used after a fork to replace the process' memory space with a new program





Process Creation

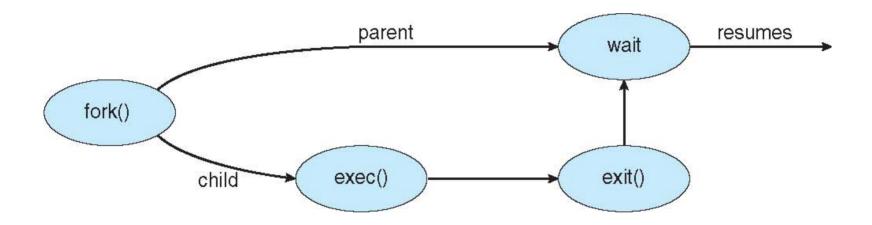






C Program Forking Separate Process

```
int main()
pid_t pid;
    /* fork another process */
    pid = fork();
    if (pid < 0) { /* error occurred */
            fprintf(stderr, "Fork Failed");
            exit(-1);
    else if (pid == 0) { /* child process */
            execlp("/bin/ls", "ls", NULL);
    else { /* parent process */
            /* parent will wait for the child to complete */
            wait (NULL);
            printf ("Child Complete");
            exit(0);
```





A tree of processes on a typical Solaris

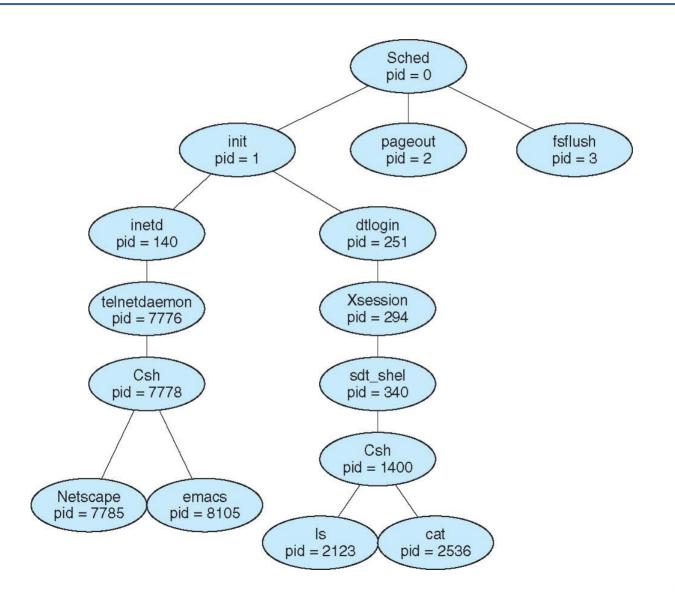





Process Termination

- Process executes last statement and asks the operating system to delete it (exit)
 - Output data from child to parent (via wait)
 - Process' resources are deallocated by operating system
- Parent may terminate execution of children processes (abort)
 - Child has exceeded allocated resources
 - Task assigned to child is no longer required
 - If parent is exiting
 - Some operating system do not allow child to continue if its parent terminates
 - All children terminated cascading termination






Interprocess Communication

- Processes within a system may be independent or cooperating
- Cooperating process can affect or be affected by other processes, including sharing data
- Reasons for cooperating processes:
 - Information sharing
 - Computation speedup
 - Modularity
 - Convenience
- Cooperating processes need interprocess communication (IPC)
- Two models of IPC
 - Shared memory
 - Message passing






Communications Models

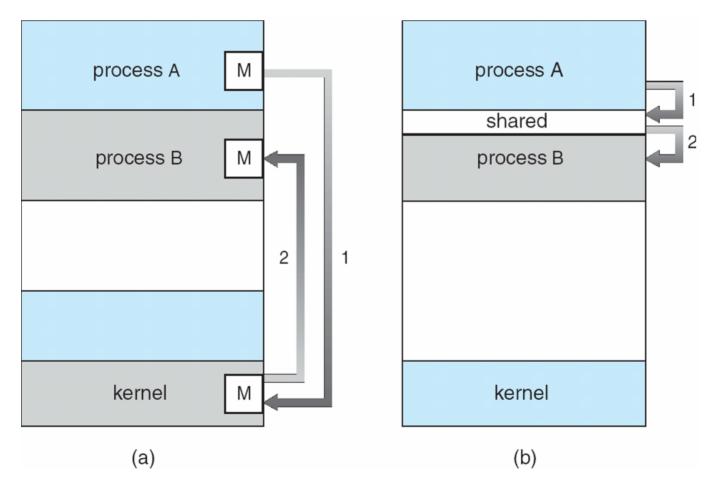



Silberschatz, Galvin and Gagne ©2009



Cooperating Processes

- Independent process cannot affect or be affected by the execution of another process
- Cooperating process can affect or be affected by the execution of another process
- Advantages of process cooperation
 - Information sharing
 - Computation speed-up
 - Modularity
 - Convenience






Producer-Consumer Problem

- Paradigm for cooperating processes, producer process produces information that is consumed by a consumer process
 - unbounded-buffer places no practical limit on the size of the buffer
 - bounded-buffer assumes that there is a fixed buffer size







Bounded-Buffer – Shared-Memory Solution

Shared data

```
#define BUFFER_SIZE 10
typedef struct {
    ...
} item;
item buffer[BUFFER_SIZE];
int in = 0;
int out = 0;
```

Solution is correct, but can only use BUFFER_SIZE-1 elements





Bounded-Buffer – Producer

```
while (true) {
   /* Produce an item */
   while (((in = (in + 1) % BUFFER SIZE count) == out)
   ; /* do nothing -- no free buffers */
   buffer[in] = item;
   in = (in + 1) % BUFFER SIZE;
}
```





Bounded Buffer – Consumer

```
while (true) {
   while (in == out)
       ; // do nothing -- nothing to consume
   // remove an item from the buffer
   item = buffer[out];
   out = (out + 1) % BUFFER SIZE;
return item;
```


3.30





Interprocess Communication – Message Passing

- Mechanism for processes to communicate and to synchronize their actions
- Message system processes communicate with each other without resorting to shared variables
- IPC facility provides two operations:
 - send(message) message size fixed or variable
 - receive(message)
- If P and Q wish to communicate, they need to:
 - establish a communication link between them
 - exchange messages via send/receive
- Implementation of communication link
 - physical (e.g., shared memory, hardware bus)
 - logical (e.g., logical properties)





Implementation Questions

- How are links established?
- Can a link be associated with more than two processes?
- How many links can there be between every pair of communicating processes?
- What is the capacity of a link?
- Is the size of a message that the link can accommodate fixed or variable?
- Is a link unidirectional or bi-directional?






Direct Communication

- Processes must name each other explicitly:
 - send (P, message) send a message to process P
 - receive(Q, message) receive a message from process Q
- Properties of communication link
 - Links are established automatically
 - A link is associated with exactly one pair of communicating processes
 - Between each pair there exists exactly one link
 - The link may be unidirectional, but is usually bi-directional





Indirect Communication

- Messages are directed and received from mailboxes (also referred to as ports)
 - Each mailbox has a unique id
 - Processes can communicate only if they share a mailbox
- Properties of communication link
 - Link established only if processes share a common mailbox
 - A link may be associated with many processes
 - Each pair of processes may share several communication links
 - Link may be unidirectional or bi-directional





Indirect Communication

- Operations
 - create a new mailbox
 - send and receive messages through mailbox
 - destroy a mailbox
- Primitives are defined as:

send(A, message) - send a message to mailbox A
receive(A, message) - receive a message from mailbox A






Indirect Communication

- Mailbox sharing
 - P₁, P₂, and P₃ share mailbox A
 - P₁, sends; P₂ and P₃ receive
 - Who gets the message?

Solutions

- Allow a link to be associated with at most two processes
- Allow only one process at a time to execute a receive operation
- Allow the system to select arbitrarily the receiver. Sender is notified who the receiver was.





Synchronization

- Message passing may be either blocking or non-blocking
- Blocking is considered synchronous
 - Blocking send has the sender block until the message is received
 - Blocking receive has the receiver block until a message is available
- Non-blocking is considered asynchronous
 - Non-blocking send has the sender send the message and continue
 - Non-blocking receive has the receiver receive a valid message or null






Buffering

- Queue of messages attached to the link; implemented in one of three ways
 - Zero capacity 0 messages
 Sender must wait for receiver (rendezvous)
 - 2. Bounded capacity finite length of *n* messages Sender must wait if link full
 - 3. Unbounded capacity infinite length Sender never waits





Examples of IPC Systems - POSIX

- POSIX Shared Memory
 - Process first creates shared memory segment

```
segment id = shmget(IPC PRIVATE, size, S IRUSR | S
IWUSR);
```

Process wanting access to that shared memory must attach to it

```
shared memory = (char *) shmat(id, NULL, 0);
```

Now the process could write to the shared memory

```
sprintf(shared memory, "Writing to shared
memory");
```

 When done a process can detach the shared memory from its address space

```
shmdt(shared memory);
```





Examples of IPC Systems - Mach

- Mach communication is message based
 - Even system calls are messages
 - Each task gets two mailboxes at creation- Kernel and Notify
 - Only three system calls needed for message transfer

```
msg_send(), msg_receive(), msg_rpc()
```

Mailboxes needed for communication, created via

```
port_allocate()
```






Examples of IPC Systems – Windows XP

- Message-passing centric via local procedure call (LPC) facility
 - Only works between processes on the same system
 - Uses ports (like mailboxes) to establish and maintain communication channels
 - Communication works as follows:
 - The client opens a handle to the subsystem's connection port object.
 - ▶ The client sends a connection request.
 - The server creates two private communication ports and returns the handle to one of them to the client.
 - The client and server use the corresponding port handle to send messages or callbacks and to listen for replies.





Local Procedure Calls in Windows XP

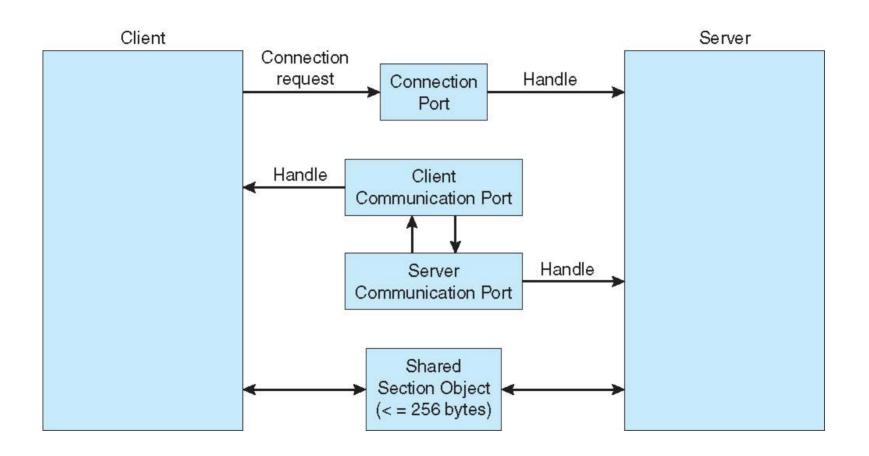





Communications in Client-Server Systems

- Sockets
- Remote Procedure Calls
- Pipes
- Remote Method Invocation (Java)






Sockets

- A socket is defined as an endpoint for communication
- Concatenation of IP address and port
- The socket 161.25.19.8:1625 refers to port 1625 on host 161.25.19.8
- Communication consists between a pair of sockets





Socket Communication

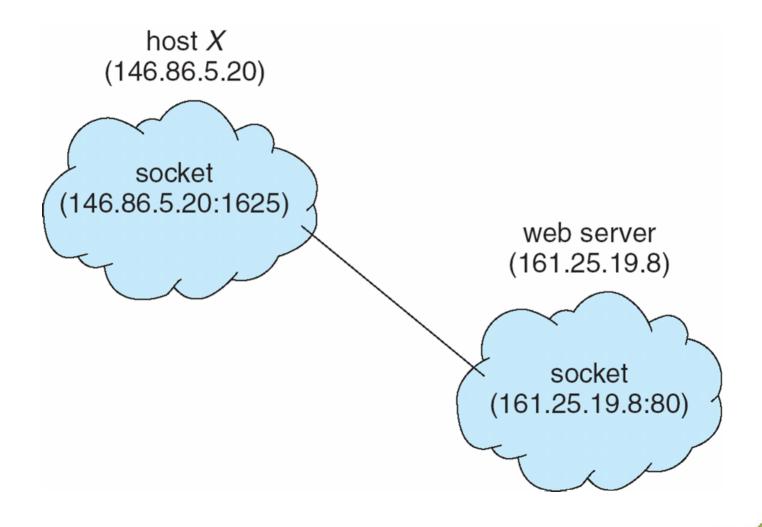




Remote Procedure Calls

- Remote procedure call (RPC) abstracts procedure calls between processes on networked systems
- Stubs client-side proxy for the actual procedure on the server
- The client-side stub locates the server and *marshalls* the parameters
- The server-side stub receives this message, unpacks the marshalled parameters, and performs the procedure on the server





Execution of RPC

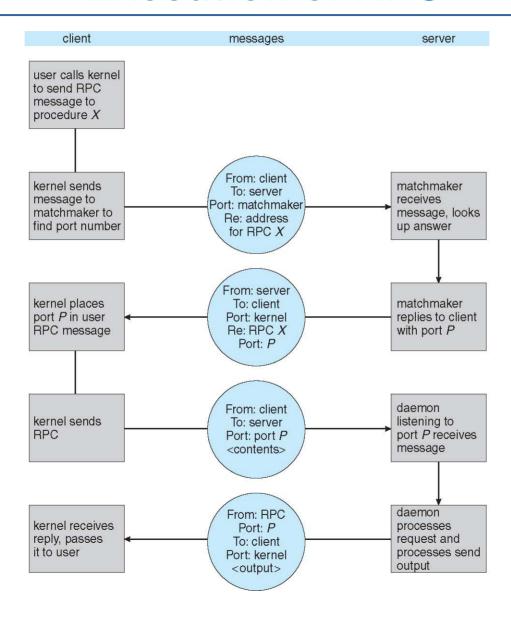






Pipes

Acts as a conduit allowing two processes to communicate

Issues

- Is communication unidirectional or bidirectional?
- In the case of two-way communication, is it half or fullduplex?
- Must there exist a relationship (i.e. parent-child) between the communicating processes?
- Can the pipes be used over a network?






Ordinary Pipes

- Ordinary Pipes allow communication in standard producerconsumer style
- Producer writes to one end (the write-end of the pipe)
- Consumer reads from the other end (the read-end of the pipe)
- Ordinary pipes are therefore unidirectional
- Require parent-child relationship between communicating processes





Ordinary Pipes

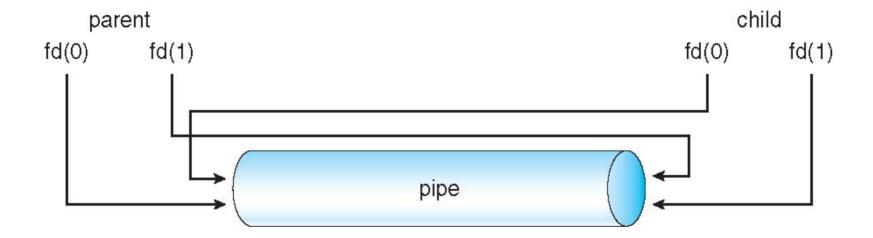





Named Pipes

- Named Pipes are more powerful than ordinary pipes
- Communication is bidirectional
- No parent-child relationship is necessary between the communicating processes
- Several processes can use the named pipe for communication
- Provided on both UNIX and Windows systems



End of Chapter 3

