

1. Description

1.1. Project

Project Name	Test_STM32F746_LED_2017_1011
Board Name	No information
Generated with:	STM32CubeMX 4.22.0
Date	10/27/2017


1.2. MCU

MCU Series	STM32F7
MCU Line	STM32F7x6
MCU name	STM32F746IGTx
MCU Package	LQFP176
MCU Pin number	176

1.3. Caution

The report was generated although the configuration was in a modified state. It may be not accurate

2. Pinout Configuration

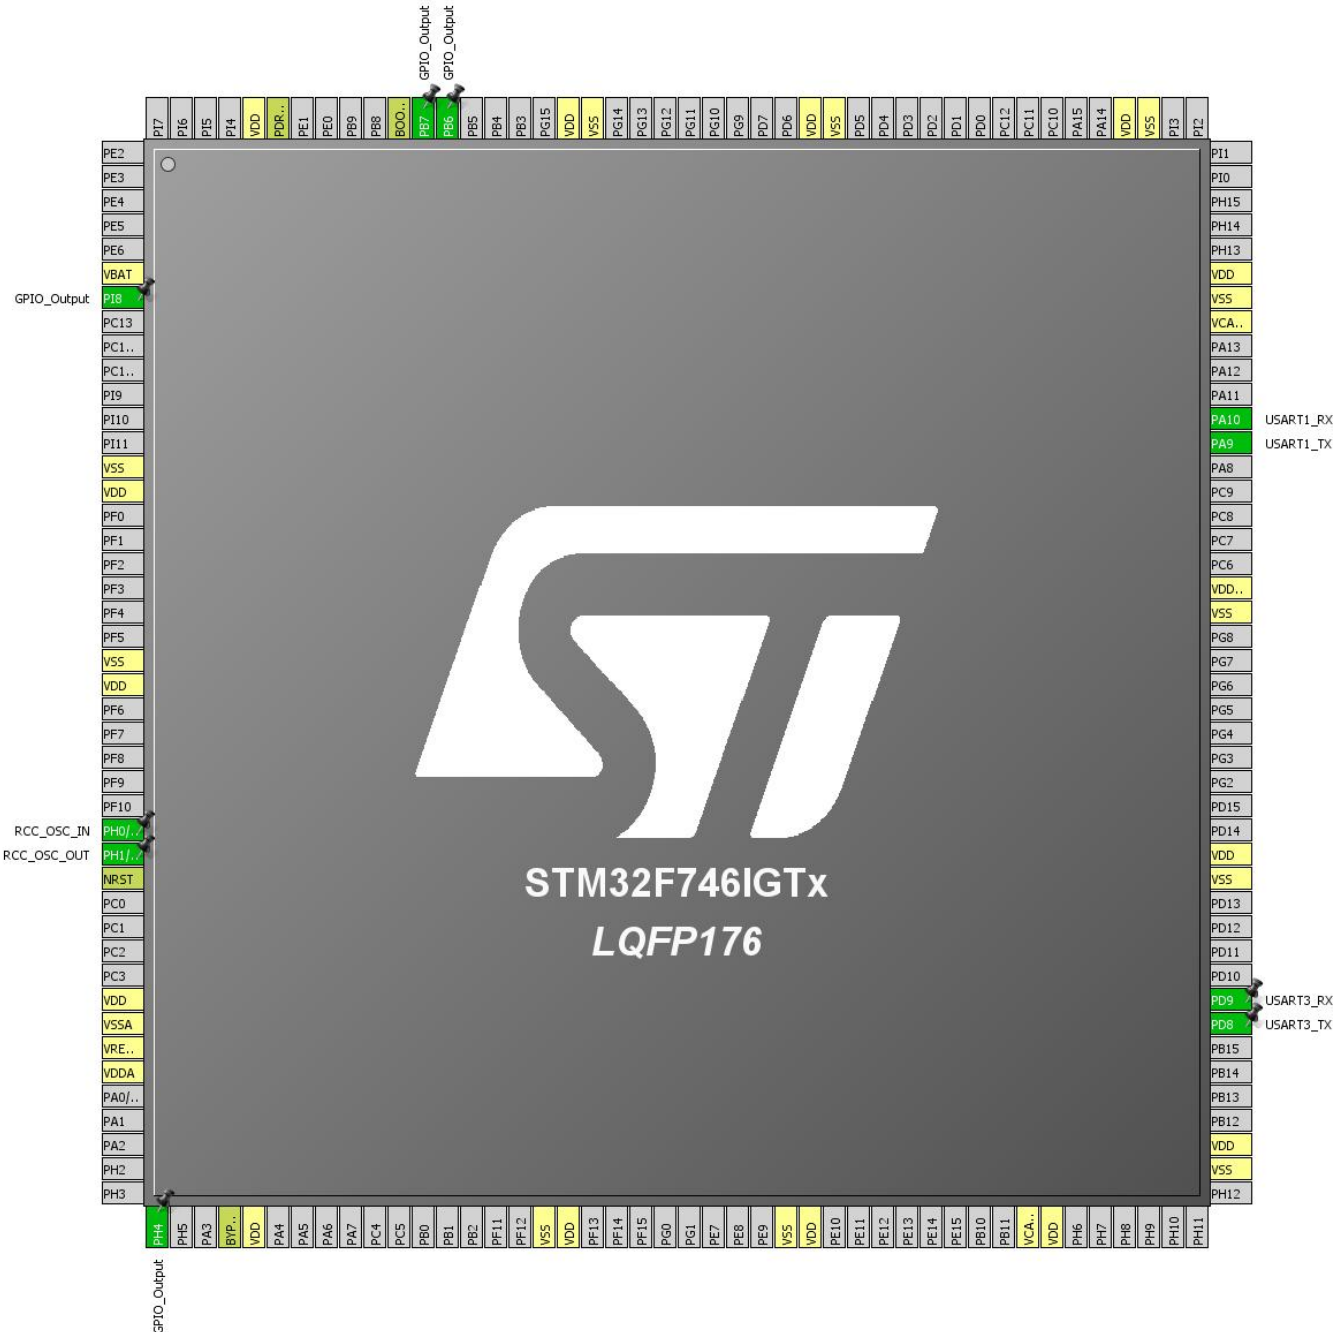


3. Pins Configuration

Pin Number LQFP176	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
7	PI8 *	I/O	GPIO_Output	
14	VSS	Power		
15	VDD	Power		
22	VSS	Power		
23	VDD	Power		
29	PH0/OSC_IN	I/O	RCC_OSC_IN	
30	PH1/OSC_OUT	I/O	RCC_OSC_OUT	
31	NRST	Reset		
36	VDD	Power		
37	VSSA	Power		
38	VREF+	Power		
39	VDDA	Power		
45	PH4 *	I/O	GPIO_Output	
48	BYPASS_REG	Reset		
49	VDD	Power		
61	VSS	Power		
62	VDD	Power		
71	VSS	Power		
72	VDD	Power		
81	VCAP_1	Power		
82	VDD	Power		
90	VSS	Power		
91	VDD	Power		
96	PD8	I/O	USART3_TX	
97	PD9	I/O	USART3_RX	
102	VSS	Power		
103	VDD	Power		
113	VSS	Power		
114	VDDUSB	Power		
120	PA9	I/O	USART1_TX	
121	PA10	I/O	USART1_RX	
125	VCAP_2	Power		
126	VSS	Power		
127	VDD	Power		
135	VSS	Power		

Pin Number LQFP176	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
136	VDD	Power		
148	VSS	Power		
149	VDD	Power		
158	VSS	Power		
159	VDD	Power		
164	PB6 *	I/O	GPIO_Output	
165	PB7 *	I/O	GPIO_Output	
166	BOOT0	Boot		
171	PDR_ON	Reset		
172	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

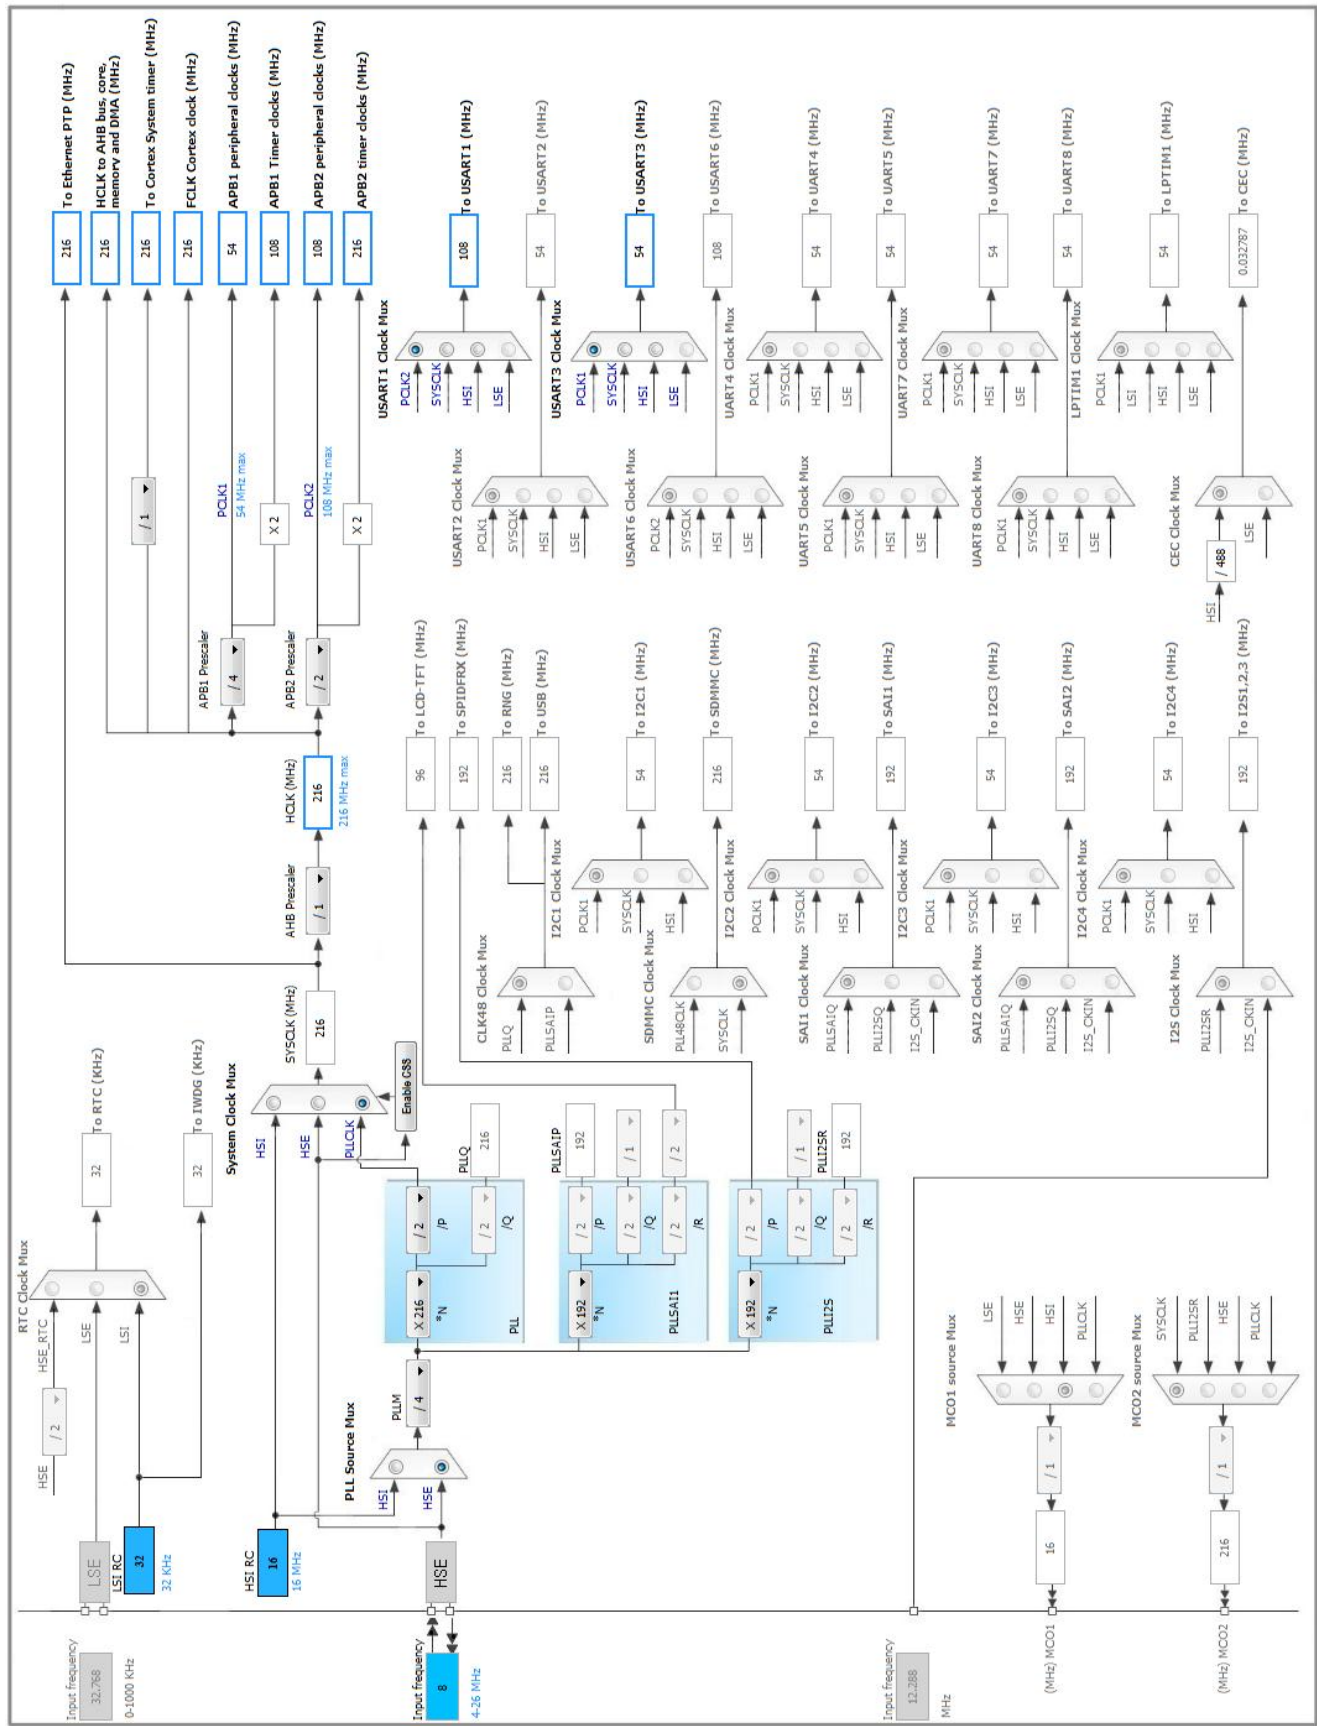

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Flash Latency(WS)	7 WS (8 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Over Drive	Enabled
Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

5.2. SYS

Timebase Source: SysTick

5.3. USART1

Mode: Asynchronous

5.3.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity) *
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

5.4. USART3

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity) *
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

*** User modified value**

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0/OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1/OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	Very High *	
USART3	PD8	USART3_TX	Alternate Function Push Pull	Pull-up	Very High *	
	PD9	USART3_RX	Alternate Function Push Pull	Pull-up	Very High *	
GPIO	PI8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PH4	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
USART1 global interrupt	unused		
USART3 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F7
Line	STM32F7x6
MCU	STM32F746IGTx
Datasheet	027590_Rev4

7.2. Parameter Selection

Temperature	25
Vdd	3.3