


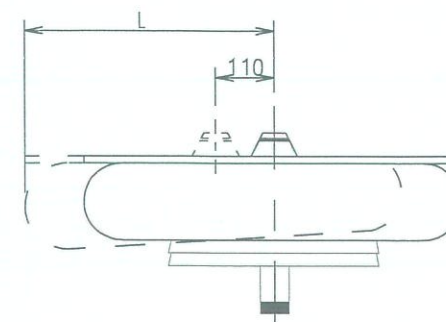

1. SPRING RATE (LOAD-86kN (7,700Kg) Vt = 47L)
 - (1) VERTICAL (STATIC) 310N/mm (31.6Kg/mm) $\pm 10\%$
 - (2) LATERAL (STATIC) $>140\text{N/mm}$ (14.3kg/mm)
(AT $\pm 40\text{mm}$ STROKE)
 - (3) LATERAL (DYNAMIC) 170N/mm (17.3kg/mm) $\pm 15\%$
AT $\pm 10\text{mm}$ STROKE 1HZ
2. RUBBER STOPPER

$\Phi(83.4\text{kN}(8500\text{kg})) - \Phi(4.9\text{kN}(500\text{kg})) - 8 \pm 1.2\text{mm}$
3. LATERAL DIRECTION MAX. STROKE ; ± 110
4. METALLIC SURFACES TO BE APPLIED
BLACK COLOR PAINT (N 1.5)
5. AIR TIGHTNESS TEST P = 735kpa (7.5kg/cm²)
6. ON 110 mm LATERAL STROKE OUT SIDE DIAMETER
OF DIAPHRAGM TO BE WITHIN $2L = 790\text{mm}$

4	HUB	KRDIA	MC	4	DRAWING MASTER: (APPLICATION 101)  INKA PT. INDUSTRI KERETA API	
3	HUB	KRDIA	TC	4		APPROVED BY : 
2	HUB	KRDI	MC	4		CHECKED BY : 
1	HUB	KRDI	TC	4		DRAWN BY : 
NO	ORDER	TYPE	GROUP	QTY/CAR	TITLE	AIR SPRING
NO OF SHEET : 1		SHEET : 1 OF 1		ORG DRG. NO :	DATE : 12 DES 2006	
PROJECTION : ISO 128 		SCALE 1/2, 1/10		DRAWING NO TB607-2-07.0-001		
REVISION	CHECK	APPR	DATE	REVISION	CHECK	APPR
A				E		
B				F		
C				G		
D				H		

	10	O - RING (P60)		1		RUBBER			ALW61061	
	9	O - RING (P50A)		1		RUBBER			ALW61050	
	8	O - RING (G50)		2		RUBBER			ALW60050	
	7	SP. WASHER (M12)		6		SUS 304			ALW21212Z	
	6	HEX. NUT (M12x1.75)		6		SUS 304			ALW11230Z	
	5	RUBBER SEAT		1		SAPH, RUBBER			(ALR54706E)	
	4	LOWER PLATE		1		SS400, TEFLON			(APK54421E)	
	3	STOPPER		1		SS400, RUBBER			(ALR54310E)	
	2	UPPER PLATE		1		SAPH, RUBBER			(ALR54123E)	
	1	DIAPHRAGM		1		RUBBER, COFD, BEAD, WIRE			AP5101C31	
BM	REF NO	DESCRIPTION	DRG NO	PCS SET	PCS CAR	MATERIAL	EACH WEIGHT	TTL	REMARKS	RE MAR

ISO-1302

Ra 

TOL	UIC 800-50	WELDING
	UIC 800-51	JAPAN RAILWAY STD
		JIS WELDING