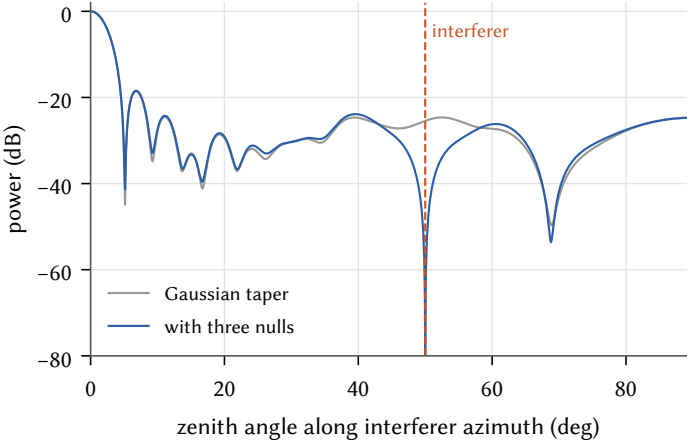
interferer
power (dB)
0
−20
−40
−60
−80
Gaussian taper
with three nulls
0
20
40
60
80
zenith angle along interferer azimuth (deg)

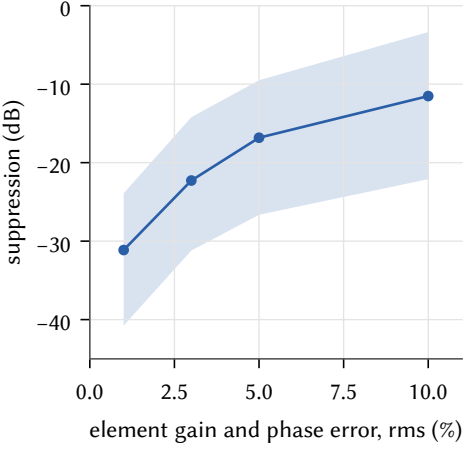
suppression (dB)
0
−10
−20
−30
−40
0.0
2.5
5.0
7.5
10.0
element gain and phase error, rms (%)