6.2 Programs

Hot Key: Alt-P


KEYWORD: PRG

Usage： PRG1 , PRG2,PRG3...

How to show: when you use one of these items , the label of the item will be shown in the place where you use

Control Basic is the programming language of the T3000. To access an individual program press the “Ins” key while high lighting that program. The programming language is discussed in Chapter 10 .

Sample Control Basic work screen:

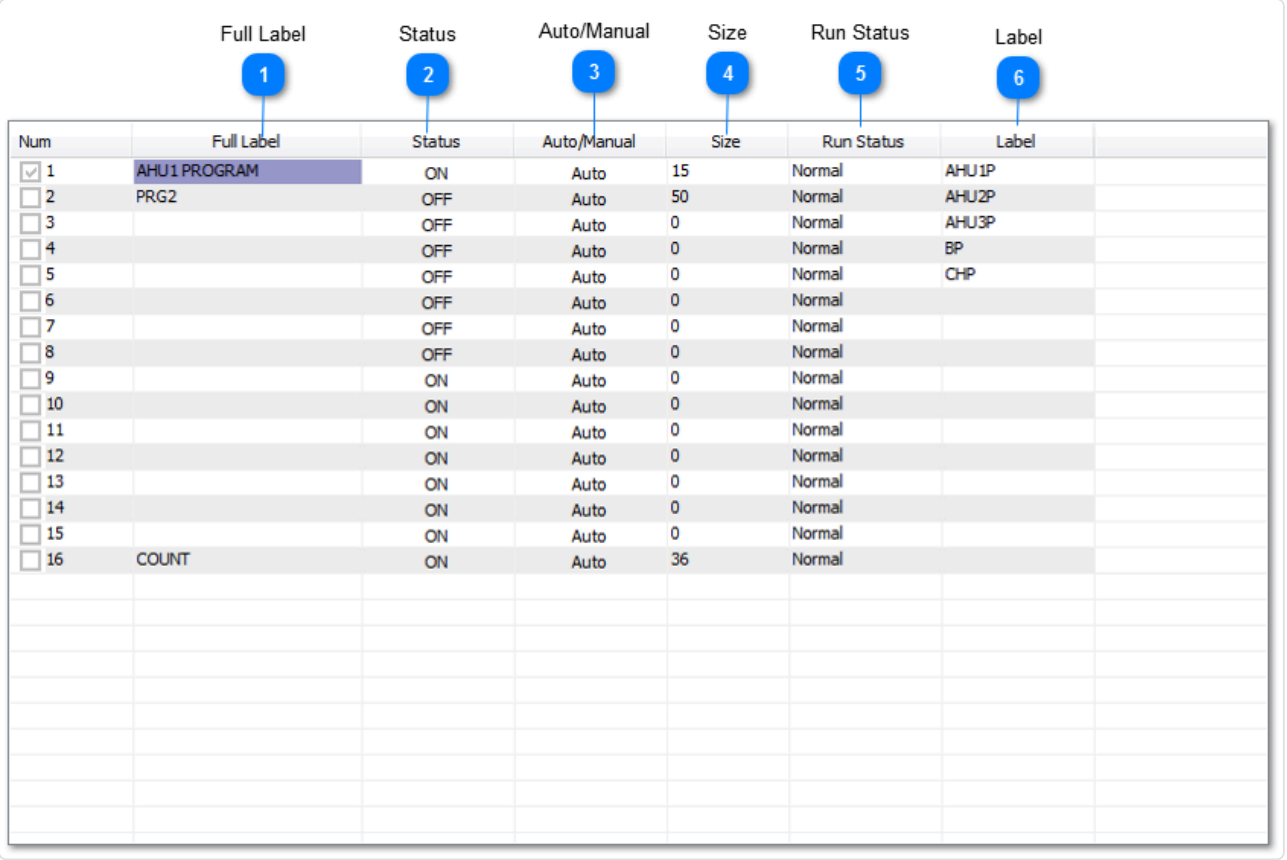

Num	Full Label	Status	Auto/Manual	Size	Run Status	Label
1	AHU1 PROGRAM	ON	Auto	15	Normal	AHU1P
2	PRG2	OFF	Auto	50	Normal	AHU2P
3		OFF	Auto	0	Normal	AHU3P
4		OFF	Auto	0	Normal	BP
5		OFF	Auto	0	Normal	CHP
6		OFF	Auto	0	Normal	
7		OFF	Auto	0	Normal	
8		OFF	Auto	0	Normal	
9		ON	Auto	0	Normal	
10		ON	Auto	0	Normal	
11		ON	Auto	0	Normal	
12		ON	Auto	0	Normal	
13		ON	Auto	0	Normal	
14		ON	Auto	0	Normal	
15		ON	Auto	0	Normal	
16	COUNT	ON	Auto	36	Normal	

Control Basic set-up fields:

1 **Full Label** Full Label A 20 character descriptor of the point.

2 **Status** Status Indicates whether the program is running or not (ON/OFF).

3 **Auto/Manual** Auto/Manual In “Auto” the running of the program can be controlled by either the program timer or another program. In “Manual” the program can be stopped and started by the operator by togglingthe status field.

4 **Size** Size The length in bytes of the program, maxi mum size is 2500 bytes.

5 **Run Status** Run Status The time between each running of the program (mins: secs).

6 **Label** Label An 8 character descriptor of the point.

See Chapter 10 for more information on how to program Control Basic and use the Control Basic Editor

