
TEMCO LEARN

TStat8

Overview · built Nov 12, 2026

Overview

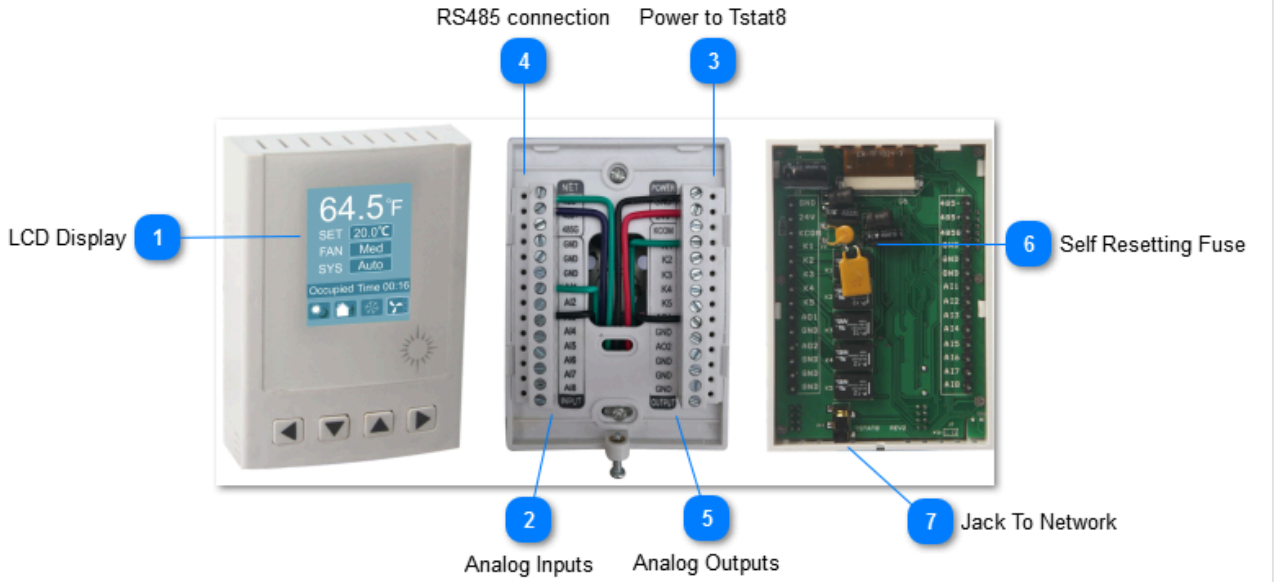

LCD Display




Color LCD display,2.4 inch diagonal

Analog Inputs




Analog inputs,8 universal inputs ,10k therm, contacts, 4-20ma, 0-5V,0-10V

Power to Tstat8

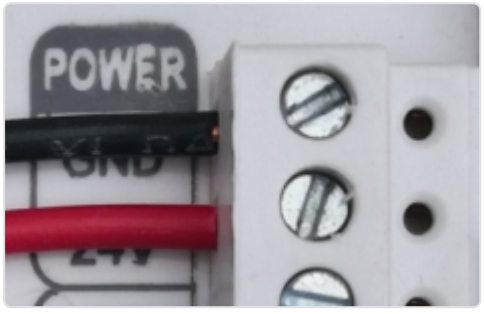

The power supply can be any 12V to 24V supply, AC or DC with capacity of approximately 2 watts. Surge and reverse polarity protected with slow blow self resetting fuse on board.

RS485 connection

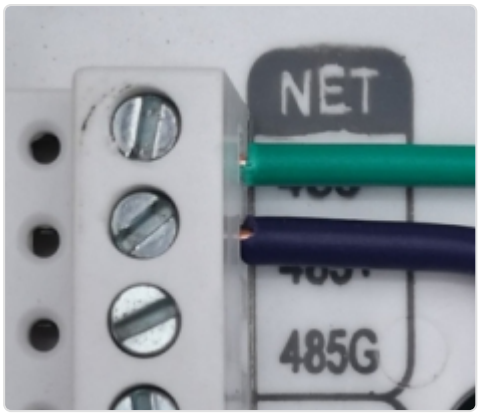

RS485 connection,BACnet MS/TP and Modbus RTU protocols over RS485.

Analog Outputs



Analog outputs,5 relay outputs 24vac @ 2 amps;2 analog outputs 10V @100mA.

Self Resetting Fuse



Jack To Network

