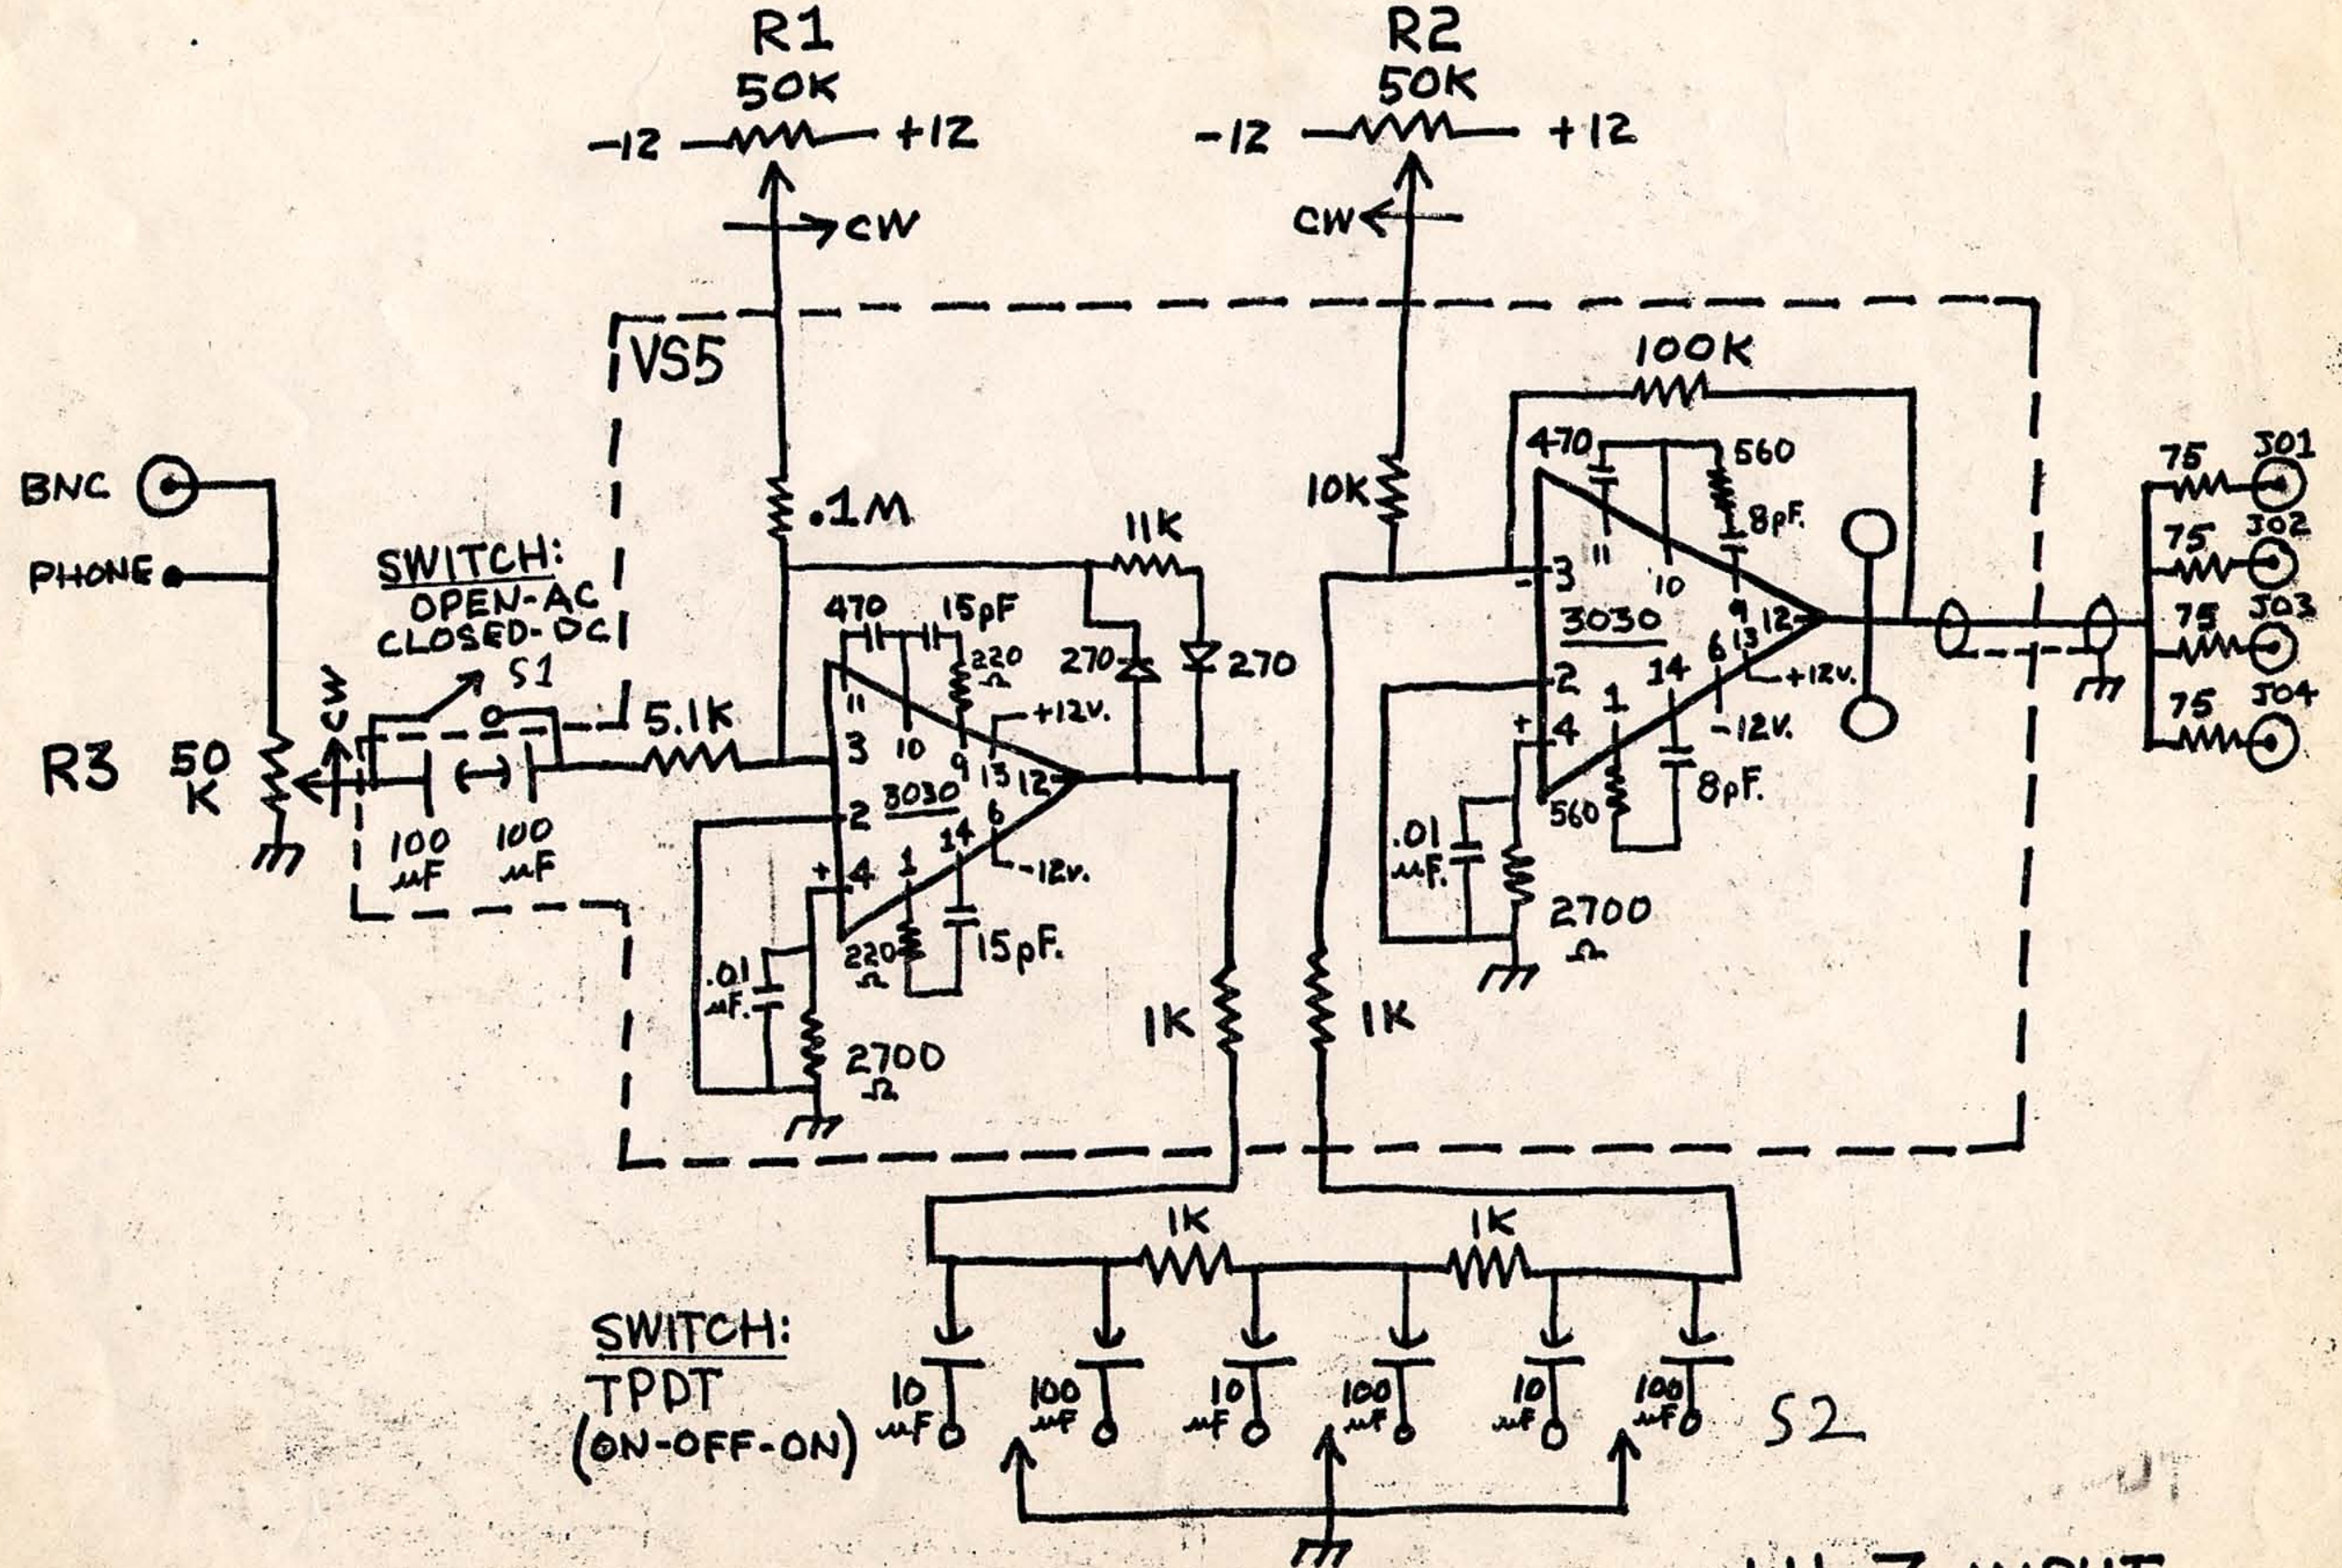
R1
50K
-12
+12
CW
R2
50K
-12
+12
CW
VS5
BNC
PHONE
SWITCH:
OPEN-AC
CLOSED-DC
S1
R3
50 K
CW
100 µF
100 µF
5.1K
.1M
11K
470
15pF
220 Ω
270
270
+12V.
-12V.
3030
3
10
9
11
13
12
2
6
14
4
1
220 Ω
15pF.
.01 µF.
2700 Ω
1K
10K
100K
470
560
8pF.
3030
8pF.
560
.01 µF.
2700 Ω
1K
75
J01
75
J02
75
J03
75
J04
1K
1K
SWITCH:
TPDT
(ON-OFF-ON)
10 µF
100 µF
10 µF
100 µF
10 µF
100 µF
S2

HI-Z INPUT

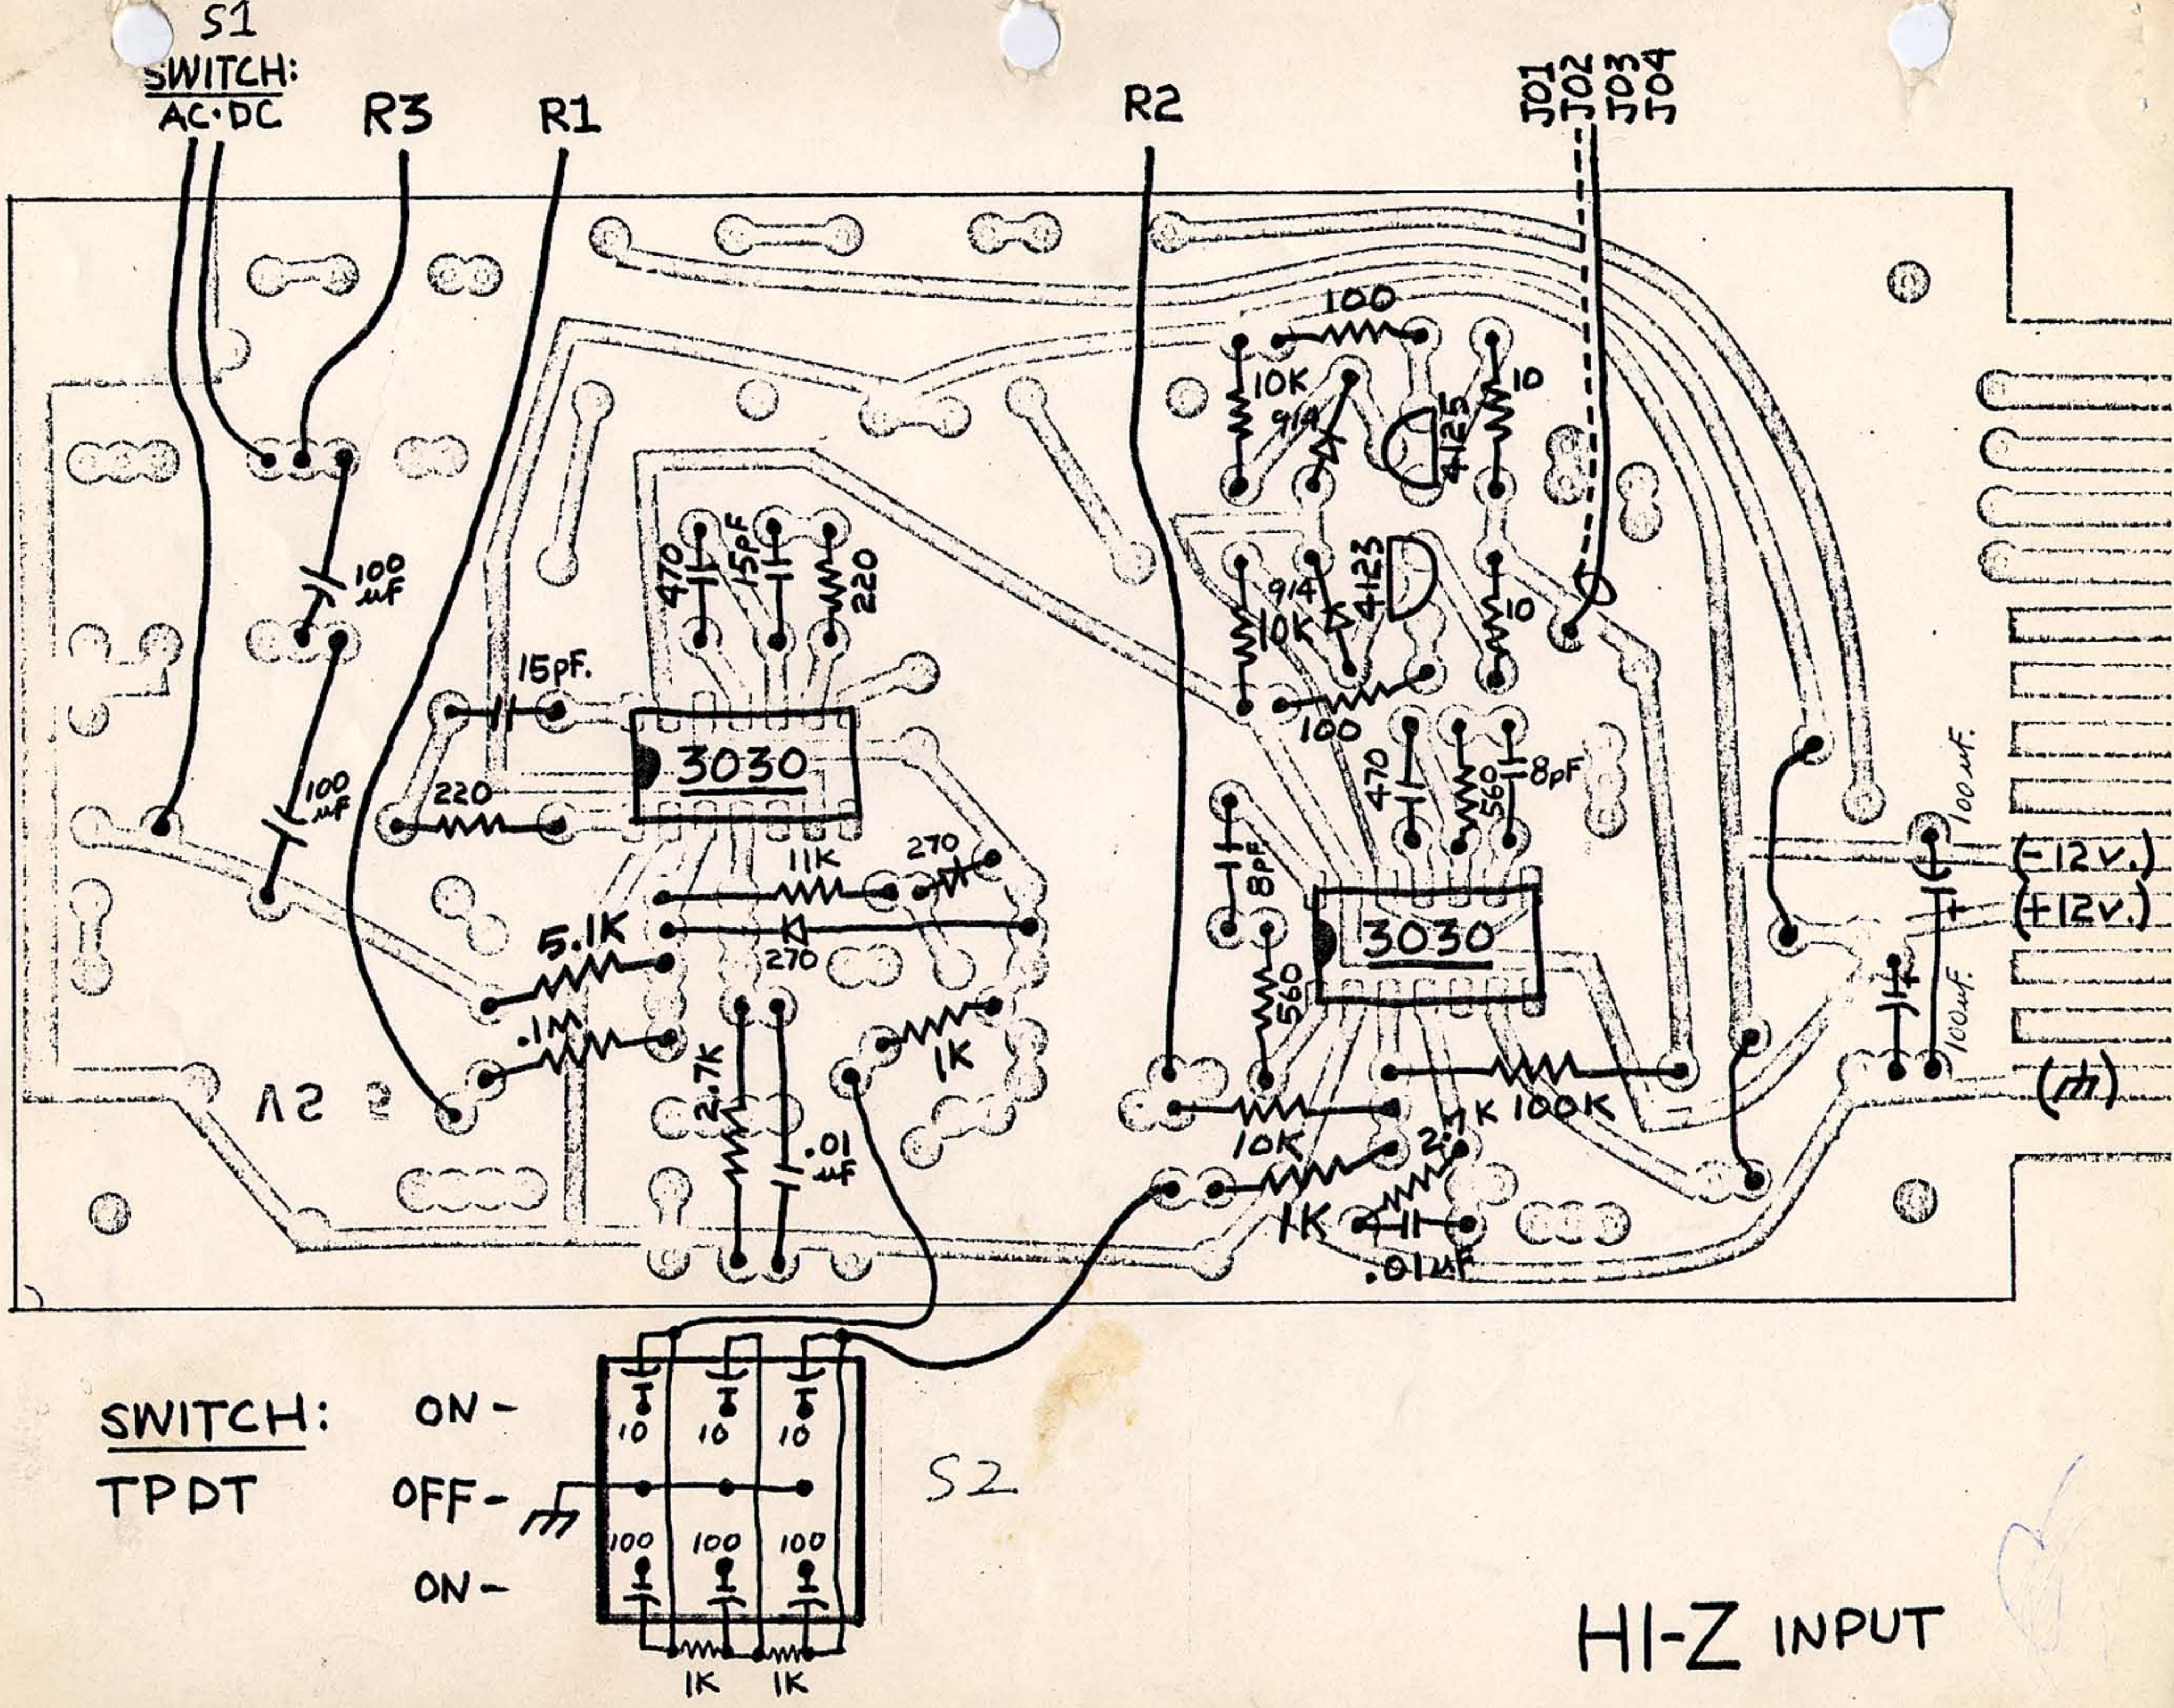
S1
SWITCH:
AC·DC
R3
R1
R2
J01
J02
J03
J04
100
10K
914
4125
10
914
10K
4123
10
100
470
560
8pF
100 uF
(-12V.)
(+12V.)
100uF
(⏚)
470
15pF
220
15pF.
3030
220
11K
270
5.1K
270
.1M
2.7K
.01 uF
1K
A2
8pF
3030
560
10K
1K
100K
22
1K
.01uF
SWITCH:
TPDT
ON-
OFF-
ON-
10
10
10
100
100
100
1K
1K
S2

HI-Z INPUT

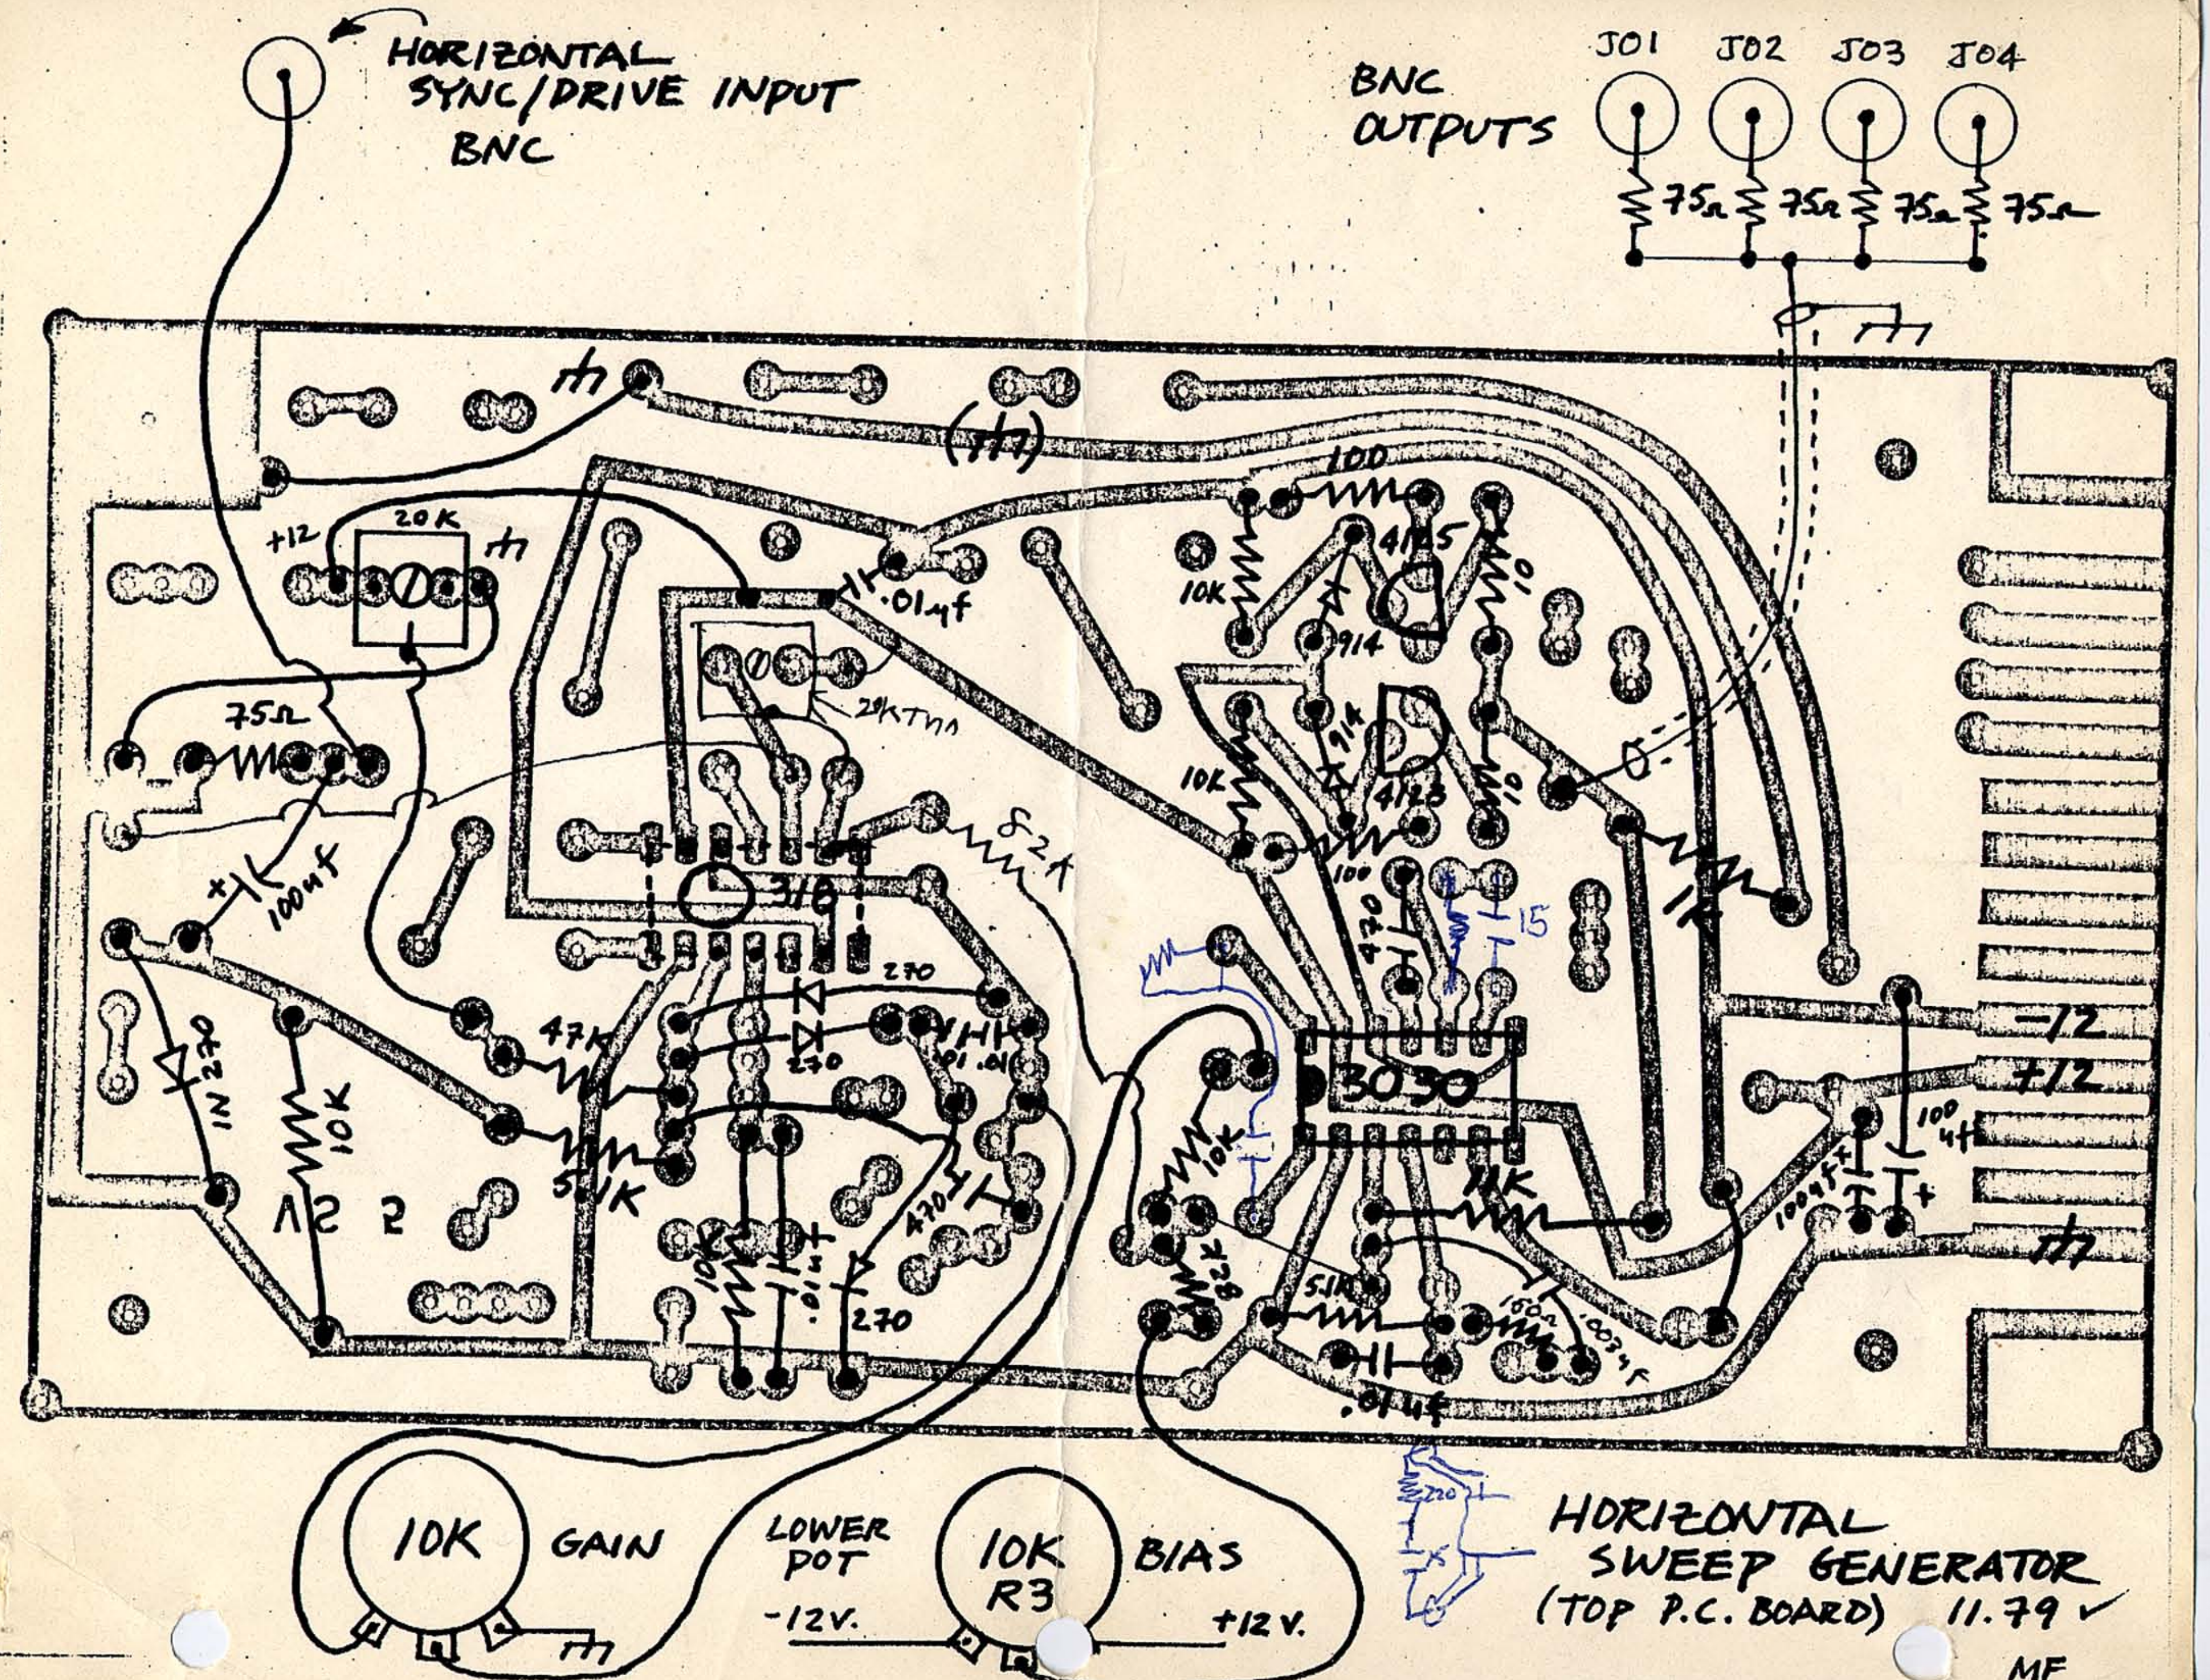
HORIZONTAL SYNC/DRIVE INPUT BNC
BNC OUTPUTS
J01
J02
J03
J04
75Ω
75Ω
75Ω
75Ω
+12
20K
75Ω
100uf
1N270
10K
2
2
47K
51K
10K
.01
270
270
270
470
.01
.01
.01uf
29KTNA
316
82K
10K
4125
4125
914
914
10K
10K
100
10
10
100
470
15
3030
10K
51K
150Ω
.0033uf
.01uf
1K
82K
100uf
100uf
-12
+12
10K
GAIN
LOWER POT
-12V.
10K R3
BIAS
+12V.
220

HORIZONTAL SWEEP GENERATOR (TOP P.C. BOARD) 11.79 ✓

MF

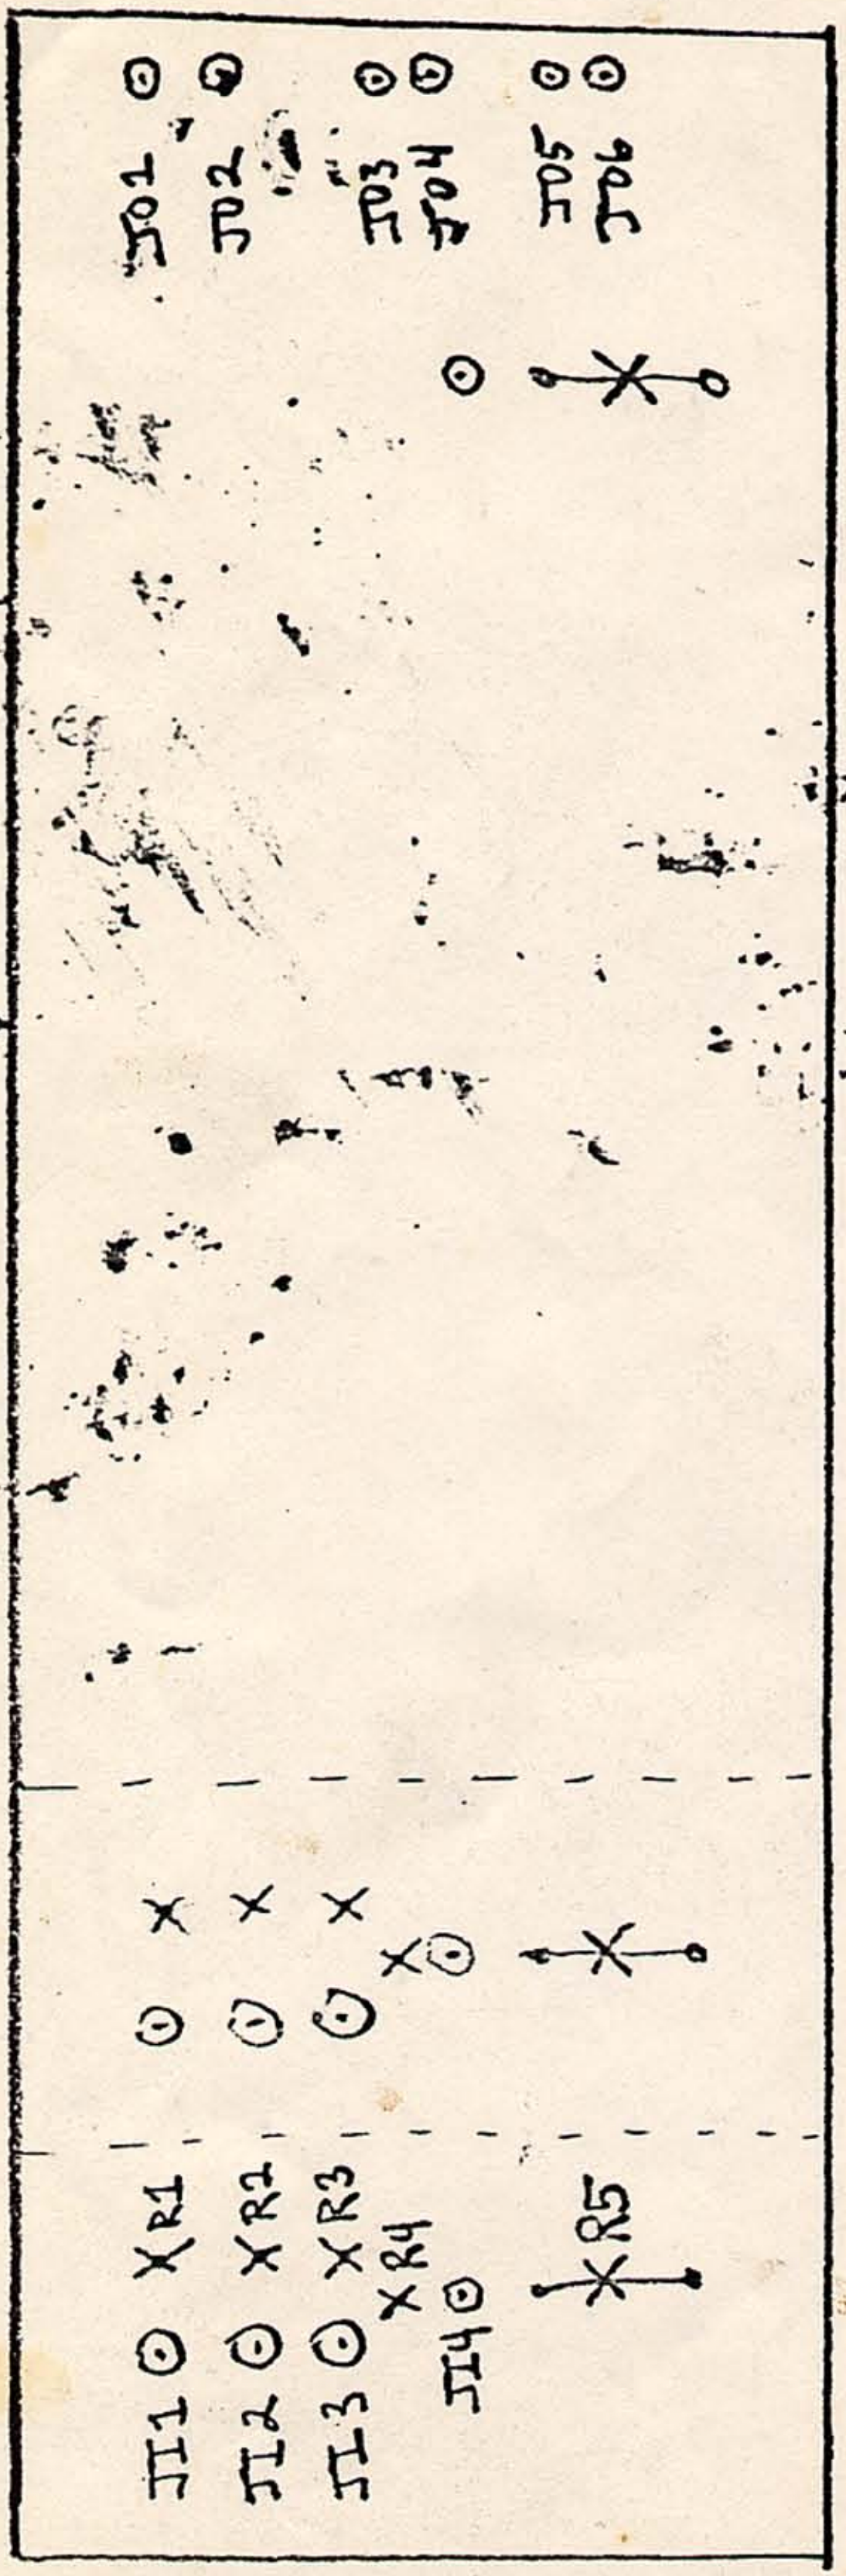
JO1
JO2
JO3
JO4
JO5
JO6
JI1
JI2
JI3
JI4
R1
R2
R3
R4
R5

FOR GREG

FRONT FACE

+5	186.8mA
-5	174.2mA
+12	211 mA
-12	269 mA

OUTPUT MIXER

12/75

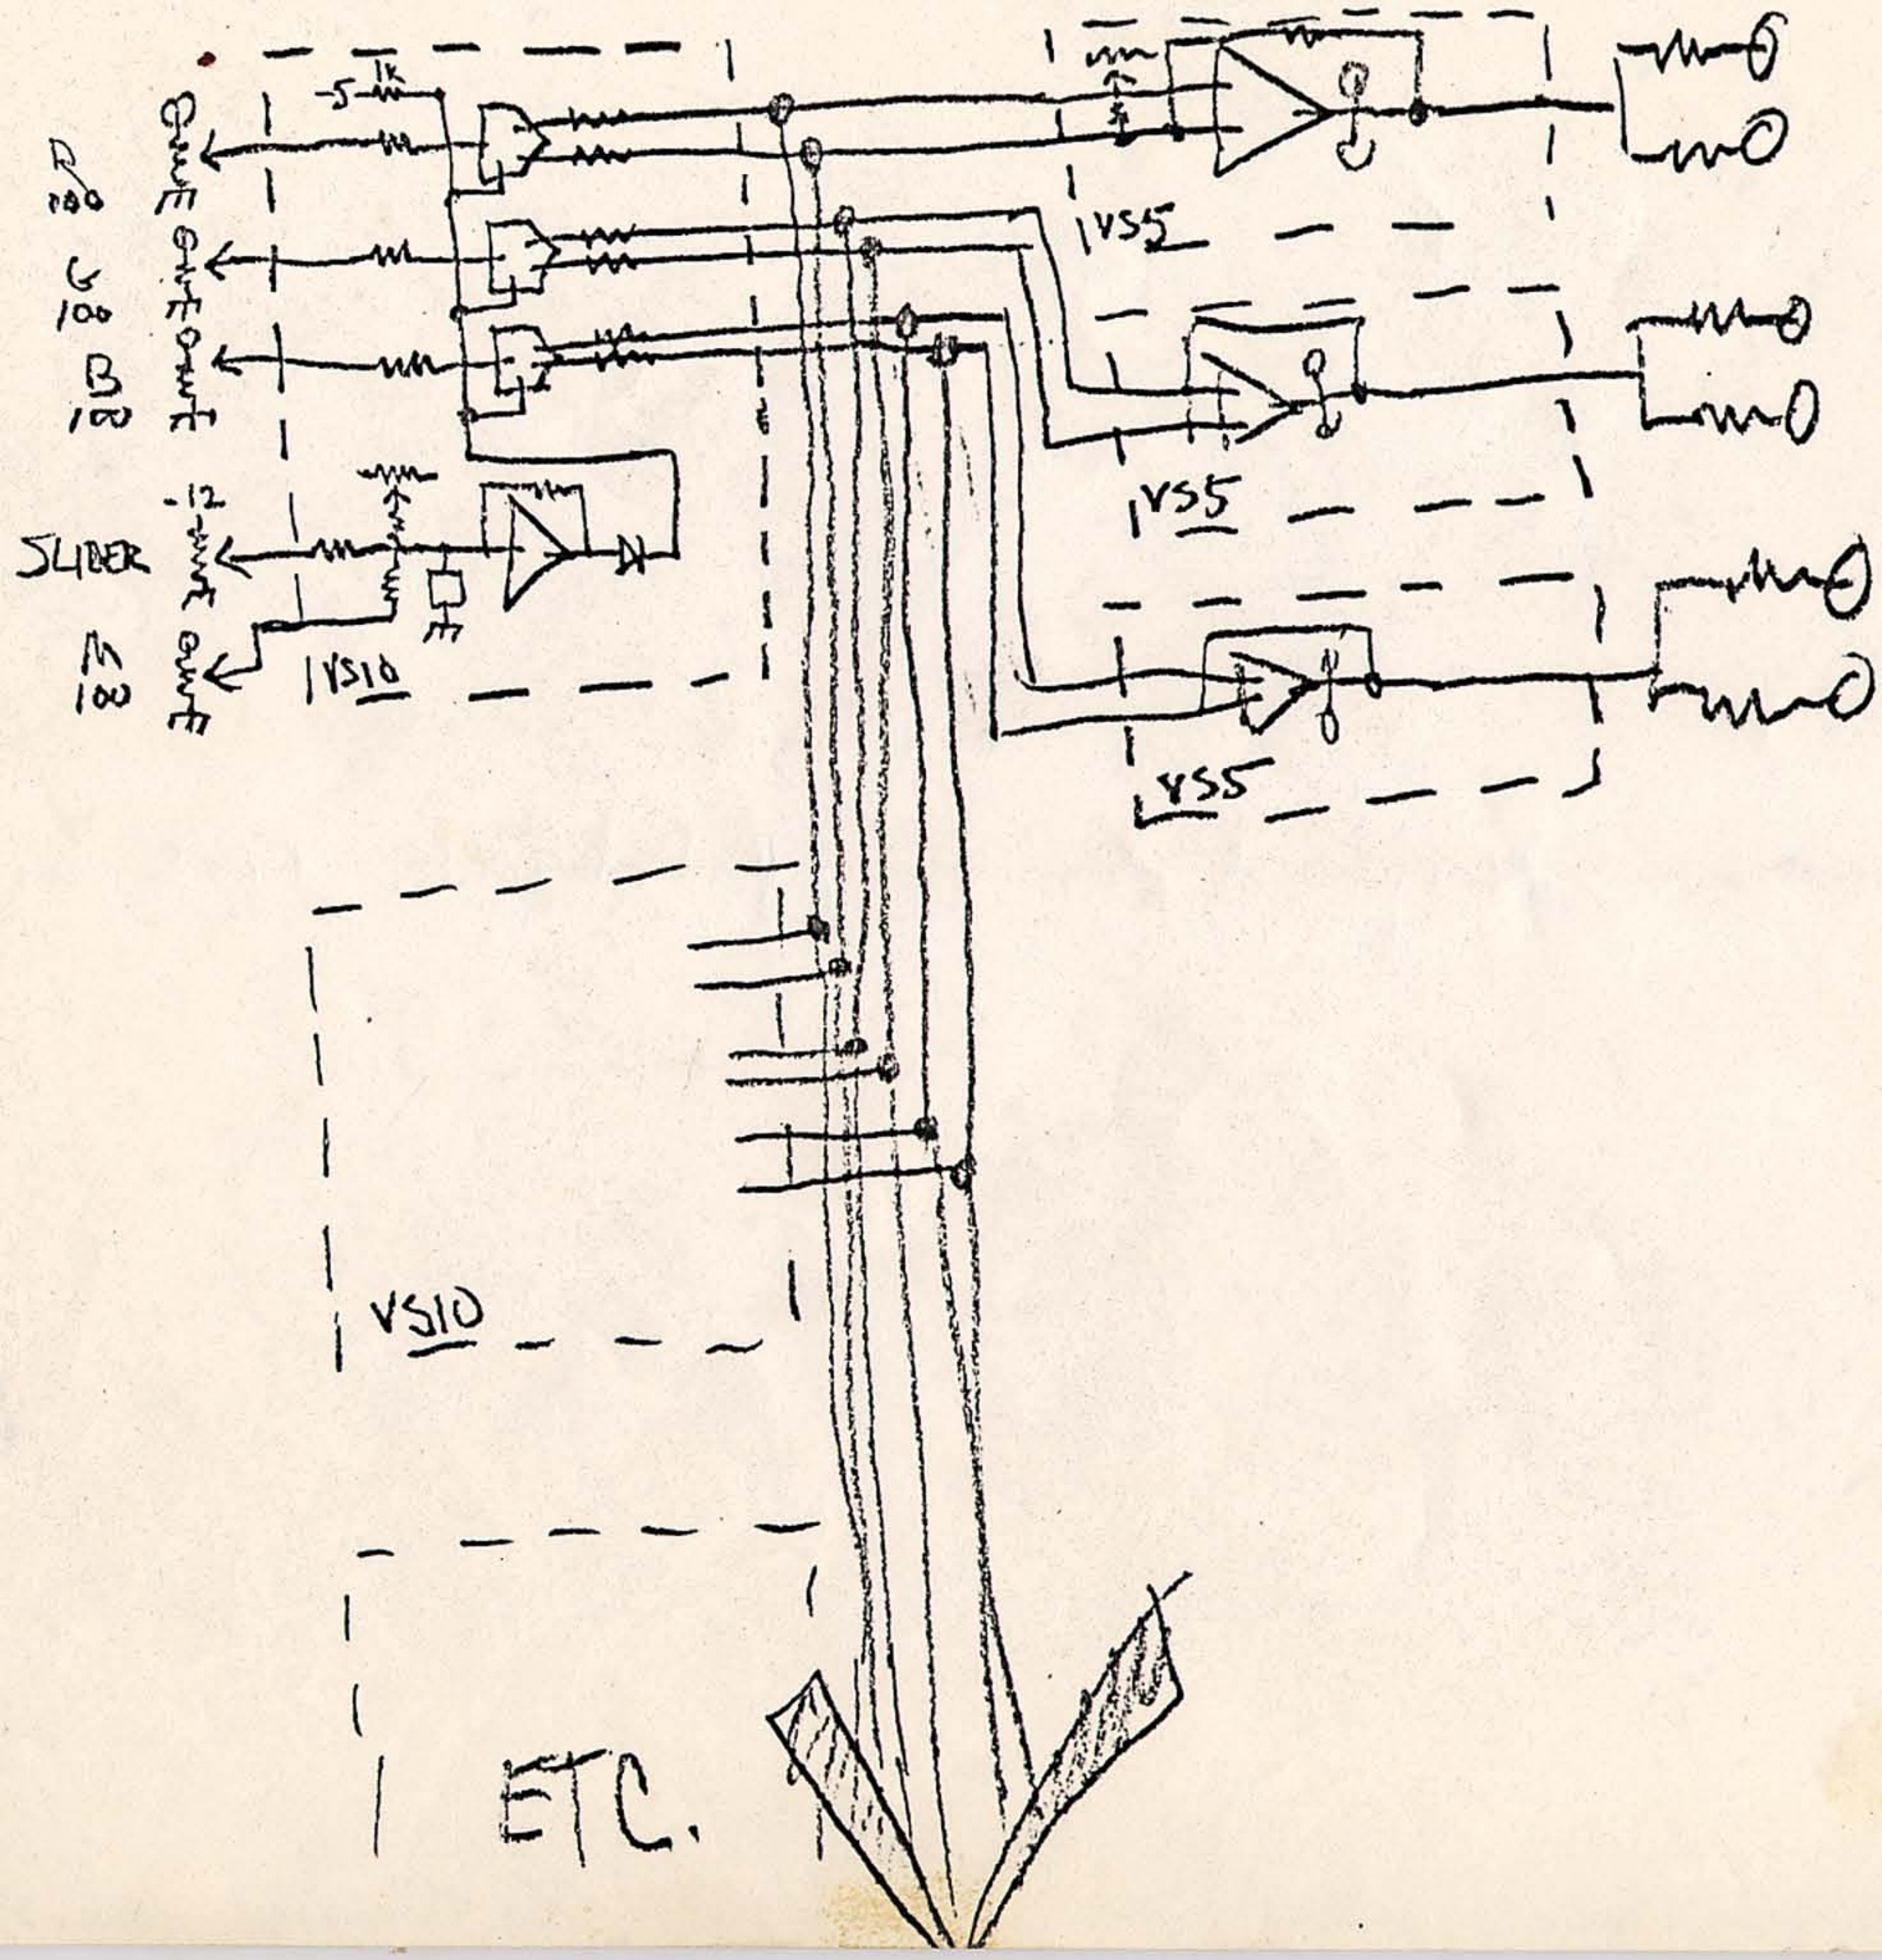
R
100
G
100
B
100
SLIDER
M
100
-5
1k
-12
VS5
VS5
VS5
VS10
VS10
ETC.

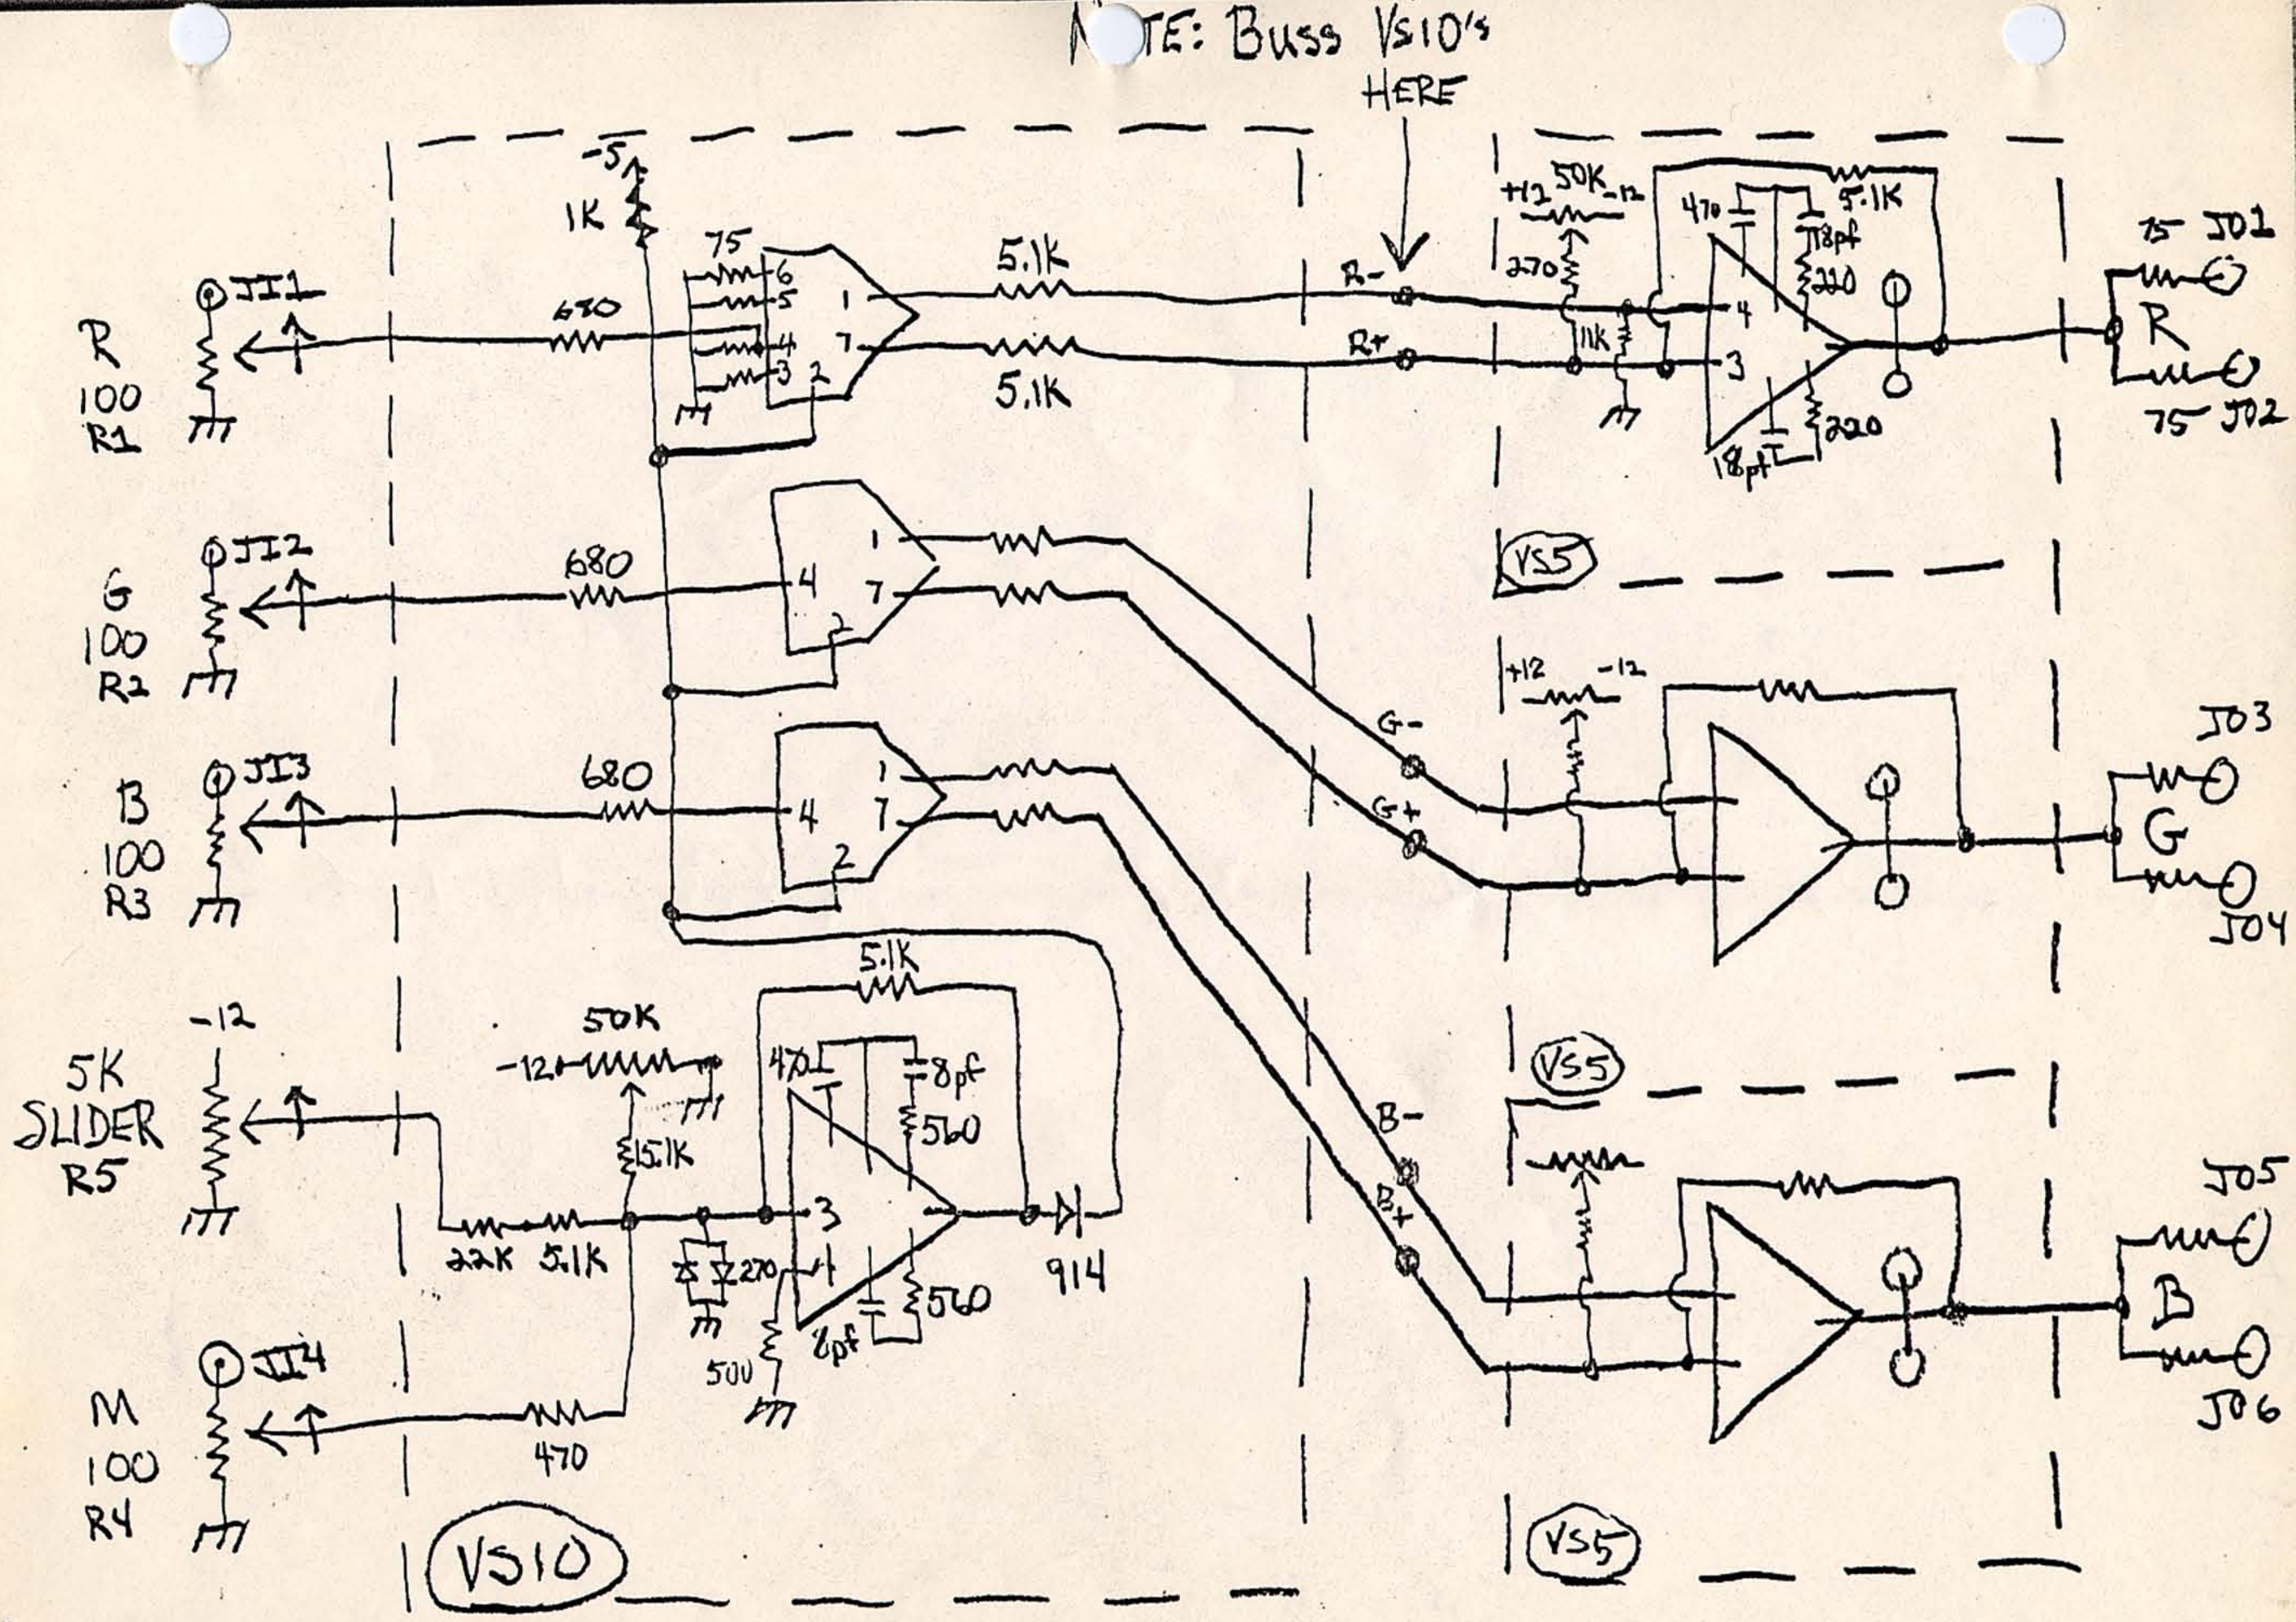
NOTE: BUSS VS10's HERE
R 100 R1
G 100 R2
B 100 R3
5K SLIDER R5
M 100 R4
JI1
JI2
JI3
JI4
-12
680
680
680
-5
1K
75
6
5
4
3
2
1
7
5.1K
5.1K
50K
-12
22K
5.1K
15.1K
470
270
500
470
8pf
560
560
8pf
5.1K
914
VS10
R-
R+
G-
G+
B-
B+
+12
50K
-12
270
11K
470
18pf
220
5.1K
220
18pf
+12
-12
VS5
VS5
VS5
75 JO1
75 JO2
R
JO3
G
JO4
JO5
B
JO6

OUTPUT MIXER

BUILD PROCEDURE NOTES:

OUTPUT MIX:

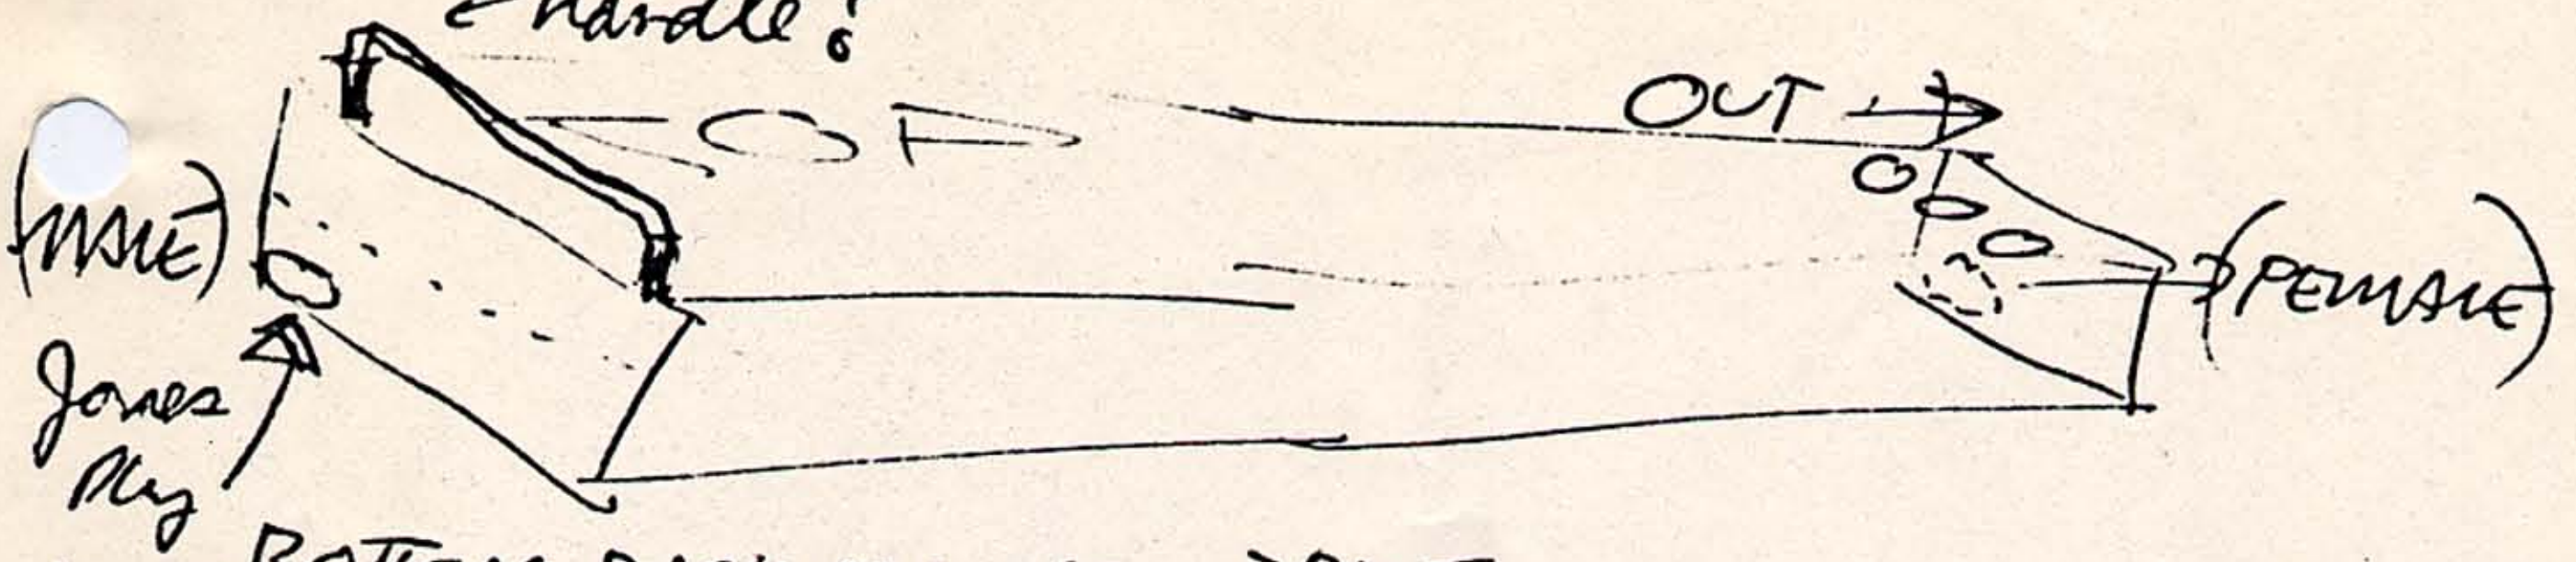
← handle?
TOP
OUT →
(MALE)
Jones Plug
(FEMALE)

xtremes BOTTOM BACK corner is BEST

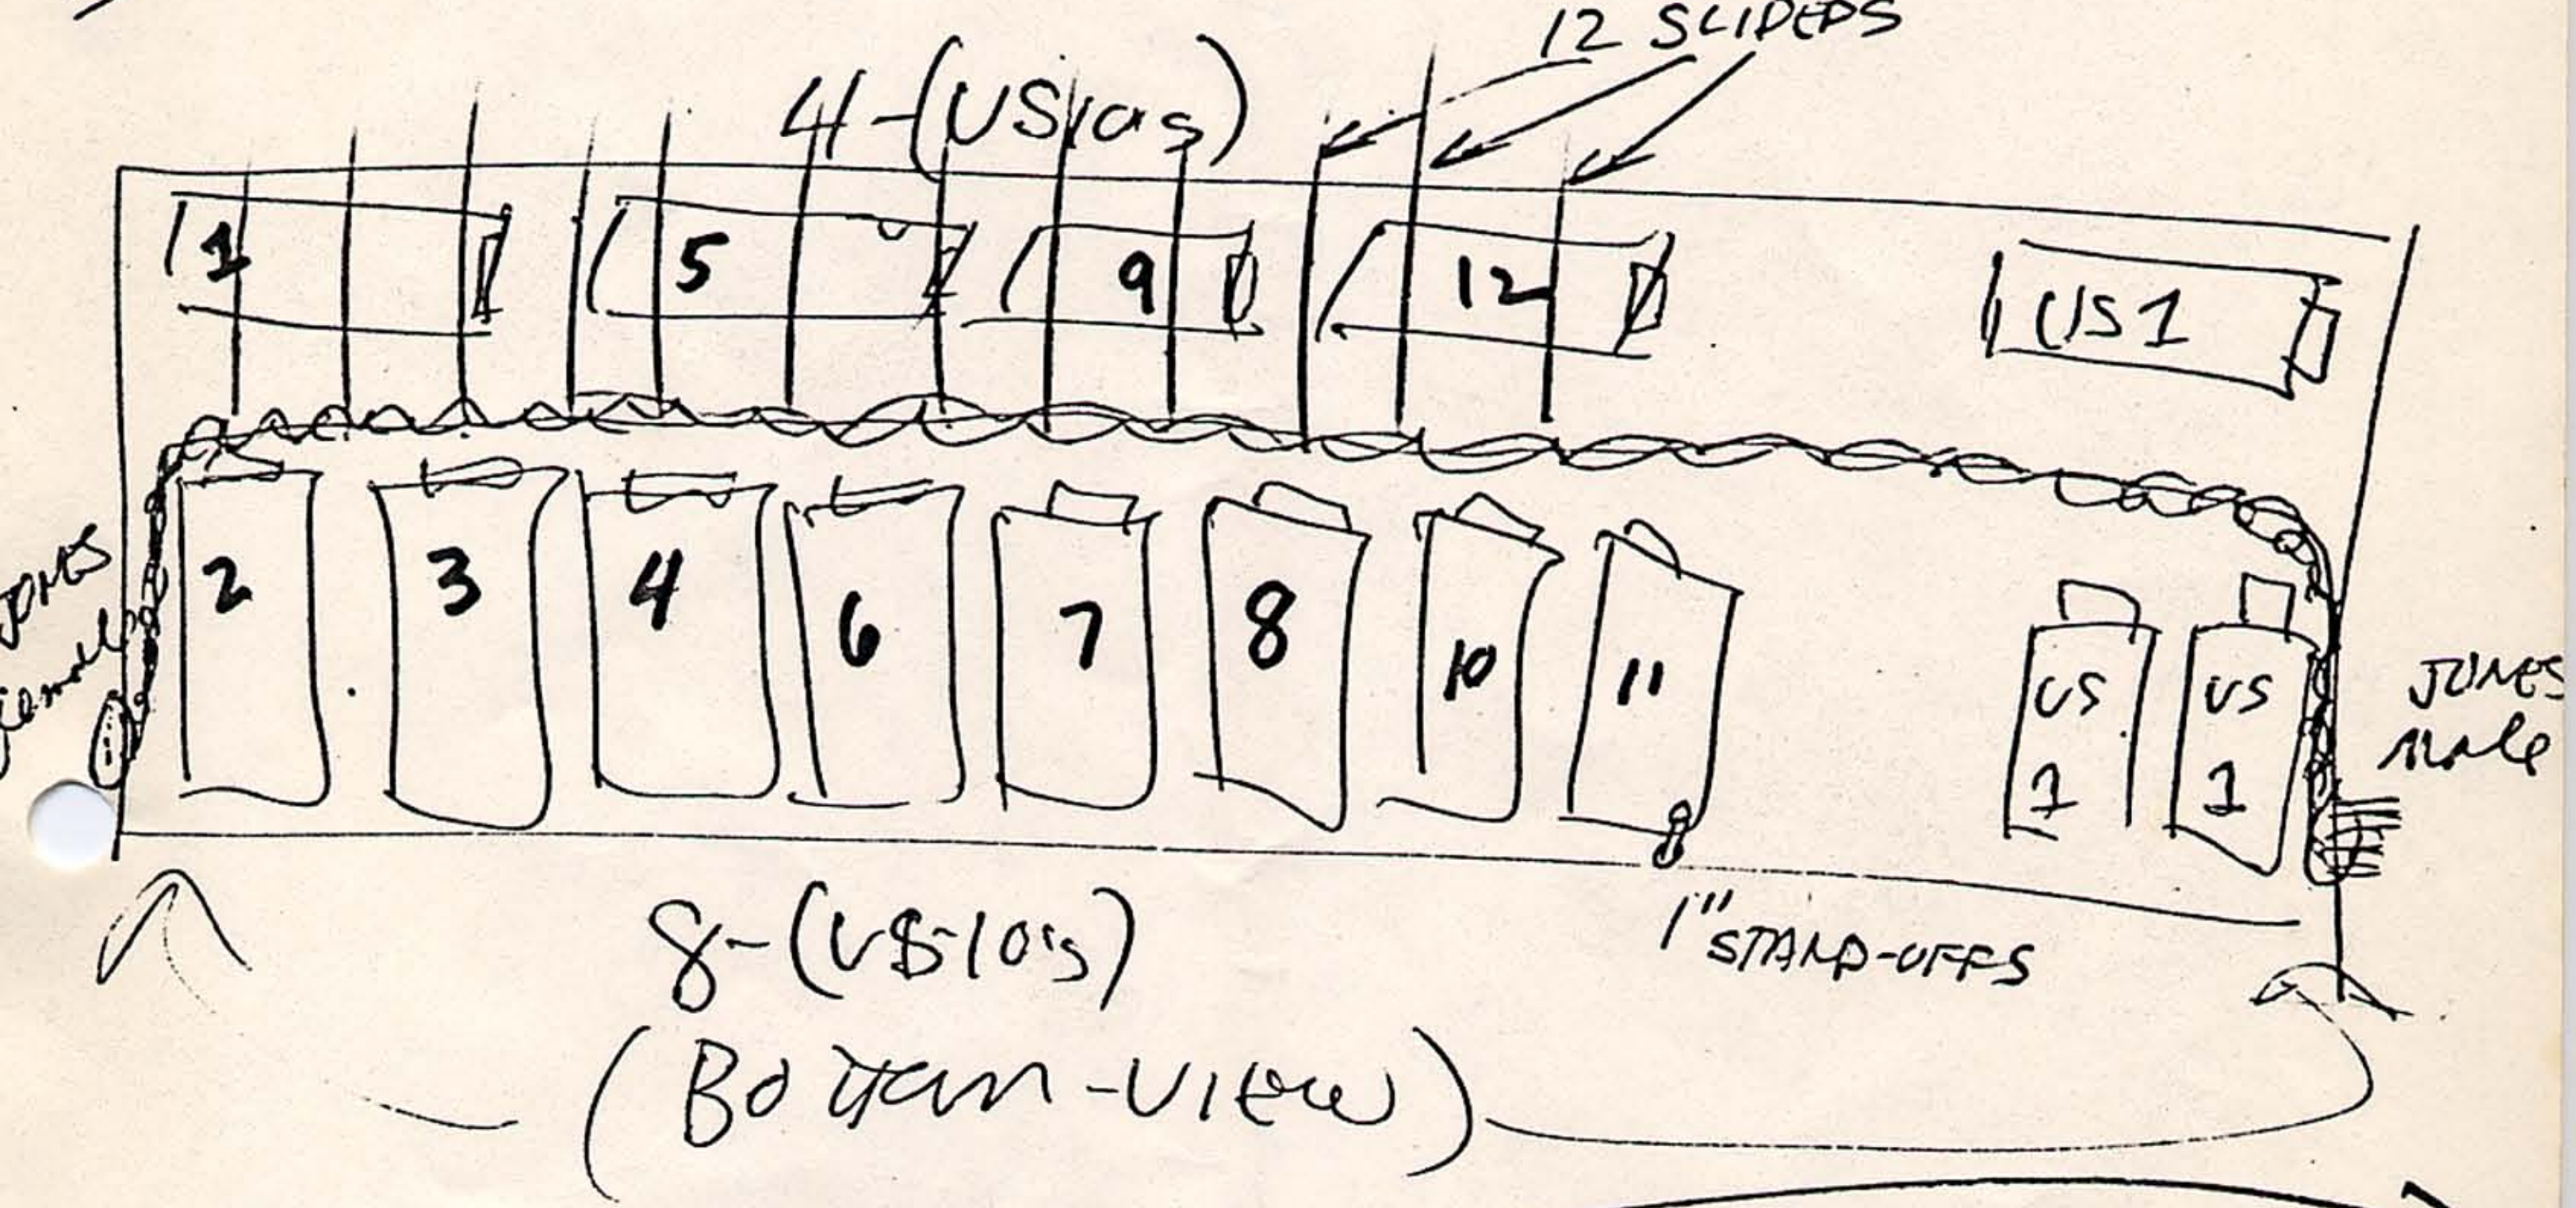
12 SLIDERS
4-(US10's)
1
5
9
12
US1
2
3
4
6
7
8
10
11
US 1
US 1
JONES female
JONES male
1" STAND-OFFS
8-(US10's)
(BOTTOM-VIEW)

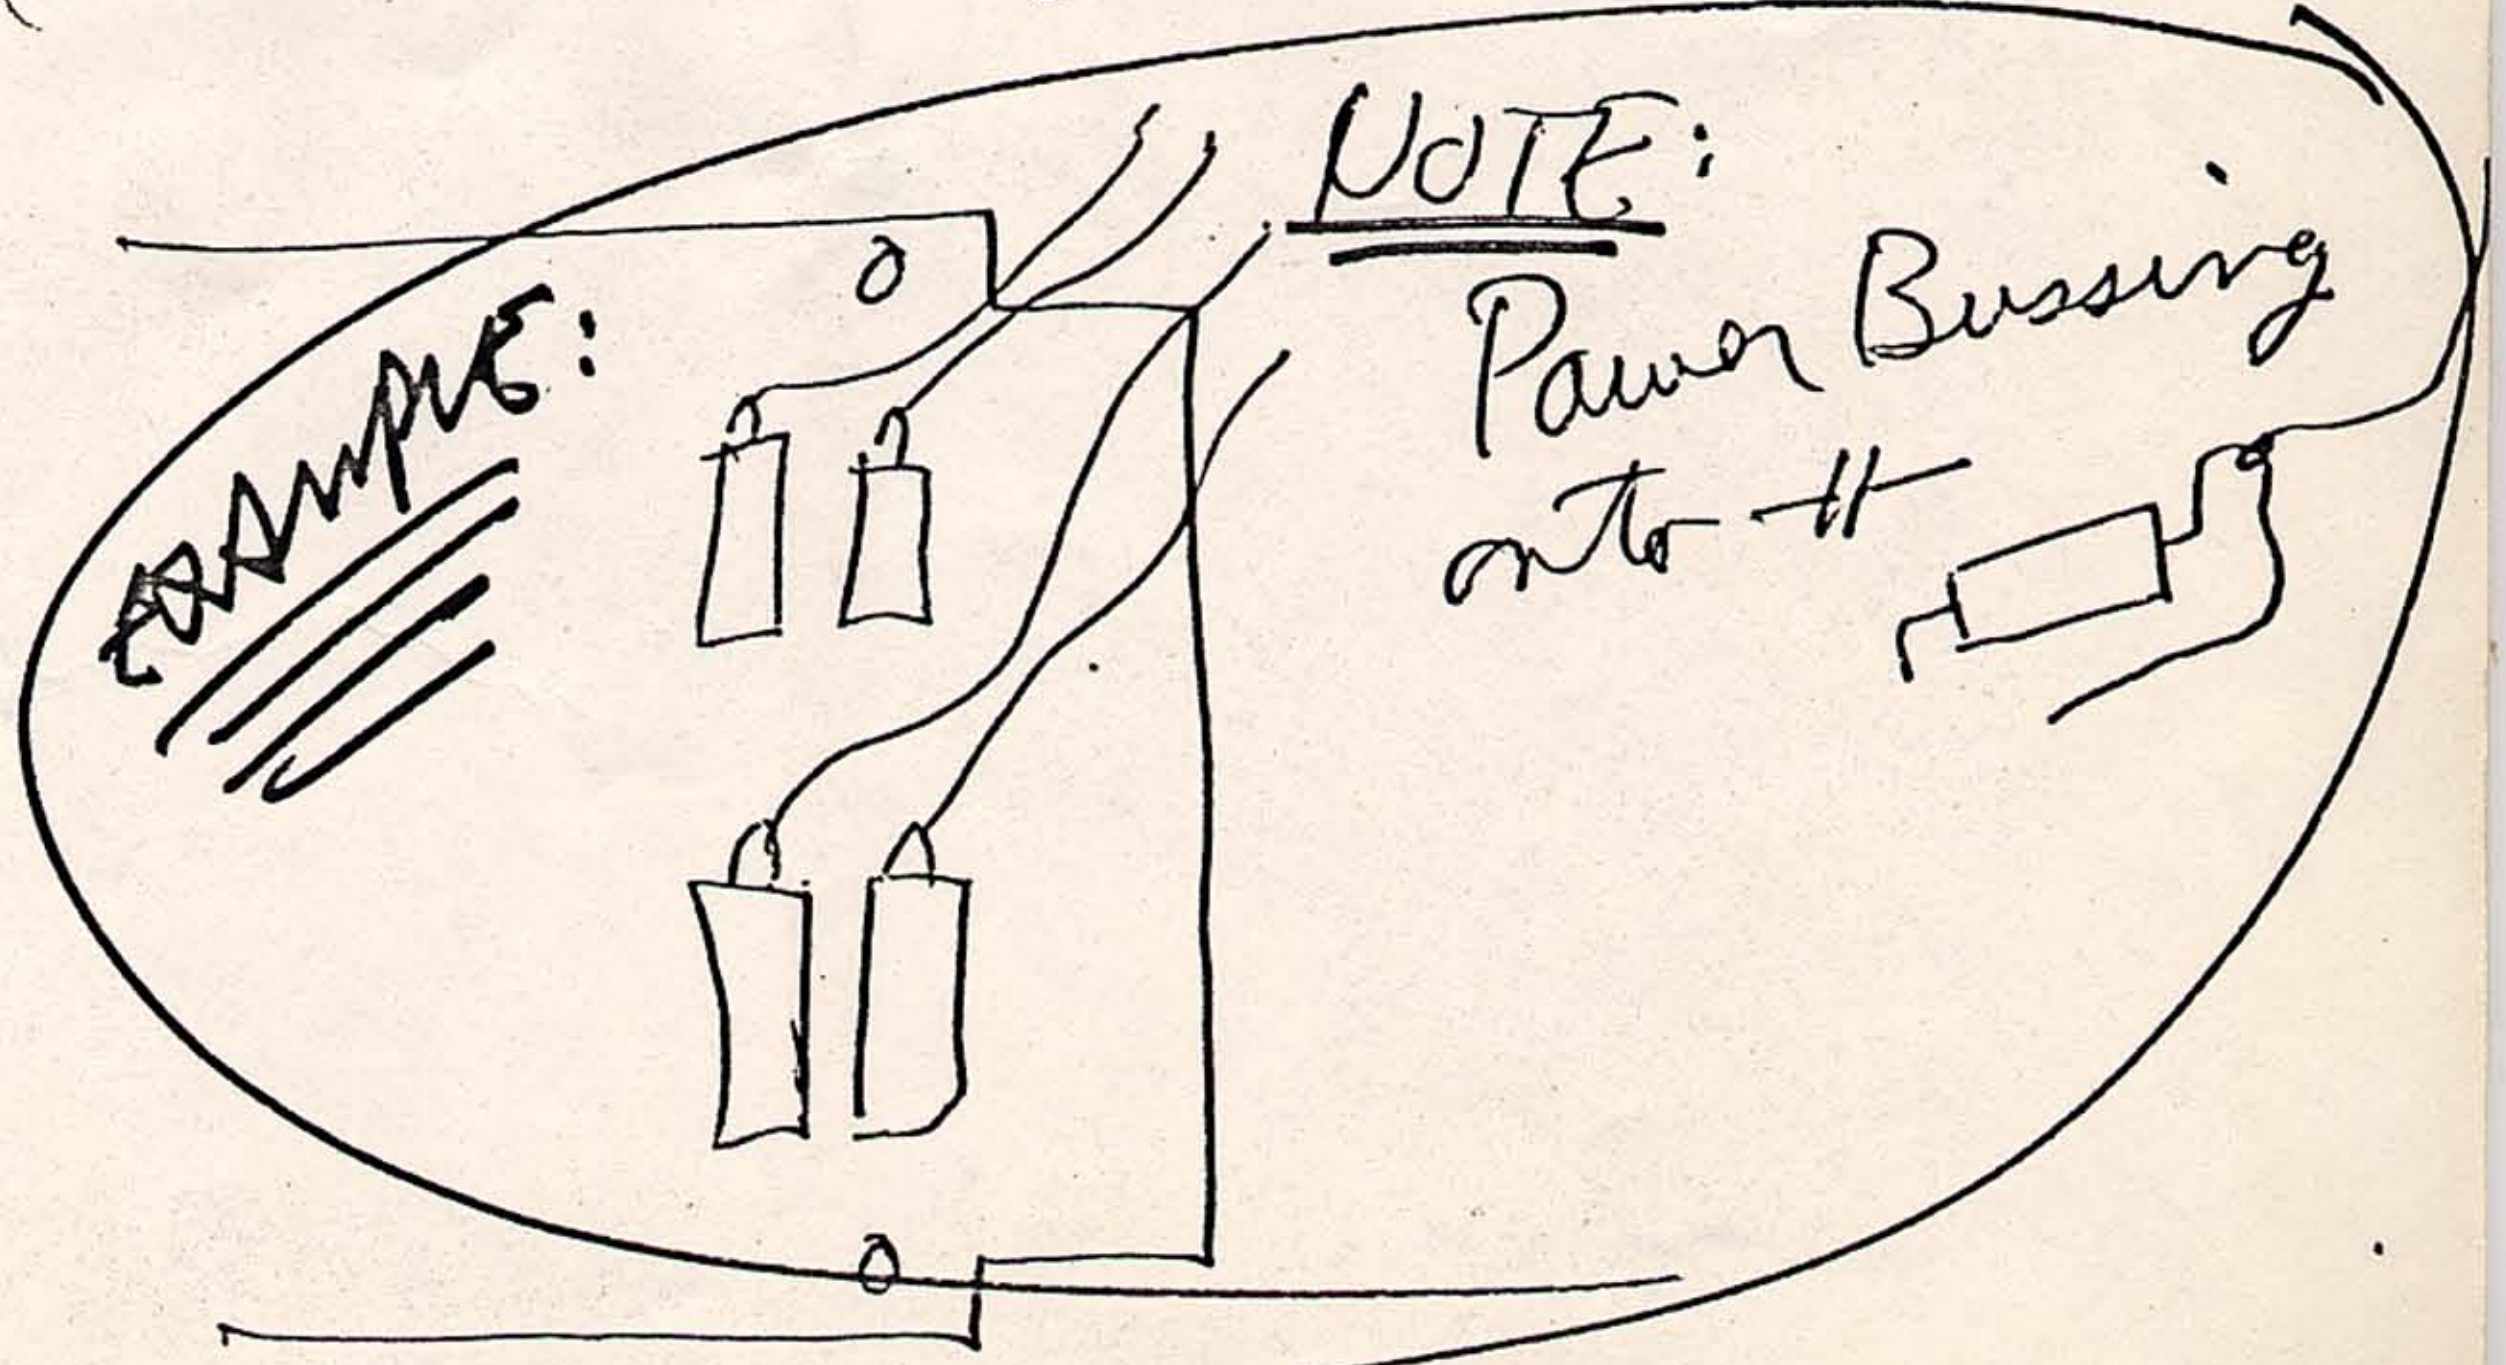

NOTE:
Power Bussing onto it



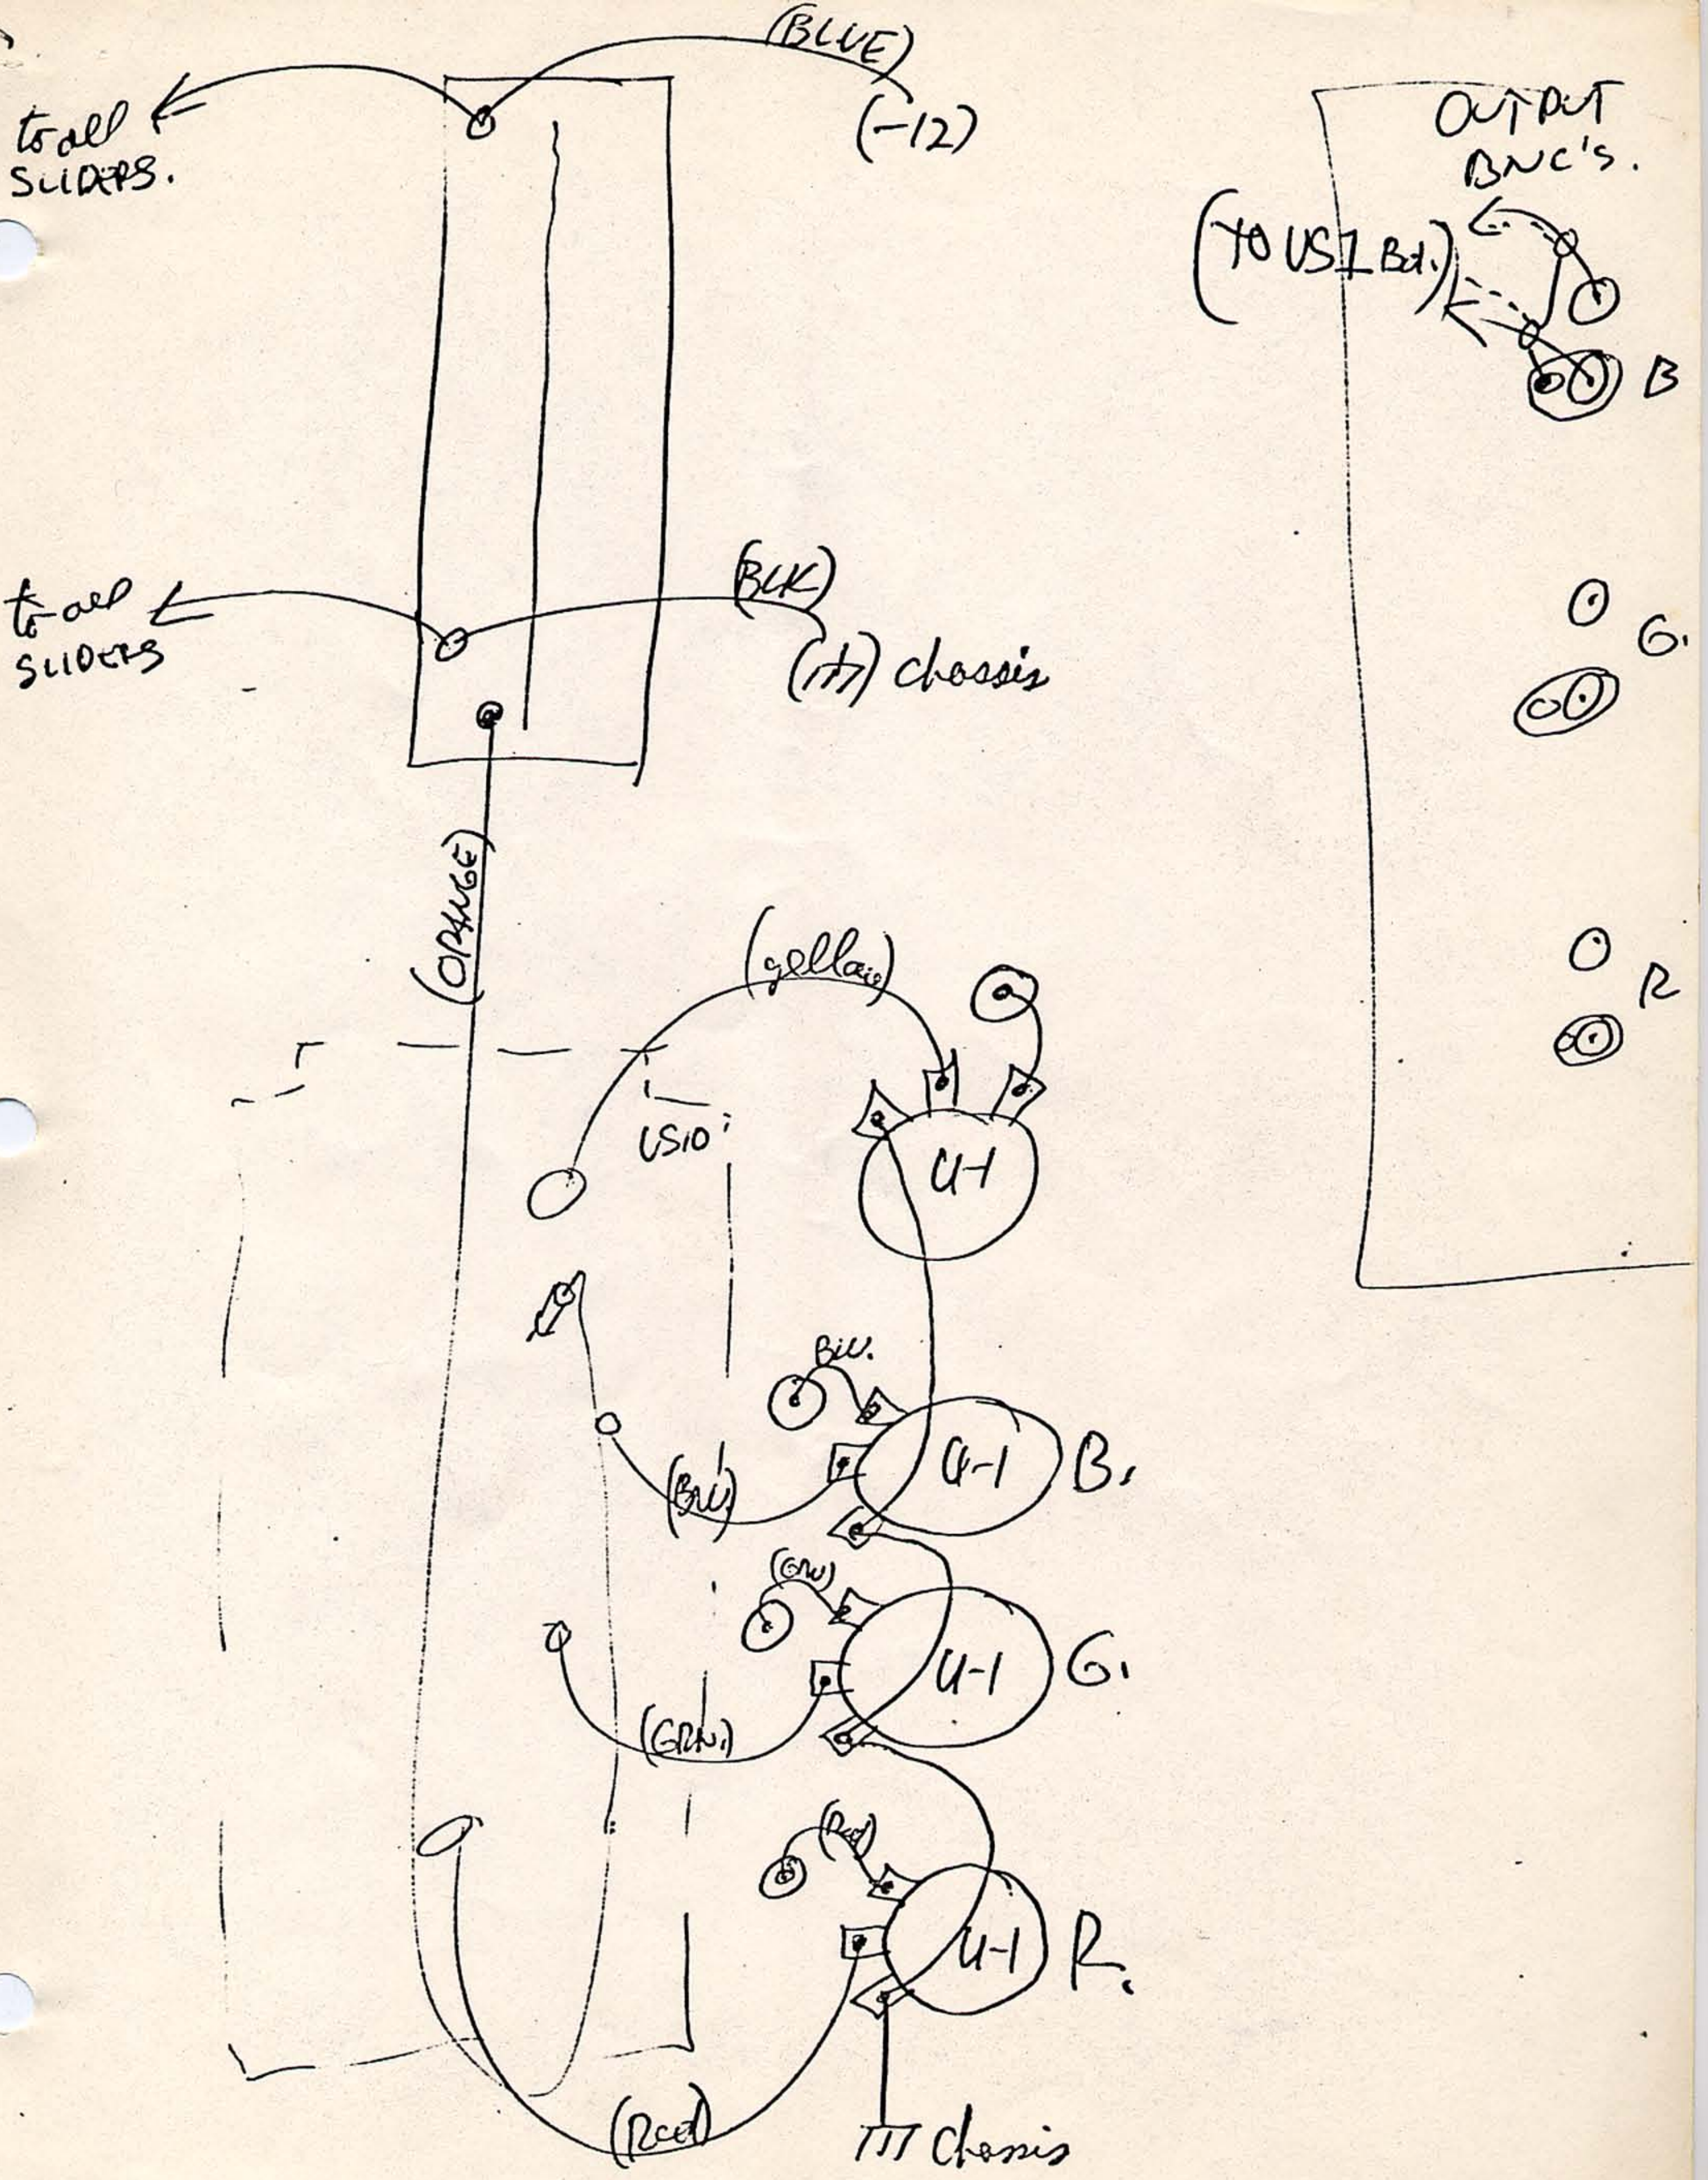
to all SLIDERS.
(BLUE)
(-12)
OUTPUT BNC's.
(TO US1 Bd.)
B
to all SLIDERS
(BLK)
(⏚) chassis
G.
R
(ORANGE)
(yellow)
US10
U-1
Blu.
(BLU)
U-1
B.
(GRN)
U-1
G.
(GRN.)
(Red)
U-1
R.
(Red)
⏚ Chassis

Drew; DAN:

~~documentation on OCTACT mix~~
~~XEROX's of DX BOARD~~

- no final slider pot ?
- 50K TRIM; #3 goes to a float...?
  DAN'S ↑
- US1 (US5) board; 270 Ω or 270,000 Ω ?
  DAN'S ↑

Multiply input BNC/pot → reason for not moving ?

BNC - tool

OUTPUT MIXER (MULTIPLIERS)

Use VSI for 3 output Mix

REPEAT 12 times

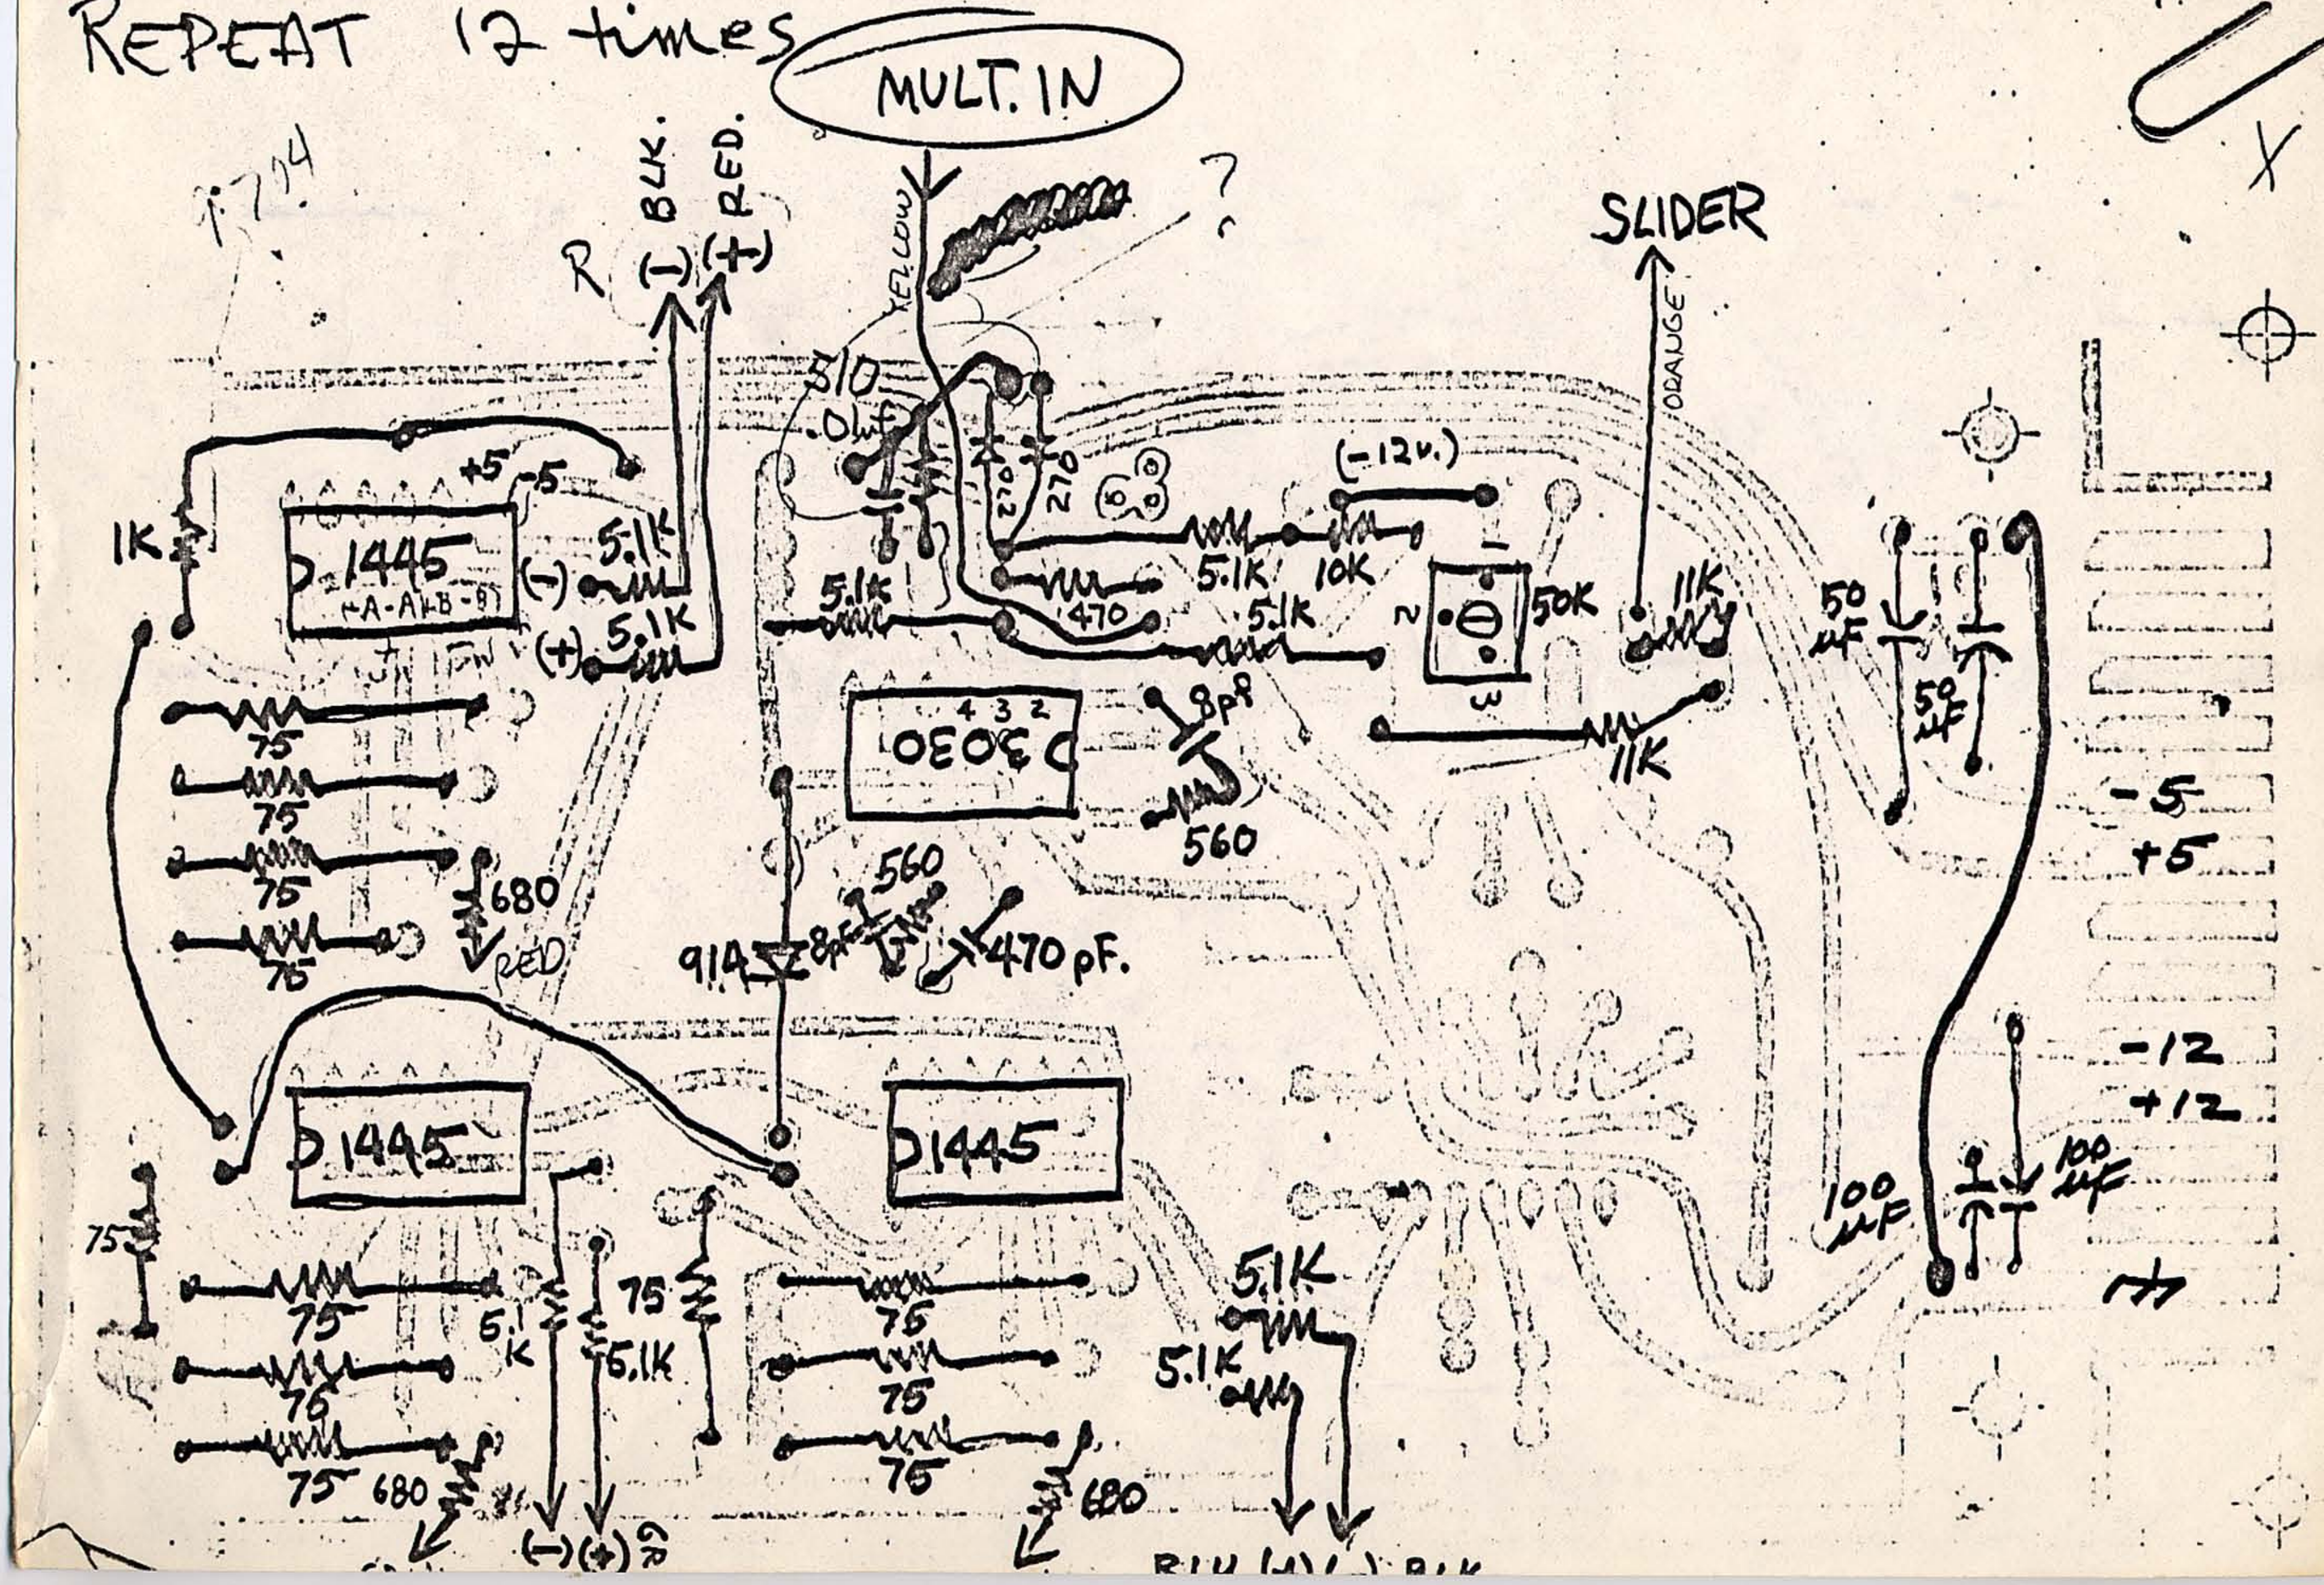
MULT. IN
YELLOW
?
SLIDER
ORANGE
R
(−) BLK.
(+) RED.
1K
+5 −5
1445
(−) 5.1K
(+) 5.1K
75
75
75
75
680
RED
510
.01uf
270
270
5.1K
470
5.1K
10K
(−12v.)
5.1K
50K
11K
11K
3030
4 3 2
8pF
560
560
914
8pF
470 pF.
50 uF
50 uF
−5
+5
−12
+12
100 uF
100 uF
1445
1445
75
75
76
75
680
5.1K
5.1K
75
75
75
75
680
5.1K
5.1K
(−)(+) GR
BLU (+)(−) BLK

OUTPUT AMPLIFIERS

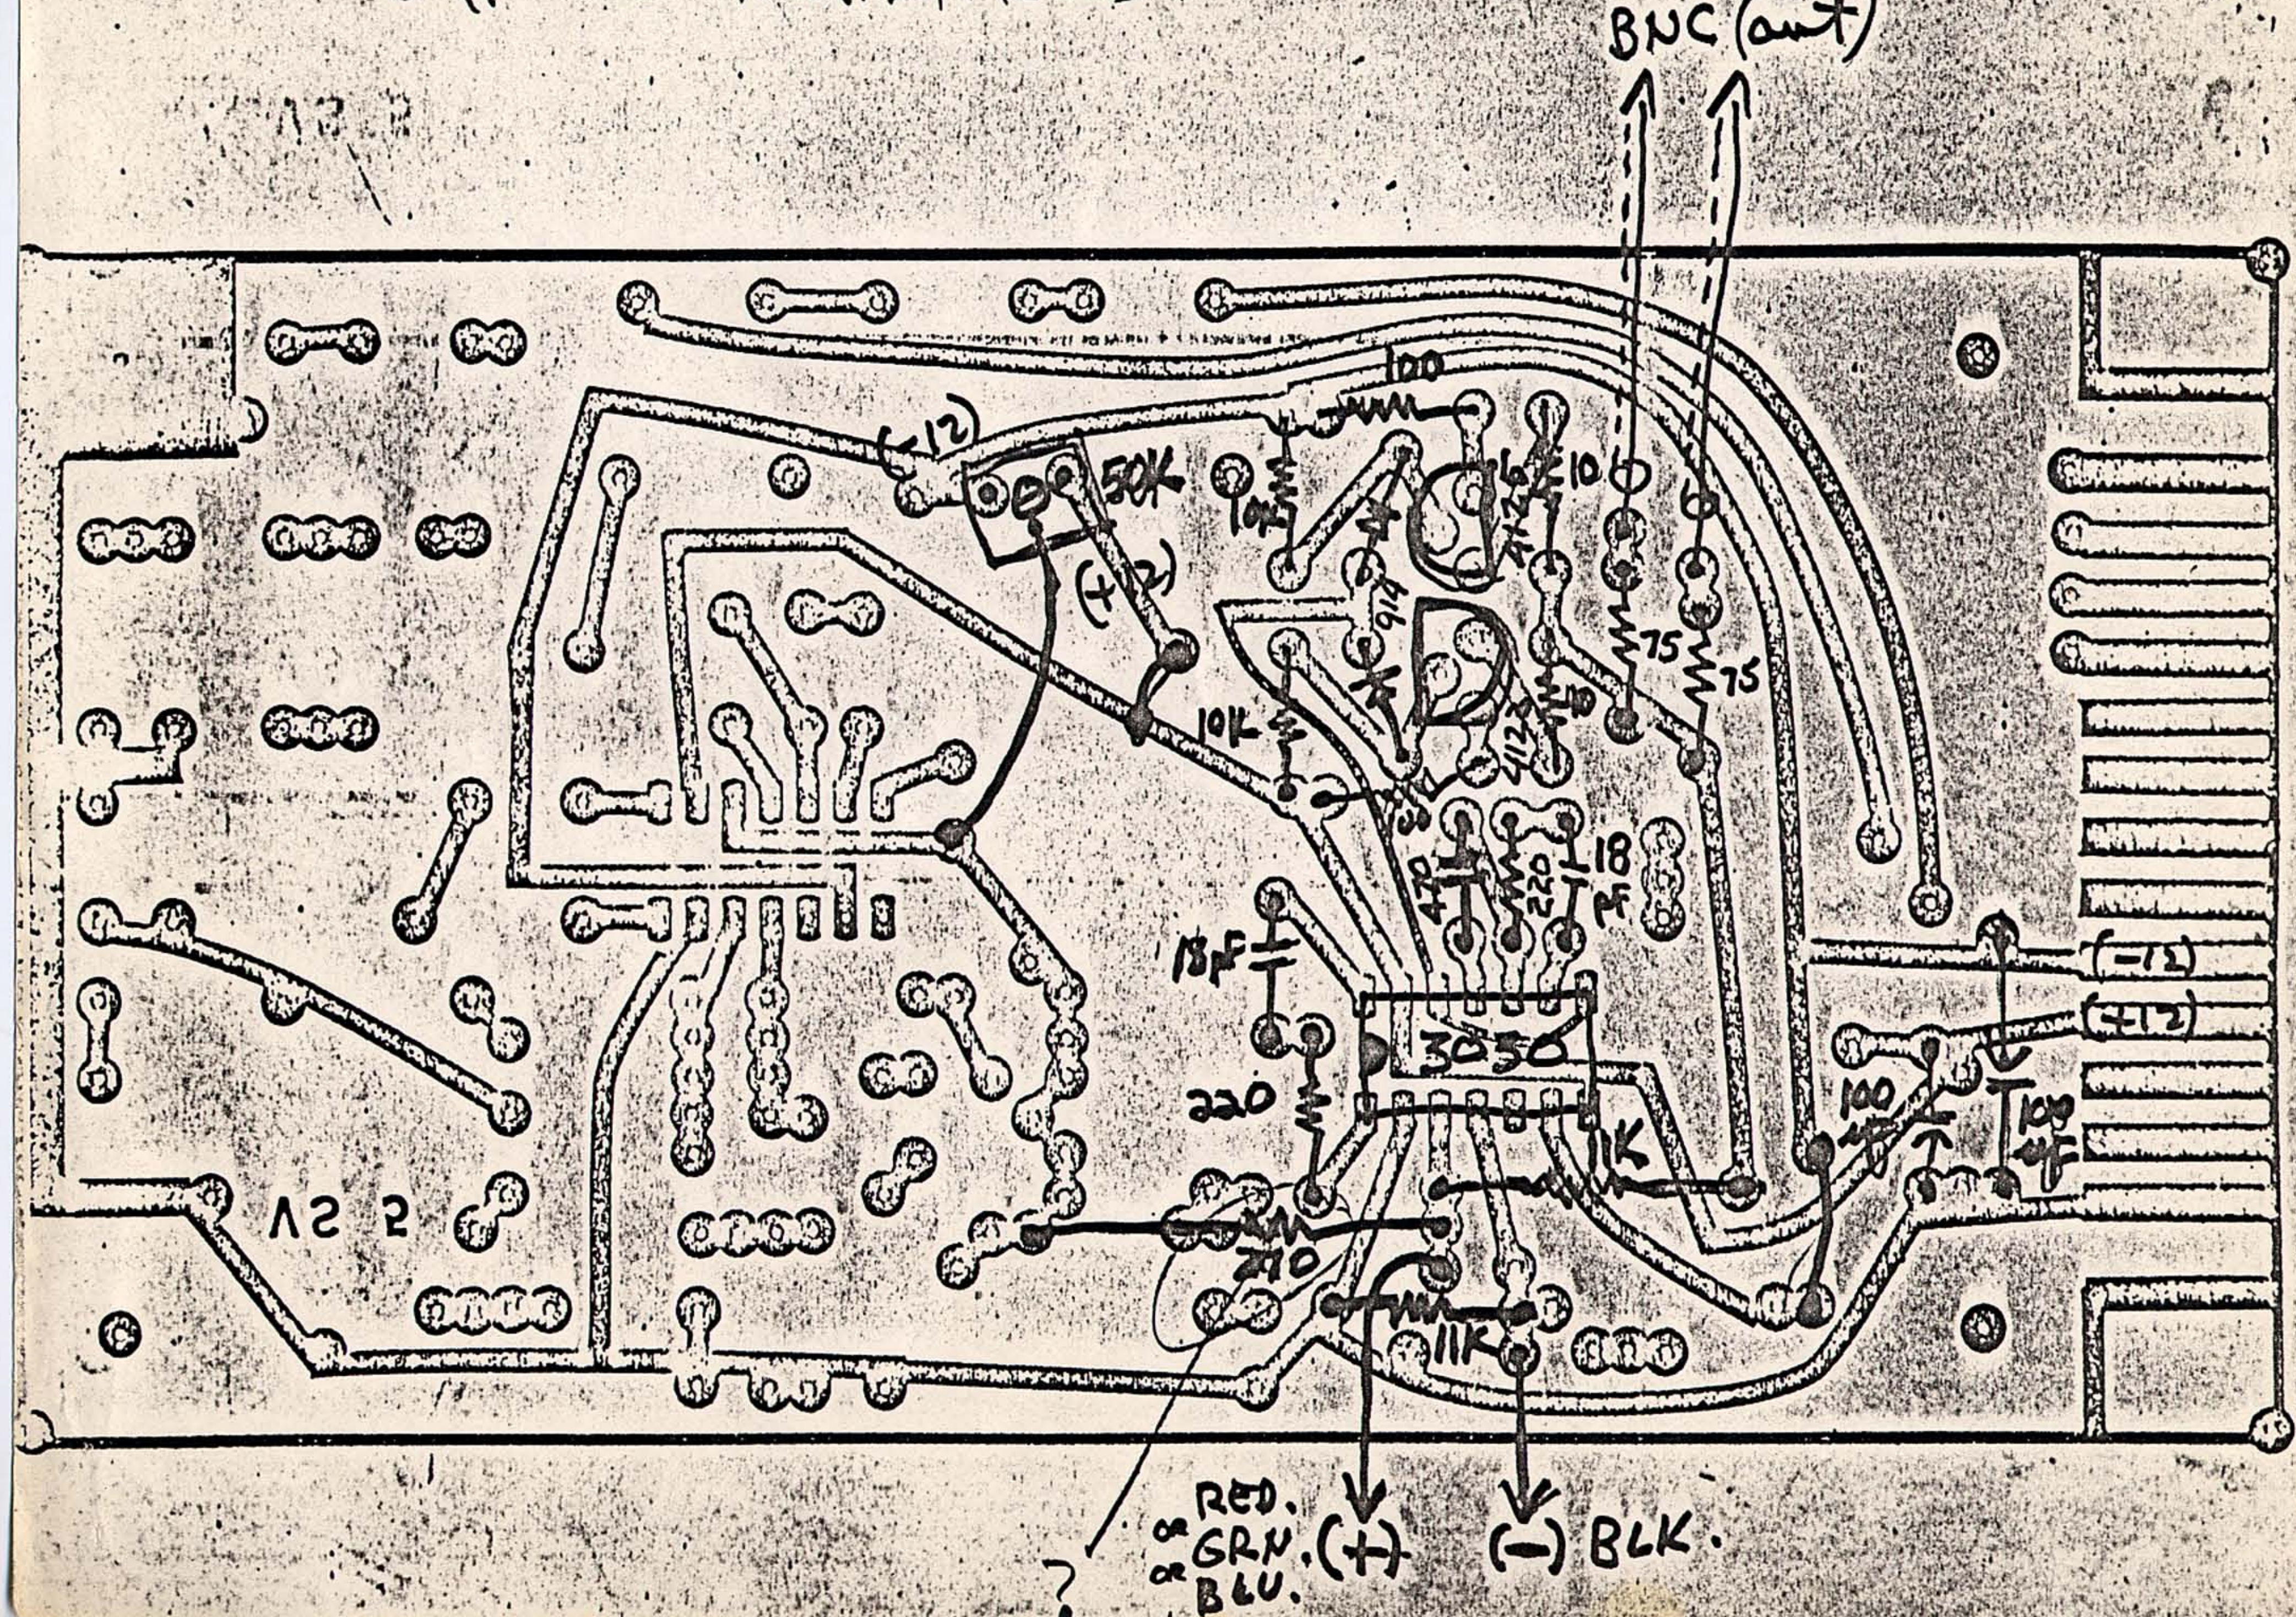
BNC (out)
100
(+12)
50K
10K
(−12)
914
4126
10
75
75
10
4123
10K
470
220
18 pF
18pF
3050
220
1K
100 µF
100 µF
(−12)
(+12)
1K
1K
270
or RED.
or GRN.
or BLU.
(+)
(−) BLK.
?

APROX. SUMMARY of TOTAL PARTS for **OUTPUT MIX MODULE**

≈50 - 100Ω POTS

12 - SLIDE POTS (MANY NEW TYPE) 3 MORE

70 - BNC

HARDWARE STAND-OFFS for 15 CARDS

12 - OUTPUT MIX CARDS ~~USING~~ VS10's

10 MORE FOR X-Y

3 - VS 5 ~~[illegible]~~ ~~4 75Ω RES's~~

1 ~~[illegible]~~ DIGITAL CARD

~~25 1445L~~

~~15 CA 3030~~

1)

2-7493P.

2) 8601

CAP. 8 µF 570Ω

2 1N270 GREEN DIODES

1 1N914.

150-75Ω RESISTORS

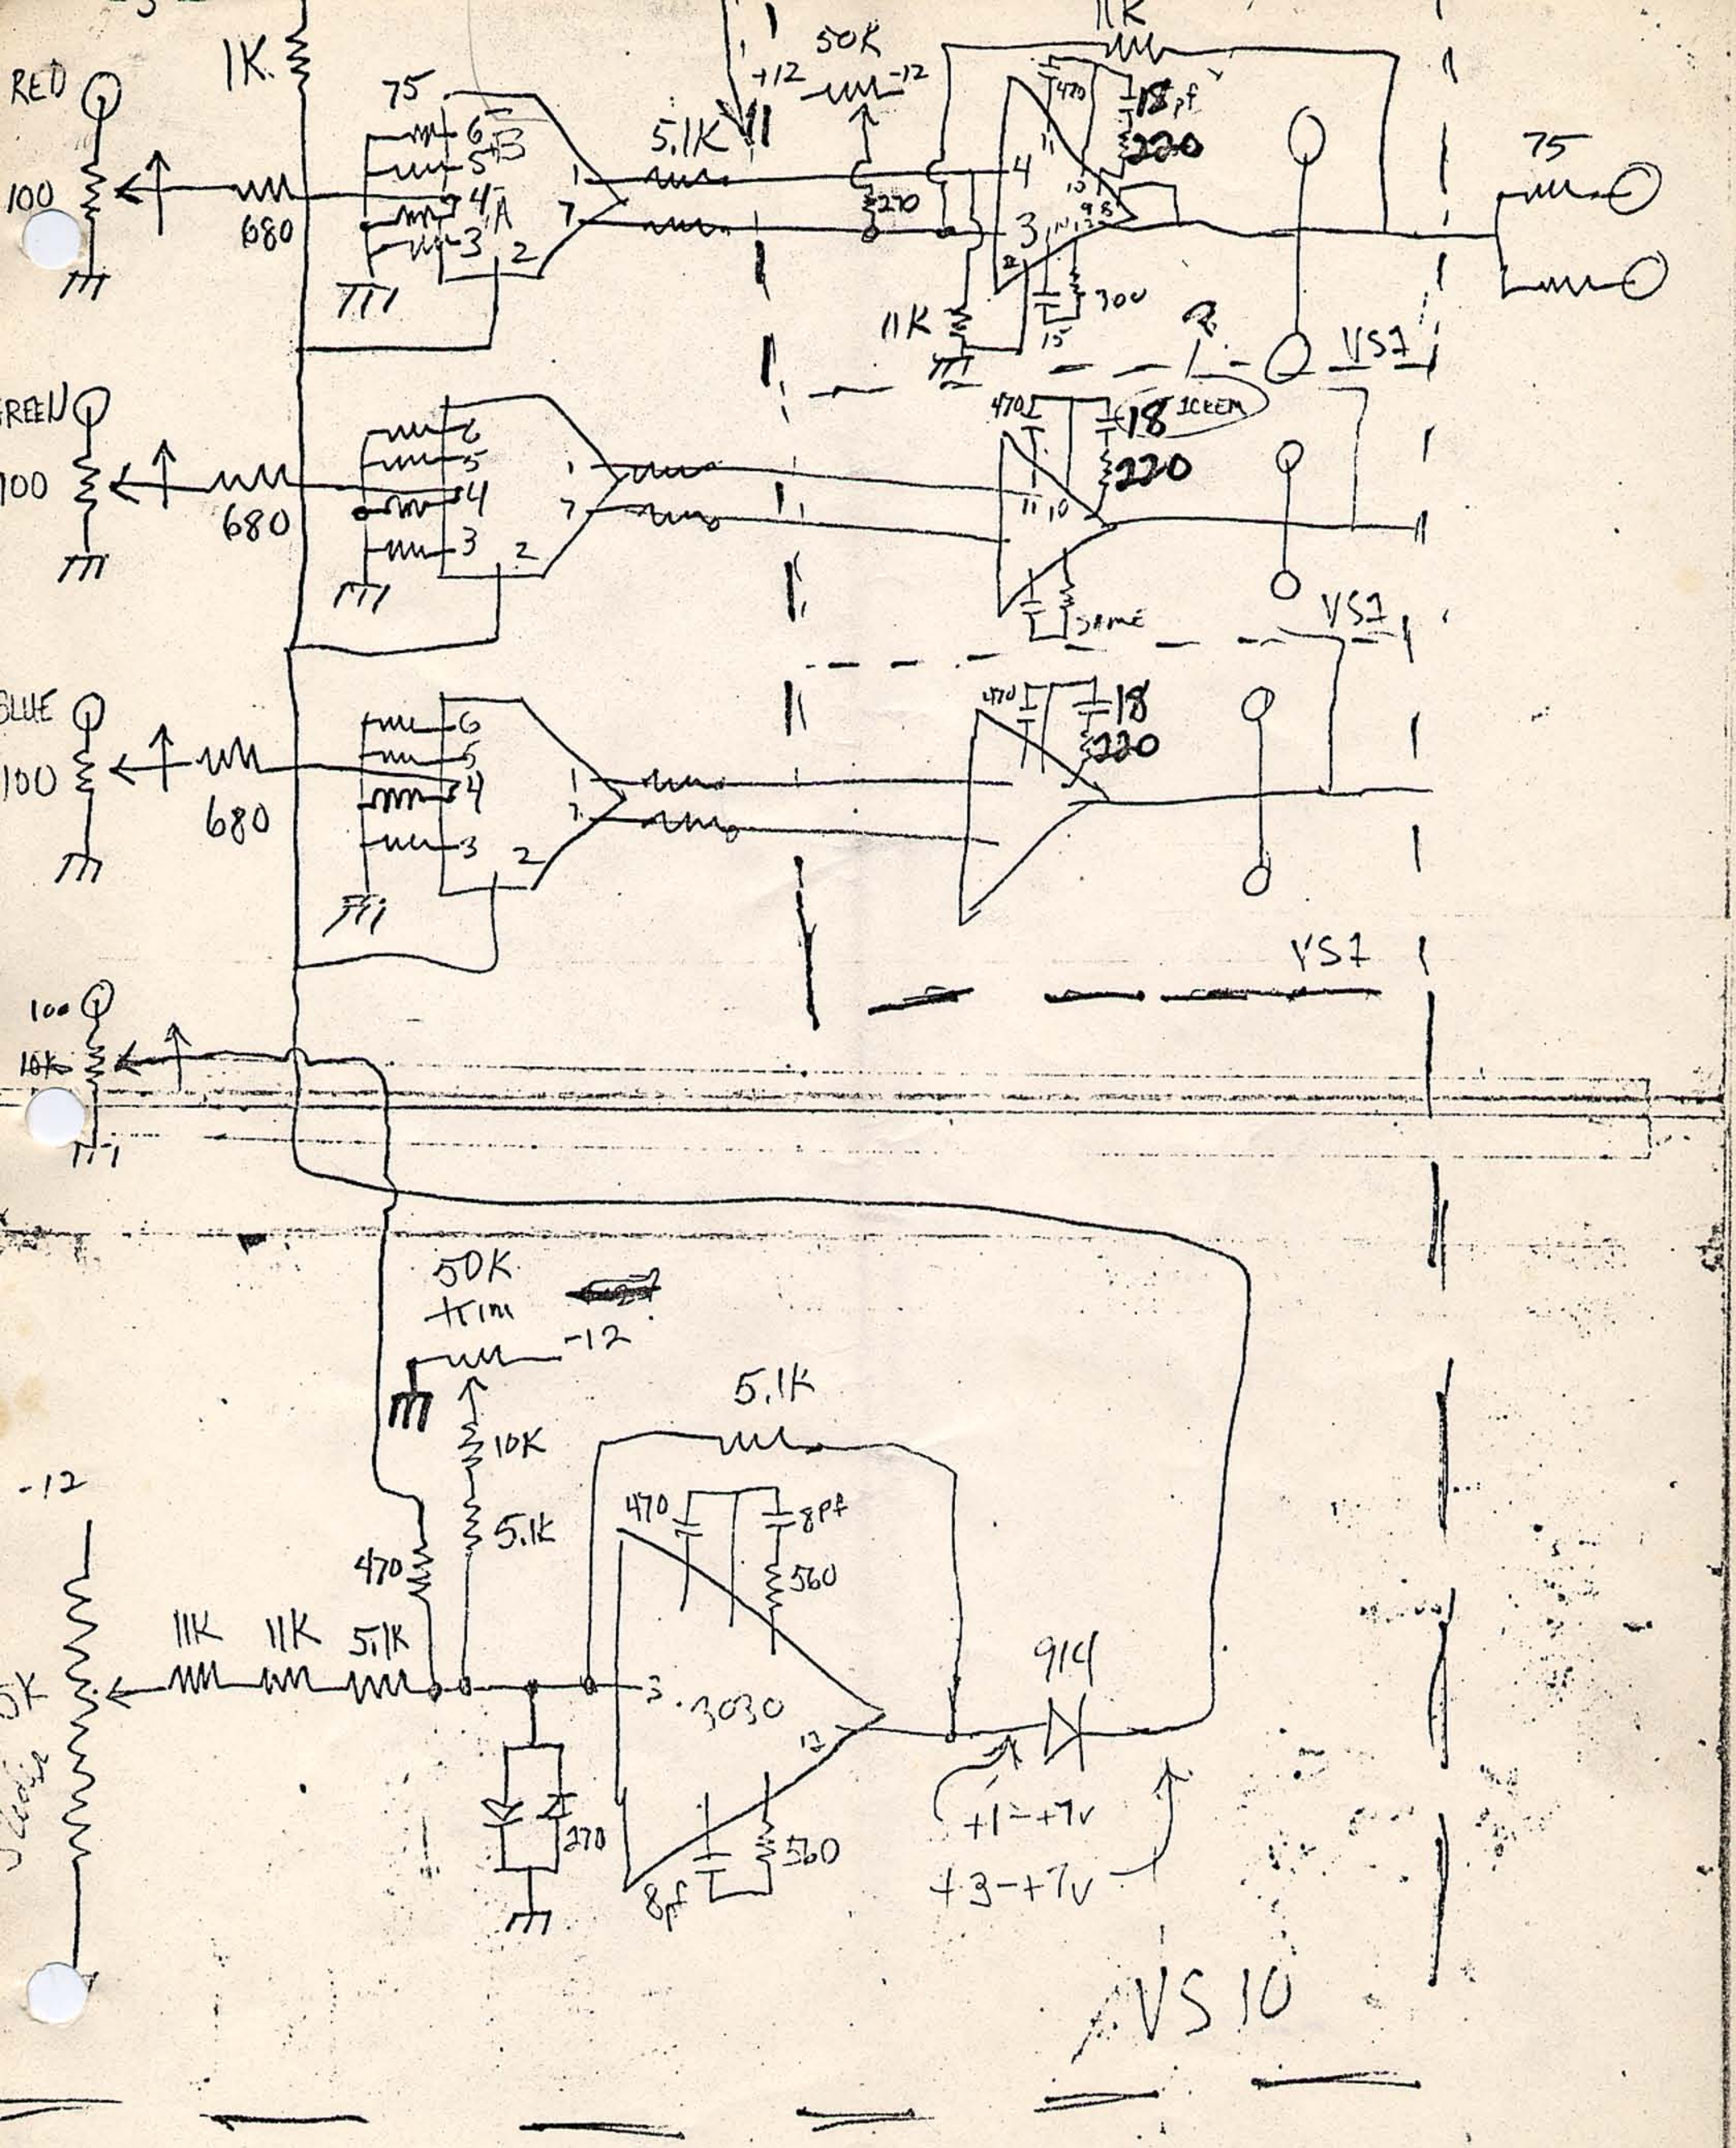
RED
GREEN
BLUE
100
680
1K
75
6
5
4
3
2
1
7
B
A
5.1K
50K
+12
-12
270
11K
470
18pf
220
300
15
VS1
ICEEM
SAME
10K
50K
trim
5.1K
470
11K
11K
5.1K
8pf
560
3030
914
270
+1-+7v
+3-+7v
VS10
-12
5K