



MIDDLE EAST TECHNICAL UNIVERSITY

DEPARTMENT OF
ELECTRICAL AND ELECTRONICS ENGINEERING

EE493 ENGINEERING DESIGN I

Car Chasing Robot Proposal Report

Supervisor: Assoc. Prof. Emre Özkan

ADDRESS

Project Start: 4/10/2018

Project End: 26/5/2019

Project Budget: \$450

Company Name : Duayenler Ltd. Şti.

Members	Title	ID	Phone
Sarper Sertel	Electronics Engineer	2094449	0542 515 6039
Enes Taştan	Hardware Design Engineer	2068989	0543 683 4336
Erdem Tuna	Embedded Systems Engineer	2617419	0535 256 3320
Halil Temurtaş	Control Engineer	2094522	0531 632 2194
İlker Sağlık	Software Engineer	2094423	0541 722 9573

November 9, 2018

This page intentionally left blank.

Contents

1	notes	4
1.1	specific requirements and objectives of the project	4
1.2	approach to the solution of the problem	4
1.3	outline of the requirements for any standards that the product would need to comply with,	4
1.4	deliverables and expected outcomes of the project,	4
1.5	tentative cost-budget analysis,	4
2	Executive Summary	4
3	Introduction	4
4	Our Team	5
5	Requirement Analysis	5
5.1	Pairwise Comparisons for Project Selection	5
5.2	Systems & Subsystems of Chosen Project	7
5.3	Solution Alternatives for Systems & Subsystems	8
5.3.1	Possible Solutions for Lane Detection Unit	8
5.3.2	Possible Solutions for Vehicle Detection Unit	9
5.3.3	Possible Solutions for Data Processing Unit	9
5.3.4	Possible Solutions for Controller Unit	9
5.3.5	Possible Solutions for Motors Unit	9
5.3.6	Possible Solutions for Wheels Unit	9
5.3.7	Possible Solutions for Speed Unit	9
5.3.8	Possible Solutions for Direction Unit	9
5.4	Design Option 1	9
5.5	Design Option 2	9
5.6	Design Option 3	9
5.7	Pairwise Comparisons for Solution Selection	9
6	Standards Section	11
7	Solution Procedure	11
7.1	Sensing Subsystem	11
7.1.1	Lane Detection Unit	11

7.1.2	Vehicle Detection Unit	12
7.2	Computation Subsystem	12
7.2.1	Data Processing Unit	12
7.2.2	Controller Unit	12
8	Expected Deliverables	13
9	Conclusion	13
	Appendix A Gannt Chart	14

1 notes

1.1 specific requirements and objectives of the project

1.2 approach to the solution of the problem

1.3 outline of the requirements for any standards that the product would need to comply with,

1.4 deliverables and expected outcomes of the project,

1.5 tentative cost-budget analysis,

2 Executive Summary

3 Introduction

Driving is a common event that many people experience in their daily life. As time passes, human reflexes started to become insufficient for driving compared to fast pace of daily life in modern world. Together with the developments in the technology, new solutions are proposed to assist the driver such as lane tracking and emergency breaking systems. The ultimate version of such solutions are considered to be fully autonomous self-driving cars.

Self-driving vehicles are presented to the society as a solution that can facilitate people's life in many ways. Fast operation of the electronics system allows faster response than humans can. A fast and reliable operation of self-driving action can prevent many accidents and increase the safety of the roads in heavy traffics since the system is immune to human defects such as distraction and panic. As a result, autonomous vehicles can open doors to a safer and more conventional future.

DUAYENLER Ltd. Şti. is launched with the aim of innovating automation technologies. In that context, a device that can detect the road and other vehicles on them will be built. It autonomously track the lane and stay on the road while trying to as fast as possible.

This report includes;

- organization of the company by explaining of the qualifications of the members.
- Requirements for physically realizing the intended vehicle
- Possible solutions in system and subsystem levels by explaining their operations
- Timeline and cost of the project
- Expected deliverables from the project

4 Our Team

DUAYENLER Ltd. Şti. (DUAYENLER) was founded in September 2018 by five electrical and electronics engineering students from Middle East Technical University. The company structure is shown in *Figure 1*. The team is composed of variously skilled visionary members. The leader of the team is Halil Temurtaş, a control engineer. Being the team leader, Halil manages the organization of the members as well as drawing an outline for the future calendar. He is experienced in using microcontrollers, device testing and project scheduling. He will be working on the development of the subsystems computation, motion and driving in parallel with his experiences. Sarper Sertel, electronics engineer, has a wide understanding of microelectronics circuits and their design as well as analog lumped circuits. He is also interested in mechanical systems. He will be working on structure, driving and sensing subsystems. Enes Taştan, hardware design engineer, is interested in several topics such as electronics and mechanics. He can also design PCBs. He will be participating to development of driving, motion and structure subsystems. Erdem Tuna, embedded systems engineer, is experienced in use of microcontrollers with sensors and likes programming. He will be contributing in computation and sensing subsystems. Lastly İlker Sağlık, software engineer, is also interested in programming and microcontrollers. He will be working on sensing and driving subsystems.

5 Requirement Analysis

5.1 Pairwise Comparisons for Project Selection

Pairwise comparisons technique can be use to assess objectives of the project. Then, these objectives can be very useful as the desired project is selected out of all potential

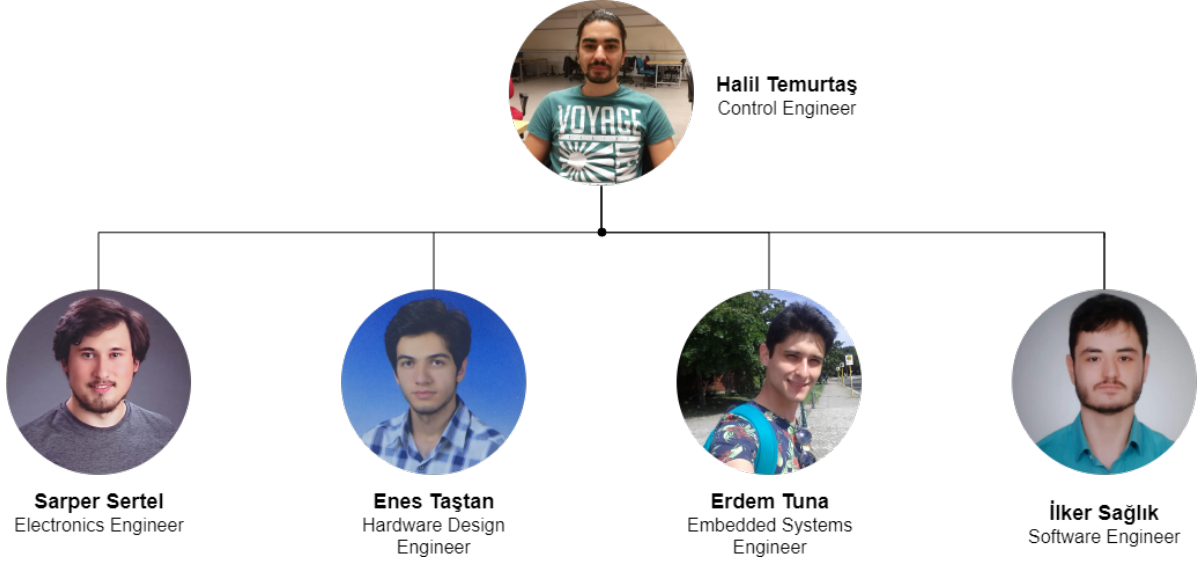


Figure 1: Company Tree of DUAYENLER.

project. For this purpose, tables at *Figures 2,3* is created by consensus of all project-pairs. The weighted objectives are then used to construct the weighted objective tree at *Figure 4*.

	Having Fun	Competition	Original Solution	Budget	Mechanical Challenges	Complexity	Marketability	Total	Weighted Objectives
Having Fun	0	0,5	0,75	0,8	0,9	0,6	0,8	4,35	0,2
Competition	0,5	0	0,7	0,7	0,5	0,75	0,8	3,95	0,2
Original Solution	0,25	0,3	0	0,6	0,7	0,55	0,8	3,2	0,16
Budget	0,2	0,3	0,4	0	0,2	0,3	0,8	2,2	0,1
Mechanical Challenges	0,1	0,3	0,3	0,8	0	0,3	0,8	2,6	0,12
Complexity	0,4	0,25	0,45	0,7	0,7	0	0,8	3,3	0,16
Marketability	0,2	0,2	0,2	0,2	0,2	0,2	0	1,2	0,06
								20,8	1

Figure 2: Pairwise Comparison Charts

	Having Fun (0.2)	Competition (0.2)	Original Solution (0.16)	Budget (0.1)	Mechanical Challenges (0.12)	Complexity (0.16)	Marketability (0.06)	Total
Balloon Catching	8	10	6	4	0	2	6	5,28
Air Hockey	1,6	2	0,96	0,4	0	0,32	0,36	
Chasing Cars	8	8	4	8	2	6	8	5,84
Mapping Robot	1,6	1,6	0,64	0,8	0,24	0,96	0,48	
	10	8	8	6	6	8	10	7,48
	2	1,6	1,28	0,6	0,72	1,28	0,6	
	4	4	8	2	8	0	6	4,04
	0,8	0,8	1,28	0,2	0,96	0	0,36	

Figure 3: Project Evaluation Chart

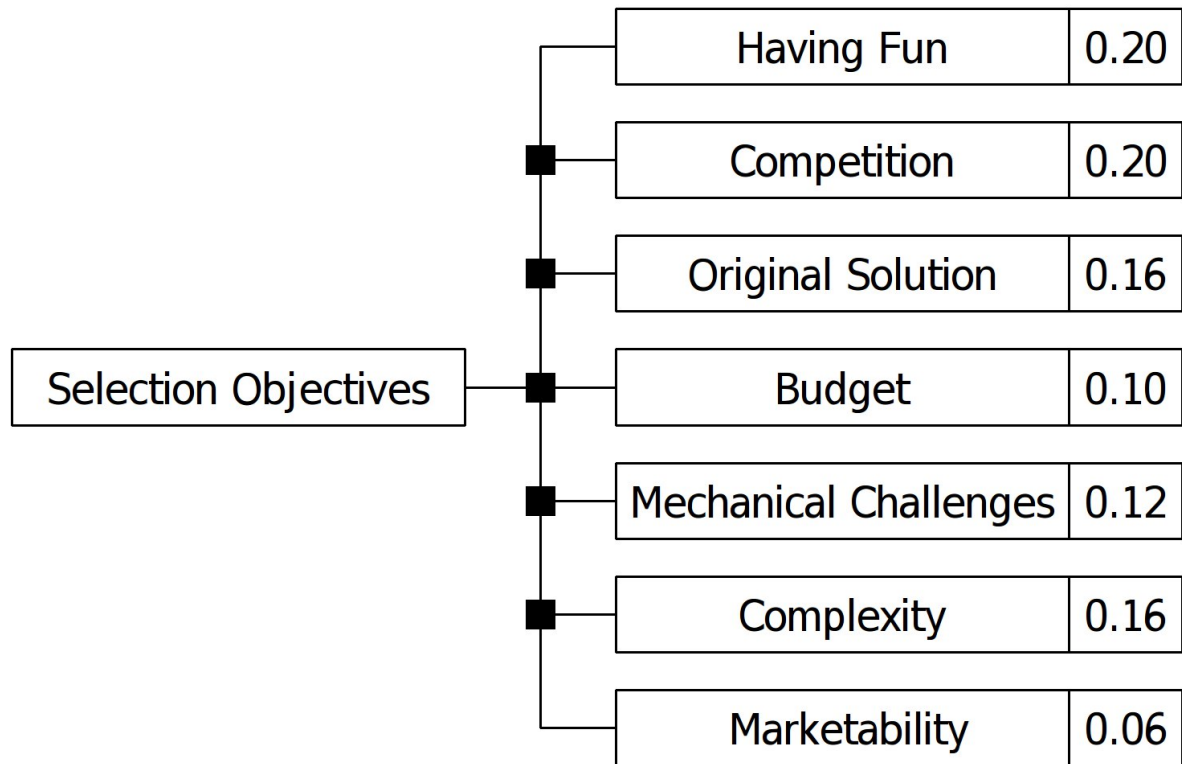


Figure 4: Weighted Objective Tree

5.2 Systems & Subsystems of Chosen Project



Figure 5: System Diagram for the Chosen Project

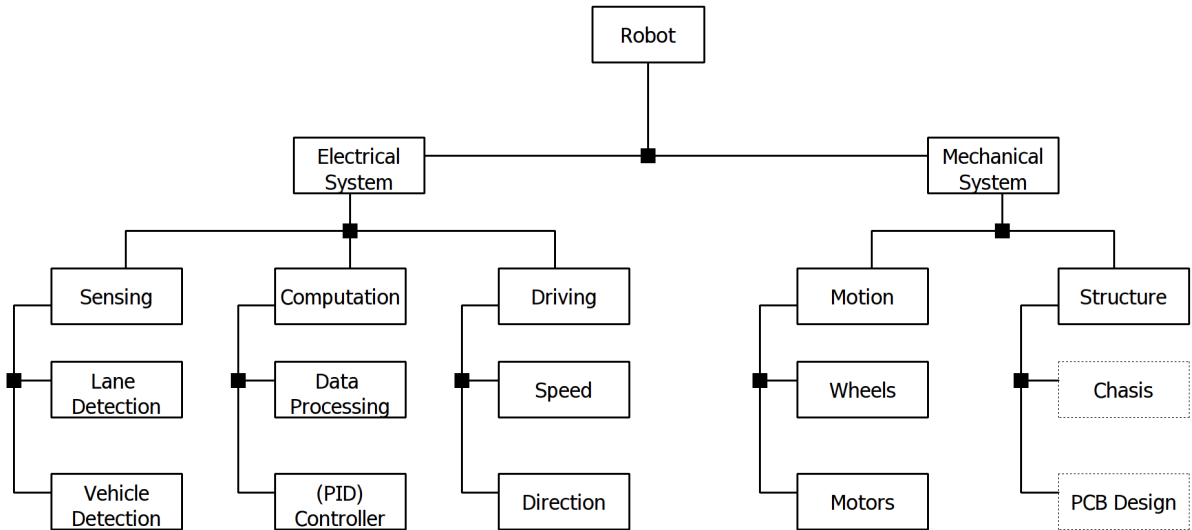


Figure 6: Systems & Subsystems of Chosen Project

5.3 Solution Alternatives for Systems & Subsystems

5.3.1 Possible Solutions for Lane Detection Unit

- 1.

5.3.2 Possible Solutions for Vehicle Detection Unit

5.3.3 Possible Solutions for Data Processing Unit

5.3.4 Possible Solutions for Controller Unit

5.3.5 Possible Solutions for Motors Unit

5.3.6 Possible Solutions for Wheels Unit

5.3.7 Possible Solutions for Speed Unit

5.3.8 Possible Solutions for Direction Unit

5.4 Design Option 1

5.5 Design Option 2

5.6 Design Option 3

5.7 Pairwise Comparisons for Solution Selection

	Fast Operation	Robust	Weight Balance	Total	Weighted Objectives	Weighted Objectives
Fast Operation	0	0,55	0,4	0,95	0,32	0,144
Robust	0,45	0	0,5	0,95	0,32	0,144
Weight Balance	0,6	0,5	0	1,1	0,36	0,162
				3	1	0,45

Figure 7: Pairwise Comparison Charts for Sub-Objectives

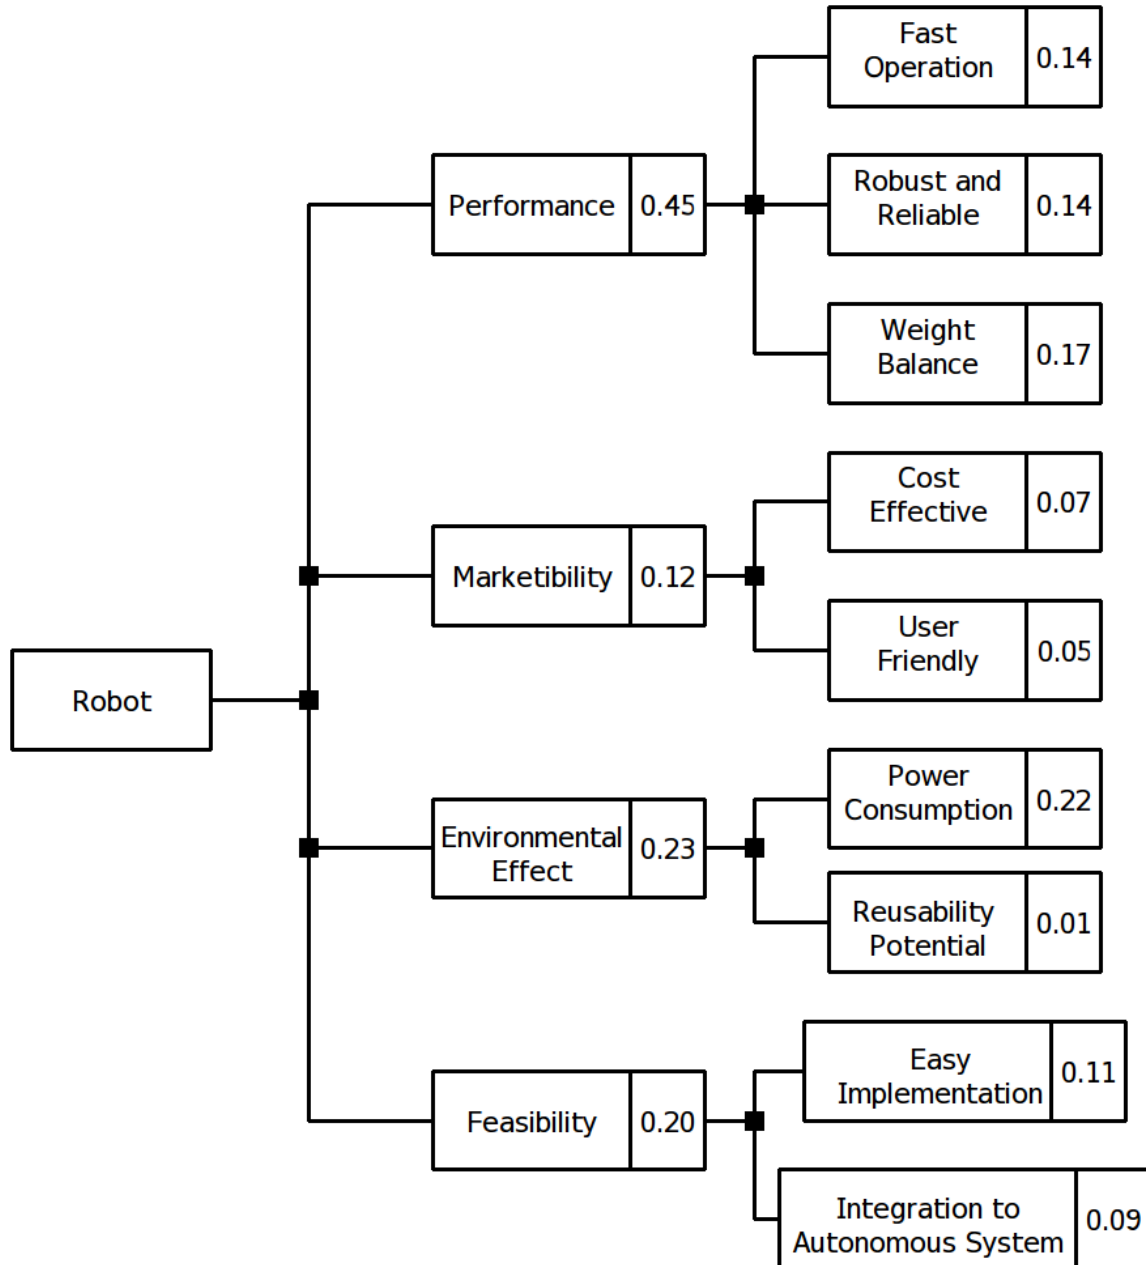


Figure 8: Weighted Objective Tree

	Fast Operation (0.14)	Robust and Reliable Operation (0.14)	Weight Balance (0.17)	Cost Effective (0.07)	User Friendly (0.05)	Power Consumption (0.22)	Reusability Potential (0.01)	Easy Implementation (0.11)	Integration to Autonomous Systems (0.09)	Total
Design 1	8 1,12	4 0,56	4 0,68	10 0,7	6 0,3	8 1,76	6 0,06	8 0,88	4 0,36	58 6,42
Design 2	10 1,4	6 0,84	6 1,02	8 0,56	8 0,4	6 1,32	6 0,06	6 0,66	6 0,54	62 6,8
Design 3	8 1,12	10 1,4	8 1,36	6 0,42	8 0,4	4 0,88	6 0,06	4 0,44	10 0,9	64 6,98

Figure 9: Pairwise Comparison Charts for Solution Selection

6 Standards Section

7 Solution Procedure

7.1 Sensing Subsystem

This unit has two main tasks which are observing lane and another vehicle on the path.

7.1.1 Lane Detection Unit

To solve this problem, path and environmental differences, such as color difference, contrast difference could be used. In addition to these, image processing could be an alternative to detection of lane and vehicle. Infrared sensors can be used to solve lane detection problem. Line follower vehicle logic can be implemented to this problem, by placing two sensor arrays to both sides of the path to align vehicle at the center. Sensors gives current proportional to reflection of the surfaces. By using such outputs, an algorithm to be developed to track the path on the center.

Another approach to detect the lane is using camera and image processing. Camera can be placed at an angle to see the path, and by using the raspberry pi, the path can be followed. To clarify, captured frames can be analyzed by the raspberry pi, and utilizing open source image processing libraries. An example analysis can be summaries as follows: Firstly, distortions in the image can be beautified, and then color thresholding can be applied to sharply detect the elevated path. Optionally, to increase accuracy of the detection, Canny edge detection can be used. Lastly, center line can be calculated by using processed image.

Color sensor can be utilized as an alternative for image processing. Color sensors basically senses the color with the help of 8x8 array of photodiodes and generates a PWM signal whose duty cycle is proportional to the light intensity. For example, if the elliptic path is red, we can give the s2 and s3 pins of the sensor low voltage, we activate the red photodiodes and we can use the Arduino command to measure the on or off time of the generated PWM signal. When the robots are out of the path, the output duty cycle of the sensor will significantly decrease, so this information can be used to keep the robots in the path. However, using color sensors can be problematic, because of their size and slow operation.

7.1.2 Vehicle Detection Unit

The detection of the opponent can be implemented using distance sensors. In order to stop the robot when it catches the opponent, or it is caught, a sensor must be placed at the front and the back. The most common distance sensors are ultrasonic, infrared and laser sensors.

Ultrasonic sensors have acceptable range. They send a sound wave and take back the echo, then give a PWM voltage related to the distance. However, using ultrasonic sensors can cause problems if the opponent also uses ultrasonic sensors; because of the interference. Besides, when measurement is angled, measuring is failing.

Infrared sensors can be another approach to this problem, they may provide better accuracy. Moreover, Laser distance measurement can be applied to solve this problem. They have the best accuracy, but their price is the highest among the rest.

7.2 Computation Subsystem

Functionality of computation subsystem will be presented in this section.

7.2.1 Data Processing Unit

This unit is the main algorithm application level. Data from sensor will be aggregated in this unit and will be pre-processed. Then, processed data will be output to the controller unit. Processing will mainly be done using Arduino and Raspberry Pi (if used). Suitable algorithms will be developed to realize desired operations with the controller unit


7.2.2 Controller Unit

Mathematical models will be implemented in this unit to realize controllers such as P, PI, PID. The output of the controller unit will be sent to driving subsystem. This output will be the ultimate decision to realize a desired operation according to the data sent from sensor.

8 Expected Deliverables

9 Conclusion

A Gantt Chart

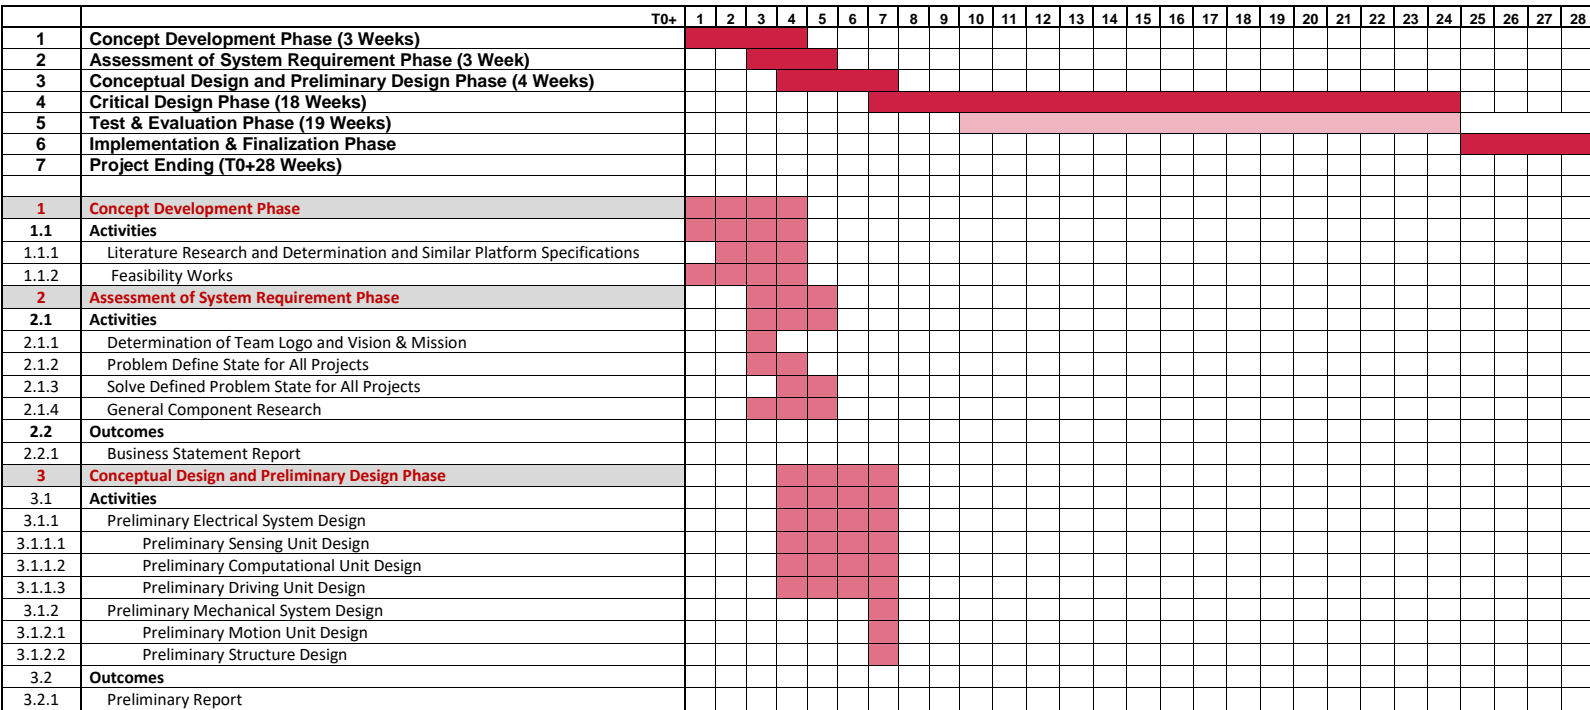

		T0+	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
4	Critical Design Phase																													
4.1	First Semester																													
4.1.1	Electrical System Design																													
4.1.1.1	Sensing Unit Design																													
4.1.1.2	Computational Unit Design																													
4.1.1.3	Driving Unit Design																													
4.1.2	Mechanical System Design																													
4.1.2.1	Motion Unit Design																													
4.1.2.2	Structure Design																													
4.1.3	To be detailed																													
4.2	First Semester Outcomes																													
4.2.1	Standards Report																													
4.2.2	Module Test Demo																													
4.2.3	Conceptual Design Report																													
4.2.4	Presentations																													
4.3	Second Semester																													
4.3.1	To be detailed																													
4.4	Second Semester Outcomes																													
4.4.1	Critical Design Review Report																													
5	Test & Evaluation Phase																													
5.1	First Semester Activities																													
5.1.1	To be detailed																													
5.2	First Semester Outcomes																													
5.2.1	To be detailed																													
5.3	Second Semester Activities																													
5.3.1	To be detailed																													
5.4	Second Semester Outcomes																													
5.4.1	Critical Design Review Report																													
6	Finalization Phase																													
6.1	Activities																													
6.1.1	To be detailed																													
6.2	Outcomes																													
6.2.1	Finalized Product																													
6.2.2	Final Report																													
6.2.3	Final Demo																													
7	Project Ending																													