SUPERCITY

Sealed Aircraft Battery, VRLA, LT Technology, 12V, 24Ah



SPECIFICATIONS					
Model	7025-24				
Nominal Voltage, V			12		
One Hour Capacity, C1, Ah			24.2		
30 Minute Emergency Rate, C/2, A			33		
Weight, Lb. Maximum			23.40		
Power Performance	23°C (74°F)	-18°C (0°F)	-30°C (-22°F)		
lpp, A	1100	725	500		
lpr, A	825	550	400		



Upgrade to the Next Generation of Lead-Acid Technology!

✓TSO Authorized ✓DO-160E Tested ✓Sealed, VRLA, Non-Spillable

✓18 Month/1800 Hour Capacity Check Inspection






7025-24 **AVAILABLE NOW AT DISTRIBUTORS**



7.722 [196] 5.926 [151]	1
	7.022 [178]
 7.466 [190]	

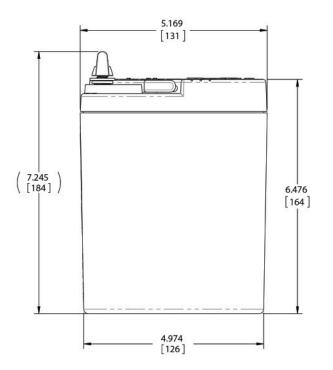

FAA-PMA		
MAKE	MODEL	
Alexandria	17-30, 17-30A, 17-31, 17-31A, 17-31TC, 17-31ATC	
American Champion	7ACA, 7EGA, 7GCBC	
Beechcraft	19A, B19, 23, A23, A23A, B23, C23, A24, A24R,	
	B24R, C24R, E33, E33A, E33C, F33, G33,	
	35-33, 35-A33, 35-B33, 35-C33, 35-C33A,	
	D-55, D55A, E55, E55A, 58, 58A, 58P, 58TC,	
	G58, 77, 95, B95, B95A, D95A, E95, 95-55,	
	95-A55, 95-B55, 95-C55, 95-C55A	
Cessna	120, 140, 150, 150A, 150B, 150C, 150D, 150E,	
	150F, 150G, 150H, 150J, 150K, 150L, 150M,	
	A150K, A150L, A150M, 170, 172, 172B, 172C,	
	172D, 172E, 172F (USAF T-41A), 172G,	
	172H (USAF T-41A), 172I, 172K, 172L, 172M,	
	172N, F172D, F172E, F172F, F172G, F172H,	
	F172K, F172L, F172M, F172N, 175, 175B, 175C,	
	P172D, 177, 177A, 177B, 188, 188A, 188B, T188C,	
	310, 310B, 310C, 310D, 310F, 310G, 310H,	
	E310H, 310I, 310J, 310J-1, E310J, 310K, 310P,	
	310Q, 320, 340	
Commander	112, 112TC, 112B, 112TCA	
Piper	PA-11, PA-22-108, PA-22-135, PA-22-150,	
	PA-22-160, PA-23-235, PA-23-250,	
	PA-28-140, PA-28-150, PA-28-151, PA-28-160,	
	PA-28-161, PA-28-180, PA-28-181, PA-28-201T,	
	PA-28-235, PA-28-236, PA-28R-180,	
	PA-28R-200, PA-28RT-201, PA-28RT-201T,	
	PA-32-260, PA-32-300, PA-32R-300,	
	PA-32RT-300, PA-32RT-300T, PA-36-285,	
	PA-36-300, PA-36-375, PA-38-112	
Socata	GA-7	
True Flight	AA-1, AA-1A, AA-1B, AA-1C, AA-5, AA-5A, AA-5B	

No STC's or modifications required for any of the models listed