MASONRY UNITS & BLOCKS
SIZE & SHAPE GUIDE

PREMIER
CONCRETE PRODUCTS

INDUSTRY LEADING

CUSTOMER SERVICE...

4" UNITS



Regular
#200



Single Bullnose
#230



Double Bullnose
One End
#231



Double Bullnose
One Side
#231



Single Score
#202



SBN
& DBN
Available

Half
#220



Solid
#290

Split Face
#260



Split Face
Single Score
#261



Split Face
Return Corner
#270



Split Face Return
Corner Single Score
#271

[THICKNESS] X [HEIGHT] X [LENGTH]

SERVICING THE
GULF SOUTH REGION

6” UNITS



Regular w/Sash
#300



Square End Regular
#300



Solid Bottom Lintel
#312



Single Bullnose
#330



Double Bullnose One End
#331



Double Bullnose One Side
#331



Single Score
#302



Half w/ Sash
#320



Split Face
#360

BENEFITS

- Available in lightweight and heavyweight (normal weight) mix designs.
- Manufactured to meet the latest ASTM C-90, exceeding 2,000 PSI.
- Manufactured in dozens of different colors.
- We own a fleet of tractor trailers equipped with forklifts for site deliveries, 6 days a week.

Regular w/Sash
#400



Square End Regular
#400



Solid Bottom Lintel
#412



Restricted Bond Beam
#414



Conduit w/ Knockout Webs
#416



Single Bullnose
#430



Double Bullnose One End
#431



Double Bullnose One Side
#431



Stand Up Deep U
#476

4-Hour Rated
#418



Half High
#410

Regular Single Score
#402

Header
#440



Half with Sash
#421

Half Single Bull Nose
#421

Half Double Bull Nose
#422

DRY BLOCK AVAILABLE IN ALL MASONRY UNITS

Premier Concrete's Dry Block are tested through a rigorous Water Repellancy testing to ensure minimum permeation. Blocks are tested to withstand a Wind Driven Rain up to 80 mph.

Please consult your local salesperson to ensure your project is ready to handle the extreme weather.

8” SPLIT FACE



Split Face
#460

Split Face Single Score
#461

Split Face Solid Bottom Lintel
#465

Available Scored



Split Face Restricted Bond Beam
#463



Split Face Corner
#470



Split Face Corner Single Score
#471

Split Face Half
#467

Split Face 8-Half
#477

CONFIGURATIONS

4” Unit Configurations

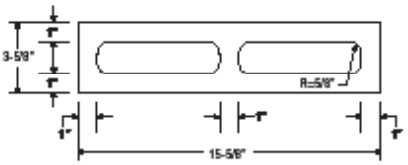

6” Unit Configurations

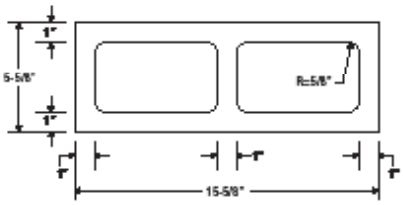

8” Unit Configurations

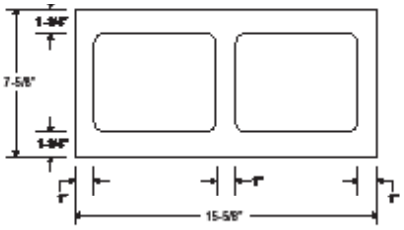

12” Unit Configurations

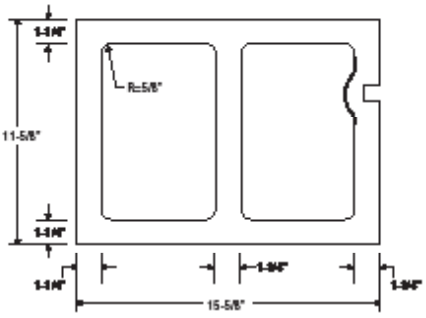

12” UNITS



Regular w/Sash
#600



Square End Regular
#600



Solid Bottom Lintel
#612



Restricted Bond Beam
#614



Conduit Block w/ Knockout Webs
#616



Single Bullnose
#630



Double Bullnose One End
#631



Double Bullnose One Side
#631



Single Score
#602

Half w/ Sash
#620



Split Face
#600



Split Face Single Score
#661



Split Face Lintel Restricted Bond Beam
#663

Split Face Half
#667

8 Flute Split Face
#677

Split Face Lintel Open / Solid Bottom
#665

NOTES:

MOBILE HOME | **FOUNDATION BLOCK**

MOBILE HOME BLOCK



1 5/8 x 8 x 16
Solid



2 1/4 x 8 x 16
Solid



4 x 8 x 16
Solid



16 x 4 x 16
Full Pad



8 x 8 x 16
Regular

FOUNDATION BLOCK

8 x 8 x 8

Utility Brick
2 x 4 x 8

6 x 8 x 16

8 x 8 x 16

Jumbo Brick
4 x 4 x 8

POROUS PAVEMENT

Dimensions: 24”L x 16”W x 4”H
Sq. Ft. Per Paver: 2.67 Sq. Ft. per Paver
Pavers Per Pallet: 40 pieces / pallet
Sq. Ft. Per Pallet: 107 Sq. Ft. Per Pallet

Porous Pavement
#C140

REDI-DEK BLOCK

11” Base x 7.25” High x 8” Top
Dek Block #C005

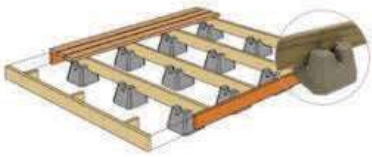

JUMBO V LOCK BLOCK - PRECAST

24” x 24” x 72”
Approximately 3500 lbs
Jumbo V-LOCK BLOCK
#X110

NOTES:

PARKING BUMPERS - PRECAST

Length: 72”
Width: 8”
Height: 5”
Weight with Forklift Grooves: 180 lbs.
Weight Flat Bottom: 200 lbs.
Pallet Quantity: 20 units

Grooves
#X100

Flat
#X101

COMPACS & CAPS - RETAINING WALLS

Compac Units
Split Face Angle Face
18”L x 12”D x 8”H
#K510

Compac Units
Split Face Straight Face
18”L x 12”D x 8”H
#K520

Universal Caps
Split Face Straight Face
18”L x 10.5”D x 4”H
#K300

TEN MOST COMMON PRODUCTS

PRODUCT ID	PRODUCT DESCRIPTION	UNIT PER PALLET	UNIT WEIGHT (LBS)	PALLET PER TRUCK W/LIFT	PALLETS PER TRUCK NO LIFT
L400	8 x 8 x 16 Standard LW	90	30	14	16
C400	8 x 8 x 16 Standard S&G	90	38.5	11	13
L440	8 x 8 x 16 Header	90	24.5	17	19
L460	8 x 8 x 16 Split Face Standard	90	33.5	13	15
L600	12 x 8 x 16 Standard LW	60	44	15	17
C003	2 x 4 x 8 Utility Brick	595	4.5	14	16
L290	4 x 8 x 16 Solid S&G	120	30.4	10	12
C002	16 x 4 x 16 Full Pads S&G	54	60	12	14
C441	8 x 8 x 8 Foundation	90	35	12	14
K510	Compac III Angle Face Split Face	32	77	16	18

IN HOUSE TESTING LAB

Our company strives for the best achievable quality.

Our in-house testing lab is equipped with top of the line Forney testing equipment.

Our certified QA/QC employees perform numerous tests on a daily basis to verify mixed designs meet ASTM standards.

Compressive Strength of Concrete Masonry (PSI*)

Comment: ASTM C-90 is the standard of masonry production specifications in the United States. With the approval of ACI-530, 1-88 specifications and the issue of ASTM c-90-91, there is one major specification change to note. In the past, block compressive strength (psi) in the past, block compressive strength (psi) was based on gross area requiring an average 1000 psi. The strength requirements have not changed but the measurements have. All new specifications now are based on net area of 1900 psi.

To assist you in calculating the net area, please follow the formula below.

Given the gross area compressive strength, you may determine the net area by knowing:

(1) percent solids of unit, or
(2) equivalent thickness of unit

Gross Area to Net Area Conversion

*Based on average of 3 units 4" height and above

Example: 8" cmu with a known 1100 psi gross area at 52% solids.

$$\frac{\text{Compressive Strength (Gross Area)} \times 100}{\text{(\%) Percent Solids}} = \text{Compressive Strength (Net Area)}$$

$$\frac{1100 \text{ psi}}{52\%} \times 100 = 2115 \text{ psi}$$

Example: 8" cmu (7.625 actual size) with a known 1100 psi gross area with an equivalent thickness of 4.0".

$$\frac{\text{Compressive Strength (Gross Area)}}{\text{Equivalent Thickness}} \times \text{Actual Thickness} = \text{Compressive Strength (Net Area)}$$

$$\frac{1100 \text{ psi}}{4.0} \times 7.625 = 2097 \text{ psi}$$

Block manufacturers have gross-area psi data as well as solids and equivalent strength numbers. Most will have the net-area compressive strength psi with future test results.

C 90 – 12

TABLE 2 Strength, Absorption, and Density Classification Requirements

Density Classification	Oven-Dry Density of Concrete, lb/ft^3(kg/m^3)	Maximum Water Absorption, lb/ft^3(kg/m^3)		Minimum Net Area Compressive Strength, lb/in^2(MPa)	
	Average of 3 Units	Average of 3 Units	Individual Units	Average of 3 Units	Individual Units
Lightweight	Less than 105 (1680)	18 (288)	20 (320)	1900 (13.1)	1700 (11.7)
Medium Weight	105 to less than 125 (1680–2000)	15 (240)	17 (272)	1900 (13.1)	1700 (11.7)
Normal Weight	125 (2000) or more	13 (208)	15 (240)	1900 (13.1)	1700 (11.7)

CONCRETE MASONRY UNITS FIRE RATING

Concrete masonry is a noncombustible construction material possessing excellent fire-resistive properties. The resistance of concrete masonry to fire is well established by extensive testing to be a function of the type of aggregarte used in the manufacture of the masonry units and their equivalent thickness.

Finishes on concrete masonry walls can increase the fire-resistance rating. Building owners and designers should consider the advantages offered by durable, noncombustible concrete masonry wall systems over other systems having equivalent fire-resistance ratings.

Below is the fire rating of Premier Concrete Products' standard lightweight masonry units:

4 x 8 x 16 Partition	1 Hour
6 x 8 x 16 Partition	2 Hours
8 x 8 x 16 Standard	2 Hours
8 x 8 x 16 Standard 4H	4 Hours
12 x 8 x 16 Standard	4 Hours

Certificate of Compliance

This signifies that the:

Premier Concrete Products, Inc. - Watson, LA

Has demonstrated compliance with all requirements of the *NCMA/ICPI Quality Control Certification Program for Dry-Cast Manufactured Concrete Products Production Plants. (Verison 1.0)*

Certified Production Plant CPP-105

May 8 , 2022

Date of Initial Certification

CERTIFIED PLANT NCMA icpi QUALITY CONTROL CERTIFICATION PROGRAM

Premier Concrete Products will participate in annual re-certification.

NATIONAL NCMA CONCRETE MASONRY ASSOCIATION

Robert D. Thomas, *President*

icpi Interlocking Concrete Pavement Institute®

BUILD **STRONG.**

PREMIER-CONCRETE.COM

Plant
38200 Hwy 16
Denham Springs, LA 70706
225 667 4545
800 575 7293

PREMIER
CONCRETE PRODUCTS

REV **10 20 2026**