
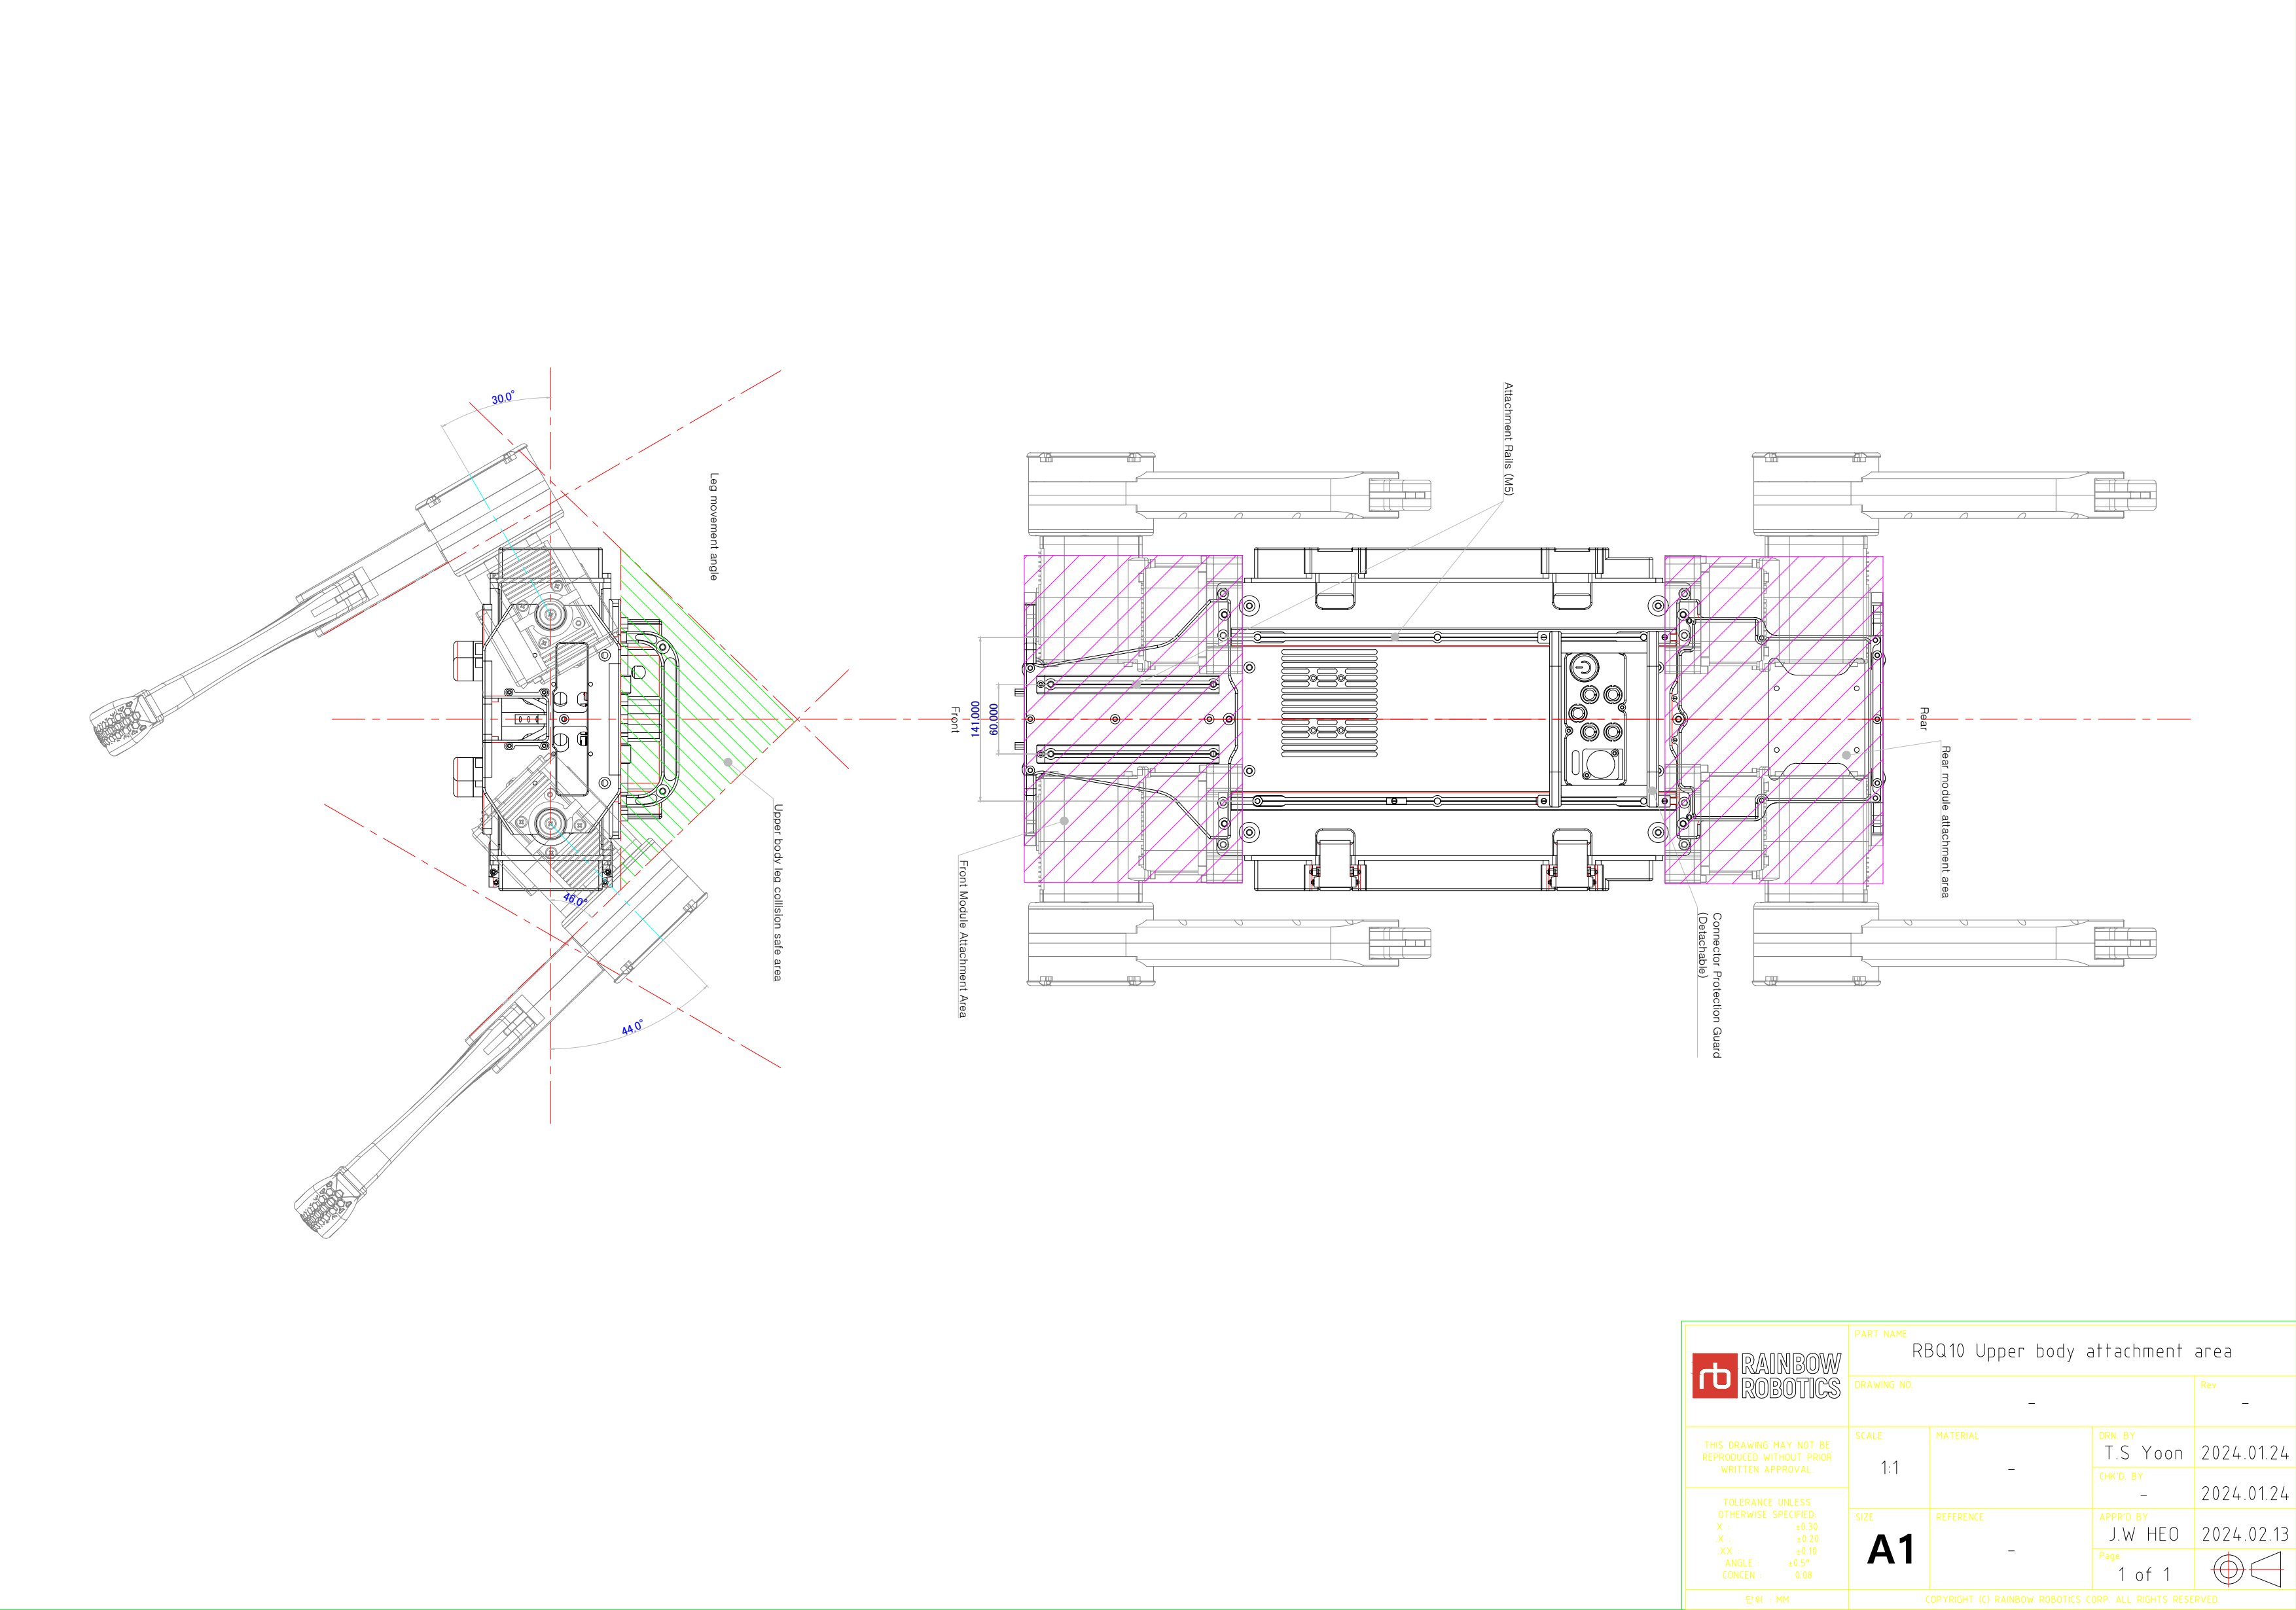
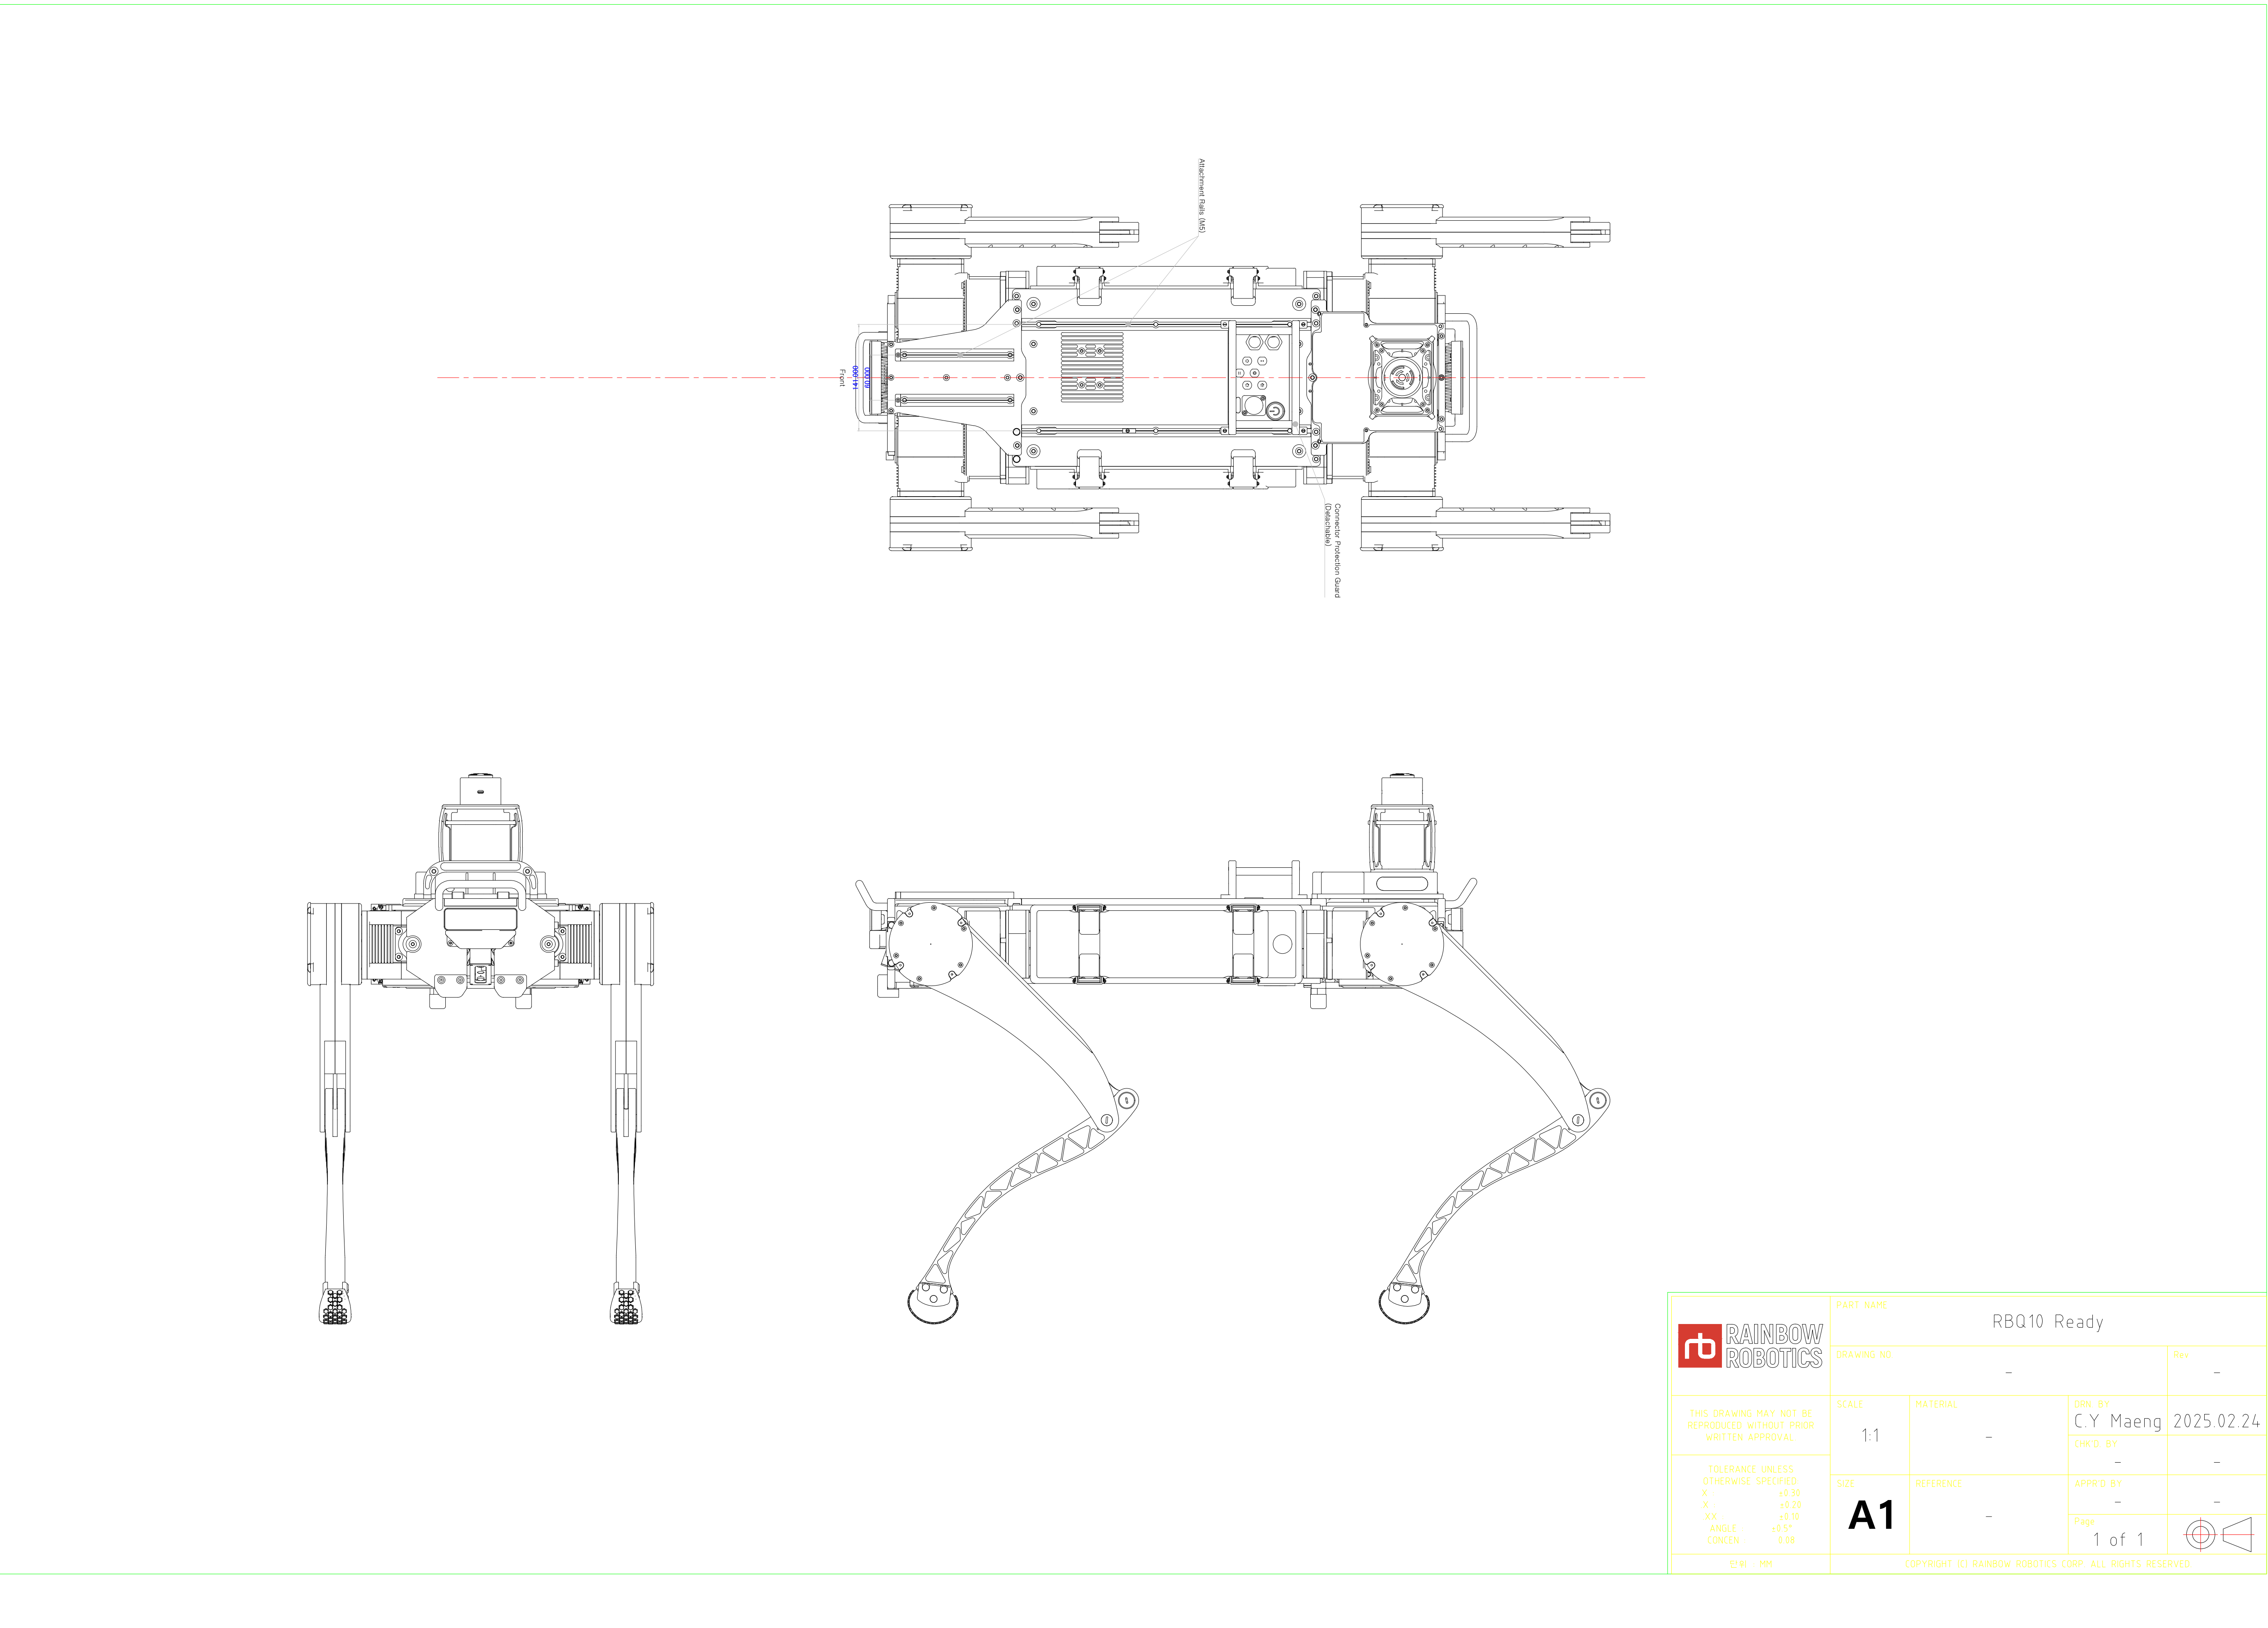


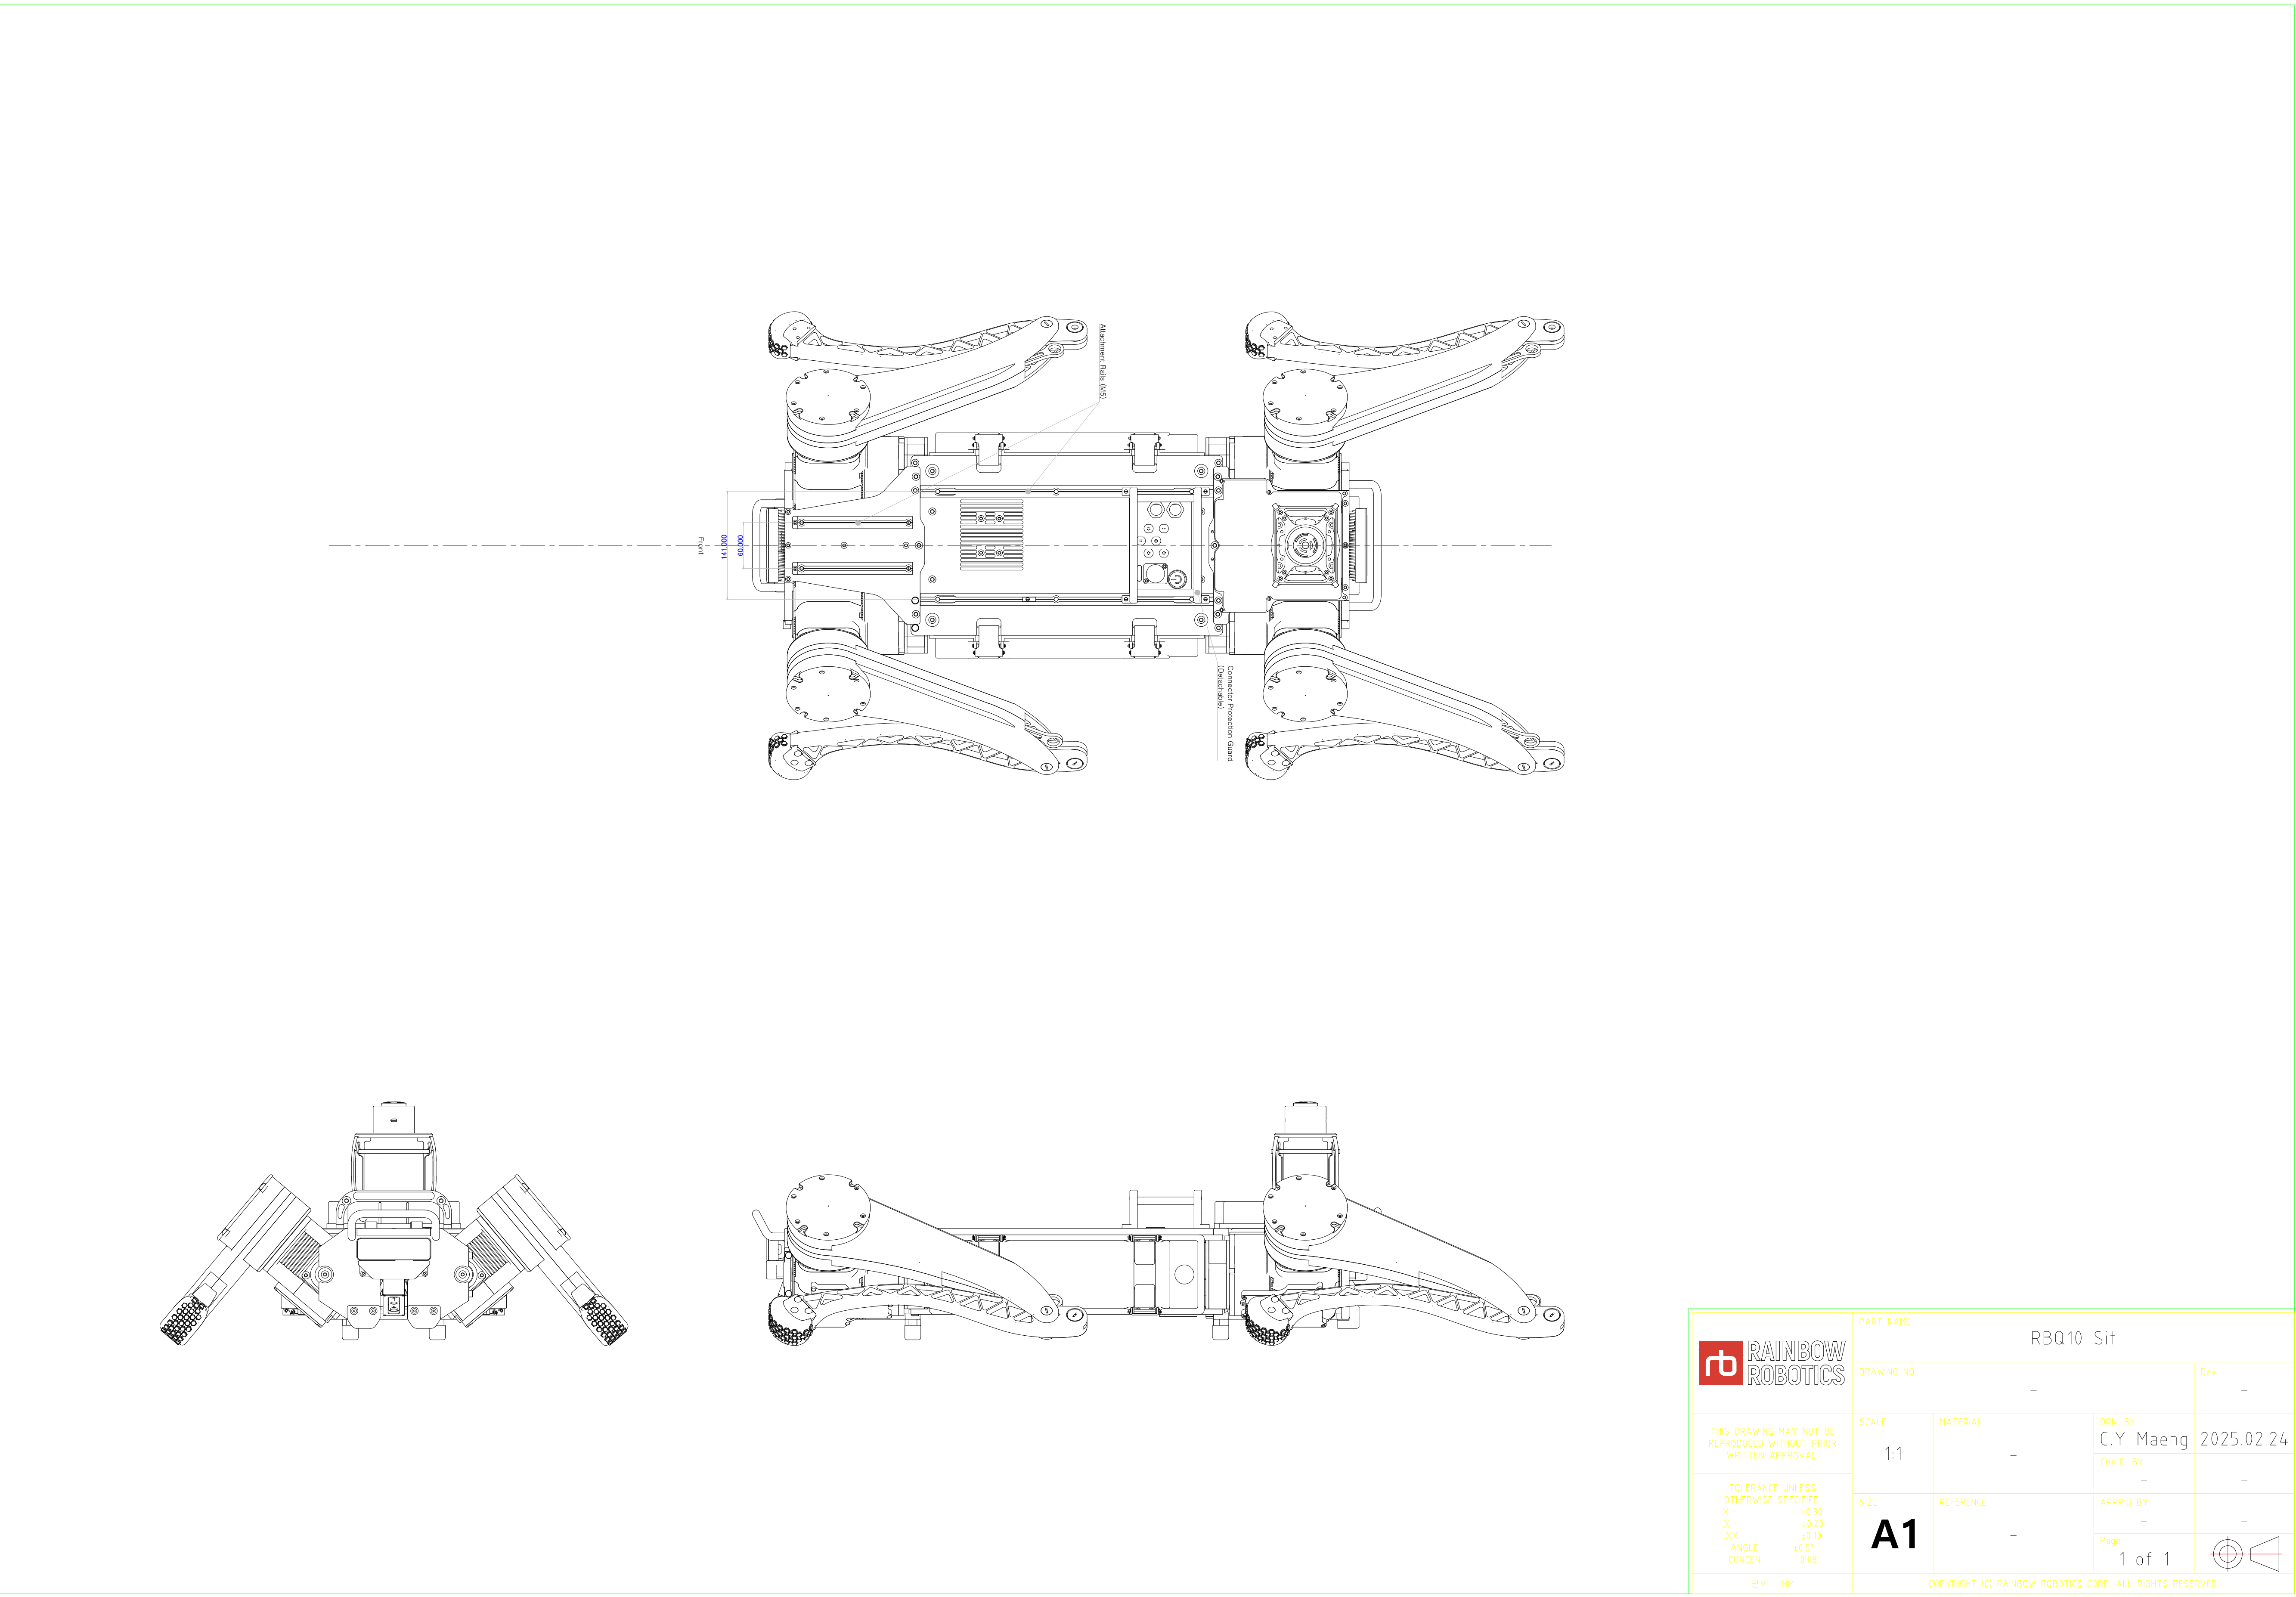

- 1.The upper attachment must not interfere with the robot in the sitting (SIT) and ready (READY) positions of the RBQ10.
- 2.The front and rear module attachment parts can rotate up to 44° upwards, so the attachment design needs to consider the rotation angle.
- 3.The green area is a safe zone where there is no interference with the leg frame.
- 4.The upper attachment is mounted using M5 bolts on rails. (spacing 141mm, 60mm)