







XCMG-4G SYSTEM BLOCK

Title			
BLOCK			
Size	Document Number	Rev	Code
A3	<Doc>	<Rev	<Code>
Date: Saturday, November 16, 2019		Sheet	1 of 10




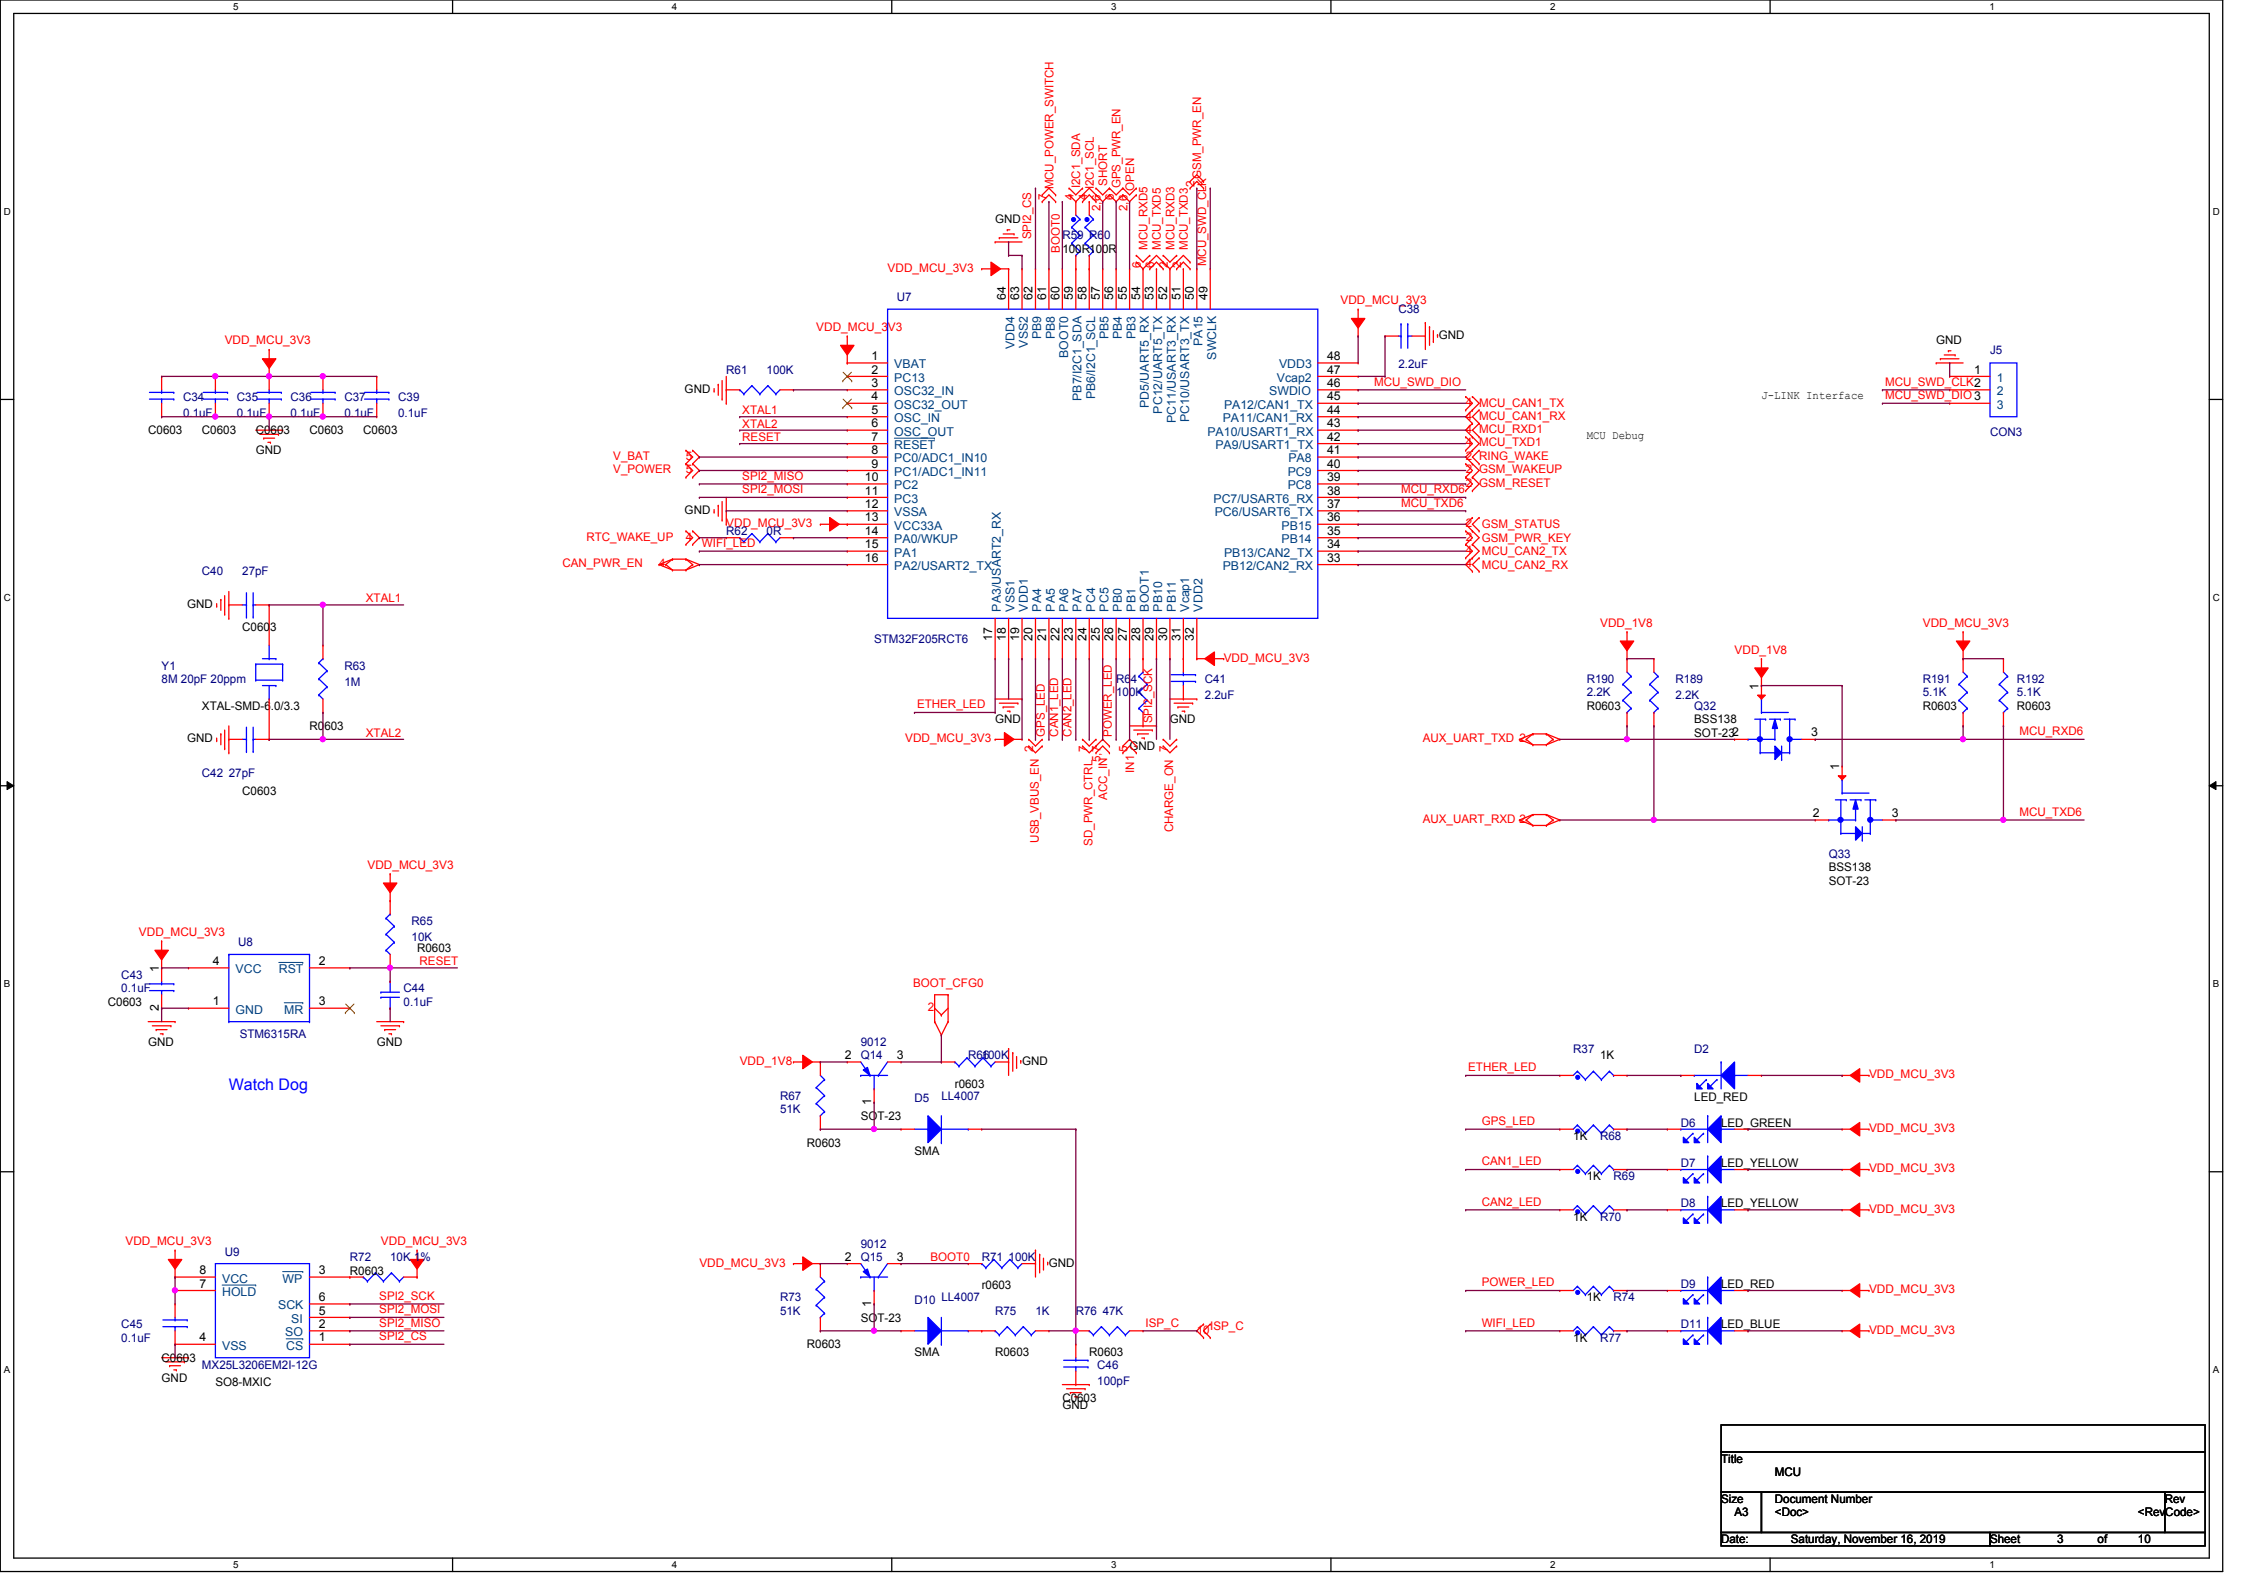

Title				MCU
Size	A3	Document Number	<Doc>	Rev
Date:	Saturday, November 16, 2019	Sheet	3 of 10	Code>

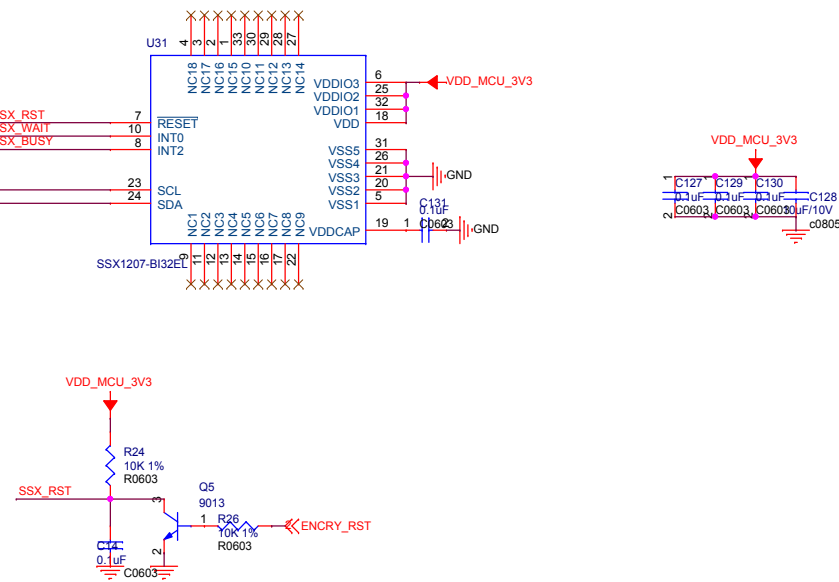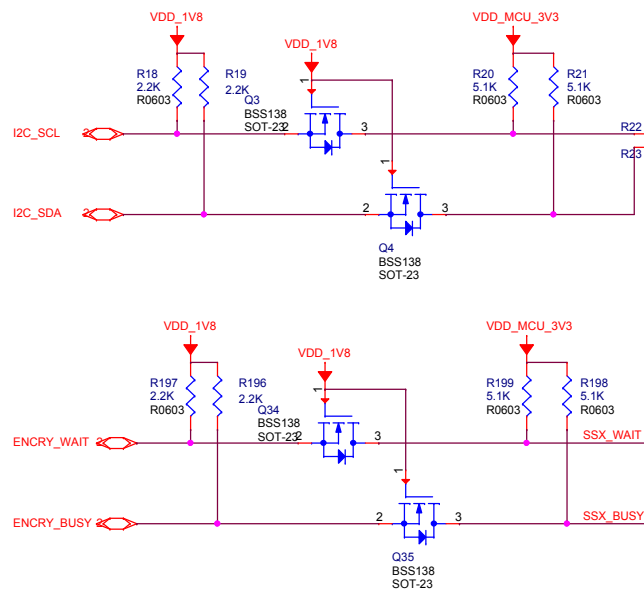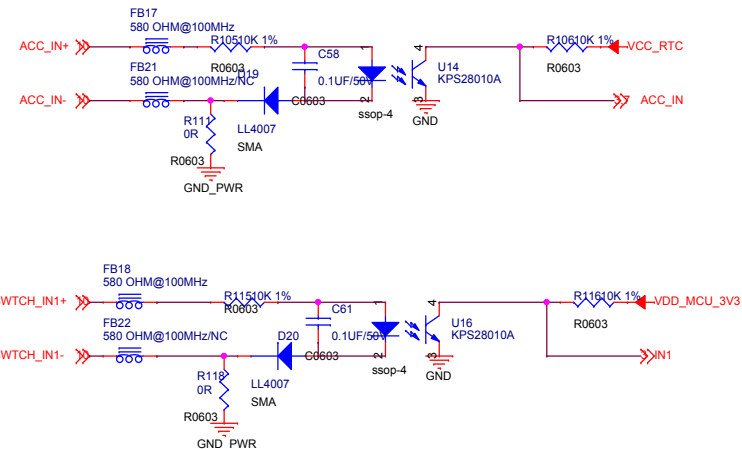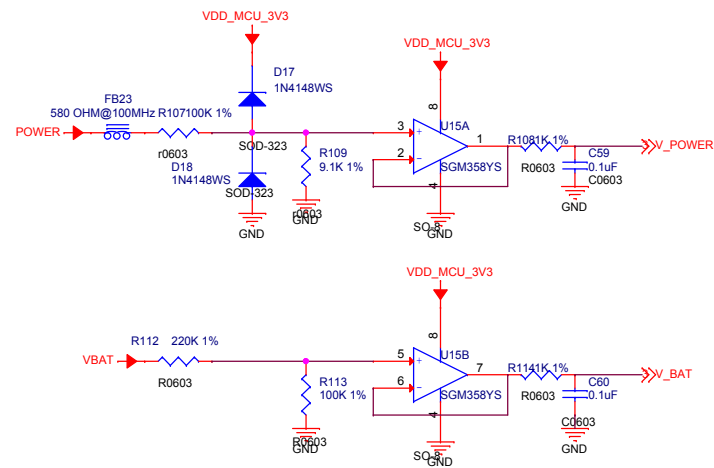


Title			IO&AD
Size	Document Number	Rev	
A3	<Doc>	<RevCode>	
Date:	Saturday, November 16, 2019	Sheet	5 of 10

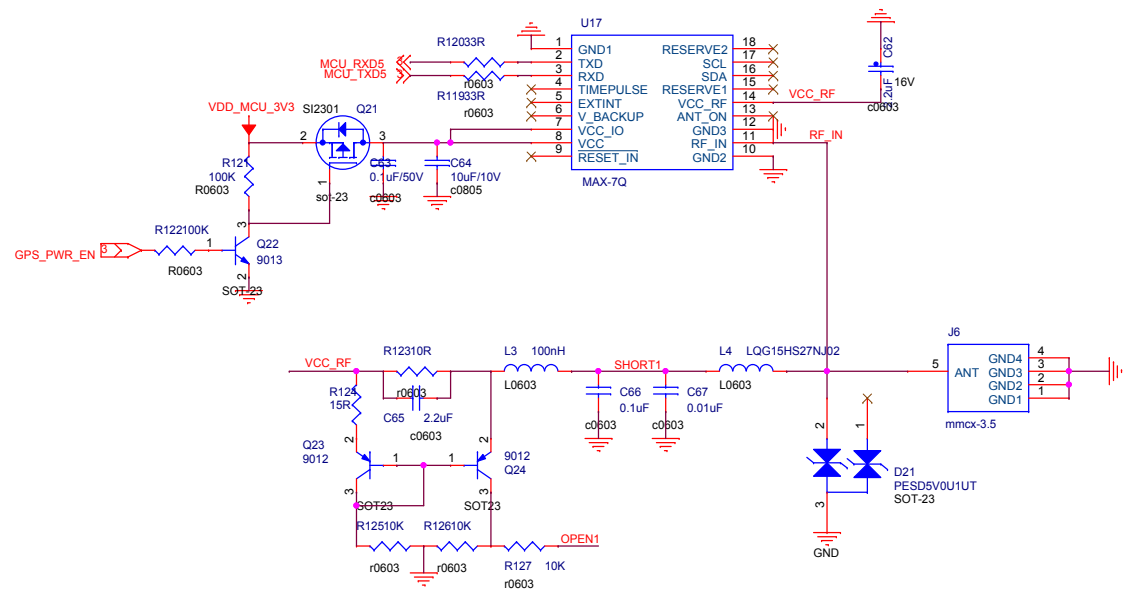


备用GPS

OPEN1 R128_0R/NR0603 OPEN
SHORT1 R129_0R/NR0603 SHORT


Title			GPS
Size	Document Number	Rev	
A3	<Doc>	<RevCode>	
Date:	Saturday, November 16, 2019	Sheet	6 of 10

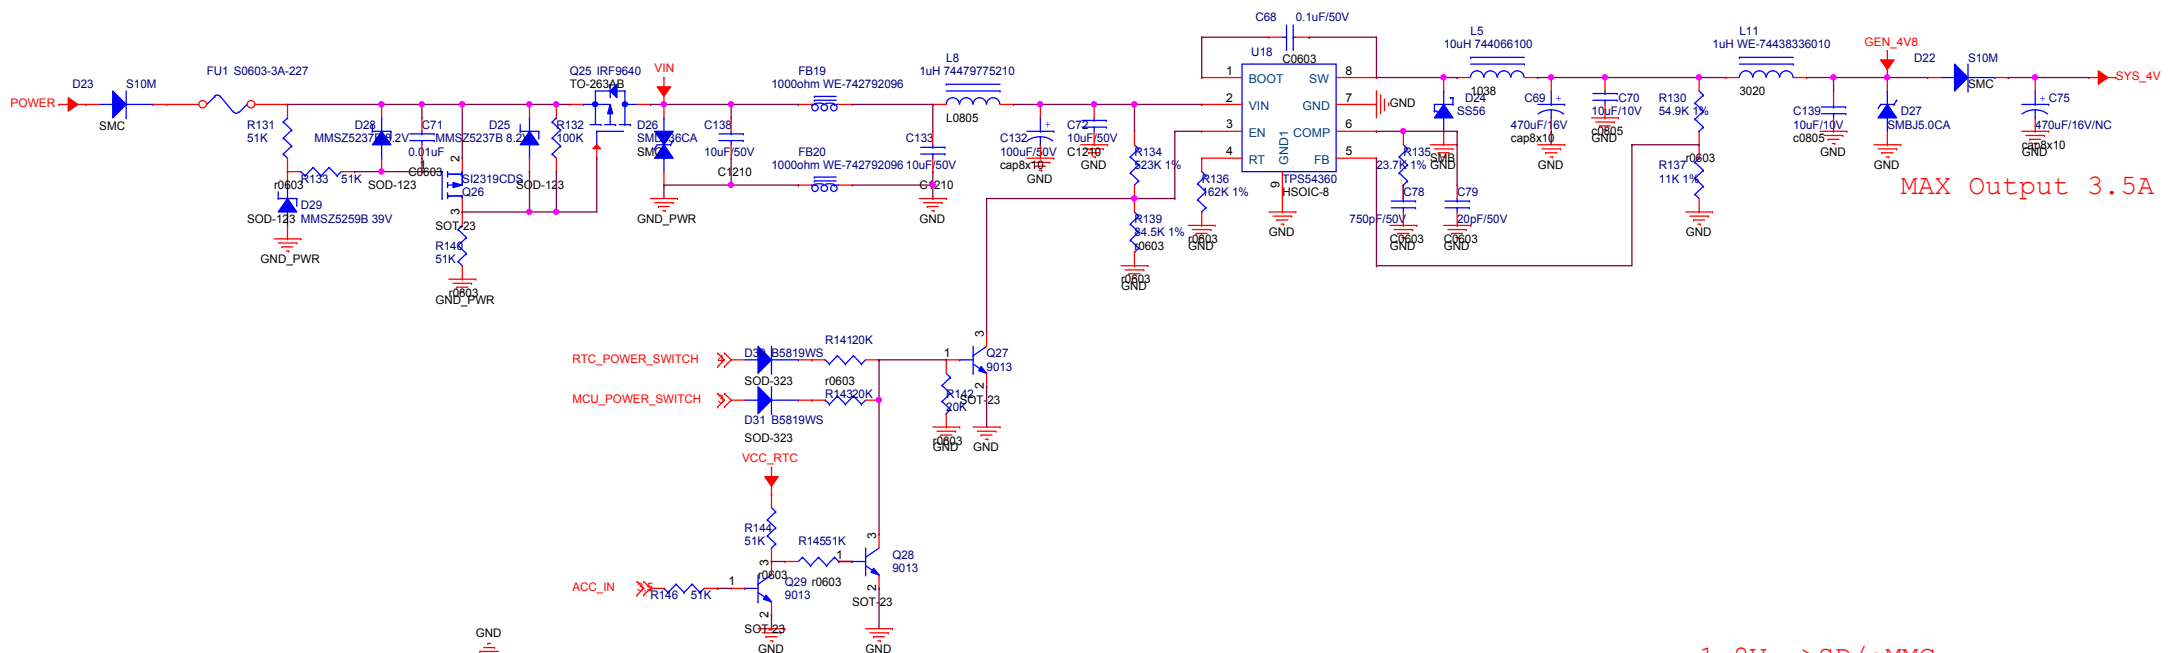

MAX Output 3.5A

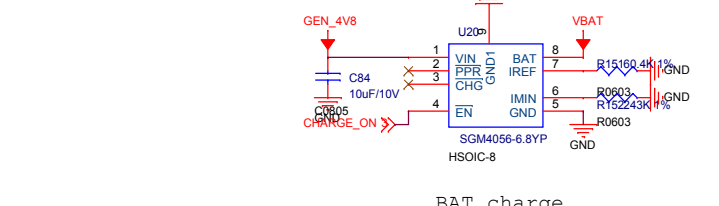



BAT charge

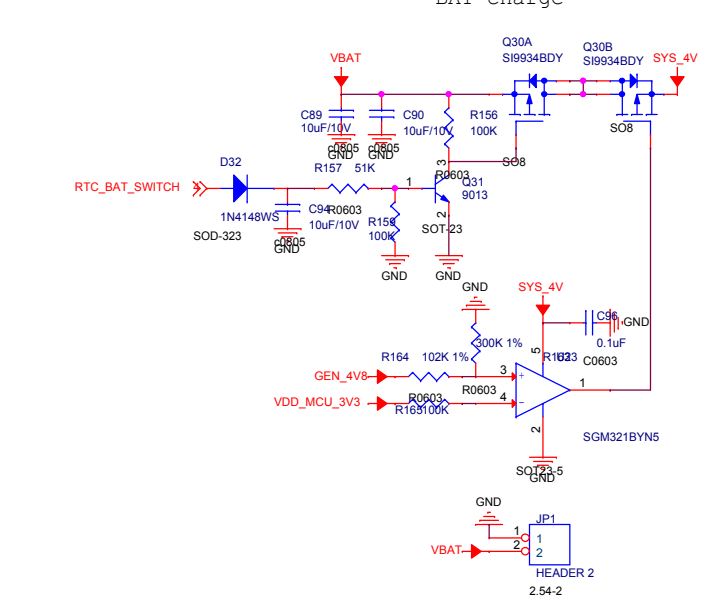

Routing USB

Max trace-length mismatch
between USB signals pairs
should be no greater than 3.8mm

90 ohms differential trace
impedance

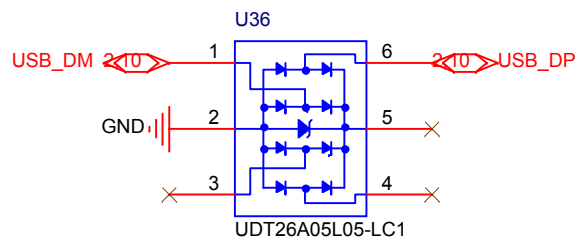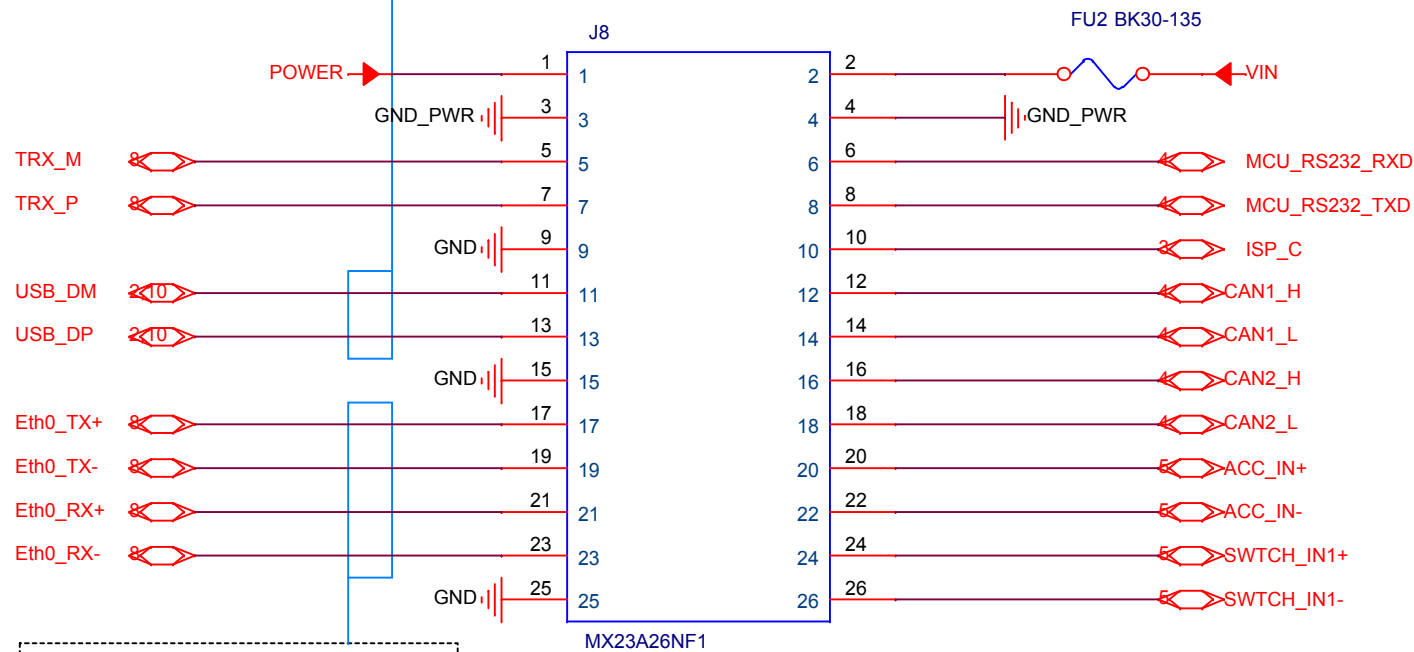

Place to connector as close as possible

Title			
CONNECTOR			
Size	Document Number	Rev	
A	<Doc>	<RevCode>	
Date:	Saturday, November 16, 2019	Sheet	10 of 10