



Step 8 — calibration-through UQ and robust design guidelines


(a) Lifetime band and regime thresholds $\pm$ CI

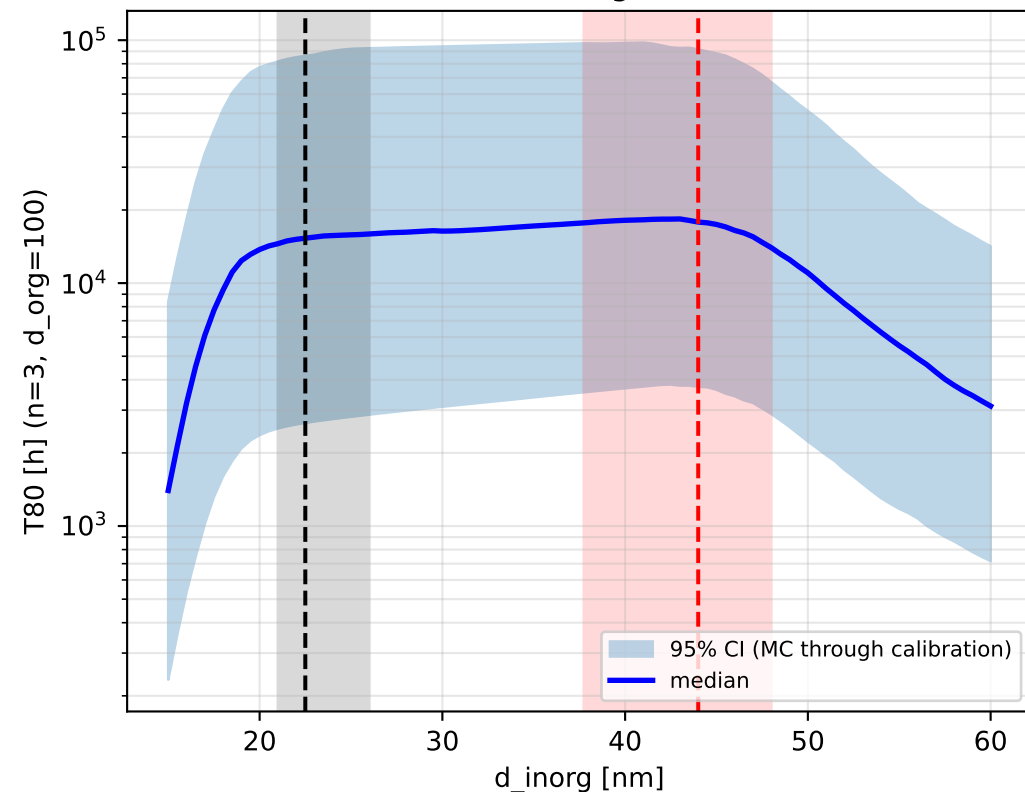

(b) Pair law: +7592 h/pair [95% CI 1321-45276]

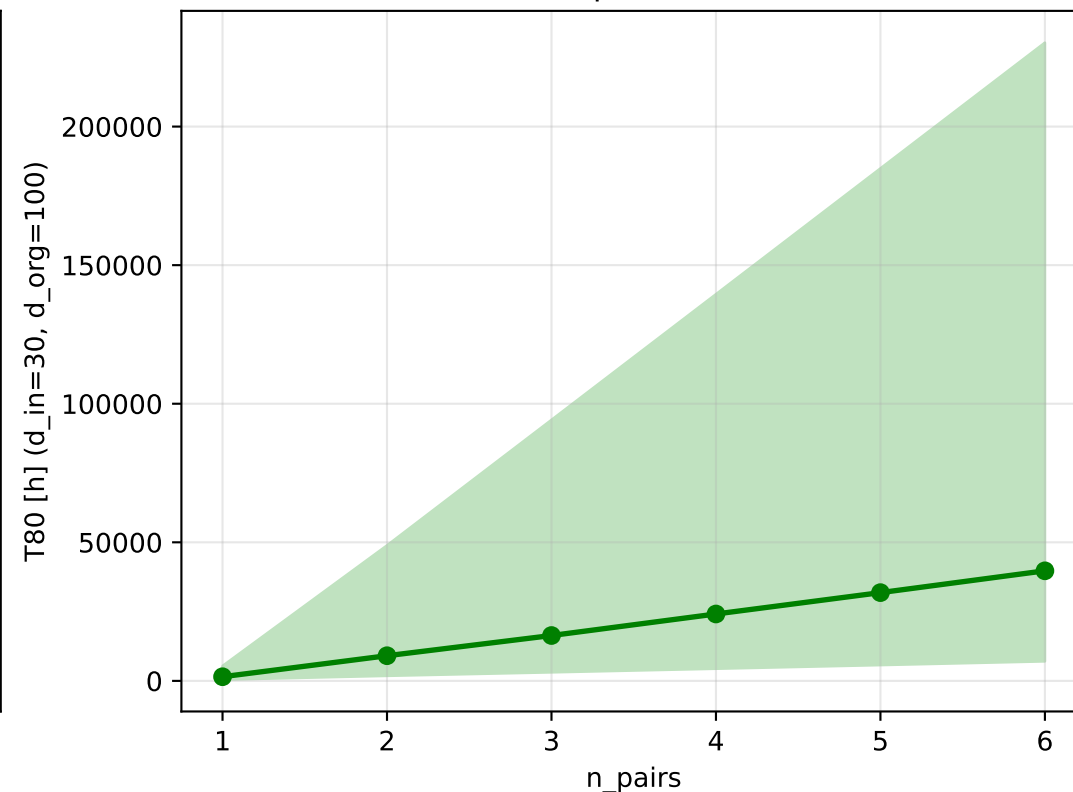

(c) 10-yr durability bound: d_in ≤ 30 nm [CI 16-49]

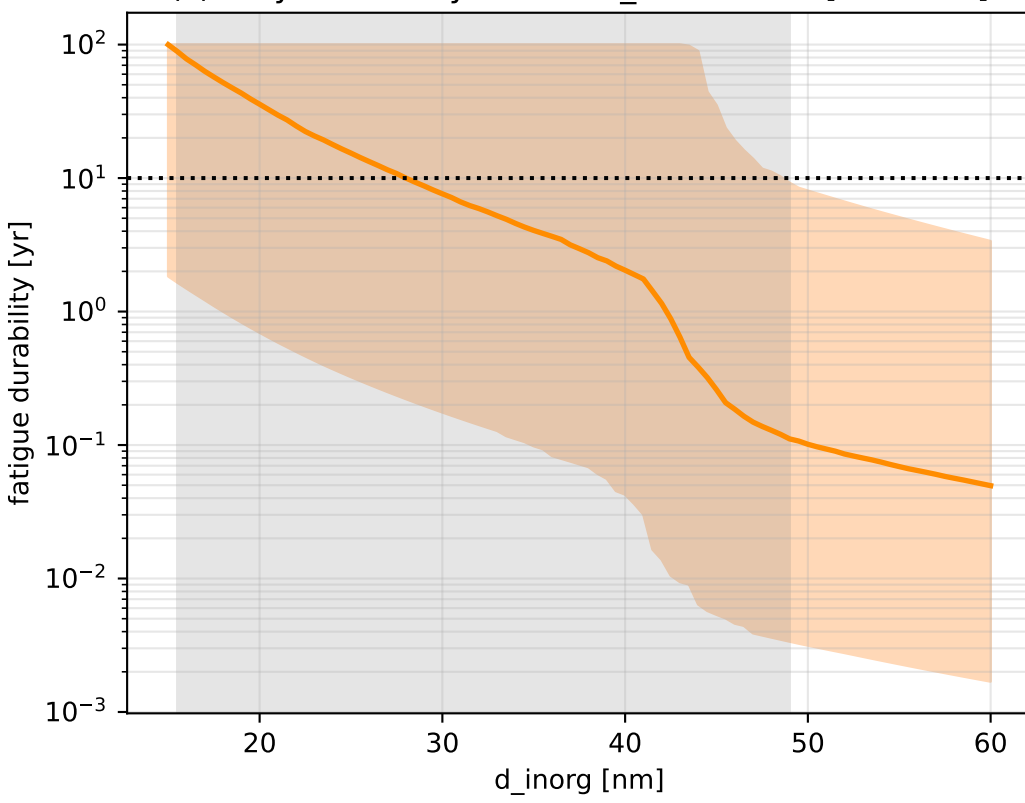

(d) Robust design map (d_org=100 nm slice)

