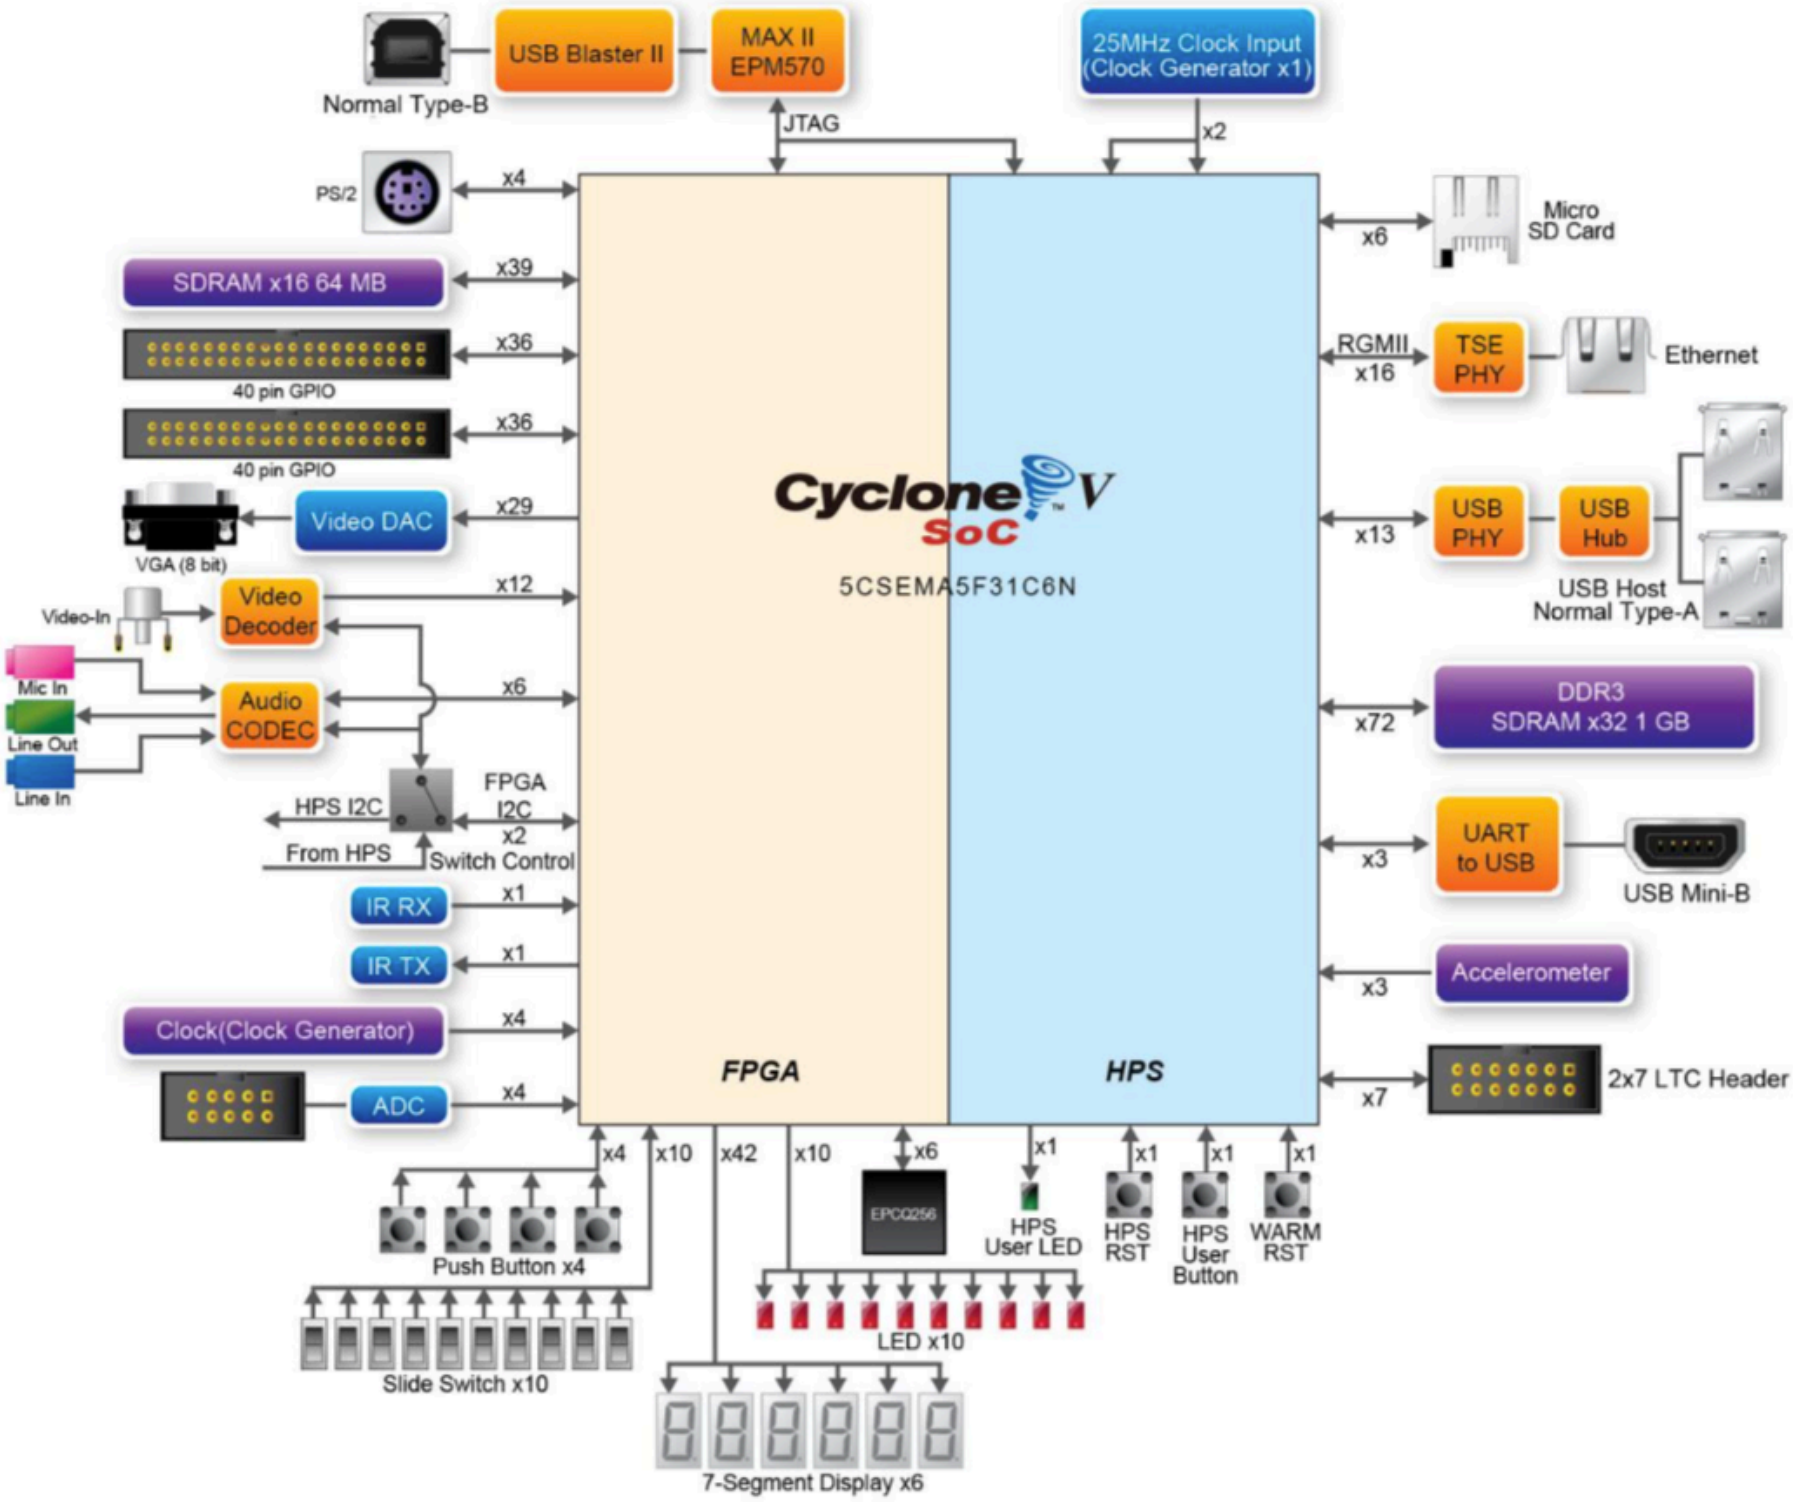

Normal Type-B
USB Blaster II
MAX II EPM570
JTAG
25MHz Clock Input (Clock Generator x1)
x2
PS/2
x4
SDRAM x16 64 MB
x39
40 pin GPIO
x36
40 pin GPIO
x36
VGA (8 bit)
Video DAC
x29
Video-In
Video Decoder
x12
Mic In
Line Out
Line In
Audio CODEC
x6
HPS I2C
FPGA I2C
x2
From HPS
Switch Control
IR RX
x1
IR TX
x1
Clock(Clock Generator)
x4
ADC
x4
Cyclone V SoC
5CSEMA5F31C6N
FPGA
HPS
x6
Micro SD Card
RGMII
x16
TSE PHY
Ethernet
x13
USB PHY
USB Hub
USB Host Normal Type-A
x72
DDR3 SDRAM x32 1 GB
x3
UART to USB
USB Mini-B
x3
Accelerometer
x7
2x7 LTC Header
x4
Push Button x4
x10
Slide Switch x10
x42
LED x10
x10
7-Segment Display x6
x6
EPCQ256
x1
HPS User LED
x1
HPS RST
x1
HPS User Button
x1
WARM RST