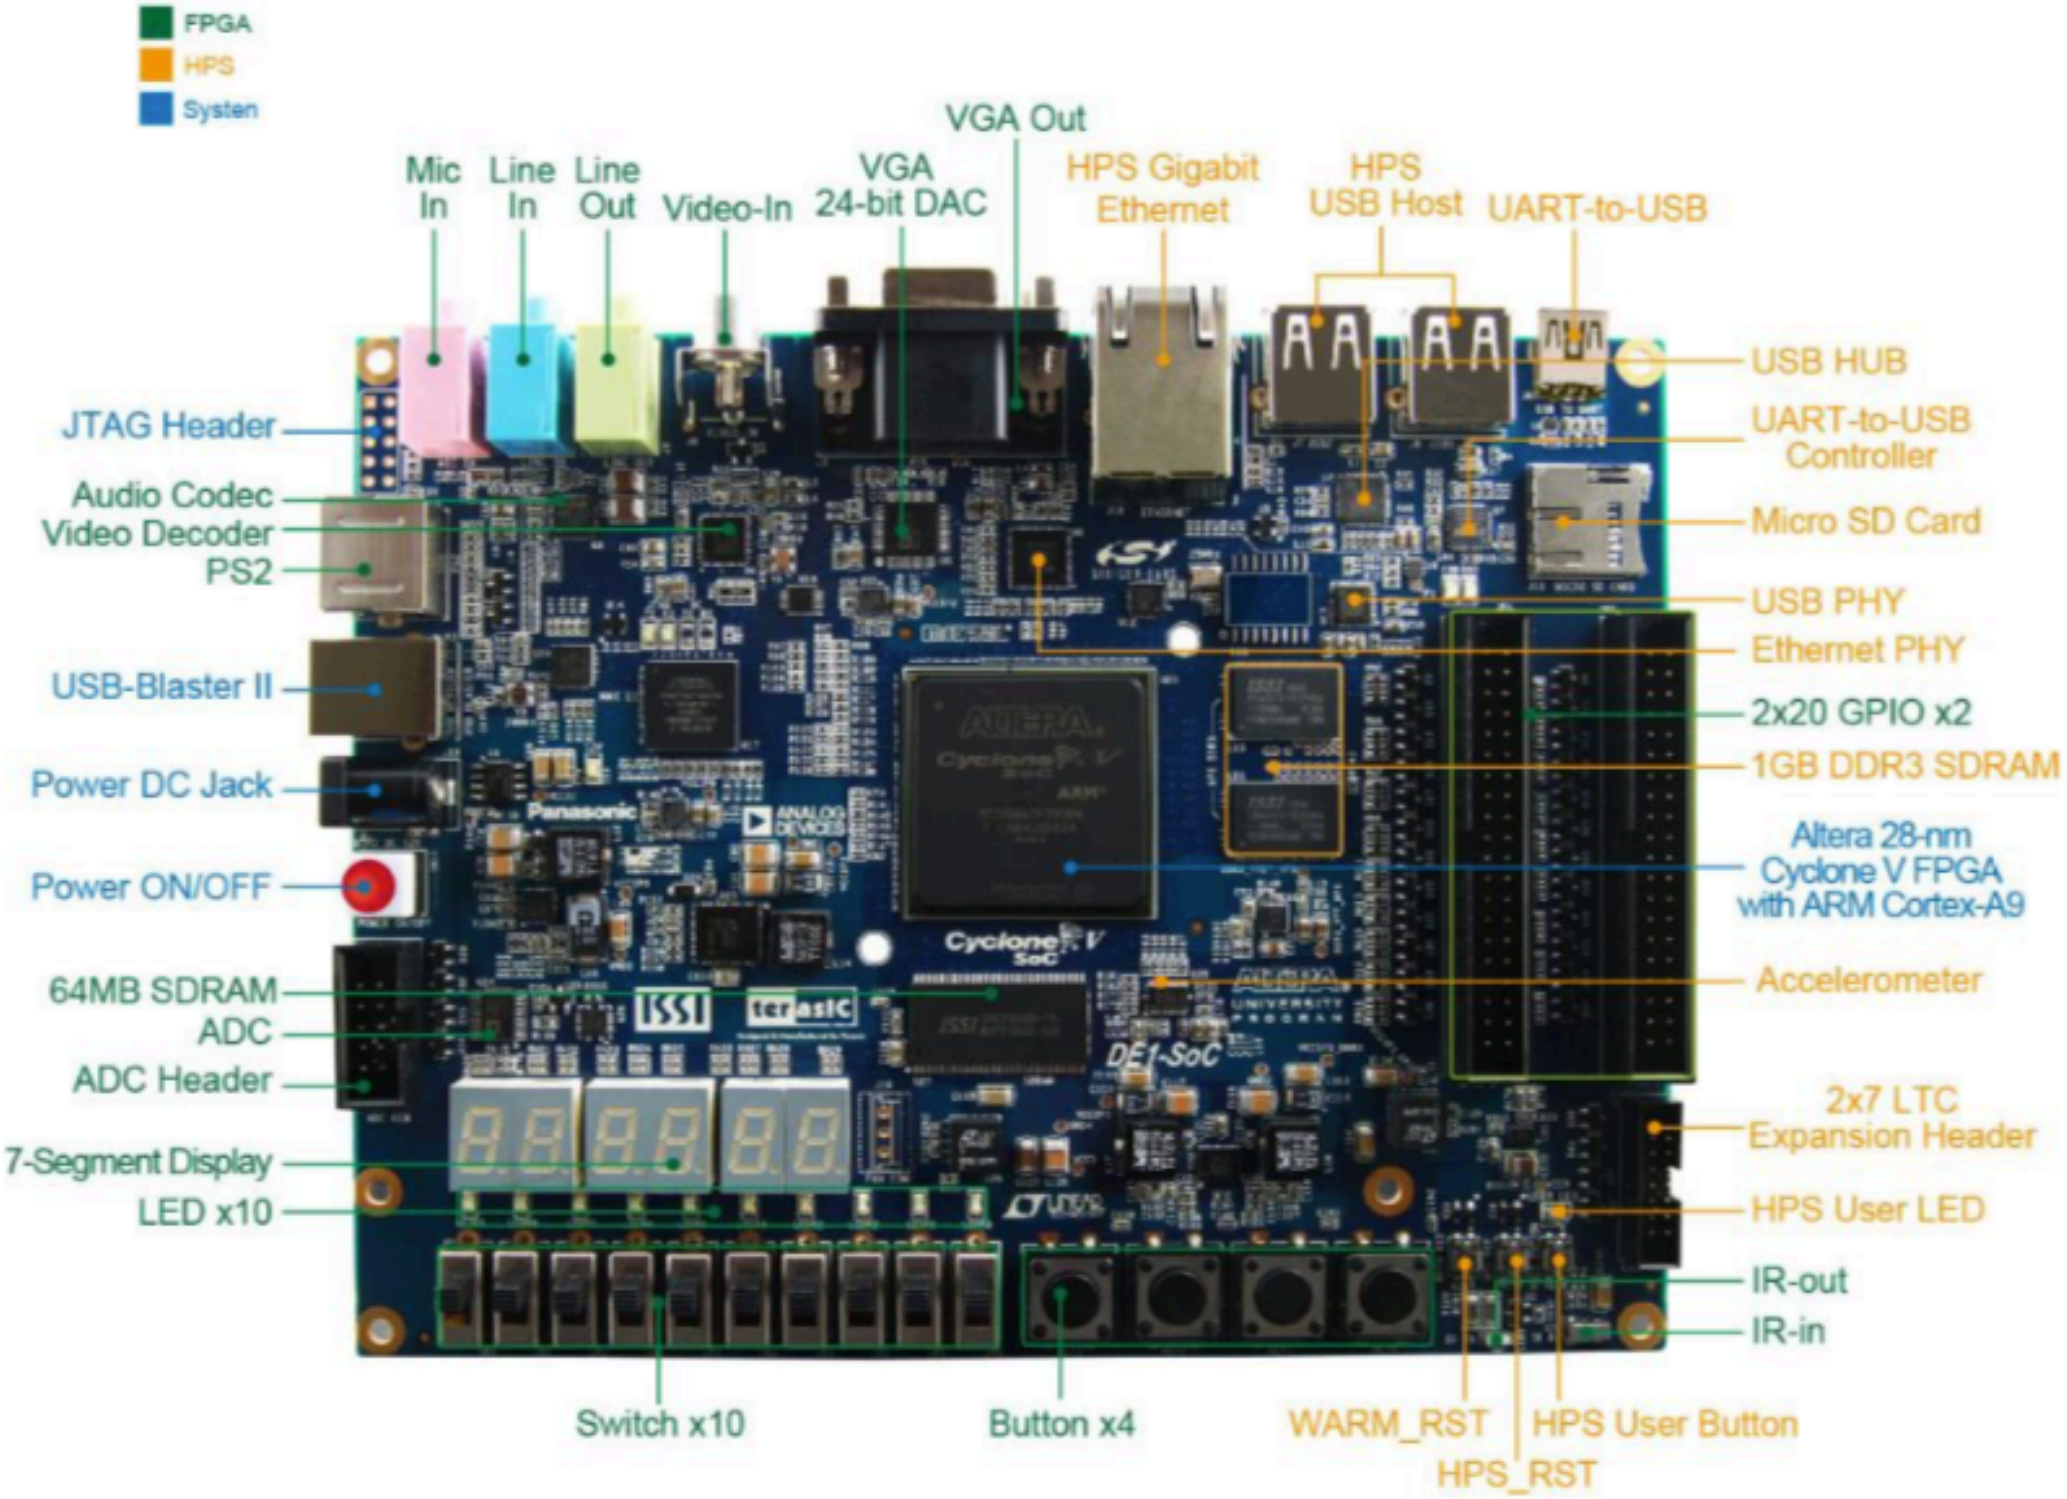

FPGA
HPS
Systen
Mic In
Line In
Line Out
Video-In
VGA 24-bit DAC
VGA Out
HPS Gigabit Ethernet
HPS USB Host
UART-to-USB
JTAG Header
Audio Codec
Video Decoder
PS2
USB-Blaster II
Power DC Jack
Power ON/OFF
64MB SDRAM
ADC
ADC Header
7-Segment Display
LED x10
Switch x10
Button x4
WARM_RST
HPS_RST
HPS User Button
IR-out
IR-in
2x7 LTC Expansion Header
HPS User LED
Accelerometer
Altera 28-nm Cyclone V FPGA with ARM Cortex-A9
1GB DDR3 SDRAM
2x20 GPIO x2
Ethernet PHY
USB PHY
Micro SD Card
UART-to-USB Controller
USB HUB
DE1-SoC