WSQ COURSE SLIDES

Electrostatic Discharge (ESD) Control for Lab and Factory Engineers and Managers

TGS-2024051412

TSC: Electrostatic Discharge Control · ELE-OPR-4002-1.1

Tertiary Infotech Academy Pte Ltd · UEN 201200696W

Trainer: Dr Alfred Ang

v3.1 · 20 August 2026



MANDATORY

Digital Attendance (TRAQOM · SSG)

1

AM attendance

Scan the live QR code shown by the trainer.

2

PM attendance

Complete the required afternoon record.

3

Assessment attendance

Complete before sitting the assessment.

4

Use the live LMS

Do not reuse a screenshot or old QR code.

© Tertiary Infotech Academy Pte Ltd

About the Trainer



General Trainer

Complete before class

NAME _____

TITLE / DESIGNATION _____

QUALIFICATIONS _____

AREAS OF EXPERTISE _____

TRAINING & INDUSTRY EXPERIENCE _____

CONTACT _____

© Tertiary Infotech Academy Pte Ltd

NAMED TRAINER

About the Trainer



Dr Alfred Ang

Lead Trainer · Tertiary Infotech Academy

NAME Dr Alfred Ang

TITLE / DESIGNATION Founder and principal trainer

QUALIFICATIONS Doctorate · engineering and digital transformation

AREAS OF EXPERTISE Technology, quality, process and AI-enabled work

TRAINING & INDUSTRY EXPERIENCE Adult learning and enterprise implementation

CONTACT enquiry@tertiaryinfotech.com

© Tertiary Infotech Academy Pte Ltd

Let’s know each other

1. Name and role
2. Lab or factory process you support
3. One ESD challenge you want to solve
4. One measurement or control item you already use

© Tertiary Infotech Academy Pte Ltd

CLASS AGREEMENT

Ground Rules

1. **Participate**
   Ask, challenge and share evidence.

2. **Respect**
   One conversation; disagree with ideas, not people.

3. **Protect confidentiality**
   Use fictional scenarios; do not expose customer data.

4. **Be punctual**
   Return from breaks on time.


5. **Phones silent**
   Step out quietly for urgent calls.

6. **Safety first**
   Stop any activity that conflicts with site electrical or process safety.

© Tertiary Infotech Academy Pte Ltd

COURSE PORTAL

Login to LMS and Download Course Material

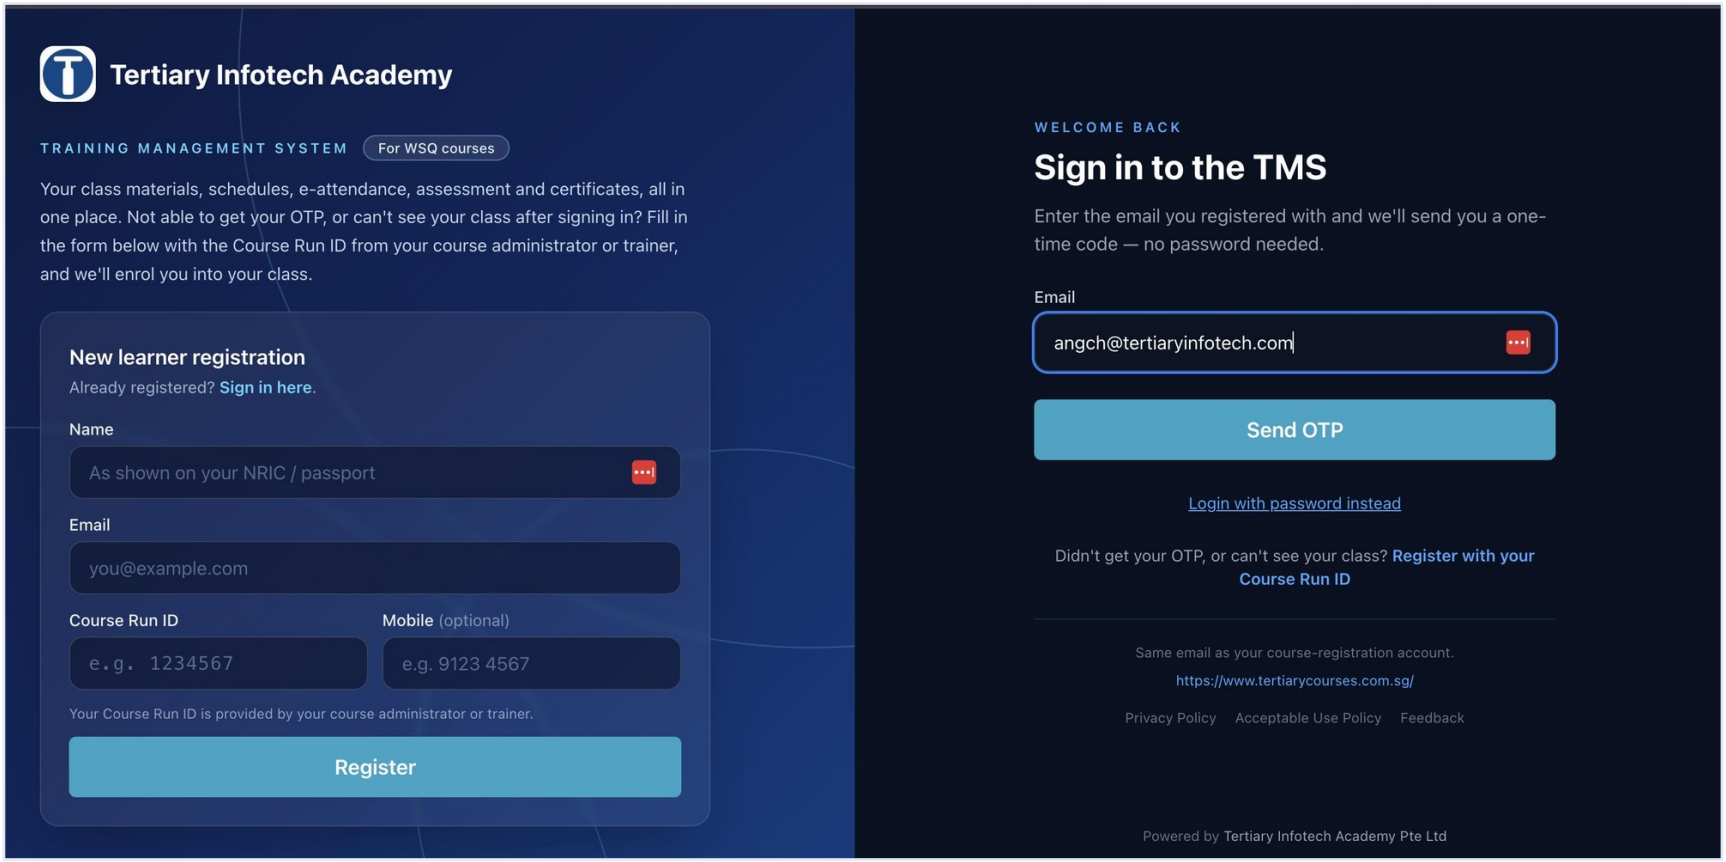

Log in at lms-tms.tertiaryinfotech.com with your registered email and the OTP sent to your inbox, then open this course to download the slides and Learner Guide.

© Tertiary Infotech Academy Pte Ltd

Two-day course architecture

1

Day 1

ESD fundamentals, failure mechanisms and control implementation.

2

Day 2

Standards, measurement, audit, incident response and management control.

3

Assessment

1 h WA + 1 h Case Study; open book; submit on LMS.

© Tertiary Infotech Academy Pte Ltd

Learning Outcomes

1

LO1

Apply control measures to manage ESD generation based on ESD principles.

2

LO2

Evaluate and recommend actions to improve ESD control effectiveness in accordance with ESD standards.

3

Evidence

Eight realistic activities build audit-ready outputs.

4

Transfer

Every activity mirrors lab/factory decisions.

© Tertiary Infotech Academy Pte Ltd

TSC Knowledge and Abilities

1 **K1**
Introduction to ESD theory and principles, test models and ESD control items.

2 **K2**
Static control with respect to established ESD standards.

3 **K3**
Types of ESD instruments used for checks and measurements.

4 **K4**
Preventive measures to reduce the risk of ESD generation.

5 **A1**
Perform control measures to control the generation of ESD.

6 **A2**
Monitor the effectiveness of employed ESD control measures.

7 **A3**
Recommend follow-up actions to reduce the risk of ESD generation.

© Tertiary Infotech Academy Pte Ltd

ADMIN

Briefing for Assessment

CANDIDATE CONDUCT

- Individual work; no discussion.
- Open book: course slides, Learner Guide and approved materials.
- Phones and other materials under the table.
- Use black/blue pen; no correction fluid.

INSTRUMENTS

- WA: 4 open-ended questions, K1–K4, 1 hour.
- Case Study: 2 open-ended tasks, A1–A3, 1 hour.
- Submit completed answers on the LMS.
- Reassessment and appeal rights apply.

© Tertiary Infotech Academy Pte Ltd

ADMIN

Assessment and Funding

ELIGIBILITY

- Minimum 75% SSG digital attendance.
- Complete both assessment instruments.
- Competent outcome required for successful completion.

OUTCOME

- Assessment evidence must be your own work.
- Assessor feedback explains the decision.
- Appeal may be lodged through the published process.

© Tertiary Infotech Academy Pte Ltd

Assessment Flow

1. TRAQOM digital attendance
2. Assessment digital attendance
3. Sit WA then Case Study
4. Submit answers on the LMS
5. Sign Assessment Summary Record

© Tertiary Infotech Academy Pte Ltd

Access the Course Activities

1. Open the course GitHub repository
2. Choose Clone or Download ZIP
3. Open the activities/ folder
4. Start with the numbered README

[Open the course activity repository]

© Tertiary Infotech Academy Pte Ltd

REASONING CHECKPOINT 1 OF 3

How to reason about ESD exposure

1

Recognise the charge source, field and vulnerable item before selecting a control.

Detailed execution steps and evidence templates are in the Learner Guide and activity folder.

© Tertiary Infotech Academy Pte Ltd

01

MODULE 1 · K1 · A1

Basics of ESD

Charge generation · discharge paths · HBM/MM/CDM · failure modes · business impact


© Tertiary Infotech Academy Pte Ltd

A sudden charge transfer can damage a device without a visible spark or a felt shock.

Treat every unprotected ESDS item as vulnerable throughout handling, test, storage and service.

© Tertiary Infotech Academy Pte Ltd

The charge–field–discharge chain

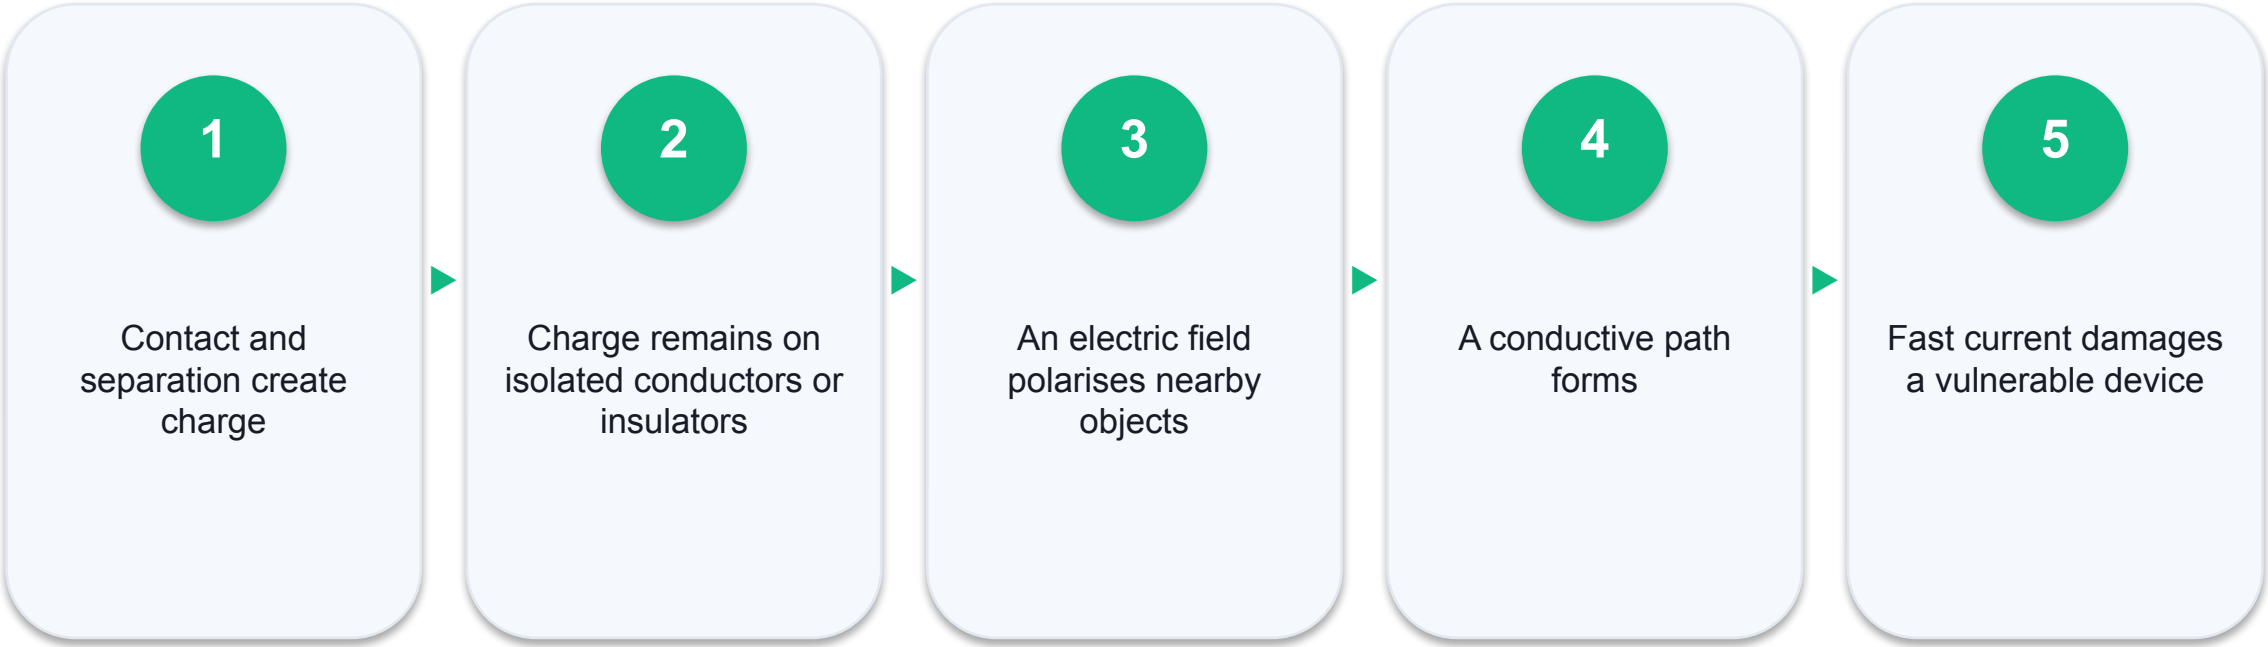

© Tertiary Infotech Academy Pte Ltd

Triboelectric charging

1

Material pair

Different electron affinities drive polarity and magnitude.

2

Contact area

More intimate contact can transfer more charge.

3

Separation

Speed and force affect charge generation.

4

Environment

Humidity and contamination change surface leakage.

© Tertiary Infotech Academy Pte Ltd

Conductors, dissipative materials and insulators

PRINCIPLE / USE

- Conductors redistribute charge quickly and can be grounded.
- Dissipative materials move charge in a controlled manner.

RISK / DECISION

- Insulators retain localised charge and cannot be neutralised by grounding alone.
- Low-charging, dissipative and shielding are different material functions.

© Tertiary Infotech Academy Pte Ltd

A metal tool, trolley or fixture can remain charged when it has no verified path to ground.

Bonding removes potential differences; grounding provides a controlled reference path.

© Tertiary Infotech Academy Pte Ltd

Electrostatic induction and polarisation

1. Charged object approaches
2. Field redistributes charge in nearby conductor
3. Temporary ground connection permits charge flow
4. Ground is removed
5. Object retains a net charge after the field leaves

© Tertiary Infotech Academy Pte Ltd

Contact discharge versus air discharge

PRINCIPLE / USE

- Contact discharge: differently charged objects touch and charge transfers directly.
- Waveform depends on the source, path impedance and contact geometry.

RISK / DECISION

- Air discharge: a strong field ionises an air gap before contact.
- Visible sparks represent only a subset of damaging ESD events.

© Tertiary Infotech Academy Pte Ltd

What controls discharge severity?

1

Voltage difference

Stored potential is one risk indicator, not the whole event.

2

Capacitance

More stored charge can raise available energy.

3

Path impedance

Resistance and inductance shape peak current and rise time.

4

Device sensitivity

Pins, package and internal structures determine failure threshold.

© Tertiary Infotech Academy Pte Ltd

Human Body Model (HBM)

PRINCIPLE / USE


- Represents a charged person discharging through a device pin.
- Useful for component qualification and handling robustness.

RISK / DECISION

- A laboratory model—not a prediction of every factory event.
- Use supplier sensitivity data and the applicable controlled test method.

© Tertiary Infotech Academy Pte Ltd

HBM qualification uses a defined source network

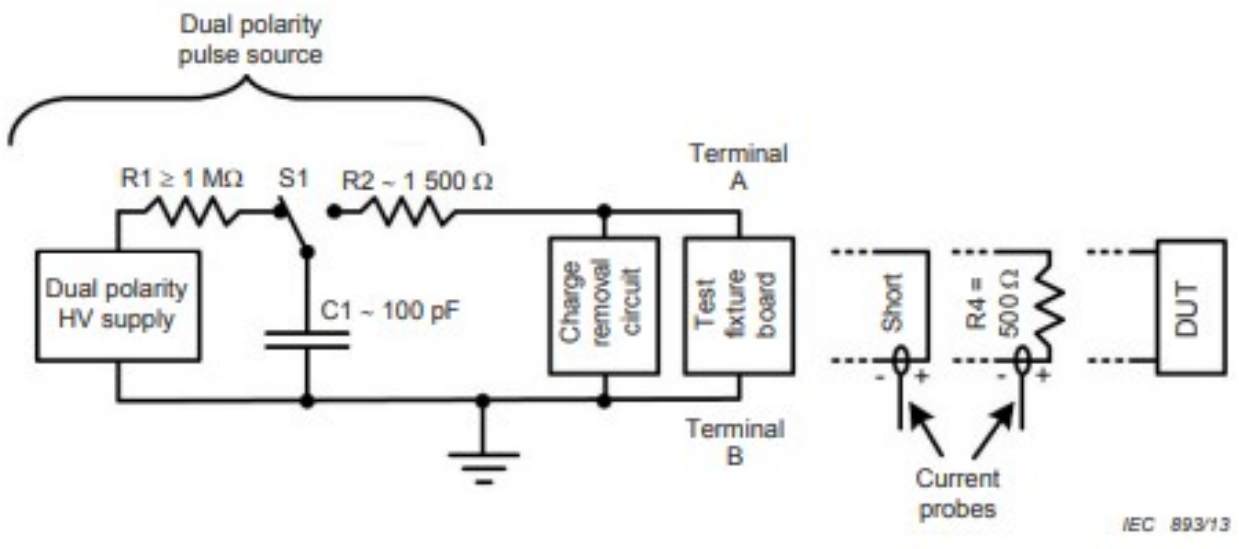

Technical figure retained from source deck slide 39

1. Capacitance and series resistance shape the test pulse.
2. The network stresses a defined pin pair under a controlled method.
3. Qualification evidence does not predict every workplace event.

Use the current controlled standard and test method for execution.

© Tertiary Infotech Academy Pte Ltd

Machine Model (MM): legacy context

PRINCIPLE / USE

- Historically represented charged metal equipment with a low-impedance discharge.
- Appears in the legacy deck and some older literature.

RISK / DECISION

- Do not assume correlation with HBM or CDM.
- Use the test model and revision required by the current product/customer specification.

© Tertiary Infotech Academy Pte Ltd

Charged Device Model (CDM)

1. Device package becomes charged
2. Device approaches grounded metal
3. One pin makes first contact
4. Very fast discharge leaves the device
5. Local current density stresses internal structures

© Tertiary Infotech Academy Pte Ltd

CDM tester: charge the device, then ground one pin

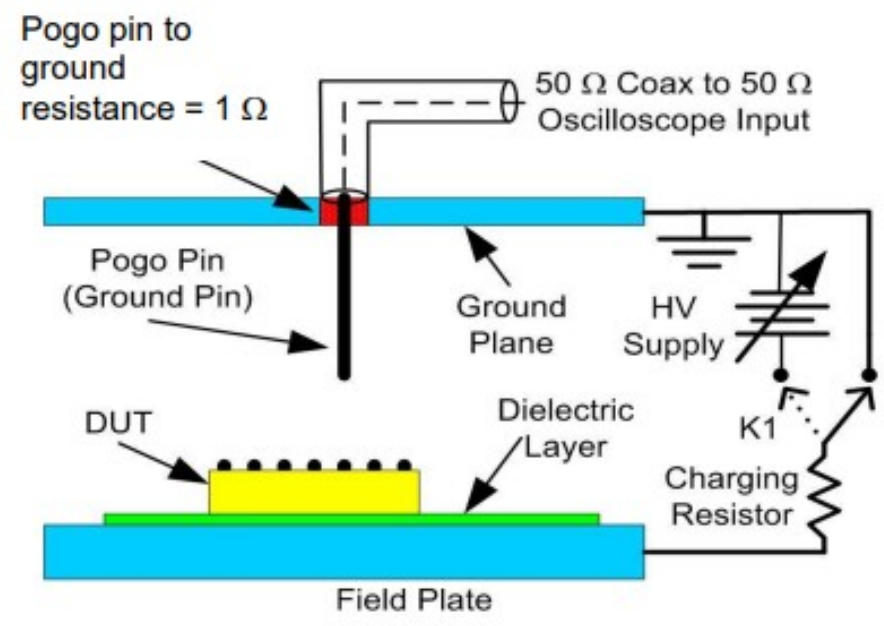


Figure 1: Simplified CDM Tester Hardware Schematic

Technical figure retained from source deck slide 208

1. The package sits above a field plate during charging.
2. A grounded pogo pin initiates the very fast discharge.
3. Package, pin and current path influence local stress.

Use the current controlled standard and test method for execution.

© Tertiary Infotech Academy Pte Ltd

HBM, MM and CDM are not interchangeable

1

HBM

Charged person → device; handling-oriented component model.

2

MM

Legacy charged-machine representation; limited correlation.


3

CDM

Charged device → ground; very fast package-dependent event.

© Tertiary Infotech Academy Pte Ltd

Source and device determine the discharge path

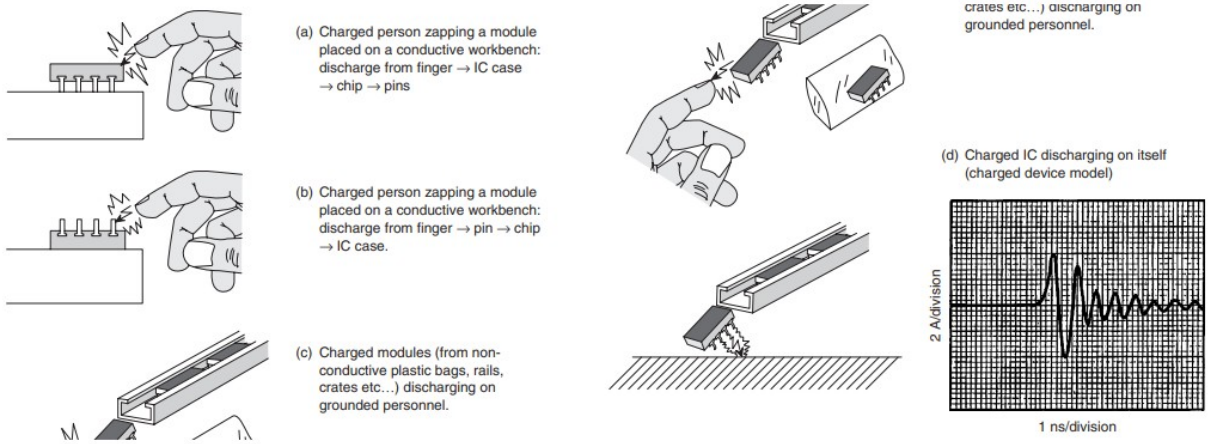

Technical figure retained from source deck slide 32

1. A charged person may inject current through a pin or package path.
2. A charged device can discharge to grounded metal without human contact.
3. Select the model that matches the qualification question—not the most familiar acronym.

Use the current controlled standard and test method for execution.

© Tertiary Infotech Academy Pte Ltd

Catastrophic failure

1. **Metal melt**
   Current density damages interconnects.

2. **Junction breakdown**
   Semiconductor junction no longer meets specification.

3. **Oxide rupture**
   Thin dielectric is punctured.

4. **Immediate detection**
   Device may fail functional or parametric test.

© Tertiary Infotech Academy Pte Ltd

Physical defect signatures

1

Gate oxide rupture

A local dielectric puncture can create leakage, a short or loss of control.

2

Junction damage

High current density can produce leakage, spiking or a shorted junction.

3

Metallisation damage

Local heating can melt, open or bridge an interconnect.

4

Passivation and edge damage

Surface or edge breakdown can shift parameters and weaken long-term margin.

© Tertiary Infotech Academy Pte Ltd

Latent and cumulative degradation

PRINCIPLE / USE

- A degraded device may still pass initial functional test.
- Leakage or margins can shift after an event.

RISK / DECISION

- The latent-failure concept is debated; evidence must distinguish ESD from other overstress causes.
- Repeated mishandling can cumulatively degrade parameters.

© Tertiary Infotech Academy Pte Ltd

ESD versus electrical overstress (EOS)

PRINCIPLE / USE

- ESD: rapid electrostatic charge transfer, usually short duration and fast rise time.
- Evidence includes handling history, field sources and microscopic damage pattern.

RISK / DECISION

- EOS: broader excessive electrical energy exposure from power, wiring or transients.
- Do not label every burnt part as ESD without a disciplined failure analysis.

© Tertiary Infotech Academy Pte Ltd

Device-level protection techniques

1. **Steering diodes**
   Route pin current toward supply rails.


2. **Clamp structures**
   Turn on during a transient to limit internal voltage.

3. **Series impedance**
   Restrict current and reduce stress entering the core.

4. **Layout discipline**
   Short, low-inductance paths and adequate spacing make protection effective.

© Tertiary Infotech Academy Pte Ltd

Protection structures divert current from the core

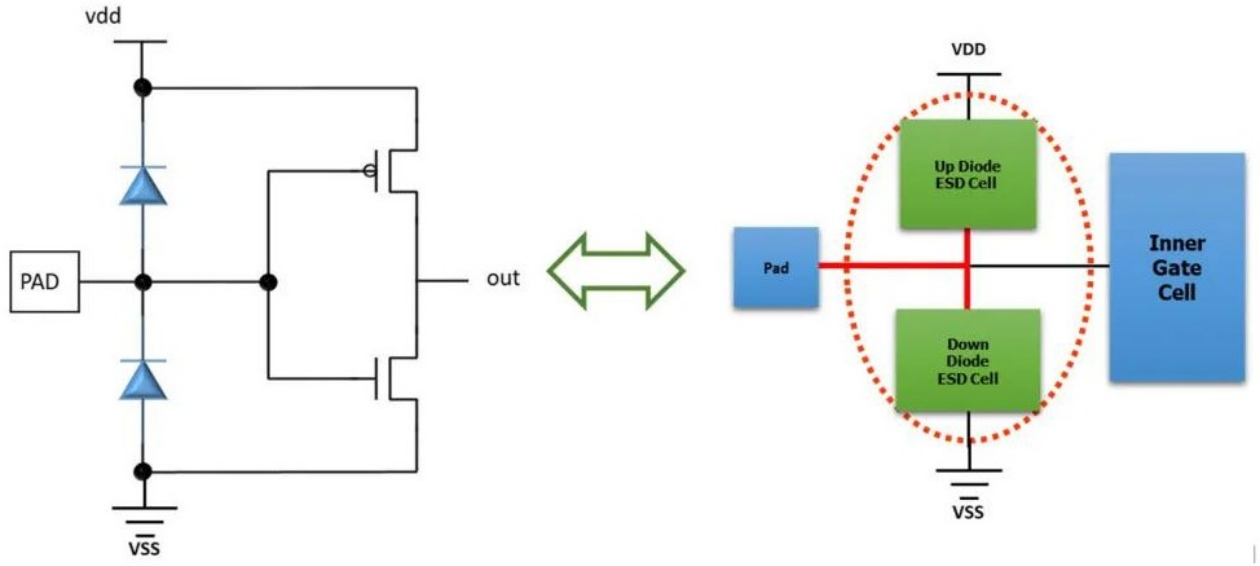


Technical figure retained from source deck slide 87

1. Rail-steering structures provide a lower-stress current path.
2. Clamp and layout performance depend on the complete transient path.
3. External handling controls remain necessary for qualified devices.

Use the current controlled standard and test method for execution.

© Tertiary Infotech Academy Pte Ltd

Where exposure occurs

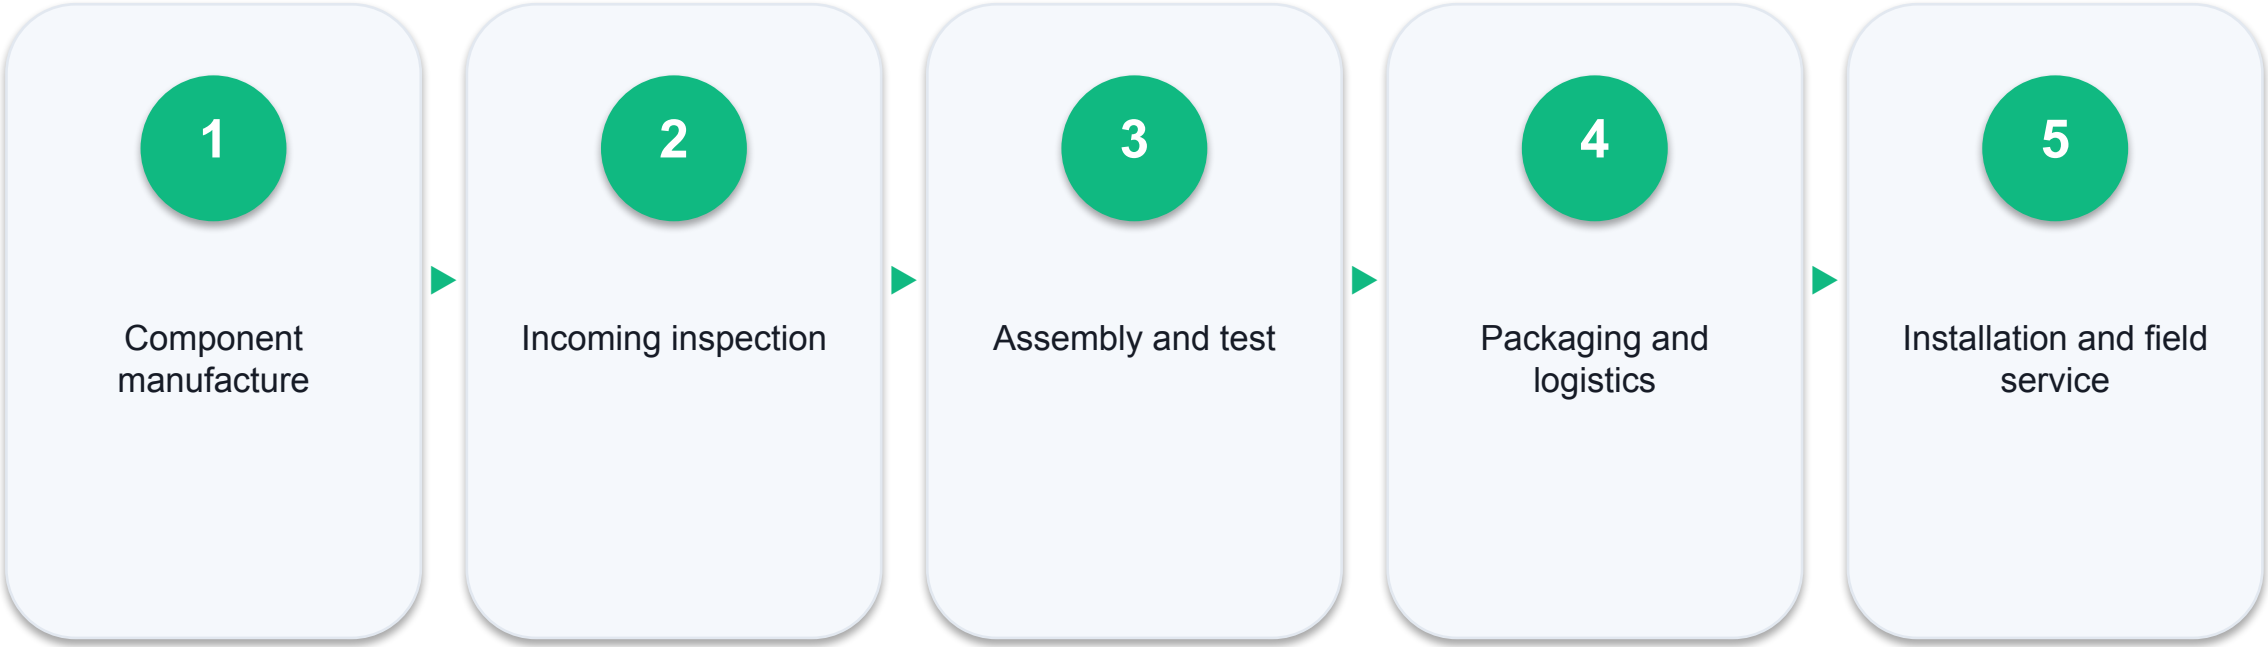

© Tertiary Infotech Academy Pte Ltd

Which devices may be sensitive?

1

Semiconductors

ICs, MOSFETs, diodes and precision analog parts.

2

Assemblies

Populated PCBs and hybrid circuits.

3

Sensors

Optoelectronic, microwave, piezoelectric and recording-head devices.


4

Supplier data

Actual sensitivity comes from product qualification information.


© Tertiary Infotech Academy Pte Ltd

Economic impact pathway

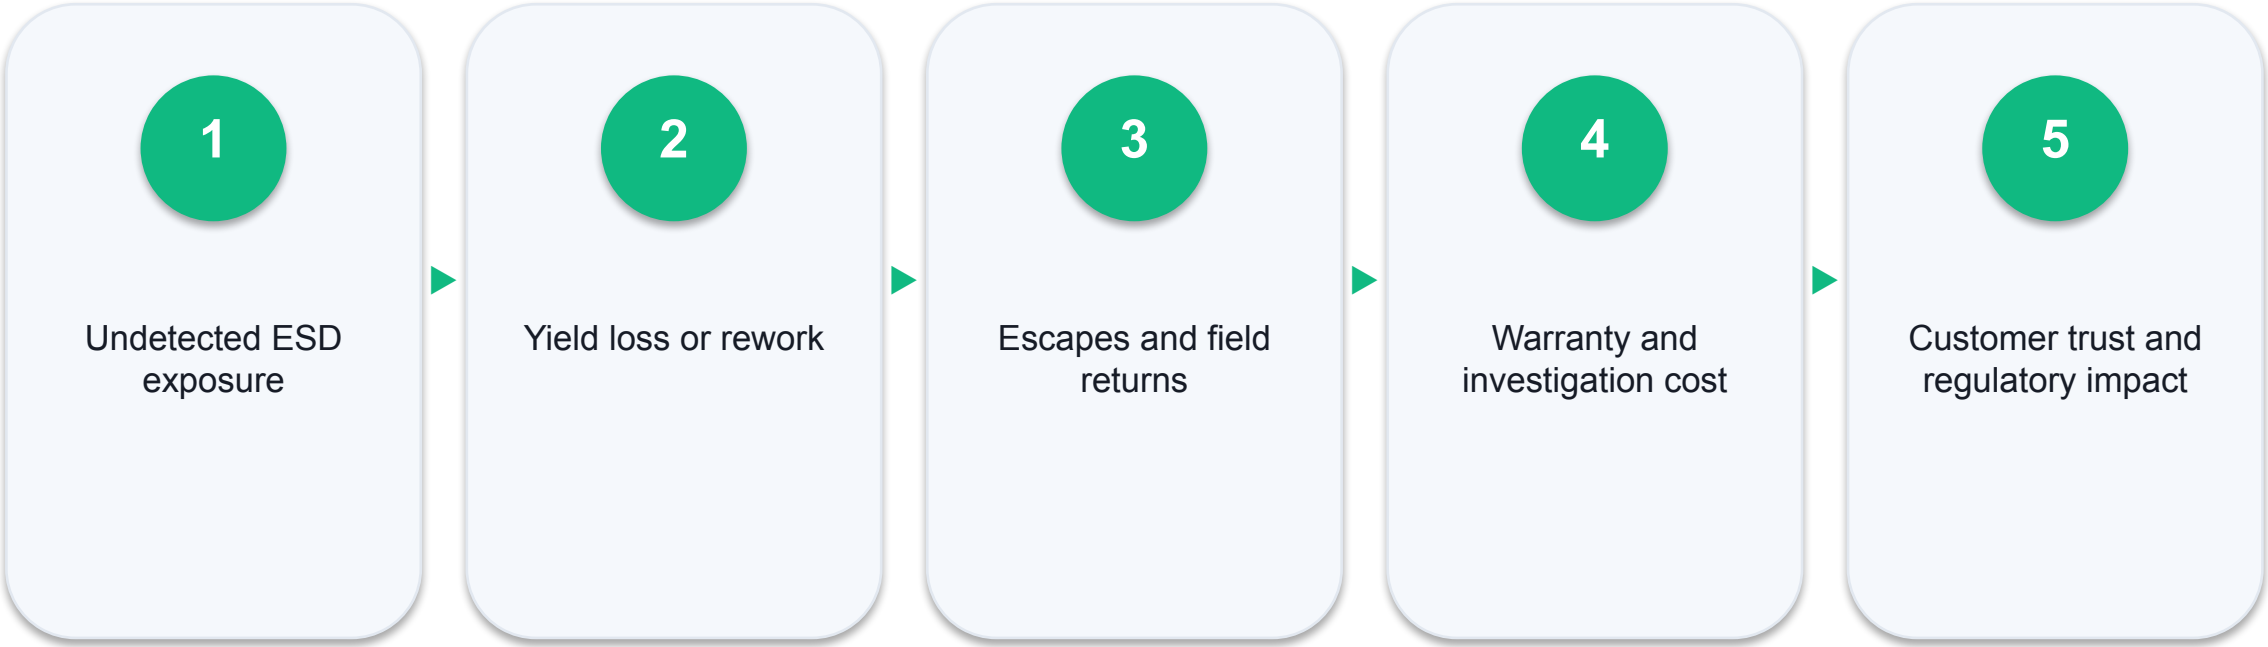

© Tertiary Infotech Academy Pte Ltd

The reliability escape chain

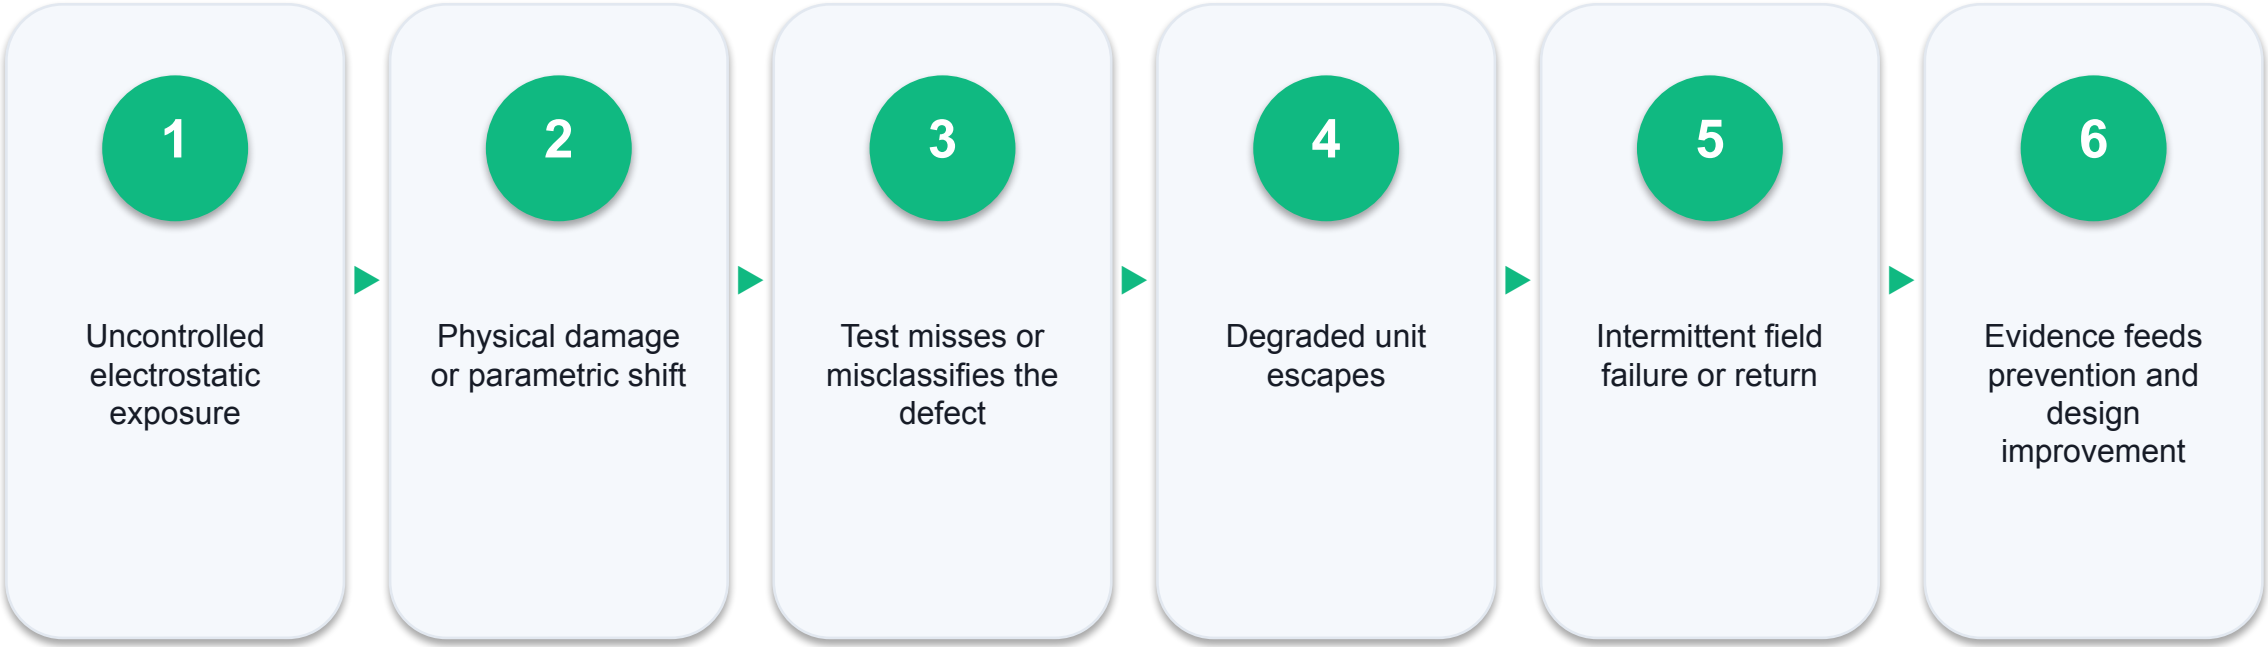

© Tertiary Infotech Academy Pte Ltd

Risk-based prioritisation

1 **Sensitivity**
Lowest credible device withstand level.

2 **Exposure**
People, motion, insulators, automation and transport.

3 **Detectability**
Whether damage is caught before shipment.

4 **Consequence**
Safety, quality, cost, customer and downtime impact.

© Tertiary Infotech Academy Pte Ltd

Lunch Break

45 minutes

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 01 · K1 · A1

Static Hazard Hunt at NovaSense Incoming Inspection

NovaSense receives MEMS sensor trays beside a label printer, stretch-wrap station and wheeled inspection trolley. Failure returns increased after a layout change, but no one has mapped charge-generation and induction risks.

MISSION

Identify credible charge sources, exposed ESDS items, isolated conductors and field-coupling paths, then prioritise controls.

Roles: ESD engineer · incoming-inspection supervisor · quality observer

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 01

Scenario questions

DISCUSS / DECIDE

- Which hazard could damage a device without a visible spark?
- Which metal object could remain charged despite being conductive?
- What evidence would distinguish induction risk from direct contact?

QUALITY OF REASONING

- Work from the evidence provided.
- State assumptions and missing evidence.
- Use current controlled limits and methods.
- Challenge the first explanation before concluding.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 01 · VERIFY

Evidence and acceptance gate

EVIDENCE TO SUBMIT

- Annotated hazard map
- Risk-prioritisation worksheet
- Three-control proposal
- Peer-review note

ACCEPTANCE CRITERIA

✓ At least eight credible hazards are identified

✓ Both direct and field-induced pathways are shown

✓ Top risks have evidence-based ratings

✓ Controls follow the ESD control hierarchy

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 02 · K1 · A1

Medical Microchip Failure Triage: ESD, EOS or Process Defect?

A medical-device ASIC passes wafer test but shows intermittent leakage after final assembly. A handler alarm occurred during the lot, yet the power-supply log also shows a transient. Management wants a defensible triage before quarantined product is released.

MISSION

Build an evidence-based hypothesis that separates HBM/CDM exposure, EOS and non-electrical process causes.

Roles: reliability engineer · failure-analysis lead · production manager

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 02

Scenario questions

DISCUSS / DECIDE

- Why is a monitor alarm not proof that this device was damaged by ESD?
- Which facts make CDM plausible?
- What would make the latent-failure claim weak?

QUALITY OF REASONING

- Work from the evidence provided.
- State assumptions and missing evidence.
- Use current controlled limits and methods.
- Challenge the first explanation before concluding.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 02 · VERIFY

Evidence and acceptance gate

EVIDENCE TO SUBMIT

- Chronology
- Hypothesis matrix
- Containment plan
- Decision-gate briefing

ACCEPTANCE CRITERIA

✓ ESD, EOS and process alternatives remain explicit

✓ Evidence needed for each hypothesis is stated

✓ Containment protects product and evidence

✓ Conclusions use calibrated language

© Tertiary Infotech Academy Pte Ltd

RETRIEVAL PRACTICE

Module 1 recap

1

Risk

Charge generation · discharge paths · HBM/MM/CDM · failure modes · business impact

2

Knowledge

K1 · A1

3

Evidence

Explain the decision and retain traceable records.

4

Next

Carry the controls into the following module.

© Tertiary Infotech Academy Pte Ltd

02

MODULE 2 · K1 · K3 · K4 · A1

ESD Control Principles, Equipment and Practices

EPA design · grounding and bonding · personnel controls · ionisation · packaging · maintenance

© Tertiary Infotech Academy Pte Ltd

The ESD control hierarchy

1. Identify ESDS items and process limits
2. Remove unnecessary charge generators
3. Ground and bond conductors
4. Neutralise essential insulators
5. Shield during storage and transport
6. Verify and improve

© Tertiary Infotech Academy Pte Ltd

Electrostatic Protected Area (EPA)

1. **Boundary**
   A defined area with controlled entry and clear visual identification.

2. **Common point**
   A known reference for compatible grounding and bonding.

3. **Approved items**
   Only qualified materials, tools and equipment inside.

4. **Behaviour**
   Handling rules, training and compliance verification are enforced.

© Tertiary Infotech Academy Pte Ltd

An EPA is a controlled system—not a bench accessory

1. Defined boundary and authorised materials
2. Equipotential paths for people, bench and fixtures
3. Handling discipline plus verification evidence



© Tertiary Infotech Academy Pte Ltd

Grounding versus bonding

PRINCIPLE / USE

- Grounding connects a conductor to a verified reference.
- Personnel and equipment paths must be compatible with safety requirements.

RISK / DECISION

- Bonding connects conductors so they remain at substantially the same potential.
- Bond isolated metal objects even when they are not intentionally energised.

© Tertiary Infotech Academy Pte Ltd

Common point ground architecture

1. Facilities/equipment ground verified
2. EPA common point established
3. Mat and fixtures bonded
4. Personnel grounding connected
5. Continuity monitored and recorded

© Tertiary Infotech Academy Pte Ltd

Personnel grounding choices

1

Seated work

Wrist strap with tested cord and verified connection.

2

Standing/mobile

Foot grounders or qualified footwear/flooring system.

3

Continuous monitoring

Real-time alarm when the selected path leaves limits.

© Tertiary Infotech Academy Pte Ltd

Wrist-strap control loop

1. Inspect band and cord
2. Test before use
3. Connect to approved point
4. Maintain skin contact
5. Respond immediately to alarm/failure

© Tertiary Infotech Academy Pte Ltd

Footwear and flooring as a system

PRINCIPLE / USE

- Foot grounders/ESD footwear provide the personnel interface.
- Correct wear and both-foot coverage matter.

RISK / DECISION

- Qualified flooring completes the path.
- Contamination, wax, humidity and wear can change performance.

© Tertiary Infotech Academy Pte Ltd

Worksurface and tool control

1. **Dissipative mat**
   Provides controlled charge decay and a defined work zone.

2. **Grounded fixtures**
   Prevents isolated conductive metal.

3. **ESD-safe tools**
   Tweezers, brushes and dispensers selected for the process.

4. **Housekeeping**
   Cleaners and residues must not defeat electrical properties.

© Tertiary Infotech Academy Pte Ltd

Essential insulators

1. Identify the process need
2. Measure field at the actual use distance
3. Increase separation where possible
4. Apply ionisation or shielding
5. Verify after changes

© Tertiary Infotech Academy Pte Ltd

Ionisation

PRINCIPLE / USE

- Balanced positive and negative ions neutralise charges on insulators and isolated conductors.
- Use where grounding is ineffective or impossible.

RISK / DECISION

- Verify offset/balance and decay performance at the work location.
- Airflow, distance, contamination and emitter maintenance affect results.

© Tertiary Infotech Academy Pte Ltd

Electrostatic field shielding

1

Conductive enclosure

Redistributes external charge and protects contents when closed.

2

Shielding bag

Provides a protective envelope for transport outside the EPA.

3

Continuity

Seams, closures and openings determine actual performance.

© Tertiary Infotech Academy Pte Ltd

Packaging functions are different

1 **Low charging**
Limits triboelectric generation during contact/separation.

2 **Dissipative**
Moves charge in a controlled way.

3 **Conductive**
Rapidly redistributes charge; may need grounding.

4 **Shielding**
Attenuates discharge current and electrostatic fields around contents.

© Tertiary Infotech Academy Pte Ltd

Handling ESDS items

1. Confirm EPA readiness
2. Ground the handler
3. Open shielding package inside EPA
4. Handle by body/edges
5. Return to protective packaging before leaving

© Tertiary Infotech Academy Pte Ltd

Safe handling keeps product inside a verified protection envelope

1. Ground the complete person-to-reference path
2. Hold assemblies by edges and avoid terminals
3. Open and close shielding packaging only in the controlled area



© Tertiary Infotech Academy Pte Ltd

Garments, gloves and finger cots

PRINCIPLE / USE

- Garments control charge from clothing and help contain personal items.
- Select design and grounding method for the process.

RISK / DECISION

- Gloves/finger cots may support contamination control but are not automatically ESD-safe.
- Qualification and correct use are required.

© Tertiary Infotech Academy Pte Ltd

Carts, racks and material movement

1

Conductive wheels

Maintain the intended path only when floor contact is suitable.

2

No loose insulators

Remove ordinary plastic wrap and foam near exposed ESDS items.

3

Covered transport

Use closed qualified containers outside EPA boundaries.

4

Route control

Avoid high-charging areas and unmanaged handoffs.

© Tertiary Infotech Academy Pte Ltd

Maintenance is part of control

1. Define owner and interval
2. Inspect and clean
3. Test with calibrated equipment
4. Record result and disposition
5. Trend failures and revise interval

© Tertiary Infotech Academy Pte Ltd

Common failure patterns

1. **Disconnected strap**
   Cord attached to an unverified point or worn over clothing.

2. **Open bag**
   Shielding package left open or folded incorrectly.

3. **Insulator creep**
   Tape, foam, trays or paperwork introduced without review.

4. **Bad response**
   Alarm bypassed, failed tester ignored or record completed retrospectively.

© Tertiary Infotech Academy Pte Ltd

Supervisor’s EPA readiness review

1

People

Training current; grounding tested; behaviour observed.

2

Place

Boundary, common point, floor, mat and ioniser verified.

3

Product

Sensitivity known; packaging and process controls matched.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 03 · K3 · K4 · A1

Design and Commission an EPA for Orion Optics

Orion Optics is moving laser-diode assembly into a small shared lab. The proposed bench has a mat and wrist strap but no documented boundary, common point, insulator policy or readiness test.

MISSION

Design an EPA that controls people, place, product and process, then define commissioning evidence.

Roles: ESD engineer · facilities engineer · lab manager

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 03

Scenario questions

DISCUSS / DECIDE

- What makes the area an EPA rather than simply a bench with a mat?
- Which item cannot be made safe by grounding alone?
- What evidence authorises production start?

QUALITY OF REASONING

- Work from the evidence provided.
- State assumptions and missing evidence.
- Use current controlled limits and methods.
- Challenge the first explanation before concluding.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 03 · VERIFY

Evidence and acceptance gate

EVIDENCE TO SUBMIT

- EPA layout
- Grounding/bonding diagram
- Insulator-control register
- Commissioning plan and readiness certificate

ACCEPTANCE CRITERIA

✓ Boundary and product flow are unambiguous

✓ All conductors have a resolved status

✓ Essential insulators have controls

✓ Commissioning includes method, limit, owner and response

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 04 · K3 · K4 · A1

Select Controls for the Aster Robotics Handling Cell

A robot transfers packaged ICs from plastic tubes to a grounded nest. Operators also perform manual rework. The team proposes more wrist straps, but field readings near the tube exit remain high.

MISSION

Match grounding, ionisation, shielding, handling and monitoring controls to both human and automated exposure pathways.

Roles: automation engineer · ESD specialist · maintenance supervisor

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 04

Scenario questions

DISCUSS / DECIDE

- Why will adding wrist straps not solve the tube-exit field?
- Which controls address CDM risk?
- What should happen when an ioniser check fails?

QUALITY OF REASONING

- Work from the evidence provided.
- State assumptions and missing evidence.
- Use current controlled limits and methods.
- Challenge the first explanation before concluding.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 04 · VERIFY

Evidence and acceptance gate

EVIDENCE TO SUBMIT

- Exposure-path map
- Control-selection matrix
- Monitoring/stop-condition plan
- Maintenance plan

ACCEPTANCE CRITERIA

✓ Controls cover human and automated pathways

✓ Insulators are addressed by an appropriate method

✓ Monitoring has explicit response actions

✓ Residual risk is stated

© Tertiary Infotech Academy Pte Ltd

RETRIEVAL PRACTICE

Module 2 recap

1

Risk

EPA design · grounding and bonding · personnel controls · ionisation · packaging · maintenance

2

Knowledge

K1 · K3 · K4 · A1

3

Evidence

Explain the decision and retain traceable records.

4

Next

Carry the controls into the following module.

© Tertiary Infotech Academy Pte Ltd

Day 1 Complete

Return on time for Day 2 digital attendance

© Tertiary Infotech Academy Pte Ltd

03

MODULE 3 · K2 · K3 · A2 · A3

ESD Standards, Testing and Auditing

Control programme structure · measurements · compliance verification · evidence · performance metrics

© Tertiary Infotech Academy Pte Ltd

ANSI/ESD S20.20-2021 and IEC 61340-5-1:2024 structure organisational controls for protecting ESDS items.

Use the current controlled copy, customer requirements and product sensitivity data for exact limits and methods.

© Tertiary Infotech Academy Pte Ltd

The standards stack has distinct purposes

1

Programme requirements

ANSI/ESD S20.20-2021 or IEC 61340-5-1:2024 defines the control-programme framework.

2

Methods and verification

Referenced test methods and verification guidance define how control items are qualified and checked.


3

Site and customer controls

The approved control plan tailors product sensitivity, process risk, limits, frequency, records and response.

© Tertiary Infotech Academy Pte Ltd

Control programme architecture

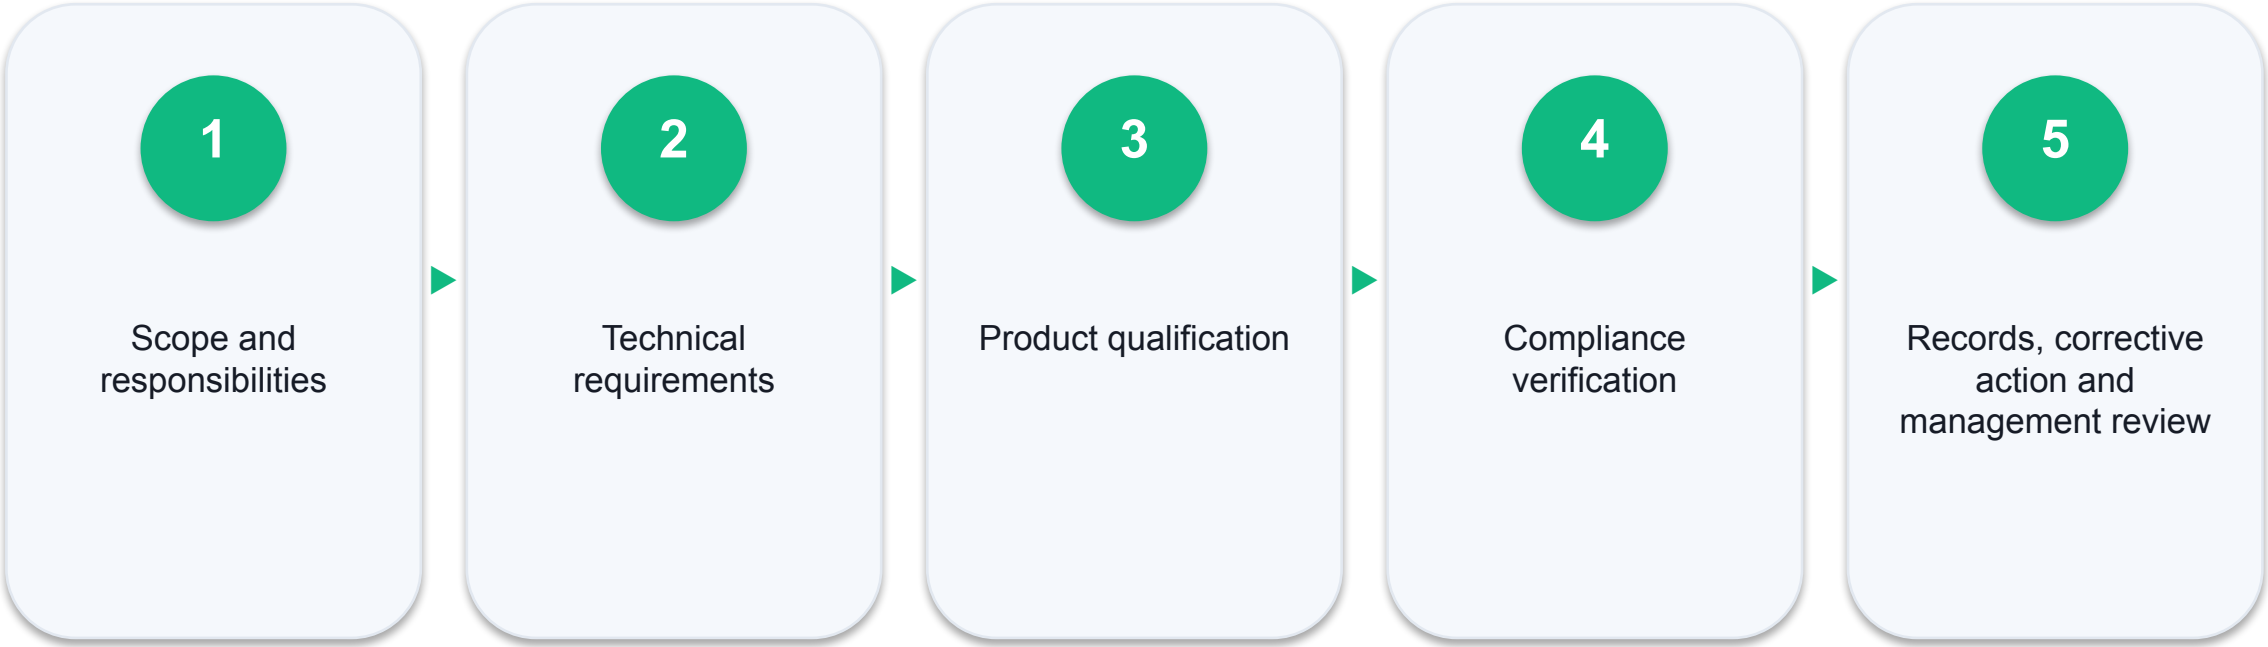

© Tertiary Infotech Academy Pte Ltd

Product qualification versus compliance verification

PRINCIPLE / USE

- Qualification demonstrates that an ESD control item/type is capable of meeting specified requirements.
- Evidence may include supplier data or internal testing.

RISK / DECISION

- Compliance verification checks that installed controls remain effective in routine use.
- It uses defined methods, frequencies, limits and response actions.

© Tertiary Infotech Academy Pte Ltd

Instrument-to-risk map

1

Resistance meter

Worksurfaces, floors, garments, packaging and ground paths.

2

Personnel tester

Wrist straps, footwear and person/footwear/floor systems.

3

Field meter

Electrostatic field and charged-object screening.


4

Charge plate monitor

Ioniser decay and offset/balance performance.

© Tertiary Infotech Academy Pte Ltd

Measurement discipline

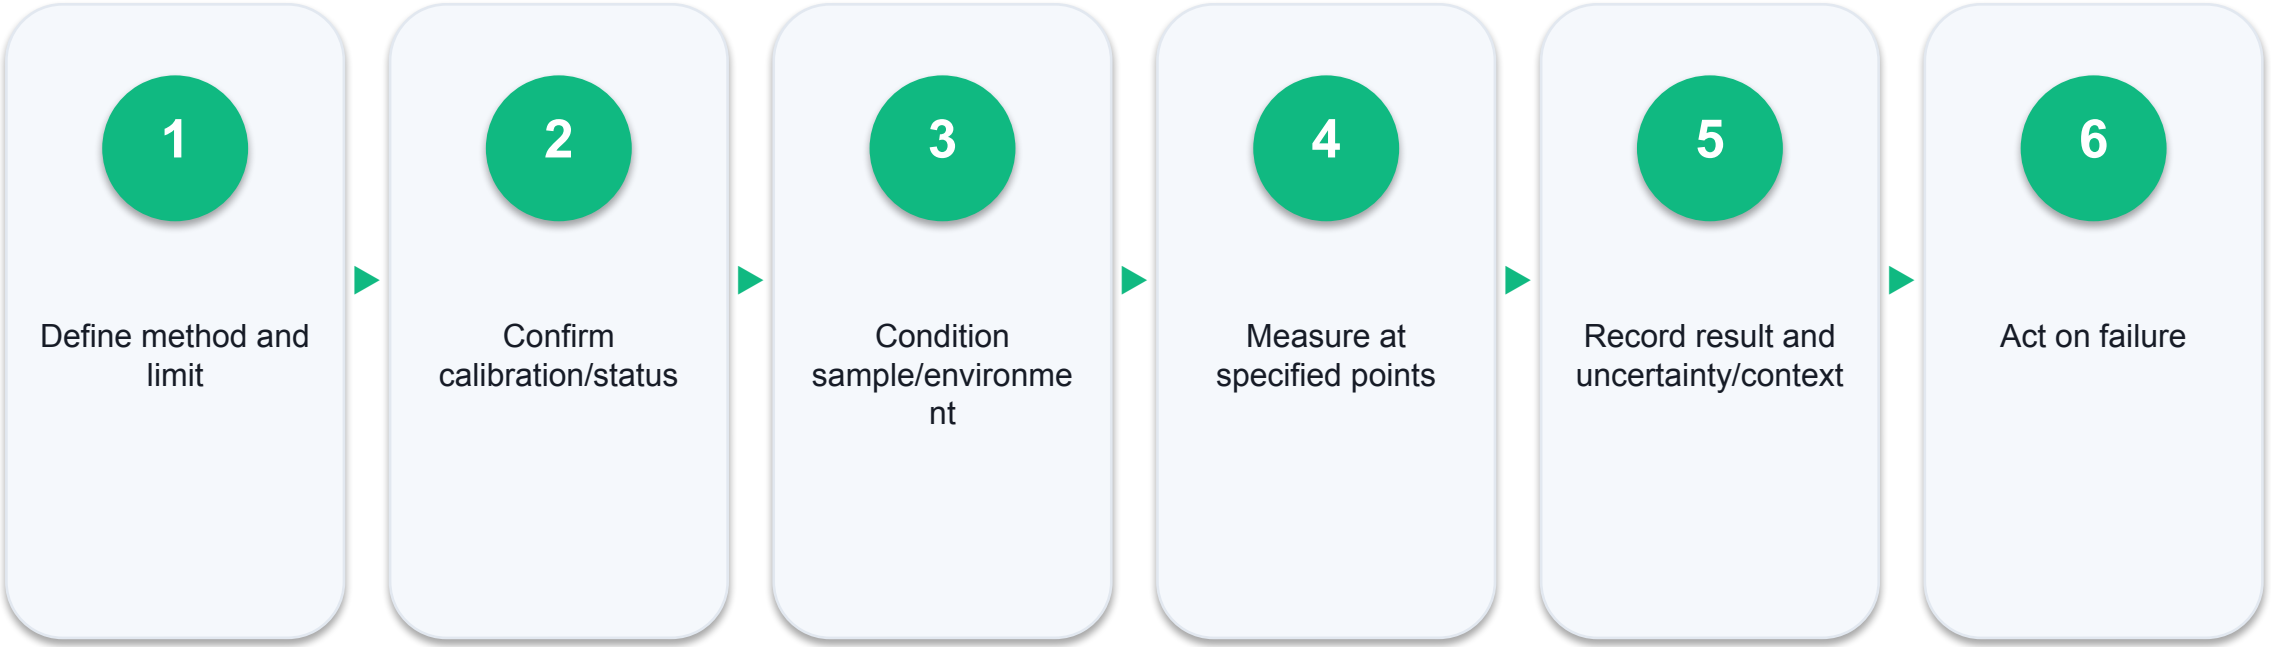

© Tertiary Infotech Academy Pte Ltd



MODULE 3 · OPERATING CONTEXT

Verification turns a control claim into traceable evidence

1. Use the specified instrument, electrodes and method
2. Record environment, location, units and first-pass result
3. Contain and investigate failures before accepting a retest

© Tertiary Infotech Academy Pte Ltd

Wrist strap and footwear checks

PRINCIPLE / USE

- Daily/user checks screen the assembled personal grounding path before work.
- Failure requires immediate stop, retest and disposition.

RISK / DECISION

- Periodic technical checks verify components, testers and flooring systems.
- Trend repeated failures by user, device, location and shift.

© Tertiary Infotech Academy Pte Ltd

Surface and point-to-ground resistance

1

Point-to-point

Characterises the path across a surface/material.

2

Point-to-ground

Characterises the installed path to the designated ground.

3

Context

Electrodes, voltage, dwell, humidity and cleanliness influence the reading.

© Tertiary Infotech Academy Pte Ltd

Ioniser performance checks

1. Inspect placement and airflow
2. Warm up per procedure
3. Measure positive/negative decay
4. Measure offset/balance
5. Clean or adjust
6. Repeat and record

© Tertiary Infotech Academy Pte Ltd

Audit evidence pyramid

1 **Observe**
Actual behaviour at the workstation.

2 **Measure**
Current test results from calibrated instruments.

3 **Interview**
Personnel can explain risk and response.

4 **Records**
Training, qualification, maintenance, failures and CAPA are traceable.

© Tertiary Infotech Academy Pte Ltd

Risk-based audit sampling

PRINCIPLE / USE

- Increase attention where products are most sensitive, exposure is high or process changes are recent.
- Sample across shifts, people and workstations.

RISK / DECISION

- Do not let a checklist replace observation and measurement.
- A single passing sample does not prove the entire system.

© Tertiary Infotech Academy Pte Ltd

Nonconformity grading

1

Critical

Immediate product/safety exposure; contain and escalate.

2

Major

Systemic or repeated breakdown; formal CAPA and verification.

3

Minor/observation

Local weakness or improvement opportunity; track proportionately.

© Tertiary Infotech Academy Pte Ltd

Corrective-action loop



© Tertiary Infotech Academy Pte Ltd

Useful ESD performance metrics

1

Leading

Test completion, first-pass pass rate, overdue calibration, training currency.

2

Process

EPA audit score, insulator findings, alarm response time.

3

Lagging

ESD-attributed escapes, scrap, rework and field returns.

4

Learning

Repeat causes, CAPA recurrence and time-to-effective closure.

© Tertiary Infotech Academy Pte Ltd

Management review questions

1

Effective?

Are controls reducing exposure and failures?

2

Adequate?

Do changes in products/processes require new controls?

3

Sustained?

Are verification, training and CAPA completed on time?

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 05 · K2 · K3 · A2

Execute a Compliance Verification Round

Meridian Electronics has four EPAs on two shifts. Recent records show perfect results but several tester failures were repaired without documented product disposition. You must execute a verification round using a simulated data pack.

MISSION

Plan, execute and record traceable checks for personnel grounding, resistance, electrostatic field and ioniser performance.

Roles: ESD auditor · area owner · instrument custodian

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 05

Scenario questions

DISCUSS / DECIDE

- Why is a retest pass insufficient without investigating the first failure?
- Which contextual data makes a resistance reading defensible?
- Where should ioniser performance be checked?

QUALITY OF REASONING

- Work from the evidence provided.
- State assumptions and missing evidence.
- Use current controlled limits and methods.
- Challenge the first explanation before concluding.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 05 · VERIFY

Evidence and acceptance gate

EVIDENCE TO SUBMIT

- Completed measurement log
- Failure/disposition records
- Metric calculation
- Signed evidence package

ACCEPTANCE CRITERIA

✓ Every result includes method, units and conditions

✓ Instrument status is verified

✓ First-pass failures remain visible

✓ Product impact and response are documented

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 06 · K2 · A2 · A3

Standards-Based EPA Audit at Helix Assembly

Helix Assembly claims alignment to ANSI/ESD S20.20 and IEC 61340-5-1. A new customer requests evidence that controls are implemented, verified and improved—not merely purchased.

MISSION

Conduct a risk-based audit using observation, measurement, interview and records, then issue graded findings and corrective-action requests.

Roles: lead auditor · ESD programme coordinator · customer observer

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 06

Scenario questions

DISCUSS / DECIDE

- What evidence shows a control is sustained rather than merely installed?
- Why must the exact controlled standard govern numerical limits?
- What makes a finding actionable?

QUALITY OF REASONING

- Work from the evidence provided.
- State assumptions and missing evidence.
- Use current controlled limits and methods.
- Challenge the first explanation before concluding.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 06 · VERIFY

Evidence and acceptance gate

EVIDENCE TO SUBMIT

- Audit plan
- Completed checklist
- Evidence register
- Graded findings and follow-up plan

ACCEPTANCE CRITERIA

✓ Sampling is risk-based

✓ Findings cite objective evidence

✓ Critical exposure triggers containment

✓ Follow-up tests effectiveness, not only completion

© Tertiary Infotech Academy Pte Ltd

RETRIEVAL PRACTICE

Module 3 recap

1

Risk

Control programme structure · measurements · compliance verification · evidence · performance metrics

2

Knowledge

K2 · K3 · A2 · A3

3

Evidence

Explain the decision and retain traceable records.

4

Next

Carry the controls into the following module.

© Tertiary Infotech Academy Pte Ltd

Afternoon Break

10 minutes

© Tertiary Infotech Academy Pte Ltd

04

MODULE 4 · K4 · A2 · A3

Training, Awareness and Incident Improvement

Competence · behaviour · reporting · root-cause analysis · CAPA · management ownership

© Tertiary Infotech Academy Pte Ltd

Competence is role-specific

1

Operators

Recognise ESDS items, enter EPA correctly and handle/pack safely.

2

Technicians

Set up, test, troubleshoot and maintain controls.

3

Engineers

Define limits, qualify controls and investigate events.

4

Managers

Provide resources, review metrics and remove systemic barriers.

© Tertiary Infotech Academy Pte Ltd

From awareness to reliable behaviour

1. Explain the invisible risk
2. Demonstrate the correct method
3. Practise with feedback
4. Observe on the job
5. Reinforce and requalify

© Tertiary Infotech Academy Pte Ltd

ESD champions and supervision

1

Coach

Give immediate, specific feedback at the workstation.

2

Escalate

Stop unsafe handling and trigger containment when required.

3

Learn

Share incident lessons without normalising blame.

© Tertiary Infotech Academy Pte Ltd

Recognising a possible ESD incident

1

Product symptom

Sudden failure, parametric shift, intermittent behaviour or unexplained fallout.

2

Control signal

Monitor alarm, failed tester, ioniser drift or broken ground path.

3

Exposure clue

Unprotected handling, ordinary plastic, low humidity or process change.

4

Caution

Symptoms are not proof; preserve evidence for diagnosis.

© Tertiary Infotech Academy Pte Ltd

Immediate response

1. Stop and protect the process
2. Segregate potentially affected product
3. Preserve settings, logs and samples
4. Notify defined roles
5. Begin evidence-based triage

© Tertiary Infotech Academy Pte Ltd

Incident evidence set

1. **What/where/when**
   Product, lot, station, timestamp and sequence.

2. **Environment**
   Humidity, temperature, nearby motion and insulators.

3. **Controls**
   Tester logs, monitor alarms, grounding and ioniser status.

4. **People/process**
   Who handled it, procedure used and recent changes.

© Tertiary Infotech Academy Pte Ltd

Incident analysis protects both product and evidence

1. Preserve suspect parts, logs and workstation state
2. Separate ESD hypotheses from EOS and process alternatives
3. Convert findings into CAPA with an effectiveness check



© Tertiary Infotech Academy Pte Ltd

Root-cause analysis without blame

PRINCIPLE / USE

- Ask why the system allowed exposure: design, maintenance, method, material, measurement or management.
- Distinguish root, contributing and detection causes.

RISK / DECISION

- Avoid stopping at 'operator error'.
- A repeated behaviour usually reflects unclear standards, weak design, workload or ineffective supervision.

© Tertiary Infotech Academy Pte Ltd

Selecting corrective actions

1. Remove generator/exposure
2. Engineer a reliable ground or enclosure
3. Add detection/monitoring
4. Standardise work and response
5. Train and verify competence
6. Measure sustained effectiveness

© Tertiary Infotech Academy Pte Ltd

Communicating ESD risk

1

Frontline

Show the exact handling risk and the stop-work response.

2

Engineering

Use measurements, failure evidence and process capability.

3

Management

Translate risk into yield, customer, compliance and continuity impact.

© Tertiary Infotech Academy Pte Ltd

A sustainable ESD culture

1

Visible ownership

Named programme coordinator and local owners.

2

Just reporting

Near misses and failures can be reported without concealment.

3

Closed loop

Findings become actions, verified changes and updated standards.

4

Learning cadence

Metrics, incidents and changes are reviewed regularly.

© Tertiary Infotech Academy Pte Ltd

Competency certification

PRINCIPLE / USE

- Internal authorisation should match the tasks a person performs.
- Use knowledge, demonstration and observed-work evidence.

RISK / DECISION

- External credentials may support development but do not replace site-specific qualification.
- Reassess after major changes, lapse or repeated nonconformance.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 07 · K4 · A2 · A3

Investigate the PulseMed ESD Incident

PulseMed sees intermittent failures in a safety-relevant control board after a temporary operator used ordinary bubble wrap near final test. A monitor alarm was acknowledged but production continued for 47 minutes.

MISSION

Contain risk, preserve evidence, identify system causes and produce a verified CAPA plan.

Roles: incident lead · production manager · quality/reliability representative

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 07

Scenario questions

DISCUSS / DECIDE

- Which system weakness allowed the alarm to be ignored?
- What evidence must be preserved before resetting the workstation?
- How will you prove the CAPA was effective?

QUALITY OF REASONING

- Work from the evidence provided.
- State assumptions and missing evidence.
- Use current controlled limits and methods.
- Challenge the first explanation before concluding.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 07 · VERIFY

Evidence and acceptance gate

EVIDENCE TO SUBMIT

- Containment record
- Timeline and causal analysis
- CAPA plan
- Effectiveness-verification plan

ACCEPTANCE CRITERIA

✓ Exposure window and product scope are defined

✓ Causes extend beyond individual blame

✓ Actions address root and detection causes

✓ Effectiveness has measurable evidence

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 08 · K1–K4 · A1–A3

Management Capstone: Build the Apex ESD Control Plan

Apex Microsystems is opening a mixed lab/factory line for sensitive industrial controllers. Management needs an auditable ESD control plan before customer qualification, covering controls, verification, competence, incidents and improvement.

MISSION

Integrate the complete course into a management-ready ESD control plan and defend it under assessment-style questioning.

Roles: ESD programme manager · operations manager · quality manager · customer assessor

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 08

Scenario questions

DISCUSS / DECIDE

- How does the plan demonstrate A1, A2 and A3?
- Which records prove the control programme remains effective?
- What management decision is triggered by deteriorating leading indicators?

QUALITY OF REASONING

- Work from the evidence provided.
- State assumptions and missing evidence.
- Use current controlled limits and methods.
- Challenge the first explanation before concluding.

© Tertiary Infotech Academy Pte Ltd

ACTIVITY 08 · VERIFY

Evidence and acceptance gate

EVIDENCE TO SUBMIT

- ESD control plan
- Qualification and verification matrices
- Competency matrix
- Metrics dashboard and 90-day roadmap

ACCEPTANCE CRITERIA

✓ All K and A criteria are traceable

✓ Controls have owners and evidence

✓ Failure response and CAPA are closed-loop

✓ Plan uses current controlled standards for exact requirements

© Tertiary Infotech Academy Pte Ltd

RETRIEVAL PRACTICE

Module 4 recap

1

Risk

Competence · behaviour · reporting · root-cause analysis · CAPA · management ownership

2

Knowledge

K4 · A2 · A3

3

Evidence

Explain the decision and retain traceable records.

4

Next

Carry the controls into the following module.

© Tertiary Infotech Academy Pte Ltd

COURSE SUMMARY

What You Achieved

1. **Recognise**
   Explain charge generation, induction, discharge models and damage.

2. **Control**
   Design an EPA and select grounding, ionisation, shielding and packaging.

3. **Verify**
   Choose instruments, evaluate records and audit programme effectiveness.

4. **Improve**
   Investigate incidents, recommend CAPA and manage competence.

© Tertiary Infotech Academy Pte Ltd

Courseware and Assessment on the LMS

1. Open the LMS portal
2. Select this course record
3. Download current courseware
4. Complete WA and Case Study
5. Upload completed answers

Open the LMS portal

© Tertiary Infotech Academy Pte Ltd

END-OF-COURSE REMINDER

Assessment

WA

- Written Assessment (SAQ): 1 hour.
- Four open-ended questions covering K1–K4.

CASE STUDY

- Case Study (CS): 1 hour.
- Two open-ended tasks covering A1–A3.

© Tertiary Infotech Academy Pte Ltd

Assessment Flow · Final Reminder

1. TRAQOM digital attendance
2. Assessment digital attendance
3. Sit WA then Case Study
4. Submit answers on the LMS
5. Sign Assessment Summary Record

© Tertiary Infotech Academy Pte Ltd

Digital Attendance (Mandatory)

1. **TRAQOM**
   Scan the live assessment attendance QR code.

2. **Verify**
   Confirm successful submission before assessment.

3. **Privacy**
   Use your own details and device.

4. **Support**
   Ask the trainer if the live code does not open.

© Tertiary Infotech Academy Pte Ltd

THANK YOU

ESD control is a system of engineered paths, disciplined behaviour and verified evidence.

Thank you · enquiry@tertiaryinfotech.com · +65 6100 0613

© Tertiary Infotech Academy Pte Ltd