


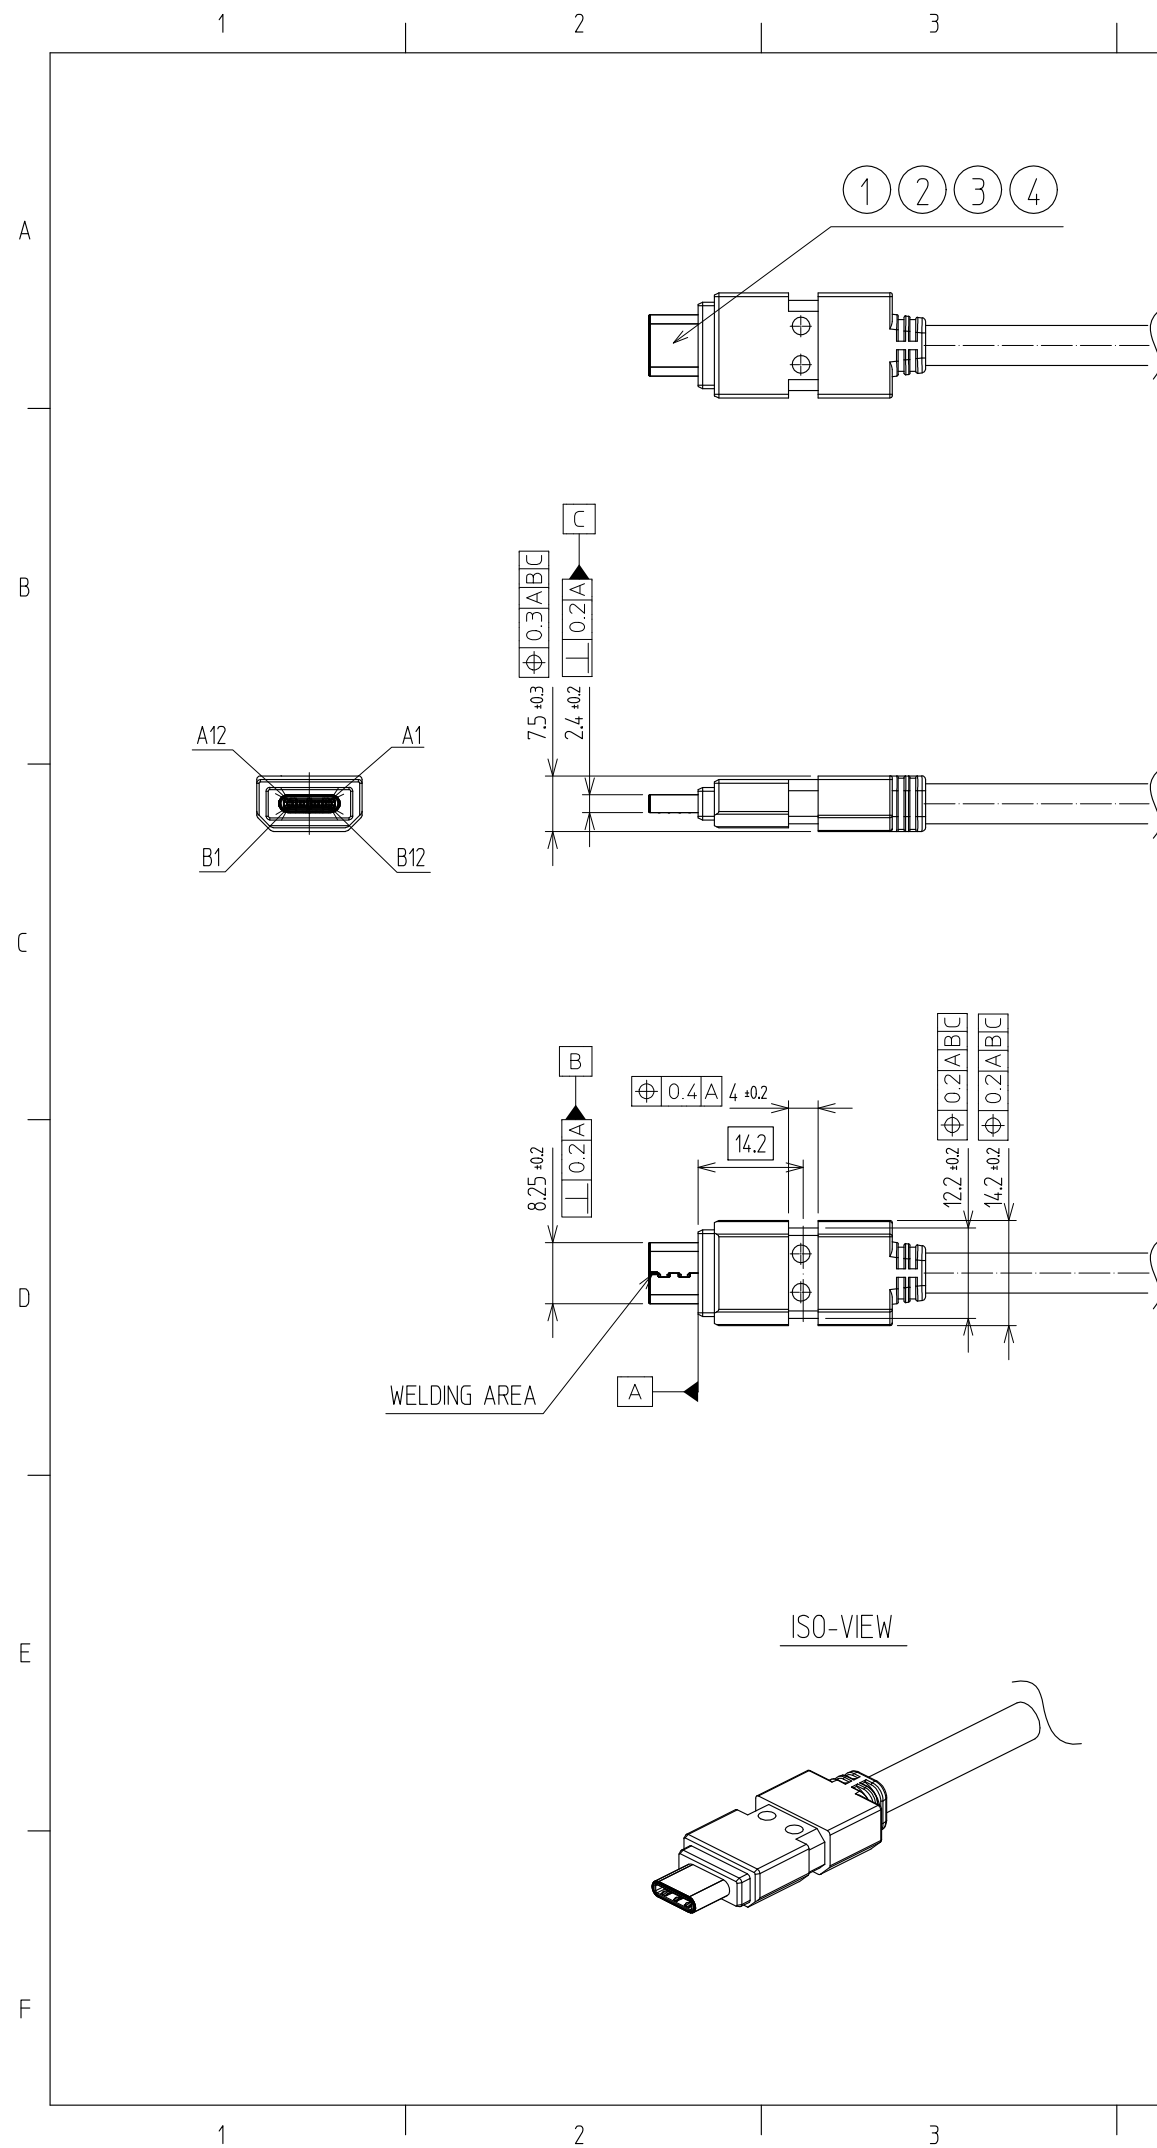

	△數 COUNT	訂正事項 DESCRIPTION OF REVISIONS	擔當 B Y	檢圖 CHKD	年 月 日 DATE		△數 COUNT	訂正事項 DESCRIPTION OF REVISIONS	擔當 B Y	檢圖 CHKD	年 月 日 DATE
△					.	△					.
△					.	△					.
△					.	△					.

NOTE:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5
2. CORNERS SHOWN AS SHARP ARE 0.2mm MAX RAD.
3. GENERAL TOLERANCE : ± 0.2
4. UNSPECIFIED RADIUS OR CHAMFER : 0.5
5. THIS CONNECTOR INTERFACE IS DESIGNED FOR PLUG INTERFACE DIMENSIONS SPECIFIED IN USB TYPE C CONNECTOR AND CABLE SPECIFICATION / RELEASE 2.3
6. RECOMMENDED RESIN PROPERTY TENSILE STRENGTH OF 125MPa
7. THIS DRAWING OF PORTION OF IT PERMITS SHARING ONLY TO PARTNER COMPANIES THAT TREAT HIROSE AUTOSERIES HARNESS AS A PRODUCT.
8. HIROSE DOES NOT PROVIDE ANY KIND OF WARRANTY OR INDEMNIFICATION, NOR DOES IT IMPLICITLY. IN PARTICULAR, THERE IS NO EXPRESS OR IMPLIED WARRANTY AGAINST THE LEGALITY, MARKETABILITY, OR ANY OTHER NON-INFRINGEMENT OF ANY KIND OF WARRANTY FOR ANY PARTICULAR PURPOSE. IN ADDITION, IT DOES NOT PROVIDE ANY KIND OF EXPRESS OR IMPLIED WARRANTY OR INDEMNIFICATION IN CONNECTION WITH THIRD PARTY CLAIMS ARISING UNDER THE INTELLECTUAL PROPERTY LAWS OF ANY COUNTRY.
9. APPEARANCE DAMAGE (DENTS, SCRATCHES, ETC.) THAT DOES NOT AFFECT FUNCTIONALITY IS JUDGED AS A GOOD PRODUCT.
10. WHEN INSERTING OR REMOVING THIS CONNECTOR WITHOUT HOUSING, HANDLE IT HORIZONTALLY WITHOUT TILTING IT.

4	OVER MOLD	TPE, BLACK COLOR					1
3	INNER MOLD	PE					1
2	SHIELD	STAINLESS STEEL					2
1	PCBA	CX60-24S1-UNIT, PCB					1
NO.	DESCRIPTIONS	REMARKS					Q' TY
CODE NO. (OLD)			DRAWN PARK 25.09.12 I.K	DESIGNED HAN 25.09.12 M.Y	CHECKED LIM 25.09.12 S.M	APPROVED LIM 25.09.12 S.M	RELEASED ENG 25.09.12 DEPT
	DRAWING NO. EDC3-634798		PART NO. AU1MS-24S-C1				
SCALE 1:1	 HIROSE KOREA CO.,LTD.		CODE NO CL 6696-0049-2				1/1
UNITS mm							