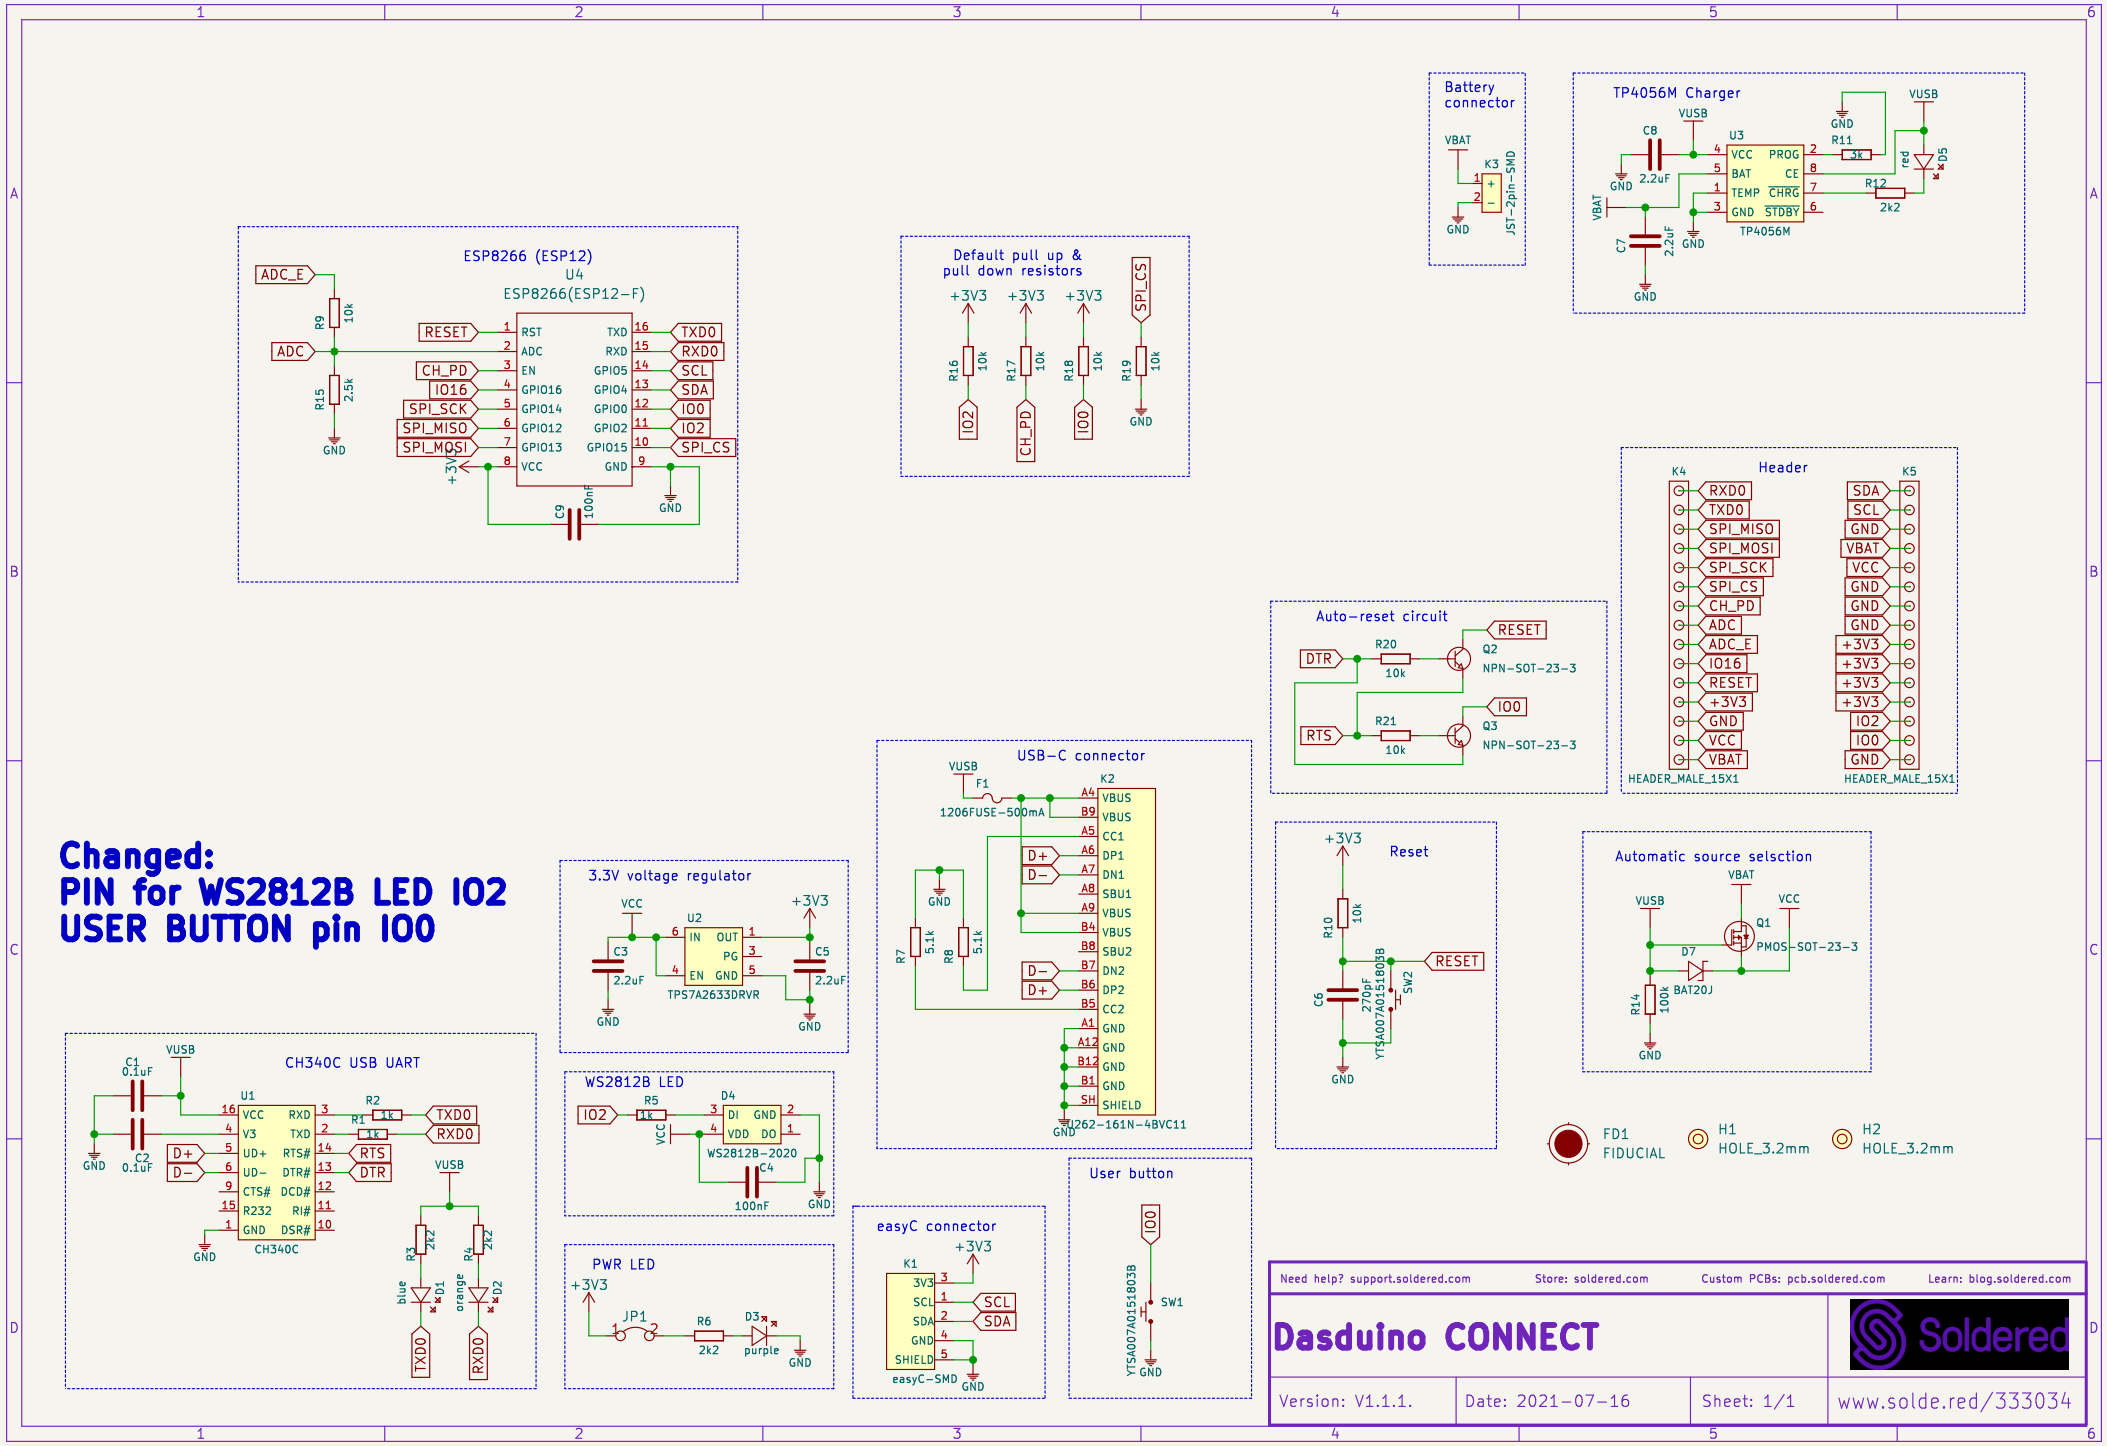
Changed:
PIN for WS2812B LED IO2
USER BUTTON pin IO0
ESP8266 (ESP12)
U4
ESP8266(ESP12-F)
Battery connector
TP4056M Charger
Default pull up & pull down resistors
Header
Auto-reset circuit
USB-C connector
3.3V voltage regulator
Reset
Automatic source selsction
CH340C USB UART
WS2812B LED
PWR LED
easyC connector
User button
FD1 FIDUCIAL
H1 HOLE_3.2mm
H2 HOLE_3.2mm
Need help? support.soldered.com
Store: soldered.com
Custom PCBs: pcb.soldered.com
Learn: blog.soldered.com
Dasduino CONNECT
Soldered
Version: V1.1.1.
Date: 2021-07-16
Sheet: 1/1
www.solde.red/333034