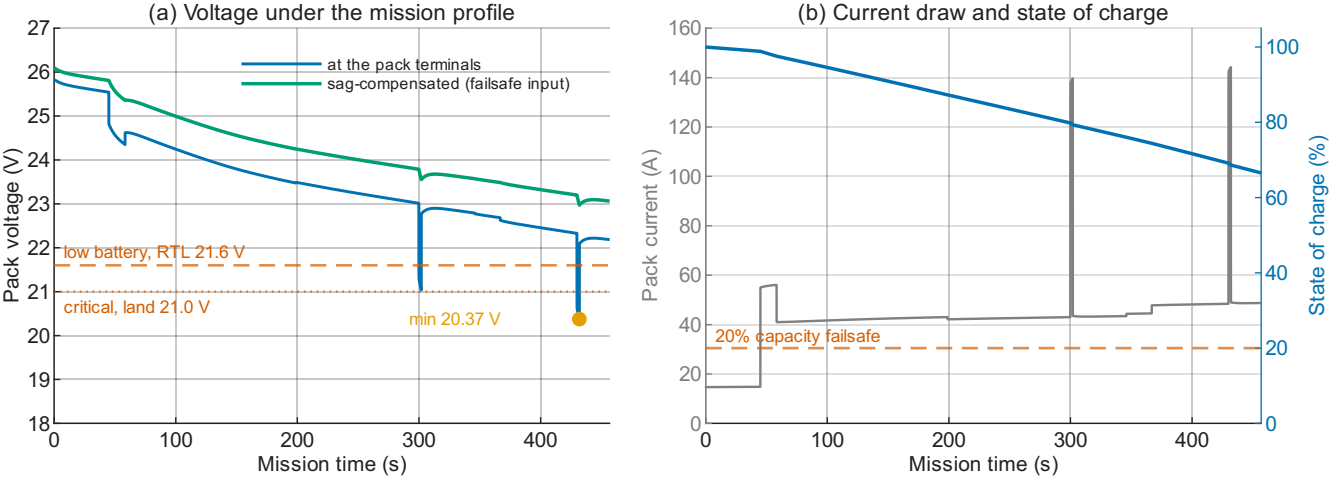

(a) Voltage under the mission profile
at the pack terminals
sag-compensated (failsafe input)
low battery, RTL 21.6 V
critical, land 21.0 V
min 20.37 V
Pack voltage (V)
Mission time (s)
(b) Current draw and state of charge
20% capacity failsafe
Pack current (A)
State of charge (%)
Mission time (s)