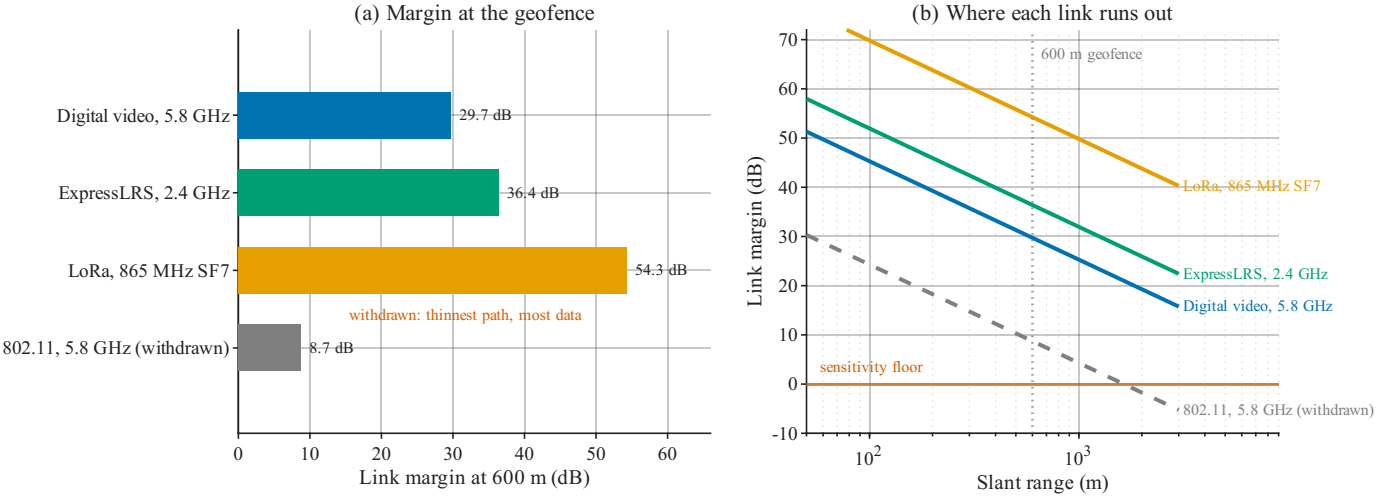
(a) Margin at the geofence
Digital video, 5.8 GHz
29.7 dB
ExpressLRS, 2.4 GHz
36.4 dB
LoRa, 865 MHz SF7
54.3 dB
withdrawn: thinnest path, most data
802.11, 5.8 GHz (withdrawn)
8.7 dB
0
10
20
30
40
50
60
Link margin at 600 m (dB)
(b) Where each link runs out
600 m geofence
LoRa, 865 MHz SF7
ExpressLRS, 2.4 GHz
Digital video, 5.8 GHz
sensitivity floor
802.11, 5.8 GHz (withdrawn)
70
60
50
40
30
20
10
0
-10
Link margin (dB)
10^2
10^3
Slant range (m)