RescueSwarm: An Autonomous Multi-UAV System for Post-Disaster Search, Localisation and Payload Delivery

Technical Design Proposal

Swastik Kumar
Department of Electronics & Communication Engineering
Thapar Institute of Engineering & Technology
Patiala, Punjab, India
skumar6_be24@thapar.edu

***Abstract*—India recorded 5.4 million internal displacements from disasters in 2024, the highest figure in twelve years. In post-flood search and rescue, locating survivors is consistently slower than reaching them: boat and ground parties cover ground slowly and at considerable risk to their crews, while rotary-wing assets are fast but scarce and are usually committed to evacuation rather than to systematic survey. This paper describes RescueSwarm, a three-aircraft autonomous unmanned aerial system that surveys a designated area, detects and geolocates survivors, and delivers a standardised relief kit to each, under a single operator and with no dependence on cellular or internet infrastructure. We present the system architecture, the sizing and geolocation error models that fix the design point, the simulation evidence obtained so far, and a phased work plan. Components are sourced domestically wherever a qualifying part exists, chiefly on schedule grounds: domestic lead times are roughly half those of imports, which in a schedule-limited programme buys flight-test days. No aircraft has yet flown, and measured, modelled and assumed quantities are labelled as such throughout.**

***Index Terms*—unmanned aerial systems, multi-robot coordination, search and rescue, coverage path planning, RTK geolocation, edge inference, disaster response**

I. Introduction and Problem Statement

A. The operational gap

India records among the highest disaster-displacement figures in the world. The Internal Displacement Monitoring Centre reports 5.4 million internal displacements in India during 2024, the highest in twelve years, of which 2.4 million were triggered by a single monsoon flood season in Assam [1]. The scale of the response problem is well established. How quickly the displaced can be found is less so.

The governing quantity in post-flood search and rescue is the elapsed time between the onset of an event and the moment a survivor is both located and reached. Nationally deployed capability addresses the second far better than the first. Boat teams and ground parties reach survivors reliably once told where to go, but they search slowly, at high risk to their crews, and with poor coverage of debris fields and rooftops. Rotary-wing aircraft search quickly, yet they are scarce, costly per flight hour, and generally committed to evacuation rather than to systematic area survey.

Localisation is therefore the bottleneck. An asset that could cover an assigned polygon systematically, detect human figures in cluttered post-flood imagery, and report each detection as a coordinate accurate to a few metres would change the tasking of every downstream resource.

B. Coordination as the governing problem

A single multirotor carrying a useful payload, with a fifteen-minute endurance, covers a disappointing area. Coverage scales with the number of aircraft operating simultaneously; so does operator workload, and a system requiring one pilot per aircraft deploys badly in a disaster. The engineering problem is consequently one of coordinated autonomous flight under a single operator, which brings with it area decomposition, task allocation, deconfliction, consolidated reporting and graceful degradation when the command link is lost.

C. Sourcing under a schedule constraint

We treat domestic sourcing as a schedule constraint. Our supplier survey puts typical import lead times at four to six weeks, against two to three weeks domestically. Within an eight-week flight-test window, that gap decides whether the programme gets one test campaign or two, so suppliers are named specifically throughout and lead time is carried alongside price wherever a part is selected.

The argument cuts against a decision taken later in this paper. The build defers the Indian autopilot and Indian propulsion on cost, and the imported parts that replace them carry exactly the longer lead time just described as decisive. We mitigate this structurally, by ordering every long-lead item in month one, ahead of the software work that would ordinarily precede

procurement. The trade of cost against schedule margin was deliberate, and the residual risk appears in Table X.

D. Contributions

1) A three-aircraft autonomous survey-and-delivery system operable by a single operator with no network dependency, sized line by line against market-verified components.
2) A geolocation error budget that treats survivor coordinate accuracy as the primary system output, together with an architecture that meets it from a team-owned RTK base and no external correction service.
3) A coordination scheme combining static equal-area decomposition, boustrophedon in-region coverage and greedy claim-and-lock allocation, selected for determinism and verifiability in preference to optimality.
4) A reproducibility regime in which every reported number regenerates from the model that produced it, and in which measured, modelled and assumed quantities are distinguished by construction.

II. Objectives and Scope

A. Primary objectives

O1 Survey a designated area autonomously with three cooperating aircraft under one operator and one ground control station.
O2 Detect human figures in nadir imagery at a ground sample distance sufficient for reliable classification, with onboard inference and multi-frame temporal fusion.
O3 Report each detection as a geodetic coordinate with a circular error probable within a few metres.
O4 Deliver a standardised relief kit to each confirmed survivor location by controlled free-fall release.
O5 Operate with no cellular, internet or cloud dependency at any point in the mission.

B. Explicit non-objectives

Each of the following is a deliberate exclusion, and each is recorded so that the claimed scope cannot be read more broadly than intended.

- **Not a casualty-evacuation platform.** The payload class is a relief kit, and we claim no growth path toward carrying a person.
- **Not beyond-visual-line-of-sight certified.** The design operates within a bounded geofence. Regulatory expansion is future work.
- **Not a night or all-weather system.** The perception stack is visible-band. Section XII sets out the case for near-infrared over thermal as the extension best matched to a target immersed in water.
- **Not a survivor-triage system.** The system reports position and delivers a kit. It makes no medical assessment.

III. Related Work and State of the Art

A. Coverage path planning

Area decomposition for multi-robot coverage is mature. Divide Areas for Optimal Multi-Robot Coverage (DARP) produces equal-area, connected, robot-specific regions and is the natural reference method [2]. Classical boustrophedon decomposition [3] remains the standard in-region motion primitive for sensor footprints that are rectangular in the body frame.

We adopt a static equal-area partition with boustrophedon in-region coverage in place of a full DARP implementation, trading optimality for determinism. A static partition returns an identical and inspectable plan for identical inputs, which the verification regime of Section VI-B requires. DARP remains the reference for the design and the natural path forward should dynamic reallocation become necessary.

B. Multi-robot task allocation

The Consensus-Based Bundle Algorithm (CBBA) is the canonical decentralised auction method for multi-agent assignment [4], and its guarantees rest on a consensus phase over a communication graph. Our system has three aircraft on a reliable star topology to one ground station, a regime in which those guarantees buy little. We therefore implement greedy claim-and-lock with a deterministic tie-break, which is substantially easier to verify and whose worst case over three agents remains within acceptable bounds.

C. Aerial detection of people

Small-object detection from altitude is the governing difficulty, since a supine adult at survey altitude occupies a few tens of pixels. Slicing-aided hyper inference (SAHI) and related tiling strategies improve small-object recall substantially by running detection over overlapping crops instead of a downsampled full frame [5]. Standard benchmarks quantify the problem: COCO classifies an object below $32^2\,\mathrm{px}^2$ as small [6], and TinyPerson introduces finer bands below that because aerial person detection falls beneath even the COCO threshold [7].

Purpose-built aerial person datasets provide the transfer-learning base. SARD [8] covers land search and rescue and the broader VisDrone benchmark [9] covers urban aerial scenes. Closest to the condition of interest is SeaDronesSee [10], which annotates people in open water from a UAV and so shares both the low-contrast background and the head-and-shoulders target signature of a flood scene. None covers post-flood Indian terrain. A field data campaign is the proper remedy, and it is deferred from this build (Section VIII); detection recall consequently remains a modelled quantity and the leading entry in the risk register.

D. Airborne payload delivery

Release state, meaning vehicle velocity and wind, dominates the error in airborne delivery; release altitude matters far less. Mathisen *et al.* demonstrate autonomous ballistic airdrop from a small fixed-wing UAV and report a mean delivery error

TABLE I
AIR VEHICLE DESIGN POINT (PER AIRCRAFT), AS MODELLED WITH THE 6S3P PACK

Parameter	Value
Configuration	Quadrotor
Rotor diameter	18 in
Maximum take-off mass	6.36 kg
Fleet mass (3 aircraft)	19.08 kg
Regulatory fleet cap	25 kg [13]
Battery	6S3P Li-ion 21700, 292 Wh
Pack nominal voltage	21.6 V (18.0–25.2 V)
Pack mass	1 449 g
Cells per aircraft	18
Peak pack current	115 A (8.5 C) at T/W 2.0
Static thrust-to-weight	2.0
Hover endurance	15.3 min
Design mission duration	7.6 min
Survey altitude	40 m AGL
Ground sample distance	≤2.0 cm/px
Survey groundspeed	8 m/s
Payload	4 kits × 200 g
Geofence radius	600 m

of 5.5 m, computing release state dynamically against wind and vehicle velocity and re-optimising it in flight because of that dominance [11]. A rotorcraft can null its groundspeed to near zero before release and so remove the dominant term altogether, which a fixed-wing aircraft cannot. This is our principal reason for selecting a multirotor, and the delivery budget of Section IV-I is built on it.

E. Positioning

Real-time kinematic correction from a locally surveyed base is standard practice, and it is the only route to sub-metre relative positioning that does not depend on an external network [12]. Because the system may use neither internet nor cellular services, a team-owned base station is a requirement of the architecture.

IV. Proposed System Architecture

A. Design point

Table I states the aircraft design point. Every value is computed by the sizing model described in this section and regenerated automatically; none is transcribed by hand.

One line of the table is not yet verified for the aircraft being built. The adopted configuration (Section VIII) uses generic motors that publish no thrust curve, so the thrust-to-weight figure is a requirement rather than a measurement until the P5 thrust stand runs. The remaining entries are fixed by the mission: mass, energy, altitude, speed and payload.

The battery rows describe the pack the model was sized with, not the one now specified. The flight pack has since changed from an 18-cell Li-ion pack built in-house to a bought 6S 16 Ah lithium-polymer pack. Section IV-B gives that pack's figures and the reason for it. The model is re-run on its measured mass before first flight, and this table follows it.

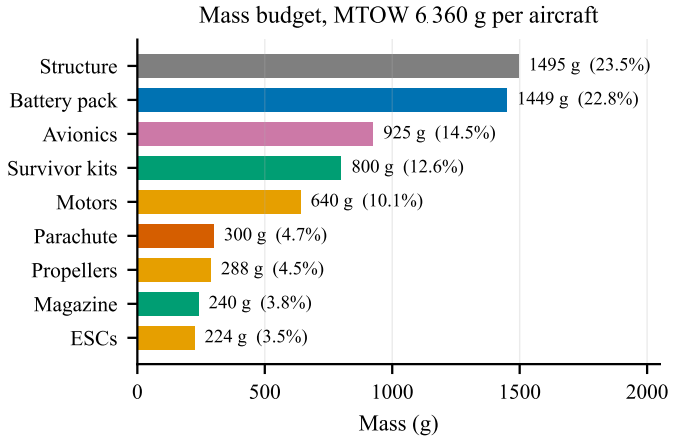


Fig. 1. Mass budget per aircraft, from the sizing model. Avionics includes the wiring harness, and the magazine entry the release mechanism. The fleet figure of 19 081 g carries 4 919 g of growth allowance against a 24 kg internal target — 26 % build overweight tolerated — inside the 25 kg regulatory cap.

The thrust-to-weight ratio of 2.0 and the hover endurance of 15.3 minutes against a 7.6-minute design mission are reserve policies rather than performance targets, because the failure mode that ends a sortie is an aircraft that does not return. The energy reserve is stated precisely in Section V; it, and not the design mission, is what sizes the pack.

Fig. 1 gives the mass statement behind those figures. Two features drive the rest of the design. Structure and battery together are 46 % of maximum take-off mass, which is why airframe mass fraction and pack chemistry are the two sensitivities carried in the risk register rather than, say, avionics choice.

The itemisation closes to maximum take-off mass exactly, and the model asserts that it does. The largest discretionary line is the recovery parachute and its mount at 300 g, 4.7 % of the aircraft and the only mass carried against loss of the airframe rather than against the mission. **That allowance is retained in the sizing although the parachute itself is deferred from this build** (Section VIII). Retaining it is deliberate and conservative: the aircraft is sized to fly with the canopy fitted, so adding it later consumes growth allowance rather than invalidating the design point. The as-built aircraft is correspondingly 300 g lighter than the 6.36 kg quoted here, and every margin in this section improves by that amount. The survivor kits are 800 g — 12.6 % of MTOW and fixed by the mission at four kits of exactly 200 g — so payload is an input to the sizing loop, not an output of it. This is why propulsion and energy resist cost reduction in a way that avionics does not: they are sized by a payload that is not negotiable, so cheaper parts of the same class are available but a smaller aircraft is not.

B. Energy storage and the reserve policy

Section V derives the pack requirement in full — the reserve policy that sizes it, the nameplate energy floor, and the continuous current figure that disqualifies most candidate

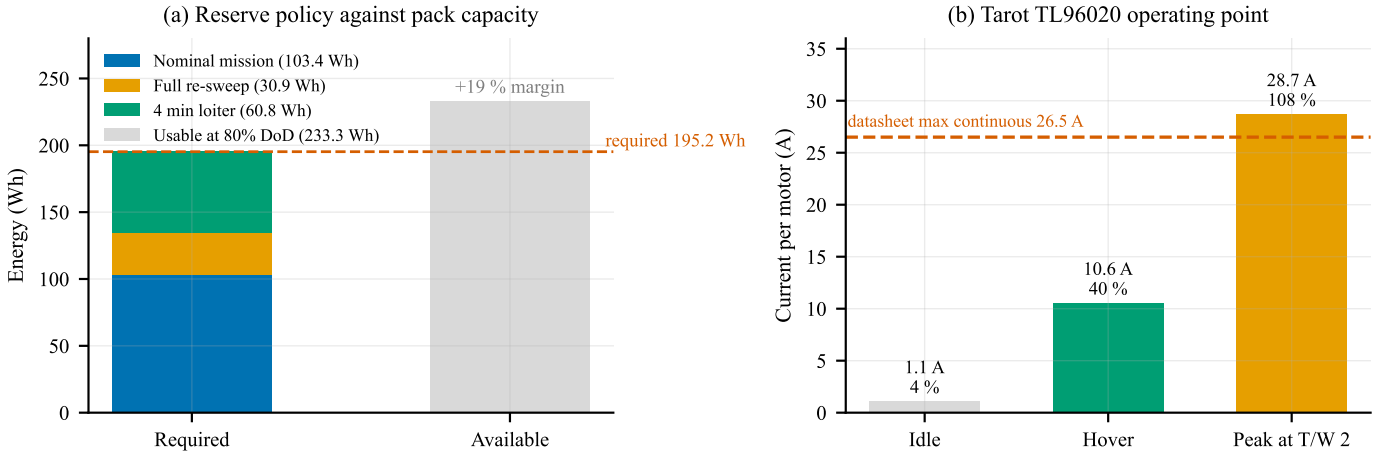


Fig. 2. (a) The reserve policy against what the pack delivers: the nominal mission, a full second sweep of the search area and four minutes of loiter, all inside the 80 % usable window. (b) The selected motor against its own datasheet. Hover sits at 40 % of rated continuous current with wide margin; the peak at the design thrust-to-weight sits at 108 %, which is acceptable only because $T/W = 2$ is a transient authority reserve rather than a flight condition. It is the tightest margin in the propulsion chain, and P2 measures current alongside thrust to settle it.

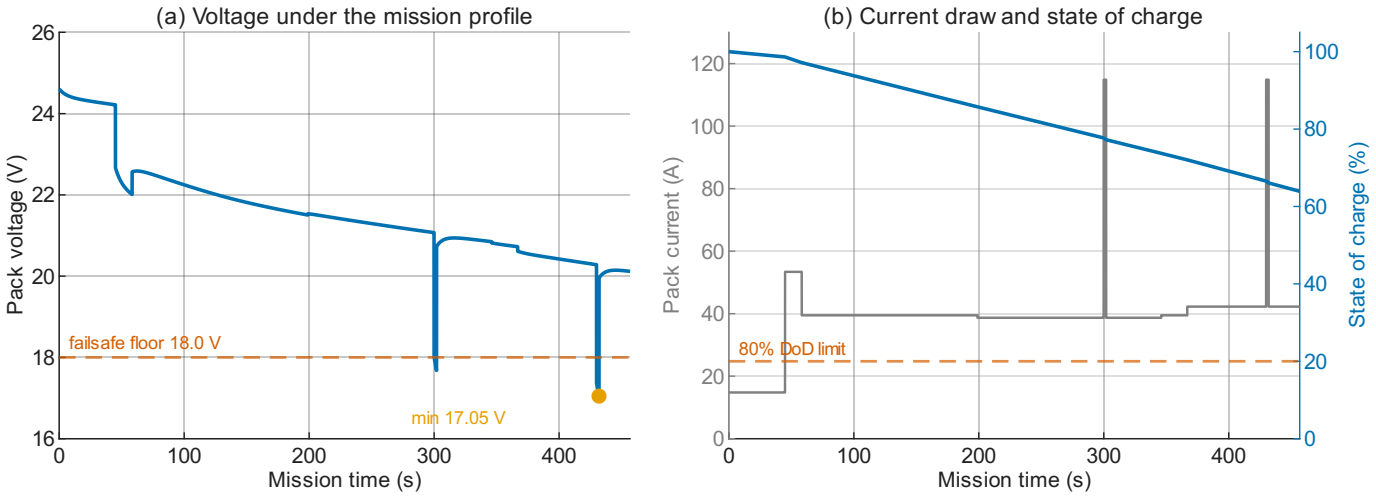


Fig. 3. Pack voltage under the mission profile, simulated with a second-order Thevenin cell model driven by the flight's own current trace and two gust-recovery transients at $T/W = 2$. The pack reaches 17.05 V — below its own 18.0 V failsafe floor — at two-thirds state of charge, long before the 80 % depth-of-discharge limit the reserve policy is built around, and the dynamic sag exceeds the static estimate by 1.2 V because the diffusion terms add to the instantaneous ohmic drop. A failsafe set on instantaneous pack voltage would therefore command a return-to-land on a healthy pack mid-search. The internal resistance is calibrated to the static assumption rather than measured; P2 replaces it with a measured value. Modelled for the previous 6S3P Li-ion pack; the LiPo is re-characterised from its measured sag before flight.

packs. The re-sweep term in that policy exists because a search finding nothing on its first pass is a normal outcome rather than a failure; the loiter term exists because a recovery queue of three aircraft is not instantaneous.

Two features of the result are design decisions, not consequences of the arithmetic, and are set out here for that reason.

A bought LiPo pack in preference to a built Li-ion one. An earlier revision chose cylindrical Li-ion on mass, cycle life and domestic sourcing, and said at the time that the electrical argument pointed the other way. The decision has been reversed, for three reasons. A 6S LiPo pack is now available from an Indian retailer, so sourcing no longer separates them. A bought pack removes the spot-welding of eighteen cells in a student lab, which was the most hazardous step in the build. And the electrical case is strong: a 25 C, 16 Ah pack supplies 400 A against a peak near 136 A, where the built pack supplied about 110 A, and it roughly halves the voltage sag.

The pack had to be sized again rather than substituted, because a heavier aircraft needs more power to hover. Each candidate was evaluated in the sizing model at its own mass, with the motors held fixed:

A 12 or 13 Ah pack fails both the endurance policy and the landing-queue reserve, and about 14 Ah is the smallest that passes. The 16 Ah pack is the smallest suitable size on sale in India. **The cost is thrust-to-weight**: at 6.8–7.1 kg the motors sized for 2.0 at 6.36 kg give 1.8–1.9, unless the P2 thrust stand measures at least 3.55 kgf per motor. The pack

TABLE II
FLIGHT PACK CANDIDATES, EVALUATED AT THEIR OWN MASS

Pack	kg	Wh	T/W	Endur.	Queue, Wh
Li-ion 6S3P (was)	1.45	292	2.00	2.02	+1.1
LiPo 12 Ah	1.42	266	2.01	1.85*	−3.7*
LiPo 13 Ah	1.52	289	1.98	1.96*	−0.5*
LiPo 14 Ah	1.64	311	1.94	2.06	+2.5
LiPo 16 Ah HV	**1.88–2.21**	**365**	**1.8–1.9**	**2.1–2.3**	**+5 to +9**

Endurance is hover time over mission time (policy ≥ 2.0). Queue is the 20 % reserve left after the third aircraft's 120 s hold and two 53 s descents. * Fails. The 16 Ah mass is bracketed from 165–194 Wh/kg: the maker does not publish it.

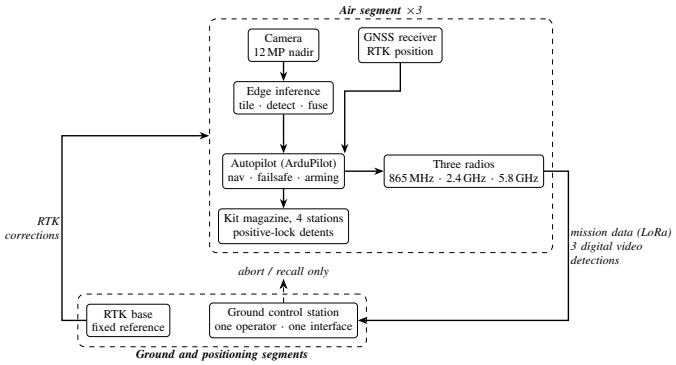


Fig. 4. System architecture. The only permitted downlink commands are abort and recall; the ground station is architecturally incapable of originating a retask, waypoint change or drop command. Detection runs onboard, so the downlink serves the operator rather than the algorithm.

is weighed on arrival, and its voltage sag is measured before the battery failsafe thresholds are set. Fig. 3 and the failsafe values still describe the Li-ion pack until then, and no flight precedes that step.

Where the reserve is evaluated. A reserve policy is only meaningful at the mass the aircraft actually flies. In the model, the Li-ion pack is rounded up to a buildable 18 cells, which lifts maximum take-off mass roughly 0.7 kg above the value at which the sizing loop converges, so the requirement is re-evaluated at the final design point rather than at the solve. Evaluated there it is about a fifth higher, and the chemistry-agnostic nameplate floor rises with it. The pack meets the policy at the adopted mass, on a margin materially smaller than an evaluation at the solve would report — which is why the check is placed after the loop rather than inside it.

C. Segment architecture

The system comprises three segments, shown in Fig. 4.

1) Air segment: Three identical quadrotors. Each carries a Holybro Kakute H7 autopilot running ArduPilot [14], stacked on a 4-in-1 speed controller whose current sensor feeds the autopilot's battery monitor. Each also carries a dual-band RTK receiver built on the u-blox ZED-F9P, tracking GPS L1/L2, GLONASS G1/G2, Galileo E1/E5b and BeiDou B1/B2 [15], with its helical antenna and a compass in one 20 g unit. The autopilot itself has no compass, so the receiver's is the heading source. The rest of the air segment is a nadir-mounted 12 MP camera, a Raspberry Pi 5 with a 26 TOPS inference accelerator, a four-station kit magazine with positive-lock detents, a 5.8 GHz digital video radio, an 865 MHz LoRa module, and a 2.4 GHz ExpressLRS link carrying safety-pilot control and abort independently of the autonomy stack.

2) Ground segment: A single ground control station presenting one unified operator interface. The station is architecturally incapable of originating a retask, waypoint change or drop command; abort and recall are the only permitted downlink commands, and are implemented as an explicit exception. This is a structural safety property rather than a policy: the relevant code paths are absent from the deployed build, not merely guarded.

3) Positioning segment: A team-owned RTK base station, positioned and set to a fixed reference from its first three-dimensional fix within the setup window. Launch is gated on a three-dimensional fix rather than an RTK fix; the first geotag is gated on RTK-fixed, and detections made before convergence are geotagged in float and re-fused once fixed.

What that decoupling costs and buys. The base is a second ZED-F9P with a survey-grade antenna on a tripod. A survey-in places it to a few centimetres, but it runs for many minutes. Skipping it removes that entire block from the setup window. It is not free: a base set from its own first three-dimensional fix inherits that fix's *absolute* error, of order a metre, and every reported survivor coordinate is offset by the same amount. What RTK preserves is the *relative* accuracy in Table V — the aircraft is centimetric with respect to the base wherever the base happens to think it is.

For this mission that trade is the right way round. A recovery crew navigates to the reported coordinate on its own metre-class receiver, so a shared sub-metre offset on every target is absorbed by the crew's own positioning, whereas twenty minutes of survey-in comes out of the flying window. The survey is worth running whenever the base can be set up before the window opens, and P7–P8 use it, because a measured accuracy figure must be referenced to something better than the system being measured.

Corrections leave the base on its own 865 MHz LoRa module and reach each aircraft on the matching module, which is connected to the companion computer rather than the autopilot because the autopilot's serial ports are fully allocated. The companion forwards the RTCM 3.x stream to the autopilot as MAVLink, and ArduPilot's `GPS_INJECT_TO` passes it to the receiver [14]. The corrections therefore take a path independent of both the command link and the video link. The base is limited to MSM4 messages at 1 Hz to keep the stream within the radio's capacity. The receiver falls back to SBAS when corrections are lost, so the degraded mode needs no additional hardware.

D. Geolocation error budget

Survivor coordinate accuracy is the primary system output, and the error budget is therefore the governing analysis of the whole design. Total error is the root sum of squares of GNSS

TABLE III
GEOLOCATION ERROR BY RECEIVER CLASS, 200 000 SAMPLES

Receiver	RSS	CEP50	CEP95
RTK fixed, 1 cm	0.88 m	**0.73 m**	1.53 m
SBAS, 0.60 m	1.07 m	0.89 m	1.85 m
Standalone multi-band, 1.0 m	1.33 m	1.11 m	2.31 m

position error, boresight and lever-arm residual, attitude error, terrain-model error and timing skew.

1) What the receiver actually buys: An earlier revision of this section held that positioning quality governs, and made RTK a mission requirement rather than an optimisation. The budget does not support that, and the reason is visible in the budget itself: the case-C terms contain *no GNSS position term at all*, because at 1 cm it is negligible against everything else. Two terms the receiver cannot touch — unmodelled error at 0.70 m and target extent and centroid at 0.50 m — carry 95 % of the variance between them (Fig. 6a).

Restoring the position term for weaker receiver classes therefore moves the result very little. A Monte Carlo over the full budget, sampling each term as an independent two-axis Gaussian, gives:

RTK buys **0.16 m of CEP50** over SBAS. Every class clears the 5 m delivery requirement with more than three times margin. The simulation is checked against the analytic result for a circular Gaussian, CEP50 $= 0.8326\times$RSS, and fails rather than reports if the two disagree; the RTK row reproduces the 0.75 m attitude-limited requirement independently.

A second consideration compounds this. The base station is set from its own first three-dimensional fix rather than a survey-in above, so its *absolute* position carries that fix's error, of order a metre, and every reported coordinate inherits it. RTK preserves the *relative* accuracy in Table V — the aircraft is centimetric with respect to the base, wherever the base believes it is. Against absolute truth, the gap between an RTK configuration on an unsurveyed base and a good SBAS receiver is smaller still.

RTK is retained, and the reason is now stated correctly. It is not that the budget fails without it, but that centimetric relative positioning makes the *relative* geometry between survivors, aircraft and pad exact, which is what P7–P8 need to measure recall and delivery error against surveyed ground. It is an instrumentation requirement for the evidence, not an accuracy requirement for the mission — and if the programme is funded below the level that supports it, dropping to SBAS costs 0.16 m of CEP50 and the ability to measure the system against itself, in that order of importance.

All three aircraft carry it. An earlier revision fitted RTK to one aircraft only, on the argument that an instrument characterises a design and all three airframes are the same. That argument still holds; the price does not. A ZED-F9P rover with its antenna and compass now costs about what the ordinary receiver it replaces did together with a separate compass, so RTK on every aircraft costs no more than RTK on one. It also means any aircraft can be the instrumented one, and a loss in testing does not remove the instrument.

TABLE IV
RECEIVER CLASSES AGAINST THE 5 M DELIVERY REQUIREMENT, 200 000 SAMPLES

Class	σ_g	CEP50	CEP95	
RTK fixed	0.01 m	0.74 m	**1.53 m**	clears
SBAS / GAGAN	0.60 m	0.89 m	**1.85 m**	clears
Multi-band autonomous	1.00 m	1.11 m	**2.31 m**	clears
GPS L1 only	2.50 m	2.21 m	**4.59 m**	marginal
NavIC SPS	5.00 m	4.23 m	**8.79 m**	*fails*

2) How good the receiver actually has to be: The trade above compares three receivers. The question that keeps returning in review is broader: why not GPS on its own, or NavIC, which is Indian and costs a fifth of the RTK unit? The answer should be quantitative, and we give it below.

NavIC is not an alternative to RTK. The two are different layers: NavIC is a constellation, alongside GPS, GLONASS, Galileo and BeiDou, while RTK is a carrier-phase correction technique applied on top of whatever constellation is tracked. The meaningful comparison is therefore between *augmentation classes*, and NavIC enters it at its standalone accuracy, because that is how it would be flown.

Everything in the budget except the receiver sums to 0.88 m (Fig. 6a), and that figure is a floor: no receiver reduces it. Adding a receiver term σ_g in quadrature and converting to the 95 % radius gives the criterion directly,

$$\mathrm{CEP95} = 1.7308\sqrt{\sigma_{\mathrm{rest}}^2 + \sigma_g^2} \;\le\; 5\,\mathrm{m} \;\Longrightarrow\; \sigma_g \le 2.75\,\mathrm{m}. \tag{1}$$

That single number settles the question. Any receiver better than 2.75 m horizontal clears the delivery requirement; any receiver worse than it does not, whatever else is done to the system.

Three conclusions follow, and the middle one is the one that matters for cost. NavIC at its published standalone accuracy *does not clear the requirement*, so it cannot replace the receiver on any aircraft; its value here would be as an additional constellation tracked alongside the others, which improves geometry and costs nothing if the chosen module already supports it. GPS on its own is marginal at 4.59 m against a 5 m requirement — it passes arithmetically and leaves nothing for the day the geometry is poor. SBAS clears it at 1.85 m, which is why it is an acceptable fallback when corrections are lost.

The sensitivity is where the honesty is. The SBAS term is carried at 0.60 m, which is optimistic; field figures for code-phase augmentation are nearer 1.0–1.5 m. Equation (1) shows the requirement survives either — 2.31 m and 3.01 m at CEP95 respectively — so the conclusion is not sensitive to the assumption. It would become sensitive at 3 m, which is why P5 measures achieved horizontal accuracy on the built aircraft rather than inheriting a datasheet figure.

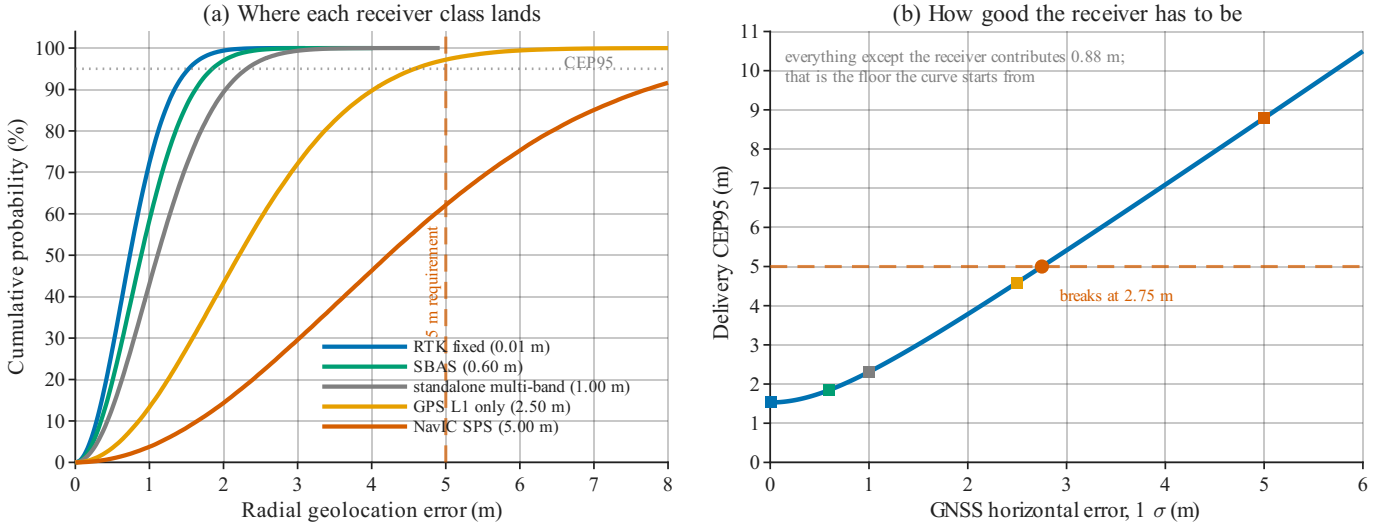


Fig. 5. (a) Radial error distribution for five receiver classes over the full geolocation budget, 200 000 Monte Carlo samples each. (b) The same result as a criterion: delivery CEP95 against the receiver's own horizontal error, with the 5 m requirement and the 2.75 m break point of (1). Markers are the five classes of panel (a) in the same colours. The curve does not start at zero — 0.88 m of the budget belongs to terms no receiver touches.

TABLE V
GEOLOCATION ERROR BY CONFIGURATION

Case	Configuration	RSS error
A	No RTK, single-frame	3.09 m
B	RTK, single-frame	∼1.3 m
C	RTK + multi-frame fusion + calibrated ground plane	**0.91 m**

Case C assumes moving-baseline heading. That receiver is deferred (Section VIII), which substitutes a magnetometer-class attitude term and gives **0.94 m** — an 0.03 m penalty, and the reason the deferral is judged affordable.

The *second* receiver, which would supply moving-baseline heading, is a different case and is deferred — see Section VIII.

Multi-frame fusion is effectively free. At the 40 m survey altitude the along-track footprint is 31.4 m, so at 8 m/s groundspeed a target remains in view for 3.9 s. A conservative 2 Hz inference rate therefore yields approximately eight independent observations of each target per pass, and the 3 Hz rate assumed for temporal confirmation yields twelve. Those observations are used both for temporal confirmation, which suppresses false positives, and for geolocation averaging.

Fig. 7 shows both effects quantitatively. Panel (a) makes the positioning argument unarguable: losing the RTK fix moves the error by nearly an order of magnitude, and a 3-D-only fix at 3.67 m RSS consumes most of the 5 m delivery allowance before ballistics or position-hold error are counted. Panel (b) shows why fusion is worth having but not worth over-investing in — it divides the random terms by $\sqrt{n}$ and leaves boresight and target extent untouched, so the curve departs from the ideal $1/\sqrt{n}$ line and flattens by about five frames. Twenty frames is not twice as good as five, and the eight to twelve frames the geometry supplies for free already sit past the knee.

E. Perception and inference budget

The sensor is a 12.3 MP module, 4056×3040 on a **1.55 µm** pitch behind a 6 mm lens, and the frame is tiled at **native resolution** — 48 crops of 640×640 at 20 % overlap, with no downsampling. At the adopted 2 Hz that is **96 inferences per second**, against the 130–160 frames per second this accelerator is measured at for the same model and input size. It fits, with margin.

An earlier revision downsampled by two before tiling, cutting 48 crops to 12. That decision was taken against a different accelerator — one with roughly a quarter of the throughput, and not the part in this bill of materials — and it discarded half the linear resolution the sensor had already delivered. Tile count depends on pixel count alone, so it does not move with altitude; only the target size does.

What the detector is handed does move with altitude, and the effect is larger than it looks:

AGL	Tiling	Target (px)	Area (px^2)	COCO class
40 m	**native**	**39**	**1 498**	medium
60 m	native	26	666	**small**
40 m	2× downsample	19	375	**small**
60 m	2× downsample	13	166	**small**

The target here is a person *in water* — head and shoulders, about 0.4 m across — which is the worst posture and therefore the one the design is sized against. A supine adult on a rooftop is four times easier.

The size class, not the pixel count, is the number that matters. Published recall figures report average precision *by* size band, and small-object AP is routinely far below medium on the same model. Only the top row clears the COCO 32^2 px^2 small-object threshold — which is why the design point is

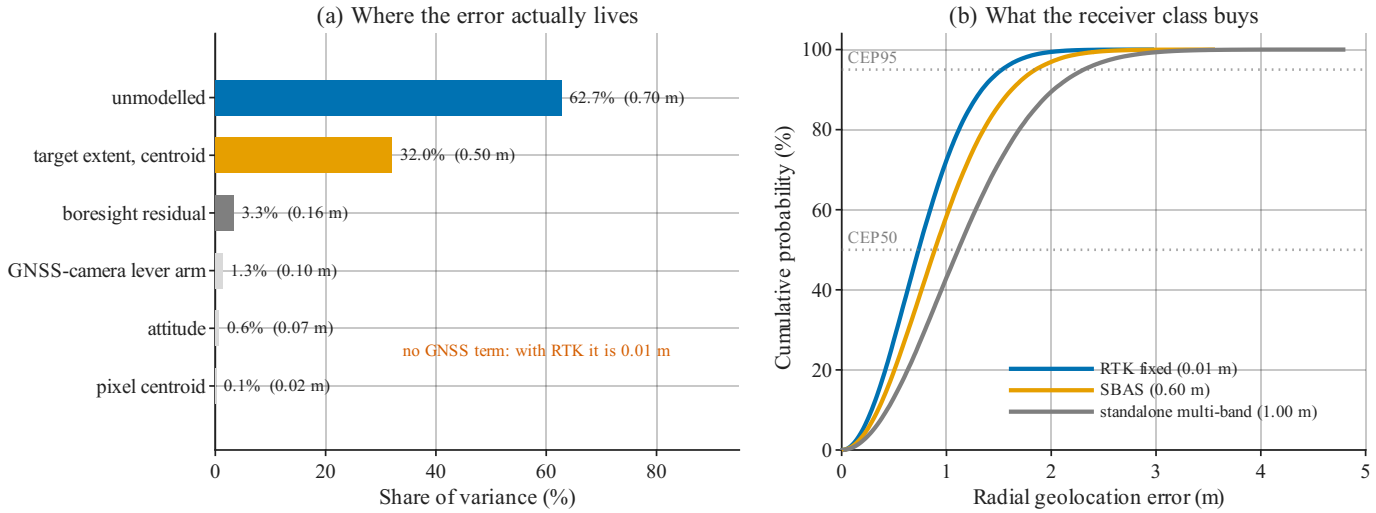


Fig. 6. (a) Where the geolocation error actually lives. Unmodelled error and target centroid carry 95 % of the variance, and there is no GNSS position term at all — with RTK it is 1 cm. (b) Radial error distribution by receiver class, 200 000 Monte Carlo samples over the full budget. The separation between an RTK receiver and an SBAS one is 0.16 m of CEP50, against terms neither can reduce.

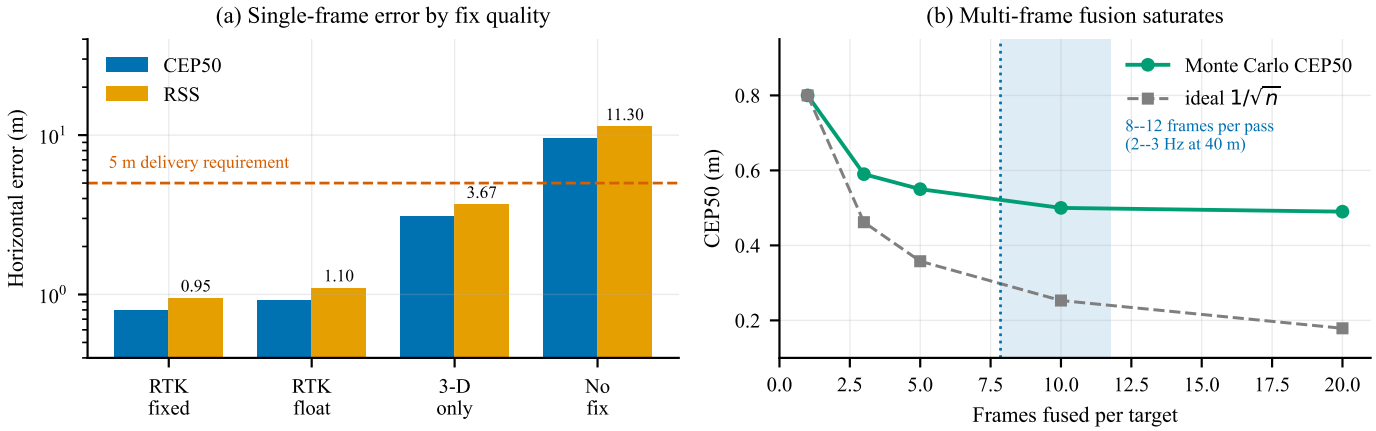


Fig. 7. Geolocation error, from a Monte Carlo run through the same projection code the aircraft flies. (a) Single-frame horizontal error against GNSS fix quality, typical attitude, on a logarithmic scale; the dashed line is the 5 m delivery requirement. (b) Effect of fusing multiple observations of the same target, RTK fixed.

40 m and native tiling, and why the two changes had to be made together. Either alone leaves the target in the band where detectors do worst.

Two modelling choices set these figures. The optics are computed for the 1.55 µm sensor the bill of materials buys, not for a generic sensor of the same pixel *count* at a different pixel *size*: it is pitch, not count, that fixes ground sample distance. And the target is taken as a person in water, presenting head and shoulders, rather than a supine adult — a fourfold difference in apparent area, and the conservative choice for a flood mission.

Together these fix the design point. Finer ground sampling narrows the field, so coverage costs more transects; but at 40 m those transects cost seconds of a mission with minutes to spare, and the mission is in fact *shorter* than at 60 m because the climb is lower.

This is the single most benchmark-sensitive figure in the design. Published throughput for comparable models on comparable hardware spans roughly 24 to 41 frames per second, and the lower end of that range leaves no margin. We therefore schedule and fund hardware benchmarking before design freeze.

F. Partitioning of the compute stack

The air vehicle carries a sensor, a single-board host and a neural accelerator. On an aircraft this size that invites the question of why it is not one part, and the answer is that each does something the others cannot.

The accelerator is an **M.2 module whose only interface is PCIe**. It has no camera input, no image signal processor and no general-purpose cores; it executes a compiled graph on tensors a host hands it. The sensor emits a raw Bayer-mosaic stream, which is not an image until something demosaics, white balances and scales it. And the tiling that the whole detection

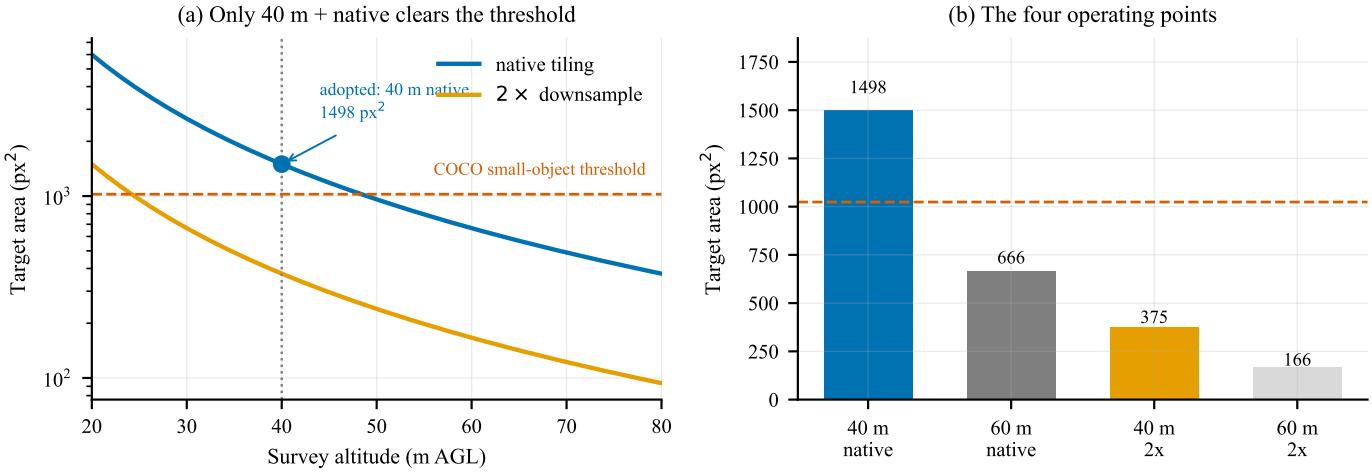


Fig. 8. Target area against survey altitude, for a person in water presenting head and shoulders. (a) Only the adopted point — 40 m with native-resolution tiling — sits above the COCO small-object threshold; downsampling by two drops it below at every altitude. (b) The four candidate operating points. The two changes are not independent: either one alone leaves the target in the size band where published detector accuracy collapses.

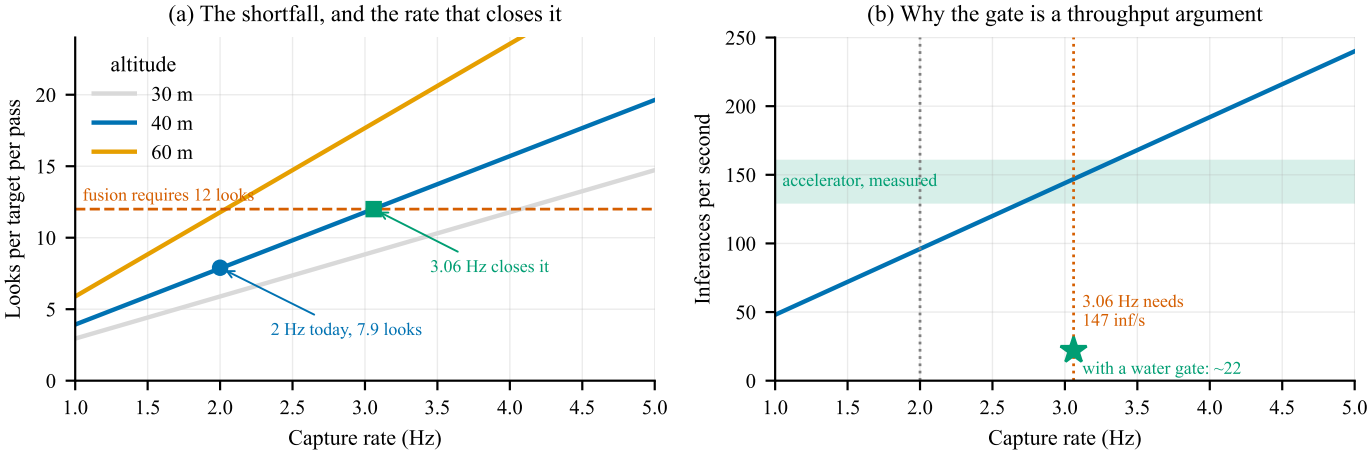


Fig. 9. (a) Looks per target per pass against capture rate. Multi-frame fusion requires twelve; the adopted 2 Hz supplies 7.9, and 3.06 Hz closes the gap. Lowering altitude worsens the shortfall rather than easing it, because the along-track footprint shrinks faster than the pass shortens. (b) What that rate costs. At 48 native tiles, 3.06 Hz is 147 inferences per second against the 130–160 measured for the accelerator — at or beyond the limit. A gate discarding the tiles that are open water is what buys it back, which makes the cascade a throughput argument rather than an accuracy one.

approach rests on — cutting each frame into 48 overlapping crops, submitting them, and reassembling detections back into frame coordinates — is host work by construction, as is every other thing the aircraft does: the phase machine, MAVLink routing, the data link, survivor claim and release, the delivery excursion and the telemetry the ground station consumes.

So the three parts are a sensor, an image pipeline with a CPU, and a matrix engine. Removing any one of them does not simplify the aircraft; it stops the detection chain working.

One alternative would genuinely remove a box, and we rejected it on a measurable ground. Sensors now exist with an inference engine on the die — the imager runs the network itself and emits detections instead of pixels, at roughly 40 % lower power than a discrete accelerator, and it would delete the accelerator line entirely. It does not fit this mission: on-sensor engines carry a model of a few megabytes and perform a *single* inference per capture at a fixed input size. This design needs **48** inferences per frame, because a survivor occupies a few tens of pixels in a 12 MP frame and tiled inference is the only thing that makes that target detectable at all (Section IV-G). An imager that cannot tile its own output is being asked to do the one thing the architecture exists to avoid. It also removes nothing else: the host is still required for everything in the paragraph above.

That trade is worth stating because it is the obvious economy to propose, and the reason it fails is specific to small-object search rather than general.

G. Onboard processing pipeline

Fig. 10 shows what runs where. The division of labour is the part worth stating plainly, because it is what keeps the search phase deterministic: **the autopilot owns the flight, and the companion computer never touches it during the sweep.** Transects are uploaded as an ordinary AUTO mission during

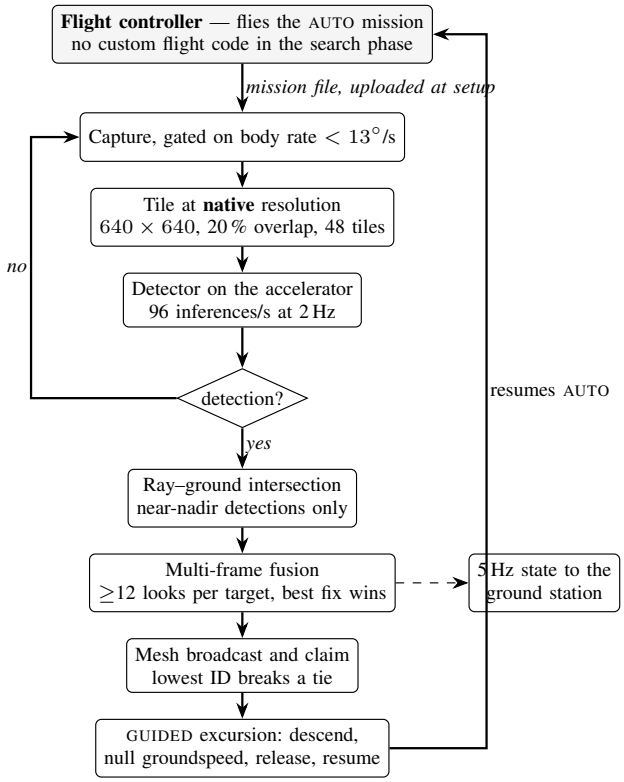


Fig. 10. Onboard processing. The autopilot flies the search pattern unaided; the companion computer detects, geolocates and claims survivors, and interrupts the mission only to deliver. Detection runs alongside the sweep and never gates it — a missed frame costs a look, not a waypoint. The capture gate suppresses turn arcs, where the ground-plane assumption is least valid and angular smear is worst. One pixel subtends 13.63 mdeg on this sensor, so at $1/1000$ s a body rate of 13.6°/s is exactly one pixel of angular blur; the gate is set at 13°/s to sit under it.

setup, and the aircraft would fly the entire search pattern with the companion powered off. The companion observes, detects, and takes control only for a delivery excursion — a bounded GUIDED interruption that returns the aircraft to the same AUTO mission afterwards.

That boundary matters for two reasons. A companion crash or thermal throttle costs detections, not control. And the search path is reproducible from the mission file alone, which is what makes the coverage and deconfliction results in Section VI-B checkable rather than emergent.

Detection does not gate flight. Inference runs on captured frames while the aircraft continues its transect. Losing frames to a thermal event or a slow model costs looks at a target, and the fusion requirement of twelve looks per pass carries enough redundancy to absorb some of that; it does not stall the sweep or extend the mission.

The accelerator is a substitution the inference budget has not yet been re-run against. The tiling arithmetic above was derived against a Jetson-class module, whose published throughput for comparable models spans roughly 24 to 41 frames per second. The adopted configuration instead pairs a 26-TOPS accelerator with a single-board host, which is a different architecture with a different throughput curve and a lower sustained power draw. The 24-inferences-per-second requirement is therefore stated against hardware that has not been benchmarked, and P5 benchmarking on the parts actually purchased is the gate before design freeze. Table X carries this rather than the text implying the figure is settled.

TABLE VI
LINK BUDGET AT THE 600 M GEOFENCE

Link	Received	Margin
Digital video, 5.8 GHz	−56.3 dBm	29.7 dB
ExpressLRS, 2.4 GHz	−71.6 dBm	36.4 dB
LoRa, 865 MHz, SF7	−68.7 dBm	**54.3 dB**
802.11 data link, 5.8 GHz	−73.3 dBm	*8.7 dB*

H. Communications

Rules require the ground station to display a live camera feed from *each* aircraft, and the system must run with no external network. Three links carry that traffic, each in a different band and each sized so that the band it occupies is not the one that fails first.

Video: digital, 5.8 GHz, one channel per aircraft. Each companion computer draws its detections onto the camera frame and sends the result over wfb-ng [16] on an RTL8812EU radio. The operator and the judges therefore see what the aircraft's software sees, not a raw feed that has to be interpreted separately. Three aircraft use three channels. The ground station has one receiver per channel, each with a 14 dBi panel aimed at its aircraft and an omnidirectional antenna on the second port. The second port also serves the short uplink the protocol needs, so neither port is left unterminated.

An earlier revision chose analog video to avoid encoding on the companion computer, which has no hardware video encoder. That load is now accepted, and it is bounded: each computer encodes only its own stream, the detection model runs on the accelerator rather than the processor, and the stream's resolution and frame rate are what give way under load. The tile count, which the perception argument of Section IV-E depends on, does not. P5 measures processor headroom with both loads running.

Mission data and coordination: SX1262, 865–867 MHz. Position, mode, battery, fix quality, survivor tags and delivery state, as one compact binary frame per aircraft per second rather than raw MAVLink. The band is delicensed in India for short-range devices, and its 54 dB margin at SF7 is the largest in the system — the right place for the link that carries the survivor coordinates.

That margin is also what pays for the operating mode. Sizing this channel by payload against bit rate is wrong, because LoRa's preamble and coded header dominate short packets: at SF7 the fleet's frames occupy a quarter of the channel, not the few per cent the bit rate suggests. The same radio runs GFSK at 50 kbps for 19 dB of the SF7 surplus, which is the adopted mode, with SF7 kept as a fallback at a reduced frame rate. Section V-I derives both, and Table VIII is the result.

Command and abort: ExpressLRS, 2.4 GHz. The only path that can command the aircraft, and it reaches the flight controller directly rather than through the autonomy stack. If the companion computer hangs or is compromised, the safety pilot still has control — an isolation property that follows from the topology rather than from any access control.

The abort path is a documented mode of the link, not an assumption about it. ExpressLRS carries MAVLink natively from version 3.5, so the same receiver that gives the safety pilot manual control also carries the autopilot's command and telemetry stream, and the ArduPilot side is a serial port set to MAVLink v2 [17]. RTK corrections do not use this link; they arrive on 865 MHz from the team's base (Section IV-D).

An 802.11 mesh was the original design and was withdrawn on the link budget. At the geofence it had 8.7 dB of margin — the thinnest path in the system, and the one carrying video, telemetry and coordination together. A mesh does not repair that, because a relay hop is the same weak link. Rule 8.17 forbids relying on an *external* network for inter-drone coordination; it does not require direct aircraft-to-aircraft links, and coordination routed through the team's own ground station is a locally deployed system under rule 8.5. What the topology gives up is relay when an aircraft is shadowed, which the link-loss failsafe already handles; what it gains is that no single band carries more than one job.

I. Payload delivery

Kits are released at 6 m above ground level, gated on a residual groundspeed below 0.3 m/s. At that release state, ballistic dispersion contributes approximately 0.32 m to total delivery error; combined with geolocation and position-hold error the root-sum-square is approximately 1.5 m with RTK active. Release altitude is chosen low enough that wind drift remains under a metre in realistic conditions, and high enough for safe clearance above a person and above debris.

Positive-lock mechanical detents on each station ensure that a power interruption cannot release a kit. This is treated as a safety-critical item and is excluded from cost reduction by policy.

J. Mission sequence

Fig. 11 shows the autonomous mission sequence. Two properties are worth drawing out. First, the launch stagger lives in the mission file as an explicit delay before each take-off command, not in operator timing — this is what converts a 1.31 m closest approach into the 64.80 m of Fig. 13. Second, every terminal branch converges on return-to-launch: link loss, low battery and operator abort share one recovery path rather than three. Third, the battery branch is *staged* rather than single-valued: the reserve threshold commands return-to-launch, and a second, lower threshold commands an immediate landing where the aircraft stands. A pack that cannot reach the pad should land under control at the point it admits this, rather than descend uncommanded partway home.

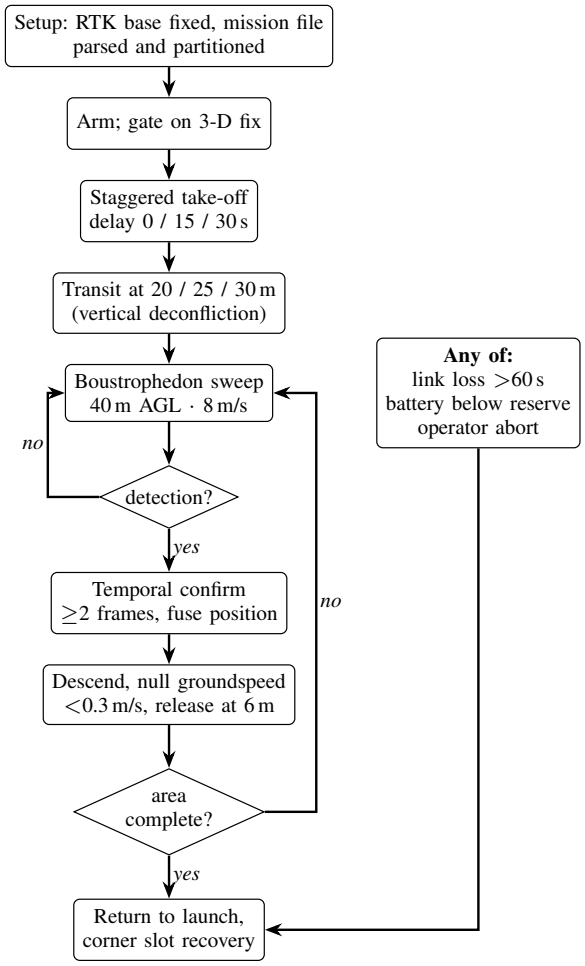


Fig. 11. Autonomous mission sequence. The take-off stagger is encoded in the mission file rather than in operator timing, and all three abnormal conditions converge on a single return-to-launch path.

V. Sizing and Analysis

This section gives the derivations behind the design point rather than only its result. Every figure regenerates from `tools/sizing-model/rescueswarm_sizing_model.py`; the section itself is generated, so a constant cannot change in the model without changing here.

A. Constants and where they come from

Symbol	Value	Basis
ρ	1.150 kg/m^3	$\sim$30 °C at 300 m density altitude; an Indian summer field, not sea level
FM	0.60	Rotor figure of merit, mid-range of the 0.5–0.7 literature band
η_{mot}	0.82	BLDC efficiency near the hover operating point
η_{esc}	0.95	Electronic speed controller
P_{avio}	55 W	Companion computer, autopilot, GNSS, camera, radios, servos
DoD	80%	Usable depth of discharge; land at 20 % state of charge
T/W	2.0	Static thrust-to-weight, a reserve policy

Two of these are deliberately unflattering. Air density is taken at a hot-day altitude rather than sea level, which *increases* the power required; and the figure of merit is mid-band rather than optimistic. Sizing errors that favour the design are the ones that are discovered on the flight line.

B. Hover power, from momentum theory

The rotor disk area for 4 rotors of diameter 18 in ($D = 0.4572$ m) is

$$A = N\pi\left(\frac{D}{2}\right)^2 = 0.6567 \text{ m}^2,$$

$$\text{disk loading} = \frac{m}{A} = 9.69 \text{ kg/m}^2.$$

Momentum theory gives the induced power required to generate thrust T across that disk [18]. Dividing by the figure of merit FM — the ratio of ideal induced power to actual shaft power, which absorbs profile drag and non-uniform inflow — converts the ideal figure to shaft power:

$$P_{\text{shaft}} = \frac{T^{3/2}}{\text{FM}\sqrt{2\rho A}} = \frac{(62.4)^{3/2}}{0.60\sqrt{2(1.150)(0.6567)}} = 668 \text{ W},$$

where $T = mg = 62.4$ N at the 6.36 kg maximum take-off mass. Adding the drivetrain and the avionics load,

$$P_{\text{elec}} = \frac{P_{\text{shaft}}}{\eta_{\text{mot}}\eta_{\text{esc}}} + P_{\text{avio}} = \frac{668}{0.779} + 55 = 913 \text{ W},$$

which at the 21.6 V pack nominal is a hover current of $I = P/V = 42.2$ A. Power loading is 7.0 g/W.

C. Peak power and the current the pack must supply

Induced power scales as $T^{3/2}$, so at the design thrust-to-weight of 2.0 the shaft power rises by $2.0^{3/2}$:

$$P_{\text{peak}} = \frac{(2.0\,T)^{3/2}}{\text{FM}\sqrt{2\rho A}\,\eta} + P_{\text{avio}} = 2481 \text{ W} \implies I_{\text{peak}} = 114.8 \text{ A}.$$

That current, not the energy, is what disqualifies most candidate packs. It is a continuous requirement rather than a burst rating: the aircraft must be able to hold 2.0 × weight, not pulse it. The adopted pack supplies 135 A, a margin of 18 %, and the per-motor share sets the controller rating at 29 A peak.

This is also where a smaller pack fails. At 13.5 Ah the peak is 8.51 C and hover is 3.13 C; a pack half the size would need twice the C-rate to deliver the same amperes. Capacity is how the design buys down discharge rate.

D. Propulsion

$$T_{\text{total}} = (T/W)\,mg = 125 \text{ N} = 12.72 \text{ kgf},$$

$$T_{\text{motor}} = 3.18 \text{ kgf}.$$

Hover demands 1.59 kgf per motor, which is **50 % of maximum** — inside the 45–55 % band where propeller efficiency and thermal margin are both reasonable. Sitting far below that band means an oversized and heavy propulsion system; far above it means no authority left for attitude control in gusts.

Against the selected motor, hover is comfortable and the peak is not. The Tarot TL96020 publishes a maximum continuous current of 26.5 A. The hover draw of 10.6 A per motor is 40 % of that, with wide margin. The peak at the design thrust-to-weight is 28.7 A, or **108 %** — above continuous rating. That is acceptable only because $T/W = 2.0$ is a transient authority reserve rather than a flight condition: the aircraft hovers at half throttle and reaches this current only in a gust recovery or an aggressive manoeuvre, for seconds. It is recorded here because it is the tightest margin in the propulsion chain, and because the P2 thrust stand measures current alongside thrust and will settle whether the motor reaches 3.18 kgf before that rating rather than after it. The datasheet also gives a motor mass of 168 g against the 160 g the sizing loop assumes, a difference of +32 g per aircraft that the P5 weigh-in resolves.

E. The coupled mass and energy solve

Pack mass, take-off mass and mission energy are mutually dependent: a heavier pack raises hover power, which raises the energy required, which raises pack mass. The model iterates to a fixed point rather than assuming one.

The reserve policy is what closes it. The pack must carry the nominal mission, one complete re-sweep of the search area, and four minutes of loiter, inside the usable window:

$$\underbrace{103.4}_{\text{nominal}} + \underbrace{30.9}_{\text{re-sweep}} + \underbrace{60.8}_{\text{loiter}} = 195.2 \text{ Wh usable},$$

against 233.3 Wh available at 80% depth of discharge — a margin of **19 %**. Expressed independently of chemistry, any candidate pack must therefore provide **244 Wh** nameplate at **6S** and **114.8 A continuous**.

The model was sized with 18 cells in 6S3P: 292 Wh, 13.5 Ah, 1449 g, 21.6 V nominal (18–25.2 V). Hover endurance is 15.3 min against a 7.6 min design mission consuming 103.4 Wh. The pack now specified is a bought 6S 16 Ah LiPo (Section IV-B); these figures are re-run on its measured mass before first flight.

At 6.36 kg per aircraft the fleet is **19.08 kg** against the 25.0 kg regulatory cap, leaving 24 % margin.

F. Camera and optics

Everything optical follows from three numbers: pixel count, pixel pitch and focal length. Active area is count times pitch,

$$w = 4056 \times 1.55\,\mu\text{m} = 6.287\ \text{mm},$$
$$h = 4.712\ \text{mm}, \qquad d = 7.86\ \text{mm},$$

and the fields of view are exact arctangents, with no small-angle approximation:

$$\theta = 2\arctan\left(\frac{s}{2f}\right)$$
$$\Rightarrow\ \text{HFOV} = 55.3^\circ,\ \text{VFOV} = 42.9^\circ,\ \text{DFOV} = 66.4^\circ.$$

Sensor and ground are similar triangles about the lens, so ground sample distance at altitude H is

$$\text{GSD} = \frac{p\,H}{f} = \frac{1.55\,\mu\text{m} \times 40\,\text{m}}{6\,\text{mm}} = 1.03\ \text{cm/px},$$

giving a 41.9×31.4 m footprint. One pixel subtends 14.80 mdeg.

Two target sizes follow, and the design is sized on the smaller. A 1.7 m supine adult — a survivor on a rooftop or dry ground — subtends 165 px, or 7,960 px^2. A person *in water* presents head and shoulders only, about 0.4 m across, and subtends **39 px**, or 1,498 px^2 — roughly a quarter of the apparent area. **The second is the design target**, because this is a flood system and immersion is the expected posture; the first is the optimistic case and is quoted here only so the two are not confused. Section IV-E argues the tiling decision on the water figure.

Focus. This is not a design problem, and the arithmetic says so. The hyperfocal distance,

$$H_{\text{hyp}} = \frac{f^2}{Nc} + f = 4.15\ \text{m},$$

taking the circle of confusion as two pixels rather than a film-era constant, puts everything from 2.08 m to infinity in acceptable focus. The aircraft never operates below 30 m. A fixed lens set once is correct at every altitude flown, and a focus mechanism would add a moving part, a power draw and a failure mode that cannot be detected from the air.

Motion blur. This does not bind either. Holding smear under one pixel requires $t_{\text{exp}} \le \text{GSD}/v$, which at 8 m/s is 1.29 ms — a shutter of $1/774$ s. The requirement already mandates $1/1000$ s or faster.

Rolling shutter. Small but not zero. Reading the frame out over 25 ms while the aircraft moves gives 0.20 m of top-to-bottom skew, about 19 px. Negligible for detection; *not* negligible for geolocation, where a detection's row position carries an along-track bias unless the pipeline corrects for readout row.

Temporal sampling. This is where the budget does not close. A target is in frame for the along-track footprint divided by ground speed, so at 40 m and 2 Hz it receives **7.9 looks** against the 12 that multi-frame fusion requires. Meeting that count needs

$$r \ge \frac{n\,v}{D} = 3.06\ \text{Hz},$$

Of the available levers — higher capture rate, lower ground speed, higher altitude, or a relaxed look count — raising the capture rate is the cheapest, because lowering altitude shrinks the along-track footprint faster than it shortens the pass and therefore *raises* the required rate, while raising altitude coarsens ground sampling and reducing ground speed lengthens every transect.

The cost of that lever is throughput, not energy. At 48 tiles per frame the required rate is 147 inferences per second, against the 130–160 FPS measured for the accelerator: at or beyond the limit. This is what a two-stage gate would buy back. A gate answering only whether a tile is homogeneous open water is a texture discrimination rather than a person detection, so it survives the downsampling that Section IV-E shows would destroy a person; at 96×96 input it costs roughly 44 times fewer pixels than a detector pass, and discarding the open water would leave of order 22 full-inference equivalents. On that argument the gate belongs on the accelerator already carried, not on an additional processor: the saving is in inferences, not in watts, and the aircraft's compute power is under one per cent of its hover power.

G. Payload release ballistics

A kit of 200 g tumbling with drag coefficient 1.05 and reference area 117 cm^2 has ballistic coefficient $\beta = m/(C_d A) = 16.3\,\text{kg/m}^2$ and terminal velocity

$$v_{\text{term}} = \sqrt{\frac{2mg}{\rho C_d A}} = 16.2\ \text{m/s}.$$

Integrating the fall with quadratic drag from a 6 m release gives 1.15 s to impact at 9.7 m/s, with a crosswind drift of 3.24 m at 3 m/s and 6.13 m at 6 m/s.

The governing sensitivity is release velocity, not release height. A residual ground speed of 0.5 m/s displaces the impact point by about 0.53 m, whereas a full metre of altitude error contributes under 4 cm. This is the whole argument for hover-and-drop: a multirotor can null its ground speed before release and a fixed-wing cannot.

H. Structure, geometry and control authority

Tip clearance of 30 mm between adjacent 18 in rotors sets a diagonal wheelbase of 689 mm and an arm length of 0.345 m. At the design thrust-to-weight the root bending moment is

$$\mathcal{M} = T_{\text{motor}}\,L = 10.7\ \text{N m}.$$

For a 25×23 mm carbon tube, $I = \pi(D_o^4 - D_i^4)/64 = 5438\,\text{mm}^4$, so the bending stress is $\sigma = \mathcal{M}c/I = 25\,\text{MPa}$ against roughly 600 MPa for unidirectional carbon — a safety factor of about **24**.

Bending is therefore not the structural driver, and the design should not be optimised as though it were. Joint and clamp design, and vibration fatigue at the arm root, are what actually govern; a tube chosen to satisfy the bending case by a factor of 24 is being chosen for stiffness and handling, not strength.

TABLE VII
ADOPTED RADIO LINKS, EVALUATED AT THE 600 M GEOFENCE

Link	P_{tx} (dBm)	ΣG (dBi)	S_{rx} (dBm)	FSPL (dB)	M (dB)
Digital video, 5.8 GHz	27.0	20	−86	103.3	**29.7**
ExpressLRS, 2.4 GHz	20.0	4	−108	95.6	**36.4**
LoRa, 865 MHz SF7	14.0	4	−123	86.7	**54.3**

Releasing one kit from a magazine offset from the centreline shifts the centre of gravity by under 2 mm, requiring a few tens of grams of differential thrust to trim — trivial in magnitude, but a *step* change that excites the attitude loop. The mitigation is to mount the magazine on the centre-of-gravity axis and hold position briefly after release rather than to trim harder.

I. Radio links

Three things have to cross the air gap, and they have almost nothing in common: video, which is high-rate and may be lost; command and abort, which are low-rate and may not; and mission data and swarm coordination, which are low-rate and must survive whatever the other two do not. An earlier revision of this design carried all three on one 5.8 GHz 802.11 mesh. The link budget is what withdrew it.

1) Margin, not path loss: Free-space path loss at the 600 m design slant range follows Friis,

$$\mathrm{FSPL} = 20\log_{10}\left(\frac{d}{1\,\mathrm{km}}\right) + 20\log_{10}\left(\frac{f}{1\,\mathrm{MHz}}\right) + 32.44, \quad (2)$$

but path loss on its own decides nothing — it is larger at 5.8 GHz than at 865 MHz for every link ever built, and says only that higher frequencies spread more. What decides whether a link closes is the *margin* left after it,

$$M = P_{\mathrm{tx}} + G_{\mathrm{tx}} + G_{\mathrm{rx}} - \mathrm{FSPL}(f, d) - S_{\mathrm{rx}}, \quad (3)$$

where S_{rx} is the sensitivity for the modulation actually used, not the best figure on the datasheet. Table VII evaluates (3) at the geofence for the three adopted links.

2) Why the single mesh was withdrawn: Run (3) on the 802.11 configuration it replaced — 20 dBm into 5 dBi at each end, MCS0 sensitivity −82 dBm — and the same 103.3 dB of path loss leaves **8.7 dB**. That is the thinnest path in the system and simultaneously the one carrying the most data, which is the worst possible pairing: the link most likely to break is the one whose loss costs most. The three-radio split leaves every remaining path above 29.7 dB, an improvement of 21.0 dB on the video path alone (Fig. 12a).

Meshing does not repair this, and the reason is worth stating because it is the argument that was originally made for the mesh. A relay hop through a second aircraft replaces one 600 m link with two shorter ones, which buys back path loss — but each hop is the same radio, the same antennas and the same sensitivity, so the relay is only as reliable as the aircraft carrying it, and the failure that takes out the direct path (a banked airframe, a body between the antennas, rain) is largely common to both. A mesh raises average throughput and does not raise the floor; here it is the floor that was the problem.

TABLE VIII
COORDINATION CHANNEL, THREE AIRCRAFT, ONE 36 B FRAME EACH AT 1 HZ

Mode	Rate	Frame	Occupancy	Margin
GFSK 50 kbps	50 kbps	7.8 ms	**2.3 %**	35.3 dB
LoRa SF7, 125 kHz	5.5 kbps	84.2 ms	25.3 %	54.3 dB

The withdrawn link is not useless — it reaches its sensitivity floor at 1.64 km, and would work perfectly on a calm day (Fig. 12b). Margin is not headroom, though. Rain, body blocking, a banked airframe and antenna misalignment all draw on it, none of them is in (3), and 8.7 dB does not cover them. The adopted video link carries 29.7 dB to the same geofence and reaches zero only at 18.4 km.

3) Sizing the coordination channel: The split has a consequence the margin table does not show. The mesh offered roughly 235 kbps per aircraft of non-video traffic; LoRa at SF7 over a 125 kHz channel carries 5469 bps for the *entire fleet*, a factor of 129 less. The two architectures had never been costed against the same traffic, so this had gone unnoticed.

Airtime, not bit rate, is the currency. For the short packets this mission sends, LoRa's preamble and coded header dominate: the number of symbols in a packet of PL bytes is

$$n_{\mathrm{sym}} = n_{\mathrm{pre}} + 4.25 + 8 + \left\lceil \frac{8PL - 4\mathrm{SF} + 44}{4\,\mathrm{SF}} \right\rceil (\mathrm{CR} + 4), \quad (4)$$

each of duration $2^{\mathrm{SF}}/\mathrm{BW}$. A 36-byte frame therefore costs 77.1 ms on air, against the 52.7 ms its payload alone would imply — the overhead is not a correction here, it is a third of the cost.

The first allocation — aircraft state, task consensus and detection reports as three separate messages at their natural rates — paid three preambles and three coded headers per aircraft per second and consumed 28.4 % of the channel, over the 25 % ceiling adopted for a slotted channel with retries and a fourth node to accommodate. Consolidating them into one 36 byte frame per aircraft per second, with a detection appended when there is one, brings it to 25.3 % — which still leaves essentially no headroom, at 1.0 Hz maximum frame rate against the 1 Hz needed.

What resolves it is already in Table VII. The 865 MHz link closes the geofence with 54.3 dB, and nothing in this mission needs anything like that much — the spreading factor that buys it is being spent on range the geofence does not use. The SX1262 supports GFSK on the same silicon, the same antennas and the same 14 dBm; at 50 kbps its sensitivity is −104 dBm rather than −123 dBm, which trades 19 dB of that surplus for a 9.1× rate increase. The frame falls to 7.8 ms, occupancy to 2.3 %, and the margin is still 35.3 dB — more than the video link has, on a tenth of the channel.

So GFSK is the operating mode and LoRa SF7 is the fallback, selected on the same radio without a hardware

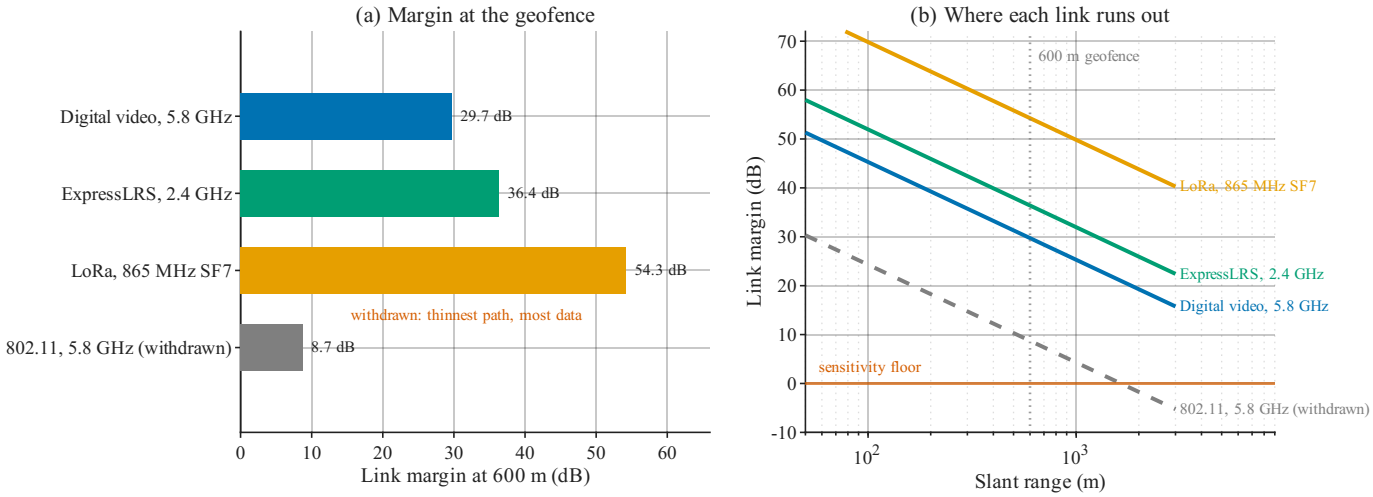


Fig. 12. (a) Link margin at the 600 m geofence, from (3). The withdrawn 802.11 mesh is retained in the figure because the withdrawal is an argument and the margin column is that argument. (b) Margin against slant range. Every adopted link is flown at a small fraction of the range at which it runs out; the withdrawn one is not.

change. The fallback is genuinely degraded and the model says so: at 25.3 % it sustains 1.0 Hz, so entering it sheds the frame rate rather than pretending the channel is unchanged.

4) What degrades first, by construction: The ordering is deliberate and follows the margins. Video is the path permitted to fail: it is digital, so it holds a clean picture until its margin is spent and then drops frames, and losing it costs the operator a view, not the aircraft a decision. Coordination degrades next, from GFSK to LoRa SF7 to a shed frame rate. Command and abort are last, on ExpressLRS at 36.4 dB, and are never traded — if that link is lost the aircraft executes its failsafe rather than waiting for it to return. Every band is licence-exempt in India: the 865–867 MHz SRD band for coordination, and the 2.4 and 5.8 GHz ISM bands for command and video, each flown well inside its permitted power.

Two limits on all of this. Every margin here is free-space, so it is an upper bound: multipath over water, Fresnel-zone intrusion from a low ground antenna and airframe blocking during a bank are real and none is modelled. And the GFSK sensitivity is a datasheet figure, not a measurement — P5 measures packet error rate against range on the built aircraft, which is when Table VIII becomes evidence rather than arithmetic.

J. What this section does not establish

Every figure above is *modelled*. The thrust figures assume a motor that publishes no thrust curve, and the detection figures assume a recall that has not been measured. The sizing is internally consistent and its arithmetic is checkable; that is a different claim from saying the aircraft has been shown to do these things, and this document does not make the second claim anywhere.

VI. Methodology and Work Plan

The programme is organised into ten phases. Phases P1–P5 are analysis, procurement and integration; P6–P10 are progressively more demanding flight test. The eight-week flight-test window spanned by P6–P10 is the binding schedule constraint on the entire programme, and the work plan is arranged to protect it.

TABLE IX
Programme Phases

Ph.	Title	Principal exit criterion
P1	Requirements and sizing	Design point frozen; all models regenerate
P2	Ground segment	Single-operator interface demonstrated against three simulated aircraft
P3	Autonomy	Deterministic plan generation; deconfliction verified in simulation
P4	Fault handling	Link-loss and low-battery behaviour verified by fault injection
P5	Procurement and build	Three airframes assembled and weighed; thrust stand complete
P6	First flight	Hover, trim, vibration and thermal characterisation
P7	Perception field trials	Detection recall measured on real imagery against fabricated targets on RTK-surveyed ground
P8	Delivery trials	Delivery CEP measured against a surveyed target mat
P9	Full mission rehearsal	End-to-end mission with all three aircraft, no operator intervention
P10	Setup and contingency	Setup drill timed over repeated runs; margin recovered

A. Onboard health monitoring

Two further inference tasks run on board, and neither is in the perception path. Both are one-dimensional signal problems small enough for microcontroller-class execution, so

they consume none of the accelerator budget that Section IV-E shows to be tight.

Propulsion anomaly detection. Per-motor current and airframe vibration are already logged for the characterisation in P6. The same signals identify propeller imbalance, bearing wear and mount loosening before they become in-flight failures, which matters in a programme flying eleven motors across three aircraft through an eight-week campaign. The training data is a by-product of flight testing rather than a separate collection effort.

Pack state of health. The reserve policy in Section V is a fixed 80 % depth-of-discharge rule. That rule is chemistry-correct but blind to cell ageing and pack temperature, so it is conservative early in life and optimistic late in it. A learned estimator over voltage, current and temperature under load returns usable remaining energy directly. Since Section IV-B shows the reserve, not the design mission, is what sizes the pack, tightening this estimate is the cheapest available route to either margin or endurance.

The governing rule for both is that an incorrect output costs energy or an unnecessary precautionary landing — never a missed detection. That is the condition under which a small model is admissible in this system, and it is why neither task is placed in the perception path.

B. Verification strategy

The programme's verification discipline is its most transferable contribution, and it exists because of a specific and recurring class of defect.

On four separate occasions during preparatory work, a configuration artefact was found to be correct, unit-tested, reviewed, and *not in the execution path* of the running system. In one instance a validated failsafe parameter set was never loaded by any simulation, so every test ran against stock defaults in which the low-battery action was disabled. In another, a message-routing configuration started cleanly and forwarded zero messages for weeks. Each of these reviewed clean and had passing tests around it.

The countermeasure adopted is procedural rather than technical: no capability is considered demonstrated until the real artefact has been exercised end to end and the resulting values read back off the running system. Consequently every claim in this proposal carries an explicit evidence class, and those classes are maintained mechanically rather than editorially:

- **Measured** — observed on a running system, in software or in hardware-in-the-loop simulation.
- **Modelled** — computed by a model whose inputs are themselves assumptions, and which regenerates in continuous integration.
- **Assumed** — neither measured nor modelled; carried explicitly as a risk.

A continuous-integration job enforces the rule that every published number regenerates byte-for-byte from its model, so that changing a model without committing its regenerated output fails the build. Thirteen model outputs are currently under this gate.

The same discipline now covers the cost basis. Every figure in this section is imported from a single module, which also generates the cost workbook and the budget charts; nothing is restated in two places. That was not true earlier in this programme — the workbook and this document drifted until they disagreed about the headline figure — and the fix was structural rather than editorial, because an inconsistency that can be reintroduced by hand eventually is.

VII. Preliminary Results

Substantial work has been completed before this request. we summarise it here with the evidence class of each result stated, because a claim whose basis is declared can be independently checked, whereas a claim whose basis is left implicit cannot be.

A. Measured in simulation

- **Low-battery failsafe returns the aircraft to the pad.** Verified across three simultaneous software-in-the-loop autopilots; return-to-launch triggered at 10 809 mAh of a 10 800 mAh planned consumption.
- **Three aircraft on one ground station.** A single telemetry router carried three distinct system identifiers to one ground station port with all three arriving.
- **Inter-aircraft separation at launch.** Staggered take-off delays encoded in the mission file, rather than in operator timing, increased the closest airborne approach during launch from 1.31 m to **64.80 m** (Fig. 13). Both figures are recomputed directly from the committed telemetry.
- **Separation during the sweep.** Minimum airborne separation away from the pad is **29.19 m**, with staggered transit altitudes of 20/25/30 m providing vertical deconfliction independent of the lateral plan.
- **Recovery deconfliction.** Assigning landing slots to the corners of the recovery pad rather than in a row increased slot spacing from 1.22 m to 2.61 m at no cost, raising the measured minimum approach from an overlapping 0.83 m to **2.27 m** — a clearance of 1.22 m between airframes (Fig. 14). Separation while stacked in the air over the pad improves by the same mechanism.
- **Ground station.** All eight required operator displays were verified against three simultaneous autopilots, with offline map tiles (Fig. 16). The video wall was verified against three simultaneous streams in a separate run with the media server active; the capture in Fig. 16 was taken without it, which is why the panes there read offline.

1) Pad containment has exactly zero margin: Fig. 14 shows the corner slots sitting precisely on the inset square. Nominal edge clearance is 0.523 m — one airframe radius — so no part of a stationary aircraft lies outside the box, and the geometric requirement is met by construction.

That is compliance with no margin, which we state plainly. The rules admit no part of any aircraft outside the box during launch and landing. Touchdown dispersion of ± 0.5 m, the figure this programme uses elsewhere for landing accuracy, would put up to half a metre of airframe over the edge.

The two constraints pull against each other: moving the slots inward to buy edge margin costs inter-aircraft spacing, which is precisely why they were moved to the corners. Resolving it needs a *measured* touchdown dispersion rather than an assumed one, and that is a P6 activity. It is recorded here because the geometry looks safe on the figure and is only safe on average.

B. Modelled

Endurance, hover power, mass budget, thermal margin, link budget, delivery dispersion and geolocation error are all modelled and regenerate from source. The geolocation Monte Carlo reconciles with the independent analytic budget to within one per cent, and the geotag projection has been verified self-consistent between two independent formulations to 7.8×10^{-10} m.

C. Obstacle sensing and its limits

The aircraft flies its sweep with no command from the ground, so what keeps it away from a building has to be designed in rather than flown around. Three things do, and a fourth deliberately does not.

Altitude clears low-rise structures and nothing else. The sweep is at 40 m AGL, which clears the two-to-four-storey construction of a rural or peri-urban flood plain by a wide margin. It does not clear an urban one. Chennai and Mumbai — the flooding this system is aimed at — contain a great deal of building well above 40 m, and the sweep altitude is below all of it.

And the aircraft cannot climb over it. This is the constraint that governs, and it is not a sensor problem. The survey altitude is pinned by detection: at 40 m a person in water is 1498 px^2 and clears the COCO small-object floor, and by 50 m the same target is 959 px^2 and does not. There is no altitude that both clears a 60 m building and resolves a 0.4 m target with this camera. Vertical avoidance is therefore unavailable, and every obstacle taller than the sweep must be avoided *laterally*.

Lateral avoidance is by declared exclusion, not by sensing. The operator draws the search region at the site, and ArduPilot's polygon exclusion fences let a pylon, a tower or a tall block be declared as a volume the aircraft refuses to enter. This is enforced by the autopilot rather than by the mission planner, so it holds even if the plan is wrong. It depends entirely on a human having seen the obstacle and drawn it.

Height is measured, not inferred. A downward lidar gives true height above whatever is beneath the aircraft. This matters most at the release: the kit is specified to leave at 6 m AGL, and a barometer reports height above the launch point, which over floodwater of unknown and changing level is a different quantity. An error here is not a nuisance — Section IV-I shows impact velocity and dispersion both scale with release height, so a kit released from a believed 6 m that is really 15 m is a different ballistic problem from the one that was analysed. The sensor reaches about 7 m outdoors, so it acquires during the descent and gates the release; it does not see forward, and is not an obstacle sensor.

The aircraft has no forward obstacle detection. We state this as a limitation of the design. Nothing on board can see a structure ahead of it, whatever the structure is made of — an optical sensor would additionally struggle with glass, but that is moot when there is no sensor at all. An undeclared tall building is therefore invisible to the system, and the aircraft would fly into it.

The scope this forces is explicit. The system as funded is for open water and low-rise flooding, where 40 m is above everything and the exclusion fence covers the isolated pylon. It is *not* for urban flooding among high-rise, and the reason is structural rather than a missing part: even with a forward sensor the aircraft could only stop or turn, not climb, so operating there needs a route planner that solves around obstacles at a fixed altitude, which is a different programme. A 360-degree lidar is of order INR 10,000 and 190 g against a 4.9 kg growth allowance and would be worth carrying as a last-resort stop — but unfunded, untested, and first flown at a competition it is a worse risk than the one it removes. P6 is where it should be flown if it is bought at all.

D. Assumed or not yet implemented

Boresight calibration residual, achieved RTK accuracy in the field, and battery internal resistance under Indian ambient conditions are all assumed, and each is a funded activity in P5–P8. **Detection recall on real post-flood imagery is also assumed, and its field campaign is deferred rather than funded** (Section VIII); it is therefore the one assumption this programme does not currently plan to retire, and it leads the risk register accordingly.

One ground-segment function is explicitly *not* implemented and is visible as such in Fig. 16: the abort and recall controls record operator intent in the mission log but transmit nothing, because no downlink command path is yet wired. Recovery today depends on the safety pilot's transmitter. Closing this is a P4 activity, and it now runs over the 2.4 GHz ExpressLRS link rather than the deferred sub-gigahertz radio — which is what makes that link load-bearing for safety and not merely a control convenience.

E. Evidence status

Nothing in this programme has flown. Every "measured" result above was measured in simulation or in software. That rules out whole classes of logical and integration error and rules out none of the physical ones. The build phase exists principally to convert the modelled and assumed rows of this section into measured ones.

VIII. Scope of This Build

This document describes an integrated system; the funding request is held separately and is not part of it. What belongs here is not what the build costs but *what it does and does not contain*, because several arguments earlier in this document depend on it.

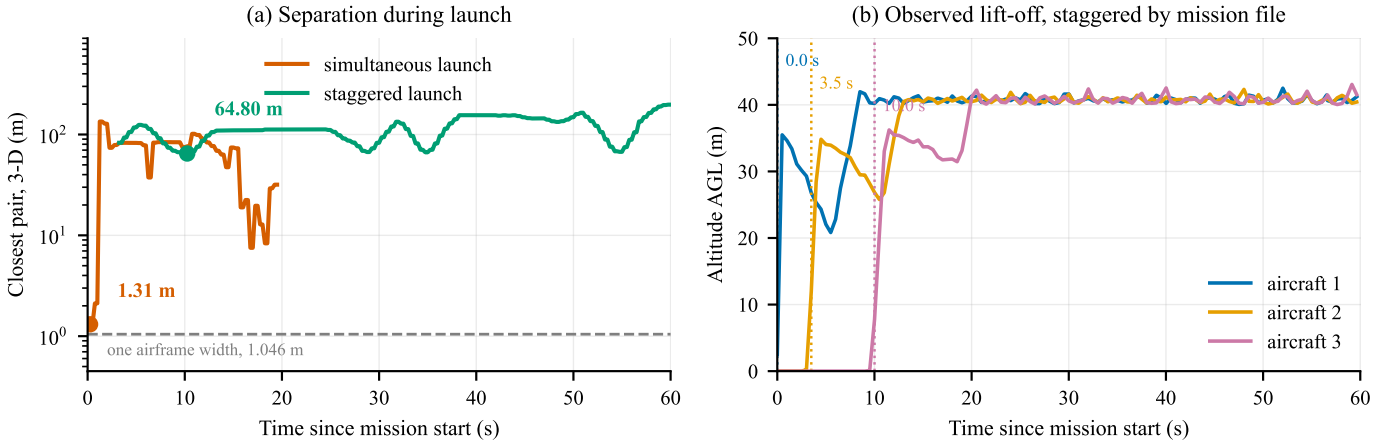


Fig. 13. Launch deconfliction, recomputed from the committed telemetry of three ArduCopter software-in-the-loop autopilots. (a) Closest pair in three dimensions, airborne aircraft only, on a logarithmic scale. Launching simultaneously brings two aircraft within 1.31 m — inside one airframe width, marked — while staggering take-off in the mission file holds the closest pair to 64.80 m. (b) The mechanism: lift-off times observed in the same recording. The mission file commands delays of 0/15/30 s; the aircraft are observed leaving the pad at 0.0/3.5/10.0 s, and **the figure plots what was observed rather than what was commanded** — see Section VII-D.

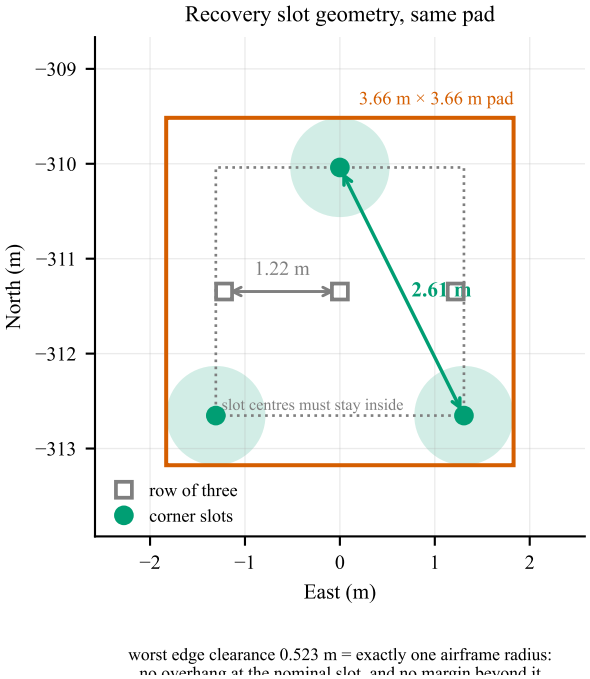


Fig. 14. Recovery slot geometry, drawn from the two committed recordings. Slot centres must stay half an airframe inside the pad edge, so they live in a 2.61 m square: a row across that square gives 1.22 m of spacing, its corners give the full 2.61 m. Shaded discs are the 1.046 m airframe footprint at the corner slots. The measured closest approach at any time rises from an overlapping 0.83 m to 2.27 m — twice the separation, on the same pad, at no cost.

A. *Deferred scope*

Each of the following was deferred rather than judged unnecessary. Stating them is not padding: a reviewer should be able to see what the lowest-cost configuration gives up, and in two cases the omission changes what this document is entitled to claim.

The field-data campaign and the ground-truth apparatus are both deferred, and the consequence is stated plainly: ***detection recall in this document is modelled, not measured.*** There is currently no funded route to measuring it. Of everything listed here this is the omission with the largest effect on delivered capability, and it is the first item that should be reinstated if the position changes.

The second GNSS receiver is deferred, and the deferral is now forced rather than chosen. It would supply moving-baseline heading, and Section IV-D shows that substituting a magnetometer-class attitude allocation into the case-C budget costs **18 mm**. The case for it was never the error budget — it was insurance against a magnetometer sitting near a high-current bus, which the budget does not model.

The adopted receiver makes the capability purchasable: two ZED-F9P receivers on one airframe, one in moving-base mode, give heading, and ArduPilot supports that configuration. It is deferred on mass and cost rather than availability. Heading rests on the compass in the rover unit. **P6 characterises achieved heading accuracy on the built aircraft; if it exceeds roughly 1°, a second receiver is fitted** for moving-baseline heading.

The sub-gigahertz safety radio is deferred, and that deferral rests on a configuration rather than on a judgement. The primary link must run in a mode that carries both control and MAVLink telemetry on one link and one autopilot serial port. The alternative transparent-serial mode consumes that link, and an aircraft configured that way has telemetry and no control. **This is verified on the bench at P2; if it does not hold, the radio is not optional.**

Recovery parachutes are permitted, not required. A crash scores −50 against −10 for landing outside the zone, so the deferral is a bet of roughly forty points against the probability of a crash.

Spares cover what crashes, not what fails rarely. Propellers,

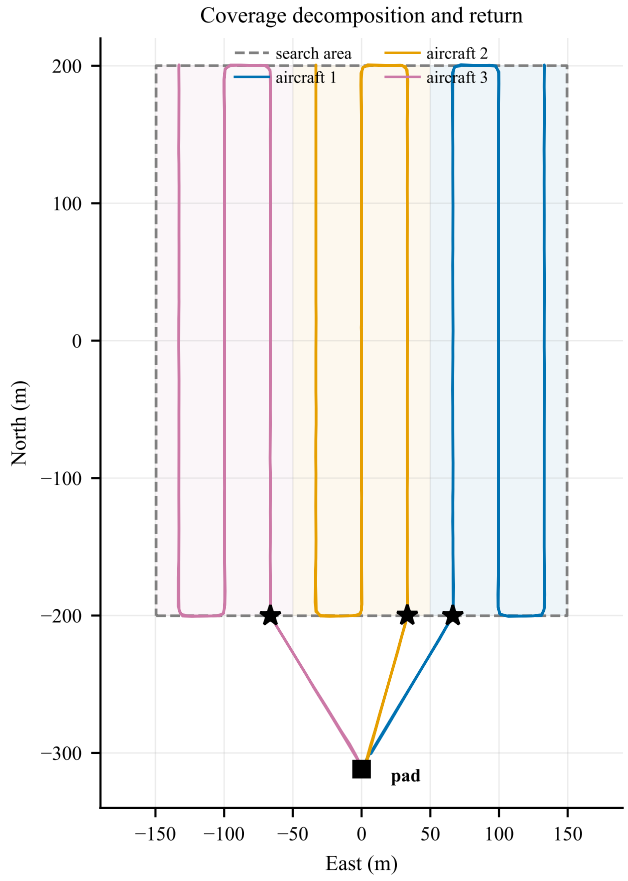


Fig. 15. Coverage decomposition and return geometry, drawn from the committed telemetry. Each aircraft is assigned an equal-area strip (shaded) and flies a boustrophedon pattern within it; each strip is swept twice, on opposing headings, so that boresight error cancels rather than accumulating. Stars mark where each sweep ends. Enumerating the four start-side and direction combinations and keeping the one that finishes nearest home brings all three aircraft to within 117–130 m of the pad, against 516 m and 540 m for two of three under the previous index-keyed rule — at identical path length, and on the lowest state of charge of the flight.

motors, arms, plate stock and packs are retained. Spare autopilot, GNSS and camera are removed. **This is an accepted risk and we state it as one:** a failure of any of those three inside the flight-test window costs schedule, and the mitigation is procurement lead time rather than inventory.

Flight insurance is deferred and must be confirmed against the rulebook and the Drone Rules before any flight takes place. This is the one deferral that is not purely a performance trade.

B. A caveat on ground-truth measurement

The ground-truth apparatus is fabricated rather than bought. Survivor targets are clothed forms of the correct size and outline; what a detector responds to is silhouette, scale and contrast against terrain, not anatomy. Two of these items are *better* fabricated: dummy kits can be made to exactly the 200 g that rule C6 fixes, and donated clothing gives wider colour and contrast variety than matched bought sets, which is precisely what detection robustness requires.

The calibration markers are surveyed using the programme's own RTK rover. That is standard practice and adequate for the purpose, but it means the ground truth against which geolocation accuracy is measured is *itself RTK-derived*. The two error sources are therefore correlated, and any measured geotag figure reported in P7–P8 will be slightly optimistic against an independently surveyed datum. Any accuracy claim arising from those phases will state this.

IX. Security and Data Protection

Three properties of the architecture are security properties, and were designed in rather than added.

The ground station cannot command the aircraft. In a mission build the command routes are not registered on the server at all, so the operator interface is structurally incapable of issuing a waypoint, a mode change or a release. That is a stronger guarantee than access control, because there is no control to bypass.

Command authority is isolated from the autonomy stack. ExpressLRS reaches the flight controller directly, not through the companion computer. If that computer hangs, is compromised, or runs a model that behaves unexpectedly, the safety pilot retains control. The isolation follows from the topology.

Nothing depends on an external network. Section IV-H places all three links in delicensed bands with no infrastructure between them and the ground station, which removes remote attack surface entirely rather than defending it.

A. Link security requirements

The mission data link carries survivor coordinates, so it is encrypted: wfb-ng's key-pair encryption on the digital link, and a per-programme ExpressLRS binding phrase that is not committed to the repository and is not shared across airframes. Neither costs measurable latency. An unencrypted data link would also weaken the regulatory position, since rule 8.4 prohibits public networks and an open link is harder to distinguish from one.

The realistic positioning threat in a disaster area is interference, not a targeted spoofer: congested spectrum, other responders, and multipath off water and structures. Four constellations on two bands give diversity if one degrades, and the launch gate gives the operator an explicit fix-quality check before the mission starts. Integrity monitoring on the receiver is an open procurement question recorded in Section VIII.

B. Survivor data as personal data

This system produces precise geographic locations of identifiable individuals in distress, together with aerial imagery of them. Under the Digital Personal Data Protection Act 2023 that is personal data, and the people concerned are in no position to give or withhold consent at the moment of collection.

The programme therefore adopts four rules, and states them because a system that locates people should say what it does with the record afterwards:

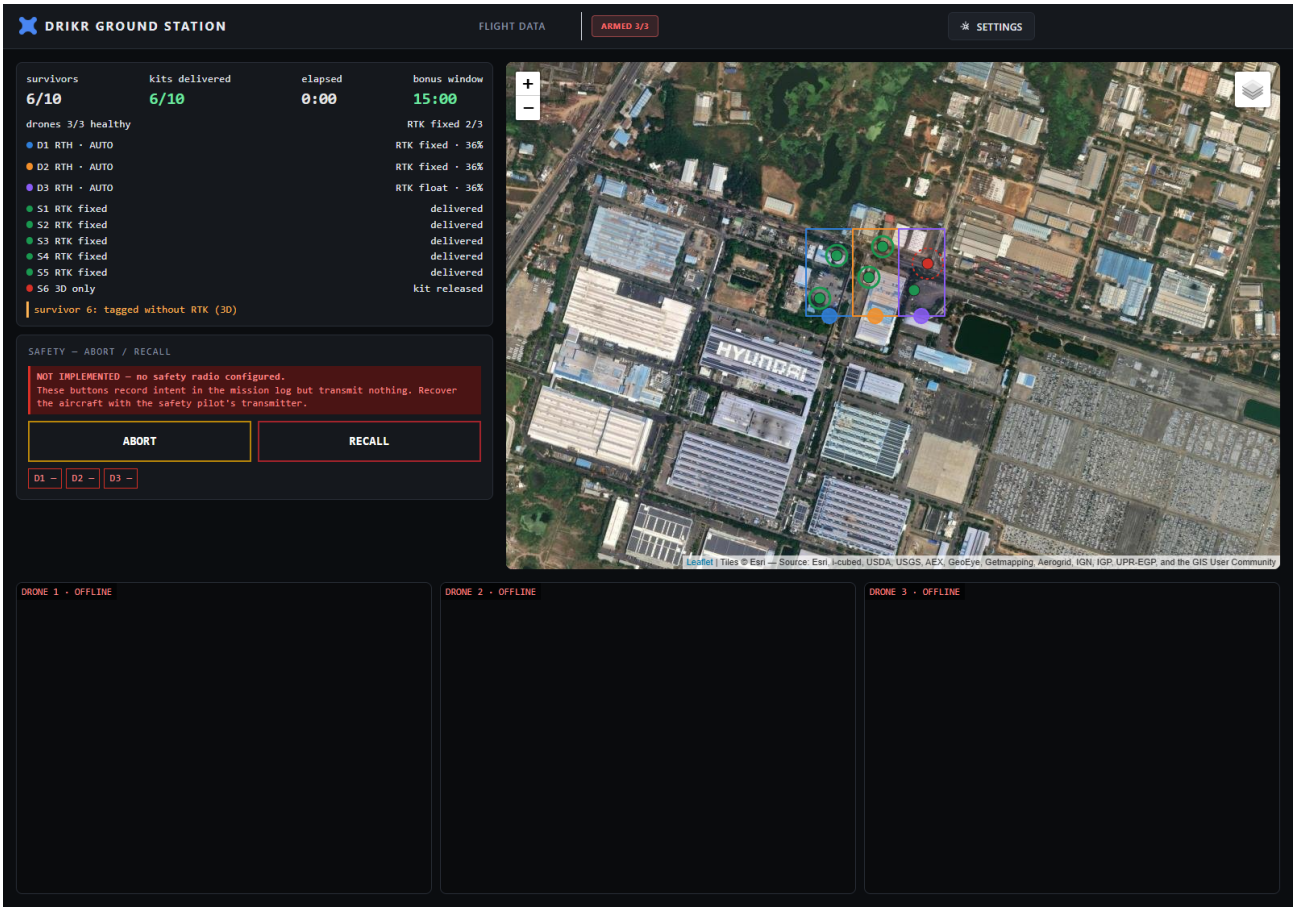


Fig. 16. Ground control station, captured unretouched from the running client and backend. **The telemetry is synthetic**: a mission driver emits MAVLink and 5 Hz mission-state documents for three aircraft, so every display can be exercised before an aircraft exists. No aircraft, autopilot or radio is involved. Visible here: the three assigned search regions on a satellite basemap served from a local tile cache, so nothing depends on a network; three aircraft armed and in AUTO, two with an RTK-fixed solution and the third in float, which is the degraded case the display must distinguish; and the mission counters, where the 15:00 figure is the fast-completion threshold rather than the flight-time limit. The run is caught after delivery, with six survivors located and six kits released, which is what puts the per-survivor rows on screen. Those rows carry the point Section IV-D2 argues: five survivors are tagged RTK FIXED and the sixth 3D ONLY, and the display says so rather than presenting six coordinates of equal worth. A rescue coordinator acting on the sixth is working to a different radius than on the other five, and the interface is required to make that visible. The safety panel is shown uncropped deliberately. It states that abort and recall are *not implemented*, that they record operator intent in the mission log and transmit nothing, and that recovery is by the safety pilot's transmitter — because no downlink command path is yet wired (Section VII-D). The video panes read offline because the media server is not running in this capture; no camera has yet flown.

1) Coordinates are transmitted to the operator and retained only for the duration of the operation. They are not retained after handover to the recovery authority.
2) Imagery is retained only where it is needed as evidence for a stated measurement, and is held on the aircraft rather than transmitted.
3) No imagery containing an identifiable person is published — in this document, in any release of results, or in any dataset — without irreversible obscuration of the face and body.
4) Detection models are trained on public datasets whose subjects consented to that use, not on imagery collected from real casualties.

The fourth rule has a cost worth naming: it is part of why detection recall remains modelled rather than measured, and why the perception evaluation in Section VI-B uses fabricated targets and public maritime imagery instead of the flood imagery that would suit it better. That is a deliberate trade of measurement quality against a category of data the programme should not be collecting.

X. Risk Register

We draw particular attention to the setup-time risk. It is currently supported by a model with a modest margin and no measurement, and it gates the entire mission. Timed bench drills are scheduled as the earliest hardware activity in the programme for precisely this reason.

XI. Expected Outcomes and Deliverables

1) Three flight-qualified aircraft with a documented, market-verified bill of materials.

TABLE X
PRINCIPAL RISKS AND MITIGATIONS

Risk	Sev.	Mitigation
Detection recall below target on real imagery	High	**Raised by deferral of the field data campaign.** Public aerial-person datasets carry the model; tiling and fusion parameters remain tunable without hardware change
Inference and video encode contend on one board	Medium	**Reopened by the move to digital video.** The companion has no hardware video encoder, so each aircraft encodes its own annotated stream in software. Inference runs on the accelerator, and under load the stream's resolution and frame rate give way, never the tile count. P5 measures processor headroom with both running
Heading rests on a compass near high-current wiring	Medium	Moving-baseline heading is available on the adopted receiver but deferred on mass and cost, so heading rests on the compass in the rover unit, which costs 18 mm in the case-C budget. P6 measures achieved heading accuracy and fits a second receiver if it exceeds 1°
Flight-test window compressed by procurement delay	High	**Raised by deferral of the training airframe and of spares.** Lead time is now the only mitigation, so long-lead items are ordered in tranche 1
Recovery parachute deferred	Medium	The 300 g allowance is carried in the sizing but the unit is not bought, so a crash is unmitigated. No domestic supplier is identified; correct mass rating and lead time remain open if the deferral is reversed
Setup time exceeds allowance	Medium	Currently modelled, not measured; timed drills are the highest-priority early test
Airframe overhangs the pad edge on touchdown	Medium	Nominal clearance is exactly one airframe radius, so dispersion has no margin. Measure touchdown dispersion in P6 before accepting the slot geometry
Motor thrust below the datasheet claim	High	Selected motors publish no thrust curve, and the stand cannot precede the motors. **Raised by the heavier LiPo pack:** holding thrust-to-weight at 2.0 at 7.1 kg needs 3.55 kgf per motor. Thrust is measured on arrival; a shortfall then forces a propulsion change with the flight-test window already open
Airframe loss during test	High	**Raised by deferral of spares.** Structure set and consumables retained; a second loss in the same week is uncovered
Flight insurance may be mandatory	Medium	Deferred at team direction. To be confirmed against the rulebook and DGCA rules before any flight

2) A single-operator ground control station demonstrated end to end against real aircraft, with no network dependency.
3) A measured detection recall figure against fabricated survivor targets on surveyed ground, replacing the current assumption. Ground truth is RTK-derived rather than independently surveyed, and the resulting figure will state that.
4) A measured delivery circular error probable against a surveyed target, replacing the current model.
5) A measured setup-to-launch time distribution over repeated drills.
6) An open, reproducible evidence base in which every published figure regenerates from its model under continuous integration.

XII. FUTURE WORK

This proposal deliberately scopes a single prototype build and nothing more. The work has a longer arc, set out here so that the boundary of the present scope is unambiguous by contrast.

A. From a prototype to a deployable system

This build is not a product. Reaching one requires, in rough order: night capability, discussed below; beyond-visual-line-of-sight approval, which is a regulatory programme rather than an engineering one; ingress protection and thermal qualification for monsoon conditions; and endurance beyond the present 15.3 minutes, which at this payload means a different airframe class rather than a better battery.

The night-sensing route is not the obvious one. Thermal imaging is the default answer, and it is genuinely valuable over rooftops, dry debris and open ground. It degrades, however, for precisely the case this system is built around. A person immersed in floodwater equilibrates toward water temperature, and the skin-to-background contrast a microbolometer depends on largely disappears; the residual signal comes from the head and shoulders alone, which is the smallest part of an already small target.

Near-infrared is the better-matched extension. Water absorbs strongly beyond roughly 900 nm while skin remains comparatively reflective, so a person presents as a bright object against dark water — the same contrast mechanism that makes NIR standard for water-body segmentation in remote sensing. It

is also an order of magnitude cheaper than a thermal core, since it requires a camera with the infrared-cut filter removed rather than a new sensor class, and it can be evaluated against public imagery before any hardware is bought. The two are complementary rather than alternative: thermal for survivors on dry ground at night, near-infrared for survivors in water.

B. The compute cliff

Section IV-E establishes that this task cannot be met by shrinking the input, because person-pixels and coverage rate trade against one another for a fixed sensor: a smaller detector input demands either a lower altitude or a longer lens, and both narrow the swath. What that argument does not establish is *where* the boundary lies.

Measuring it is a contribution in its own right. The same tiled task, on the same imagery, can be run at three compute tiers — the 26 TOPS accelerator specified here, its 13 TOPS variant, and a microcontroller-class part — and the altitude, tile count and inference rate at which each ceases to meet the recall requirement recorded. The result is a curve of achievable coverage rate against inference power, which is the quantity a designer actually needs and which is not, to our knowledge, published for aerial person detection.

The application is planetary aviation, where available power is a hard constraint rather than a budget line. *Ingenuity* flew 72 sorties on Mars from a 1.8 kg airframe in an atmosphere below one per cent of Earth's density, and *Dragonfly* is manifested for Titan in 2028; in both cases command latency is measured in minutes, so every perception decision is taken on board. Microcontroller-class inference is routinely proposed for such missions. The measurement above would establish what target size that choice actually forfeits.

C. Cost at production volume

The parts basis for this build is single-unit retail for a build of three. The marginal cost of an additional aircraft is already substantially below the per-aircraft figure quoted here, because the ground segment, test equipment and spares are one-off. At production volume the relevant questions are different ones — tooling amortisation, negotiated component pricing, and assembly labour — and none of them can be answered honestly from a three-aircraft bill of materials. We decline to extrapolate them.

D. A route to commercialisation

The natural customers are state disaster management authorities and the national and state disaster response forces. Establishing whether that is a viable business requires three things this programme does not attempt: the size and refresh rate of the addressable fleet, what a comparable capability is currently procured for, and the operating cost per flight hour of the boat or helicopter search it would displace. Those are questions for published tender data and operator interviews, not for a bill of materials. They are named here as open rather than filled with plausible figures.

What this programme does produce toward that end is the seventh deliverable in Section XI: a component-level map of where Indian UAV supply chain capability exists and where it does not. That artefact outlives the build regardless of what follows it.

XIII. Conclusion

We have described an autonomous three-aircraft system aimed at the localisation bottleneck in post-flood search and rescue, developed under a verification regime that separates demonstrated behaviour from designed behaviour. Deferrals in the current build were made on cost rather than on capability, and Section VIII records what each one costs the system.

The design point, the error budgets and the cost basis are established and reproducible. Coordination and failsafe behaviour have been demonstrated in hardware-in-the-loop simulation across three simultaneous autopilots. What remains is to build the aircraft, fly them, and replace the modelled and assumed quantities of Section VI-B with measured ones.

The claim we make for the present work is a narrow one: every figure reported here is checkable against the model that produced it, and every figure not yet measured is identified as such.

Acknowledgment

We thank Dr. Surbhi Sharma and Dr. Mamata Gulati for their supervision and guidance throughout this work, and the Department of Electronics and Communication Engineering, Thapar Institute of Engineering and Technology, for institutional support.

References

[1] Internal Displacement Monitoring Centre, *Global Report on Internal Displacement 2025*, Geneva, 2025. [Online]. Available: https://www.internal-displacement.org/countries/india/

[2] A. C. Kapoutsis, S. A. Chatzichristofis, and E. B. Kosmatopoulos, "DARP: Divide areas algorithm for optimal multi-robot coverage path planning," *Journal of Intelligent & Robotic Systems*, vol. 86, pp. 663–680, 2017.

[3] H. Choset, "Coverage of known spaces: the boustrophedon cellular decomposition," *Autonomous Robots*, vol. 9, no. 3, pp. 247–253, 2000.

[4] H.-L. Choi, L. Brunet, and J. P. How, "Consensus-based decentralized auctions for robust task allocation," *IEEE Transactions on Robotics*, vol. 25, no. 4, pp. 912–926, 2009.

[5] F. C. Akyon, S. O. Altinuc, and A. Temizel, "Slicing aided hyper inference and fine-tuning for small object detection," in *Proc. IEEE International Conference on Image Processing (ICIP)*, 2022, pp. 966–970.

[6] T.-Y. Lin, M. Maire, S. Belongie, J. Hays, P. Perona, D. Ramanan, P. Dollár, and C. L. Zitnick, "Microsoft COCO: Common objects in context," in *Proc. European Conference on Computer Vision (ECCV)*, 2014, pp. 740–755.

[7] X. Yu, Y. Gong, N. Jiang, Q. Ye, and Z. Han, "Scale match for tiny person detection," in *Proc. IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, 2020.

[8] S. Sambolek and M. Ivasic-Kos, "Automatic person detection in search and rescue operations using deep CNN detectors," *IEEE Access*, vol. 9, pp. 37 905–37 922, 2021.

[9] P. Zhu *et al.*, "Detection and tracking meet drones challenge," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 44, no. 11, pp. 7380–7399, 2021.

[10] L. A. Varga, B. Kiefer, M. Messmer, and A. Zell, "SeaDronesSee: A maritime benchmark for detecting humans in open water," in *Proc. IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, 2022.

[11] S. G. Mathisen, F. S. Leira, H. H. Helgesen, K. Gryte, and T. A. Johansen, "Autonomous ballistic airdrop of objects from a small fixed-wing unmanned aerial vehicle," *Autonomous Robots*, vol. 44, pp. 859–875, 2020.

[12] T. Takasu and A. Yasuda, "Development of the low-cost RTK-GPS receiver with an open source program package RTKLIB," in *Proc. International Symposium on GPS/GNSS*, 2009.

[13] Ministry of Civil Aviation, Government of India, *The Drone Rules, 2021*, Gazette notification G.S.R. 589(E), 25 August 2021.

[14] ArduPilot Development Team, "ArduPilot: open source autopilot software suite," 2026. [Online]. Available: https://ardupilot.org/

[15] u-blox, "ZED-F9P high precision GNSS module: data sheet and integration manual," 2024. [Online]. Available: https://www.u-blox.com/en/product/zed-f9p-module

[16] wfb-ng contributors, "wfb-ng: WiFi broadcast, a long-range packet radio link based on raw WiFi," 2024. [Online]. Available: https://github.com/svpcom/wfb-ng

[17] ExpressLRS Project, "MAVLink," ExpressLRS documentation, 2026. [Online]. Available: https://www.expresslrs.org/software/mavlink/

[18] J. G. Leishman, *Principles of Helicopter Aerodynamics*, 2nd ed. Cambridge, U.K.: Cambridge University Press, 2006.